


side (+x) (axes in mm from the view origin)

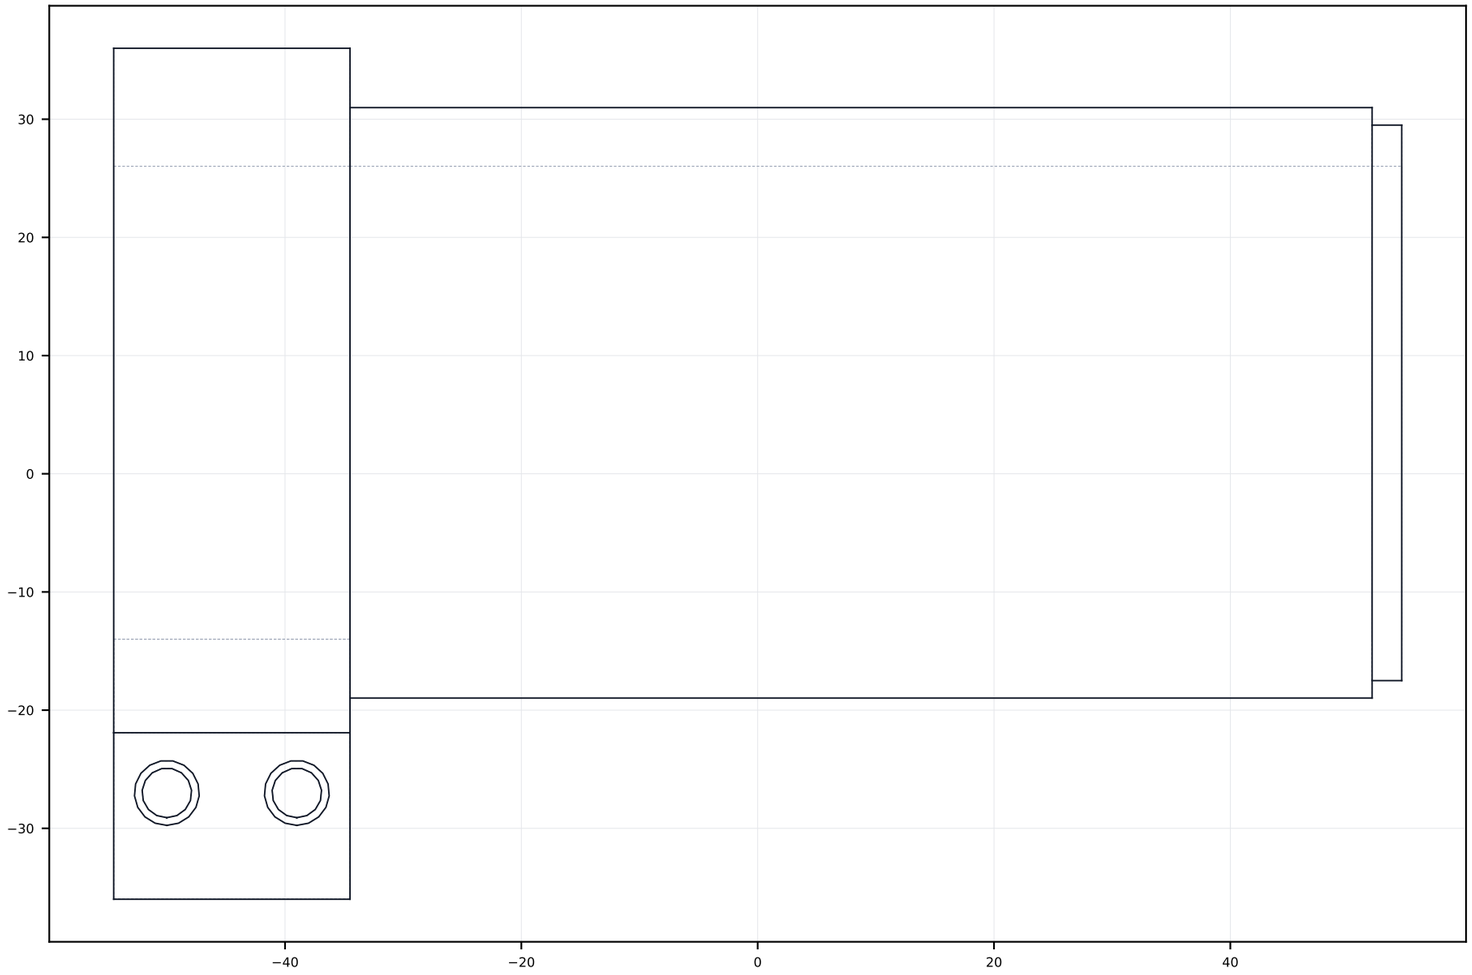


top (+z) (axes in mm from the view origin)

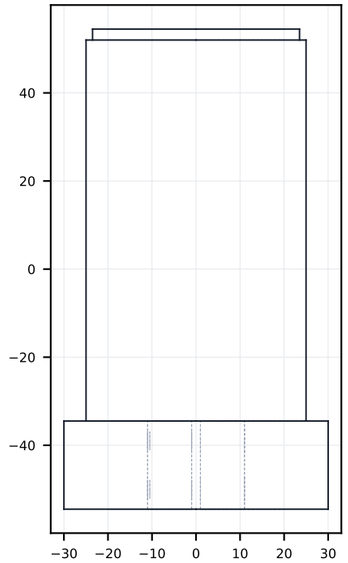

front (-y) (axes in mm from the view origin)

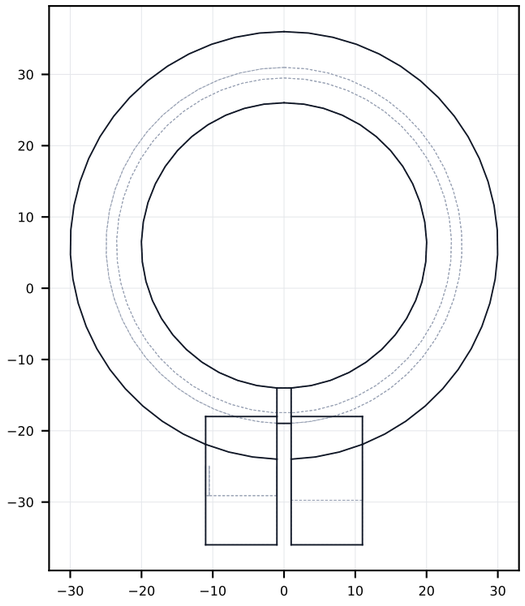

iso

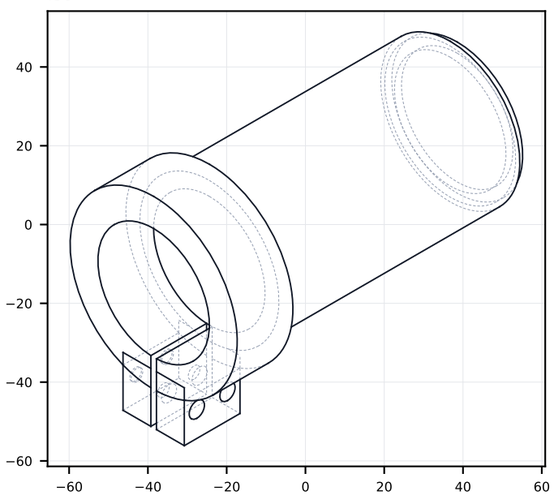

DRAWING slip_sleeve
qty per robot: 1
material: 6061-T6
process: CNC turn + slit
finish:
mass: 262.3 g overall: 60.0 x 109.0 x 72.0 mm (x, y, z)
note: locates the right inner race; slip-ring rotor collar set screws bear on it
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/slip_sleeve.step
view origin = bounding-box centre = robot (0.00, -91.50, -6.00)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M5 tapped 10.0 deep (drill 4.2)	11.00	-50.00	-27.00	-x
M5 tapped 10.0 deep (drill 4.2)	11.00	-39.00	-27.00	-x
d5.5 through	11.00	-50.00	-27.00	-x
d5.5 through	11.00	-39.00	-27.00	-x