


side (+x) (axes in mm from the view origin)

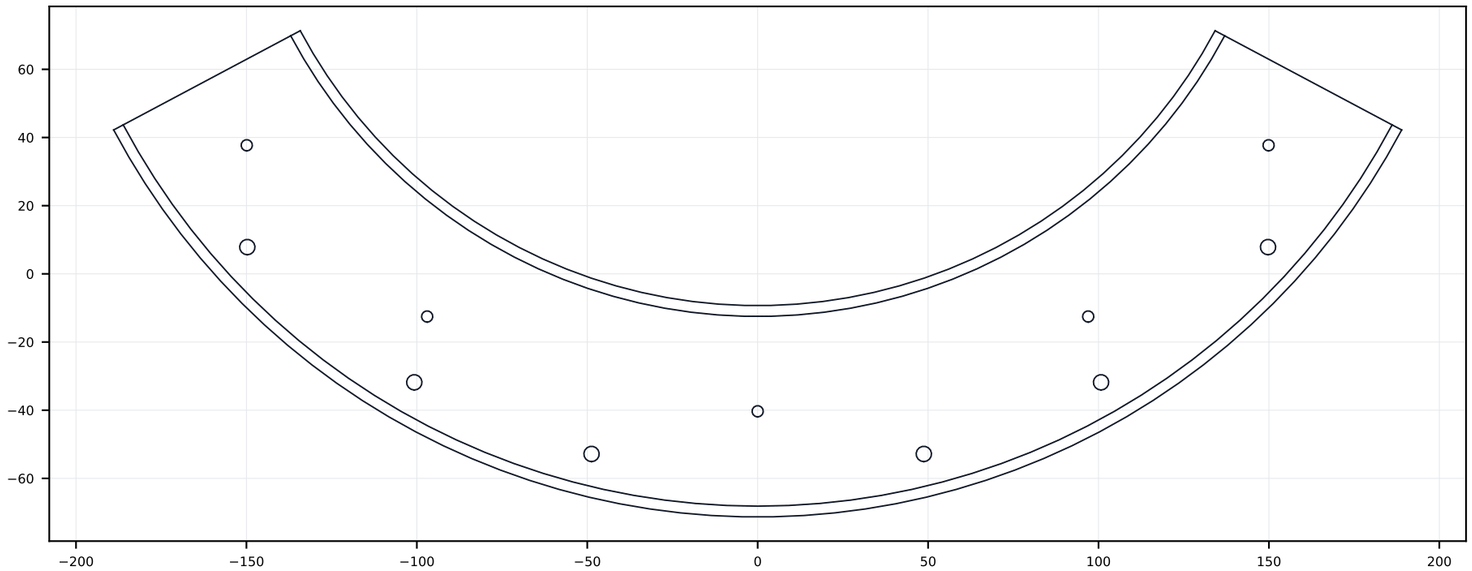


top (+z) (axes in mm from the view origin)



front (-y) (axes in mm from the view origin)



iso

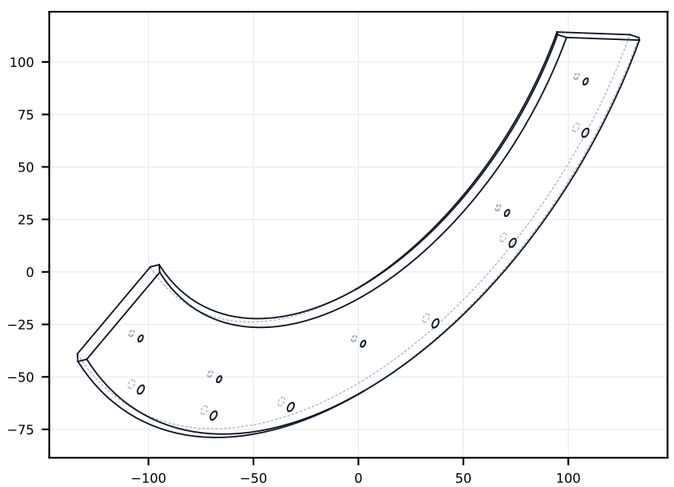

DRAWING track
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: AISI 1045, edges induction hardened HRC 53 (DualVee track spec)
process: waterjet + CNC V-edges
finish:
mass: 1154.4 g overall: 6.4 x 377.9 x 142.6 mm (x, y, z)
note:
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/track.step
view origin = bounding-box centre = robot (82.00, 0.00, -142.68)

HOLE TABLE (view coords of the screw seat, mm)

feature	x	y	z	axis
M4 tapped 6.3 deep (drill 3.3)	13.00	-149.91	37.72	-x
M4 tapped 6.3 deep (drill 3.3)	13.00	-96.97	-12.51	-x
M4 tapped 6.3 deep (drill 3.3)	13.00	0.00	-40.32	-x
M4 tapped 6.3 deep (drill 3.3)	13.00	96.97	-12.51	-x
M4 tapped 6.3 deep (drill 3.3)	13.00	149.91	37.72	-x
d4.5 through	13.00	-149.74	7.85	-x
d4.5 through	13.00	-100.75	-31.82	-x
d4.5 through	13.00	-48.75	-52.84	-x
d4.5 through	13.00	48.75	-52.84	-x
d4.5 through	13.00	100.75	-31.82	-x
d4.5 through	13.00	149.74	7.85	-x