


front (-y) (axes in mm from the view origin)

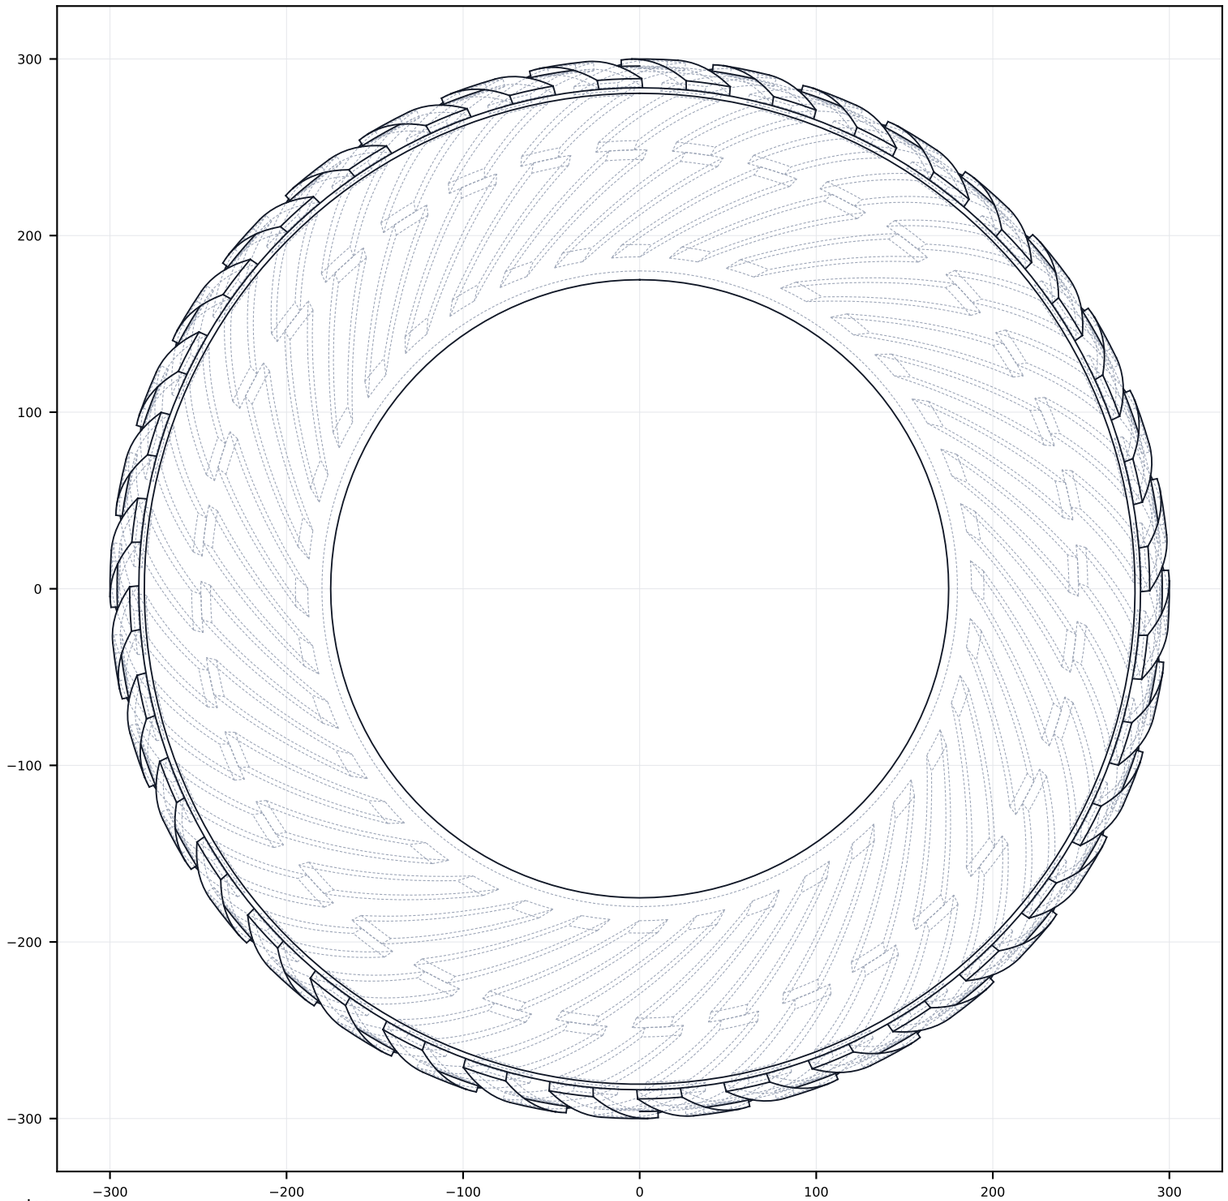


top (+z) (axes in mm from the view origin)

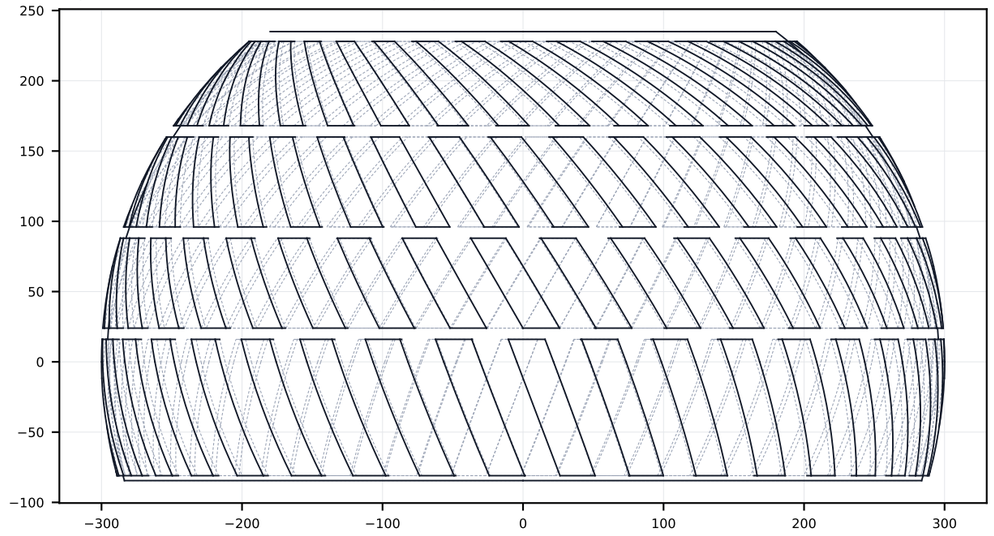

side (+x) (axes in mm from the view origin)

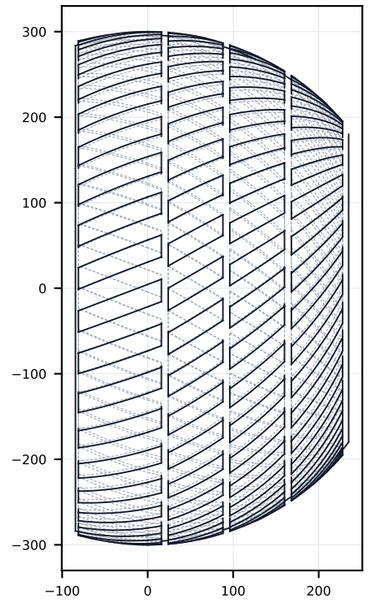

iso

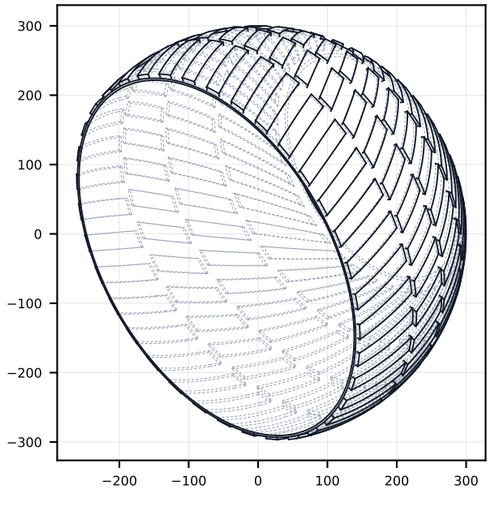

DRAWING tread
qty per robot: 2 (R-hand part = this one mirrored about XZ)
material: PU elastomer 70 Shore A (e.g. Smooth-On VytaFlex 70 class)
process: cast in place in a closed 2-piece mould
finish: as cast
mass: 3419.3 g overall: 600.0 x 592.0 x 600.0 mm (x, y, z)
note:
general tolerances ISO 2768-mK, edges broken 0.3 x 45, units mm
geometry master: parts/tread.step
view origin = bounding-box centre = robot (0.00, 90.00, 0.00)