



Logic Supply Input And Filtering

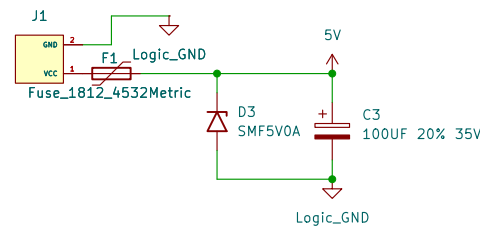


Logic Conditioning

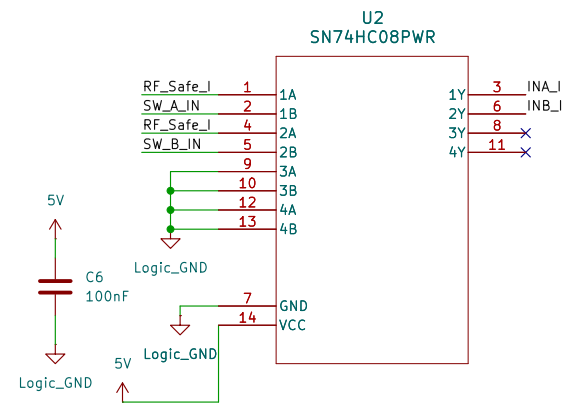


Logic conditioning provide noise immunity
Before the isolated gate driver.

Isolated Gate Power Supplies

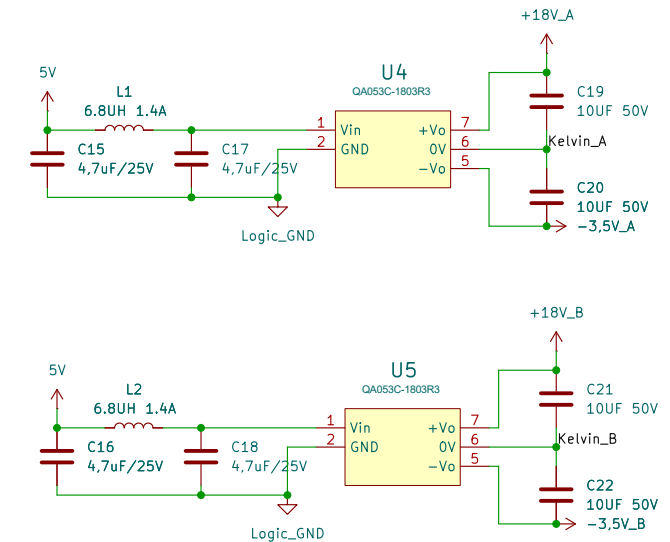


Each gate-driver channel uses an independent isolated bipolar
Supply for +18 V turn-on and -3.5 V turn-off bias.

Logic Inputs & Isolation

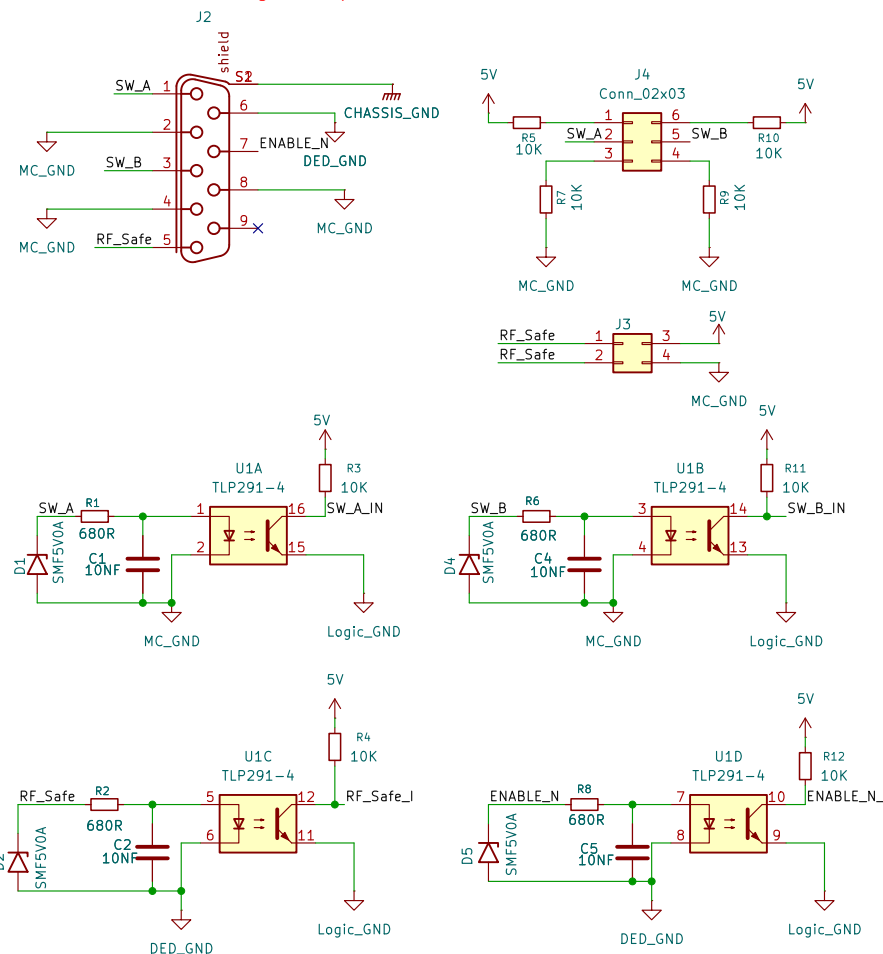


Control inputs are galvanically isolated from the
Gate-driver domain using optocouplers

Isolated Gate Driver & Input Filtering

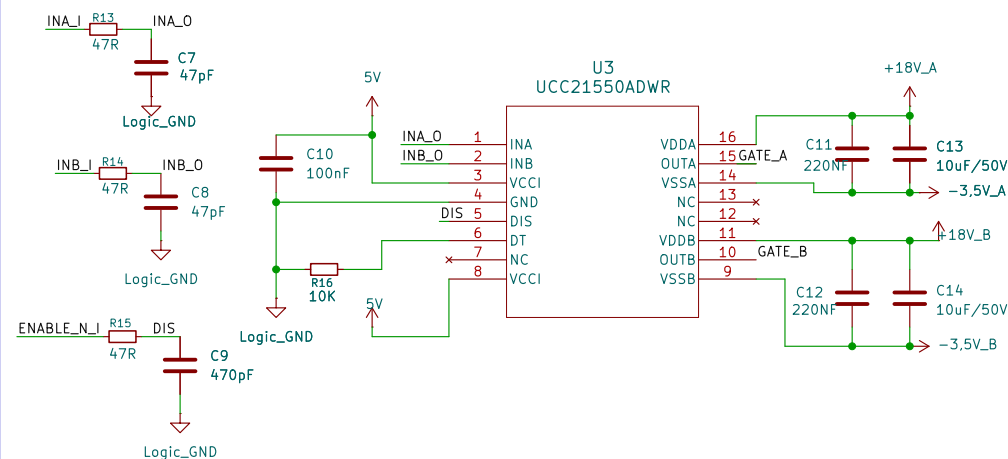

Dual isolated gate driver provides independent A/B gate
Control with programmable dead-time and disable functionality.

RF I/O & Power Switching

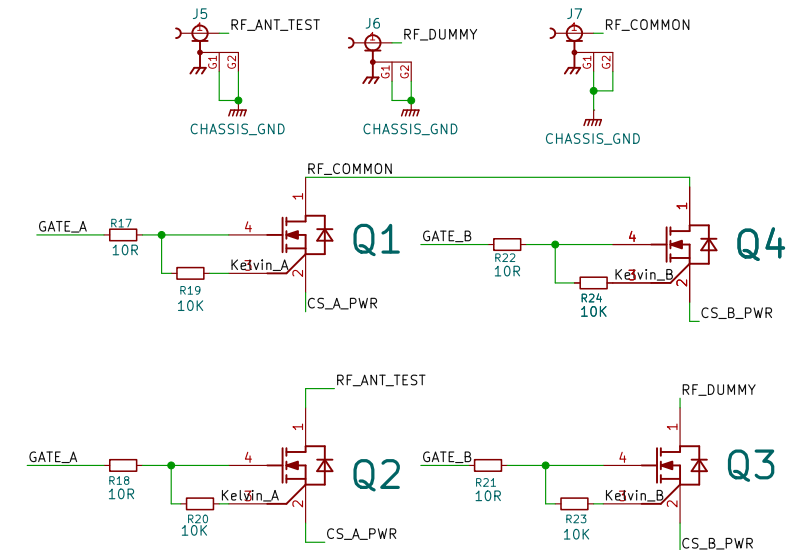

High-power 50 Ω RF path switched by back-to-back SiC MOSFET pairs
To block body-diode conduction in the OFF state.