

Logic Input & Power

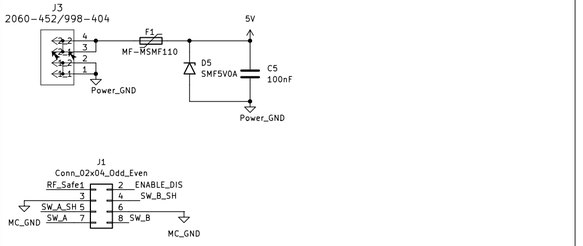


Provides protected and filtered 5 V power
For the logic and control circuitry.

Isolated Gate–Bias Supplies

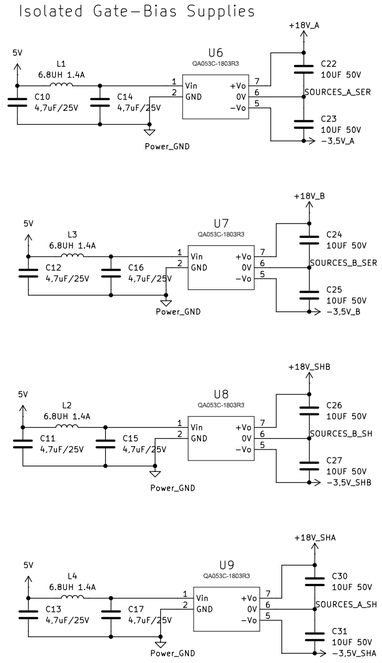


Each gate–driver channel uses an independent isolated bipolar
Supply for +18 V turn–on and –3.5 V turn–off bias.

RF I/O & Power Switching

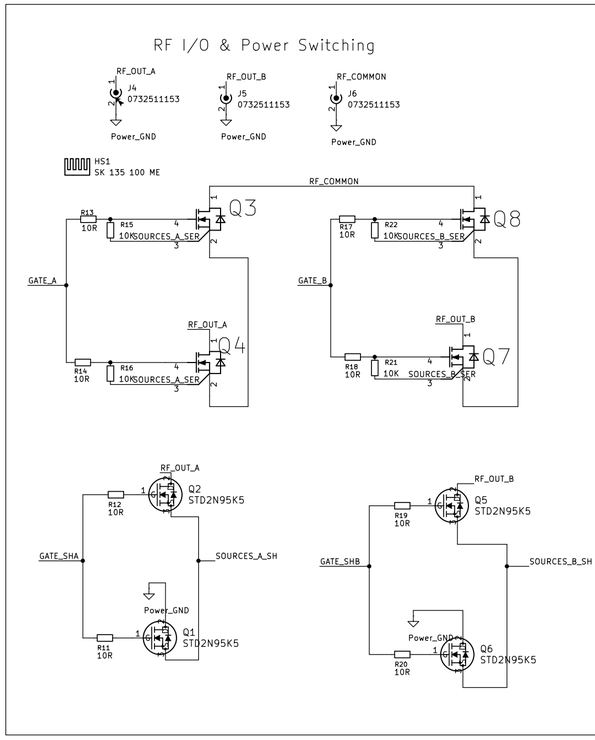


Control Inputs & Logic Conditioning

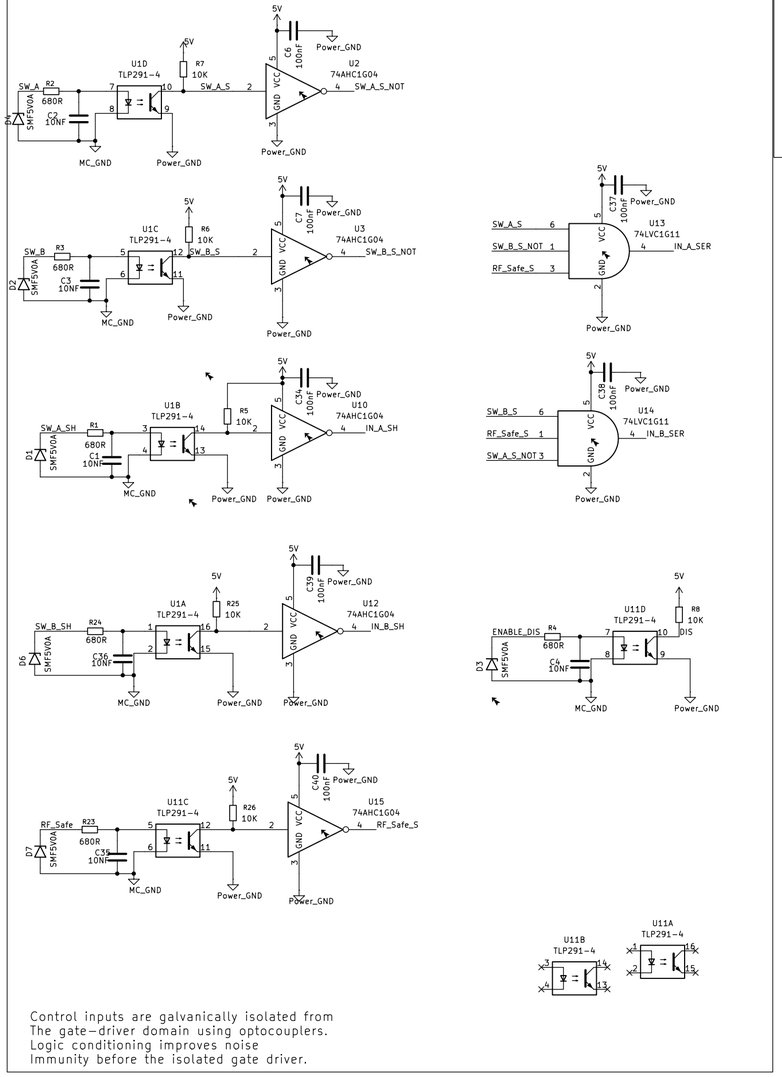

Control inputs are galvanically isolated from
The gate–driver domain using optocouplers.
Logic conditioning improves noise
Immunity before the isolated gate driver.

Isolated Gate Driver & Input Filtering

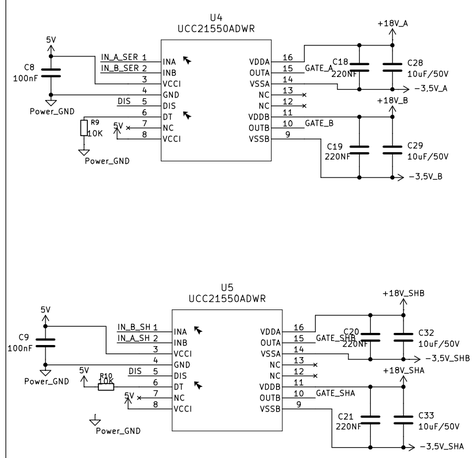

The dual isolated gate driver provides independent A/B
Control with programmable dead time and hardware disable.