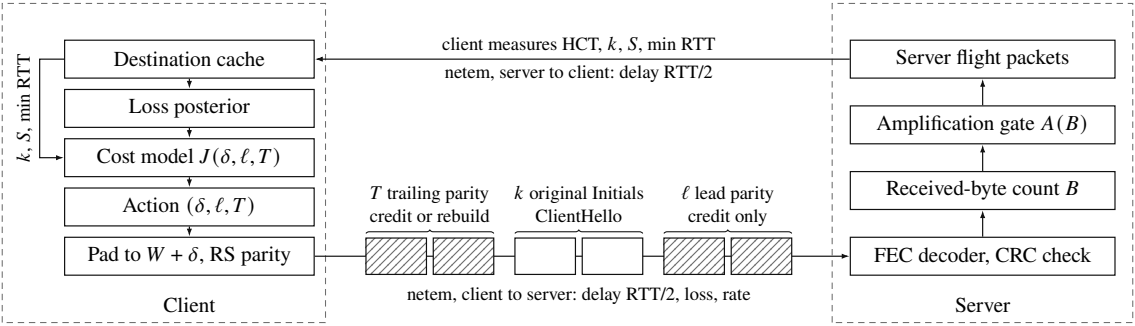
Destination cache
Loss posterior
Cost model $J(\delta, \ell, T)$
Action $(\delta, \ell, T)$
Pad to $W + \delta$, RS parity
$k$, $S$, min RTT
Client
client measures HCT, $k$, $S$, min RTT
netem, server to client: delay RTT/2
$T$ trailing parity credit or rebuild
$k$ original Initials ClientHello
$\ell$ lead parity credit only
netem, client to server: delay RTT/2, loss, rate
Server flight packets
Amplification gate $A(B)$
Received-byte count $B$
FEC decoder, CRC check
Server