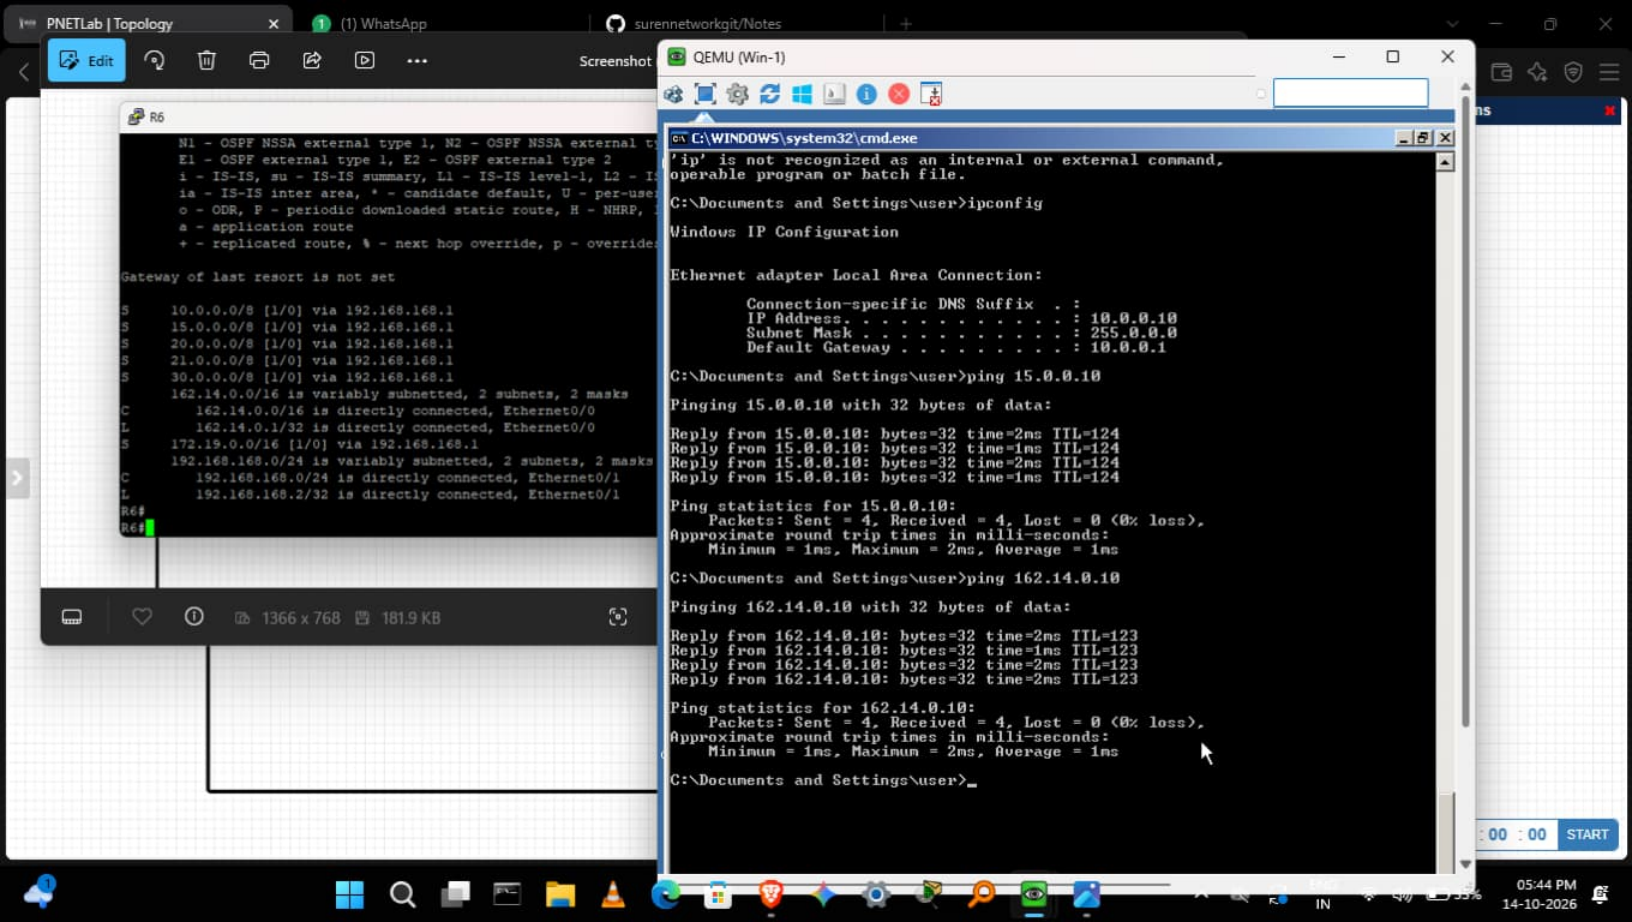
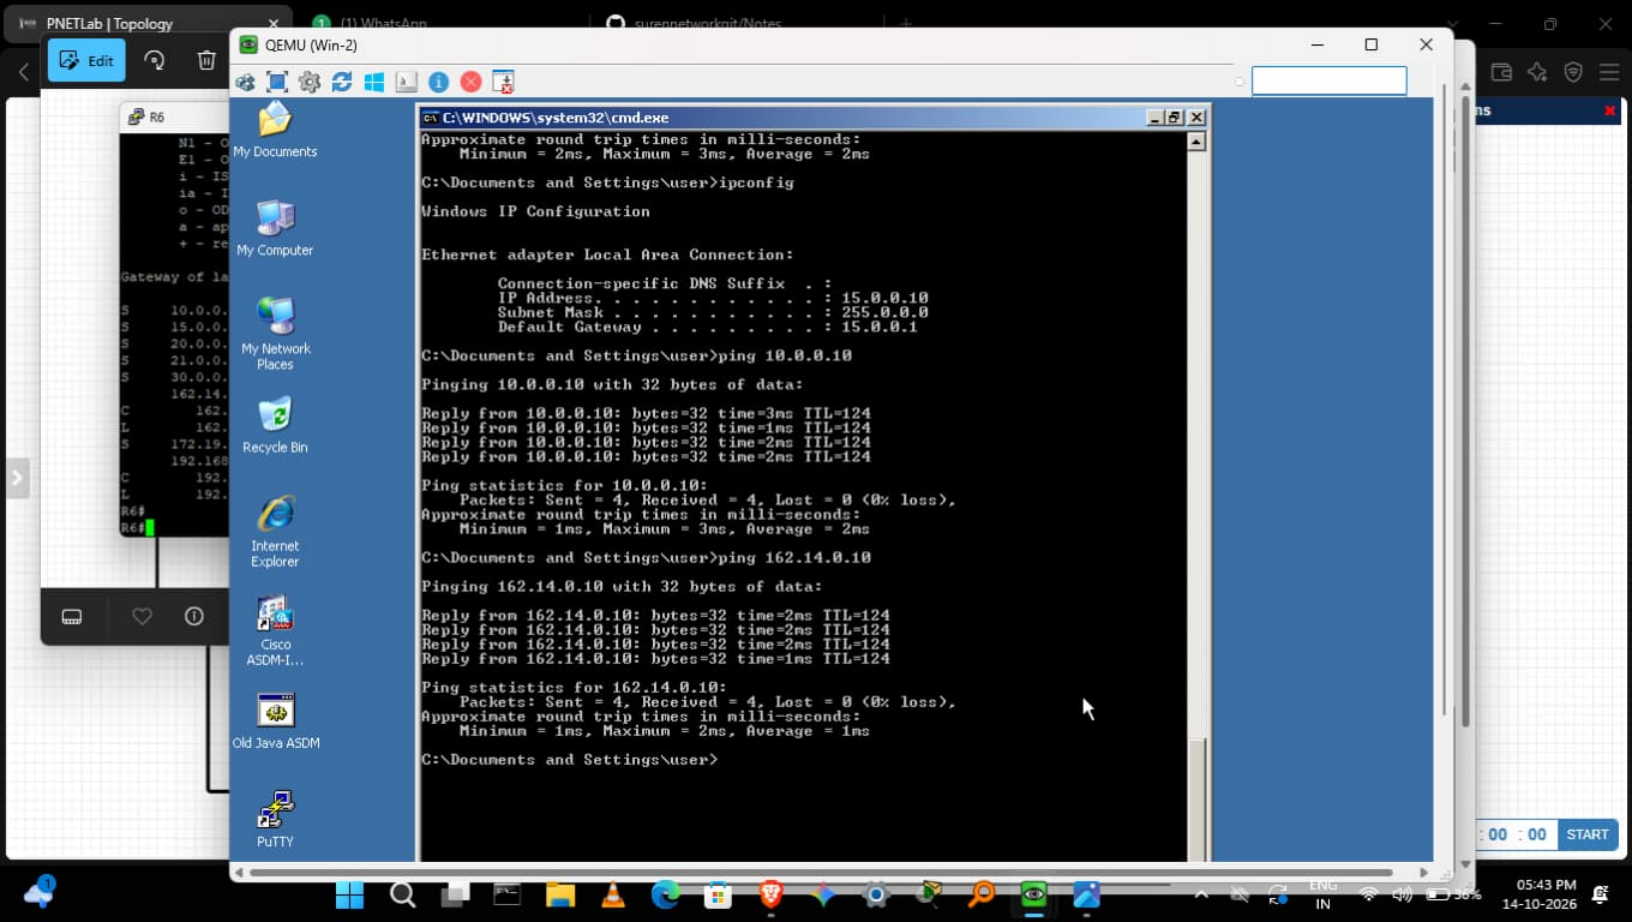

PNETLab | Topology
(1) WhatsApp
surennetworkgit/Notes
Edit
Screenshot
R6
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external t
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - I
ia - IS-IS inter area, * - candidate default, U - per-use
o - ODR, P - periodic downloaded static route, H - NHRP,
a - application route
+ - replicated route, % - next hop override, p - override
Gateway of last resort is not set
S 10.0.0.0/8 [1/0] via 192.168.168.1
S 15.0.0.0/8 [1/0] via 192.168.168.1
S 20.0.0.0/8 [1/0] via 192.168.168.1
S 21.0.0.0/8 [1/0] via 192.168.168.1
S 30.0.0.0/8 [1/0] via 192.168.168.1
162.14.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 162.14.0.0/16 is directly connected, Ethernet0/0
L 162.14.0.1/32 is directly connected, Ethernet0/0
S 172.19.0.0/16 [1/0] via 192.168.168.1
192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.168.0/24 is directly connected, Ethernet0/1
L 192.168.168.2/32 is directly connected, Ethernet0/1
R6#
R6#
1366 x 768
181.9 KB
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
'ip' is not recognized as an internal or external command,
operable program or batch file.
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 10.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . : 10.0.0.1
C:\Documents and Settings\user>ping 15.0.0.10
Pinging 15.0.0.10 with 32 bytes of data:
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Ping statistics for 15.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>ping 162.14.0.10
Pinging 162.14.0.10 with 32 bytes of data:
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123
Reply from 162.14.0.10: bytes=32 time=1ms TTL=123
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123
Ping statistics for 162.14.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
START
IN
05:44 PM
14-10-2026


PNETLab | Topology
Edit
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 15.0.0.10
Subnet Mask . . . . . : 255.0.0.0
Default Gateway . . . . . : 15.0.0.1
C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=3ms TTL=124
Reply from 10.0.0.10: bytes=32 time=1ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Ping statistics for 10.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ping 162.14.0.10
Pinging 162.14.0.10 with 32 bytes of data:
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=1ms TTL=124
Ping statistics for 162.14.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
My Documents
My Computer
My Network Places
Recycle Bin
Internet Explorer
Cisco ASDM-I...
Old Java ASDM
PuTTY
R6
START
05:43 PM
14-10-2026


Notifications

R1

```
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2
      i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
      ia - IS-IS inter area, * - candidate default, U - per-user static route
      o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
      a - application route
      + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        10.0.0.0/8 is directly connected, Ethernet0/0
L        10.0.0.1/32 is directly connected, Ethernet0/0
S     15.0.0.0/8 [1/0] via 20.0.0.2
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Ethernet0/1
L        20.0.0.1/32 is directly connected, Ethernet0/1
S     21.0.0.0/8 [1/0] via 20.0.0.2
S     30.0.0.0/8 [1/0] via 20.0.0.2
S     162.14.0.0/16 [1/0] via 20.0.0.2
S     172.19.0.0/16 [1/0] via 20.0.0.2
S     192.168.168.0/24 [1/0] via 20.0.0.2
R1#
R1#
```

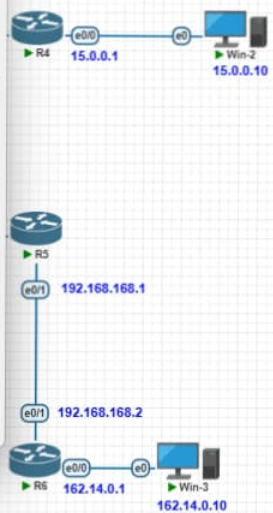

Physical


01 : 00 : 00 START

R2

```
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 20.0.0.1
S     15.0.0.0/8 [1/0] via 30.0.0.2
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Ethernet0/0
L        20.0.0.2/32 is directly connected, Ethernet0/0
S     21.0.0.0/8 [1/0] via 30.0.0.2
      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        30.0.0.0/8 is directly connected, Ethernet0/1
L        30.0.0.1/32 is directly connected, Ethernet0/1
S     162.14.0.0/16 [1/0] via 30.0.0.2
S     172.19.0.0/16 [1/0] via 30.0.0.2
S     192.168.168.0/24 [1/0] via 30.0.0.2
R2#
```

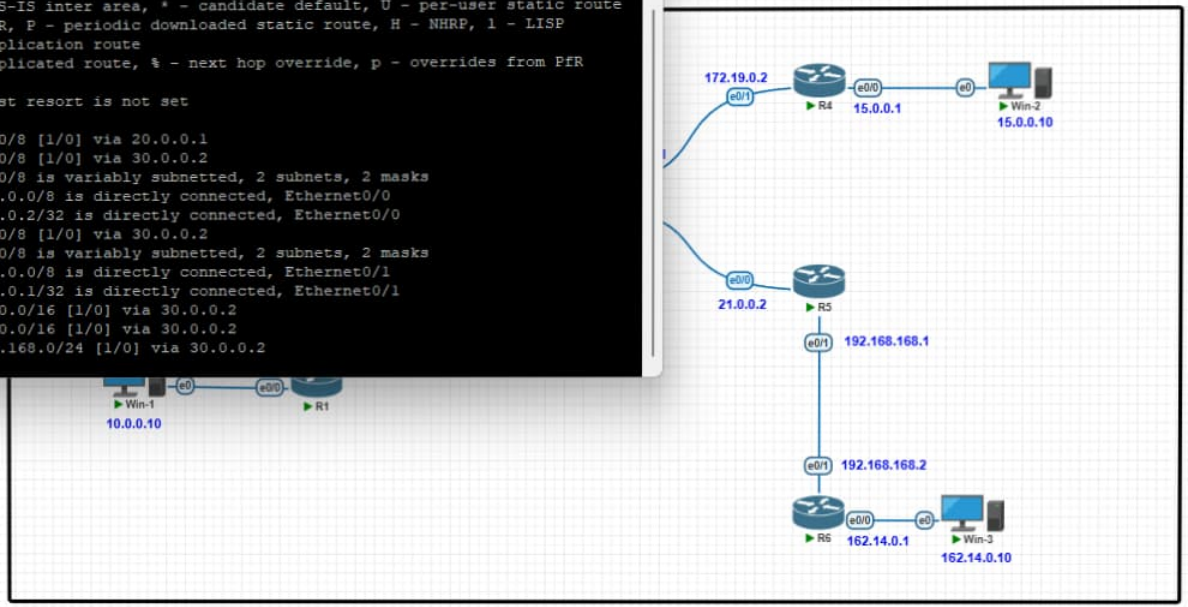


Notifications

Physical

01 : 00 : 00 START

PNETLab | Topology
WhatsApp
surennetworkgit/Notes
labs.surennetwork.com/legacy/topology
Notifications

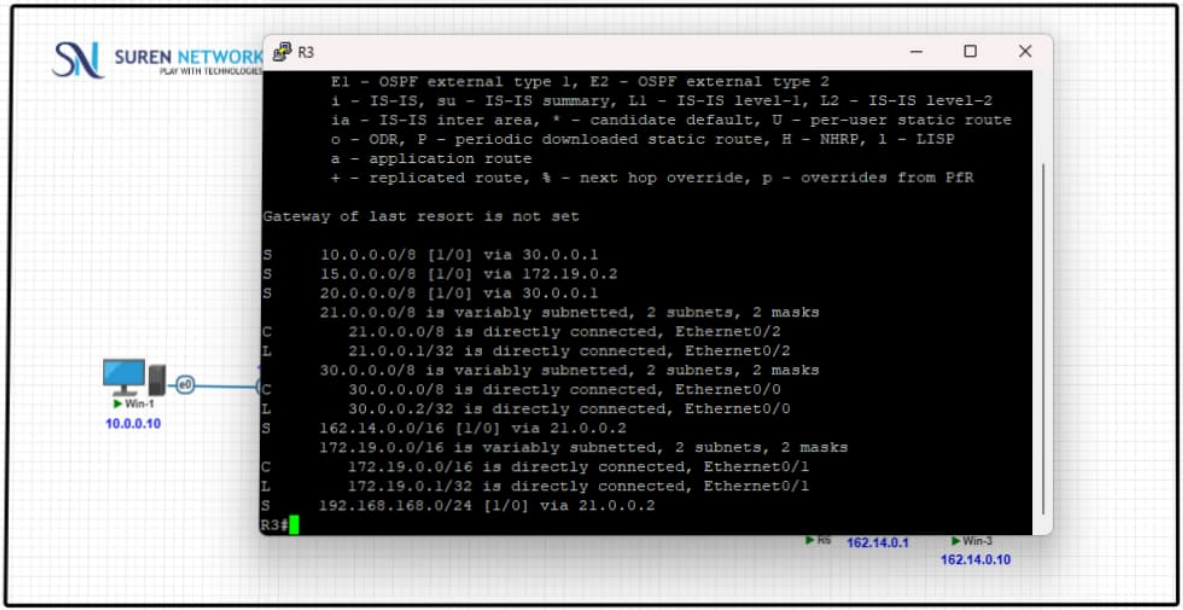

Physical
01 : 00 : 00
START

PNETLab | Topology

WhatsApp

surennetworkgit/Notes

labs.surennetwork.com/legacy/topology


Notifications

R4

```
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 172.19.0.1
      15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        15.0.0.0/8 is directly connected, Ethernet0/0
L        15.0.0.1/32 is directly connected, Ethernet0/0
S     20.0.0.0/8 [1/0] via 172.19.0.1
S     21.0.0.0/8 [1/0] via 172.19.0.1
S     30.0.0.0/8 [1/0] via 172.19.0.1
S     162.14.0.0/16 [1/0] via 172.19.0.1
      172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C        172.19.0.0/16 is directly connected, Ethernet0/1
L        172.19.0.2/32 is directly connected, Ethernet0/1
S     192.168.168.0/24 [1/0] via 172.19.0.1
R4#
```

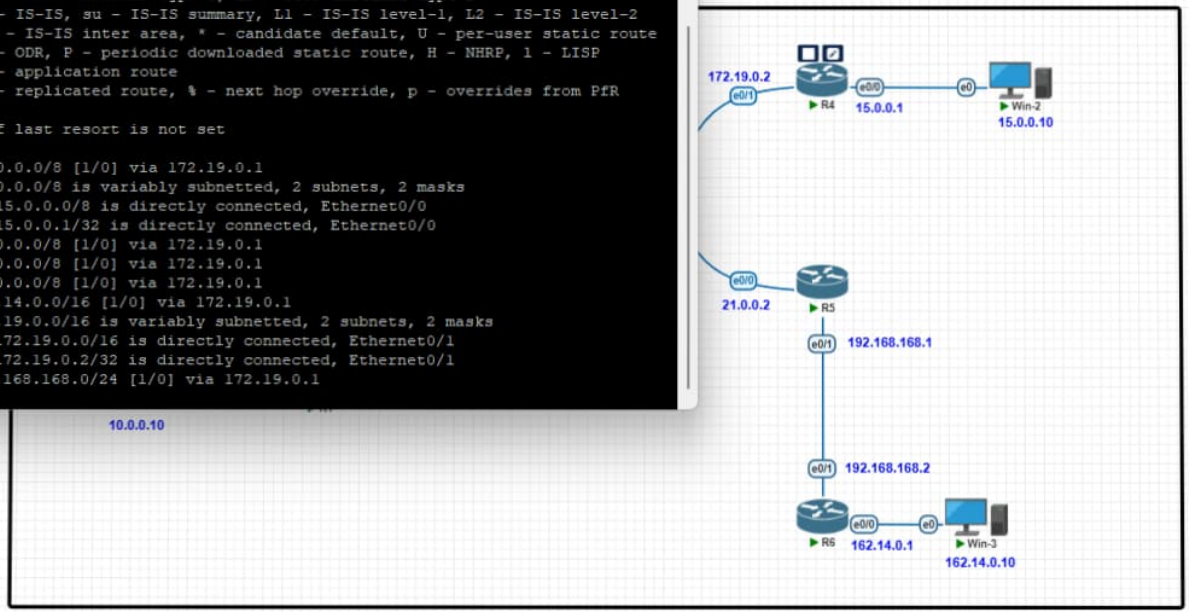

Physical

01 : 00 : 00

START

PNETLab | Topology | WhatsApp | surennetworkgit/Notes

labs.surennetwork.com/legacy/topology


Notifications

R5

```
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2
      i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
      ia - IS-IS inter area, * - candidate default, U - per-user static route
      o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
      a - application route
      + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 21.0.0.1
S     15.0.0.0/8 [1/0] via 21.0.0.1
S     20.0.0.0/8 [1/0] via 21.0.0.1
      21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        21.0.0.0/8 is directly connected, Ethernet0/0
L        21.0.0.2/32 is directly connected, Ethernet0/0
S     30.0.0.0/8 [1/0] via 21.0.0.1
S     162.14.0.0/16 [1/0] via 192.168.168.2
S     172.19.0.0/16 [1/0] via 21.0.0.1
      192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.168.0/24 is directly connected, Ethernet0/1
L        192.168.168.1/32 is directly connected, Ethernet0/1
R5#
```

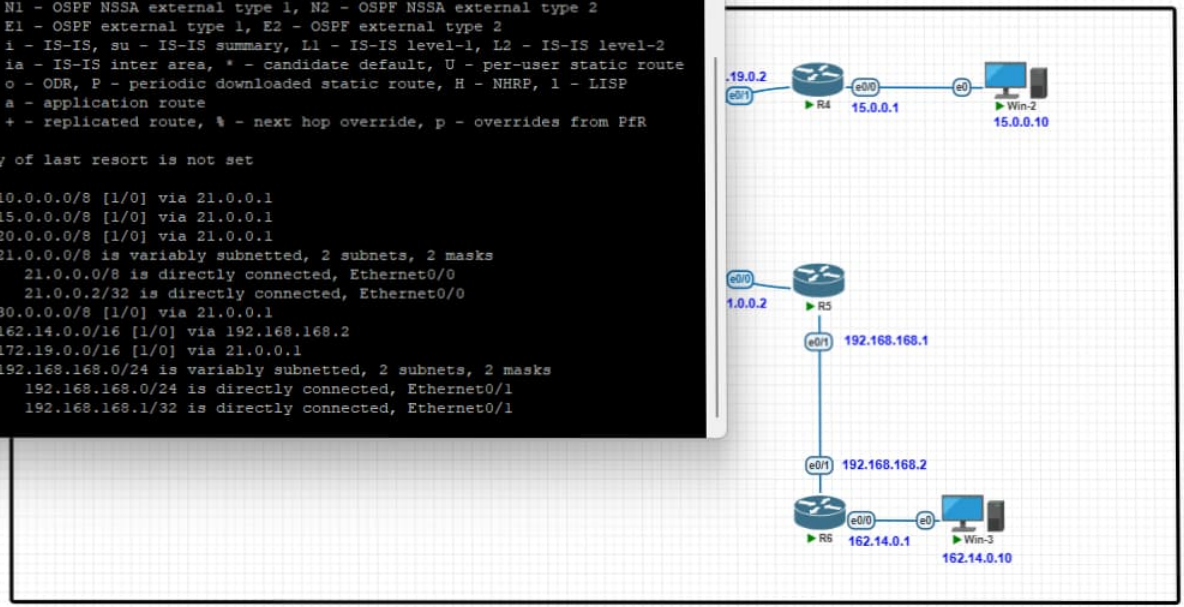

Physical 01 : 00 : 00 START

PNETLab | Topology | WhatsApp | surennetworkgit/Notes

labs.surennetwork.com/legacy/topology


Notifications

R6

```
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2
      i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
      ia - IS-IS inter area, * - candidate default, U - per-user static route
      o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
      a - application route
      + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     10.0.0.0/8 [1/0] via 192.168.168.1
S     15.0.0.0/8 [1/0] via 192.168.168.1
S     20.0.0.0/8 [1/0] via 192.168.168.1
S     21.0.0.0/8 [1/0] via 192.168.168.1
S     30.0.0.0/8 [1/0] via 192.168.168.1
      162.14.0.0/16 is variably subnetted, 2 subnets, 2 masks
C        162.14.0.0/16 is directly connected, Ethernet0/0
L        162.14.0.1/32 is directly connected, Ethernet0/0
S     172.19.0.0/16 [1/0] via 192.168.168.1
      192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.168.0/24 is directly connected, Ethernet0/1
L        192.168.168.2/32 is directly connected, Ethernet0/1
R6#
R6#
```

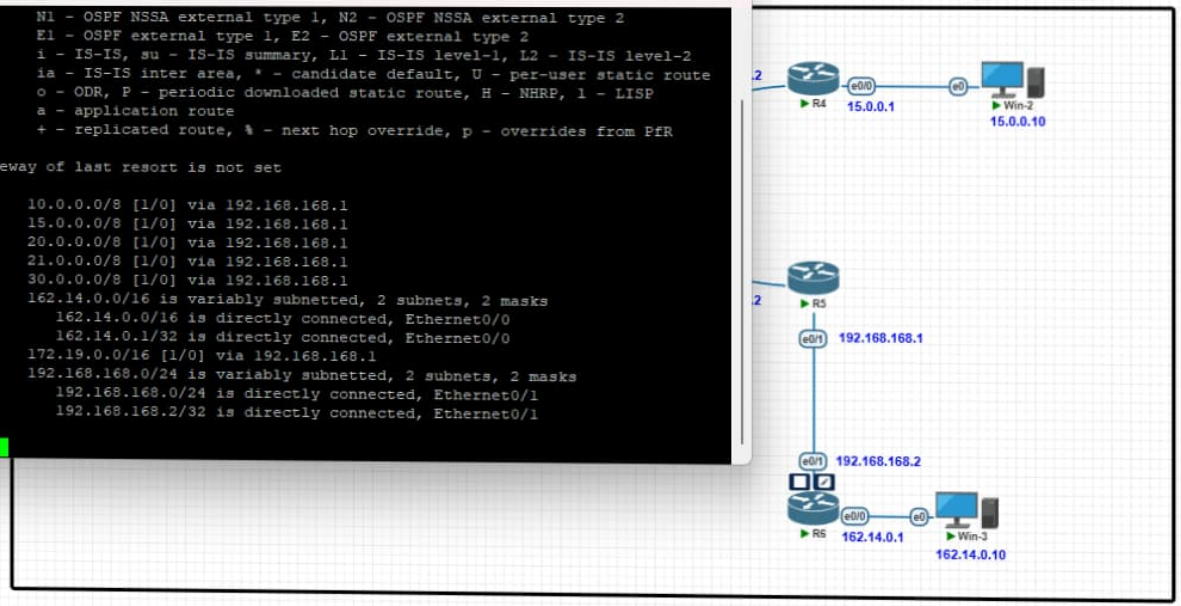

Physical

01 : 00 : 00 START