



## USB-C PC/Tablet USB-C Charger/GP

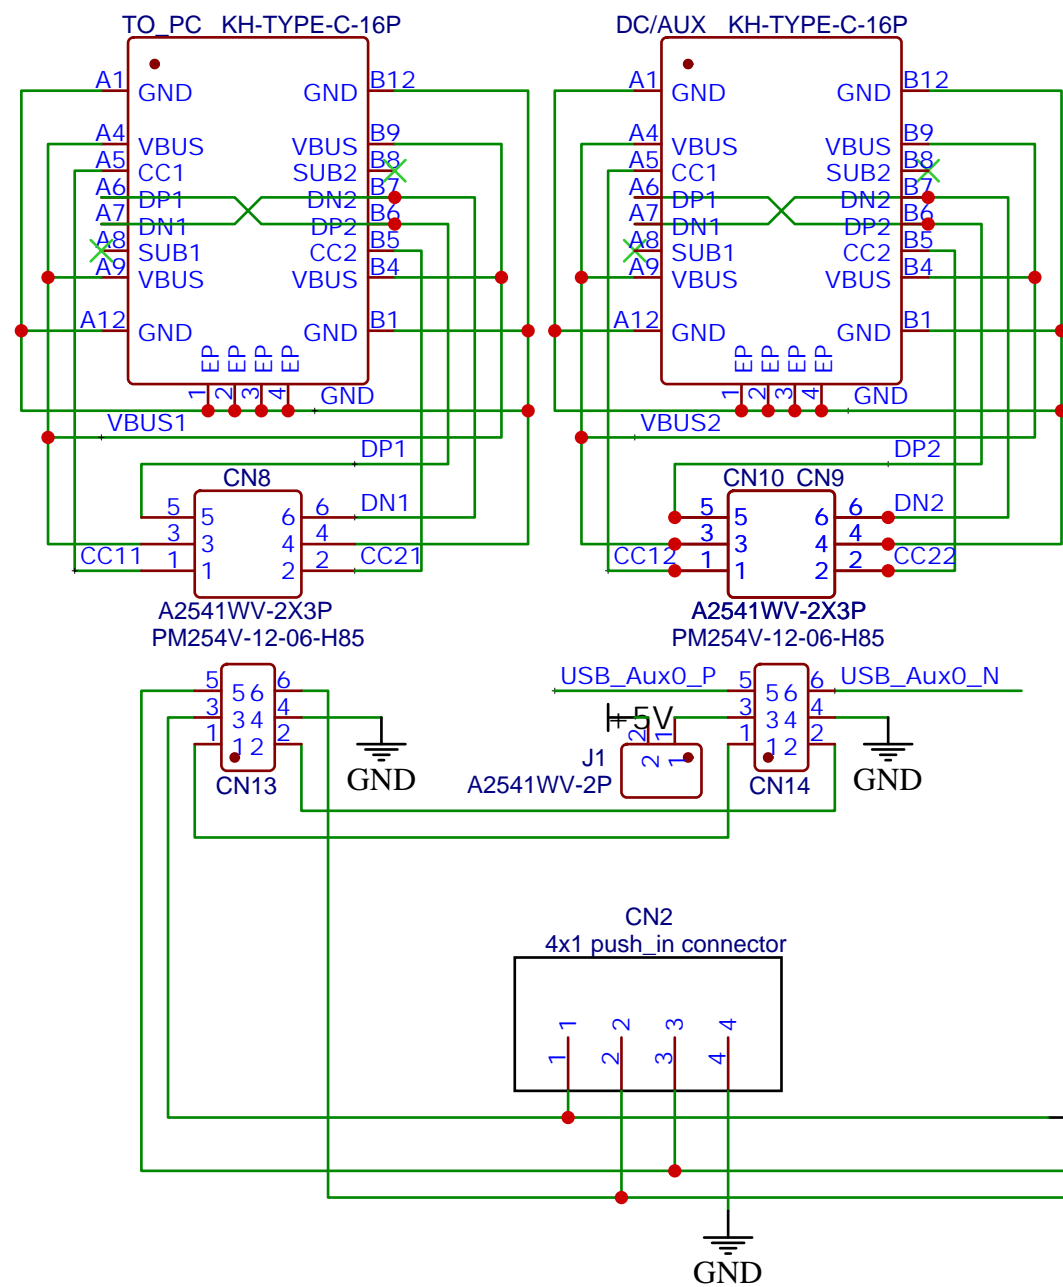


LED colors:  
white: power  
green/blue: serial data RxD/TxD  
yellow/orange: I/O  
red: error


## Roof Top Unit Connector

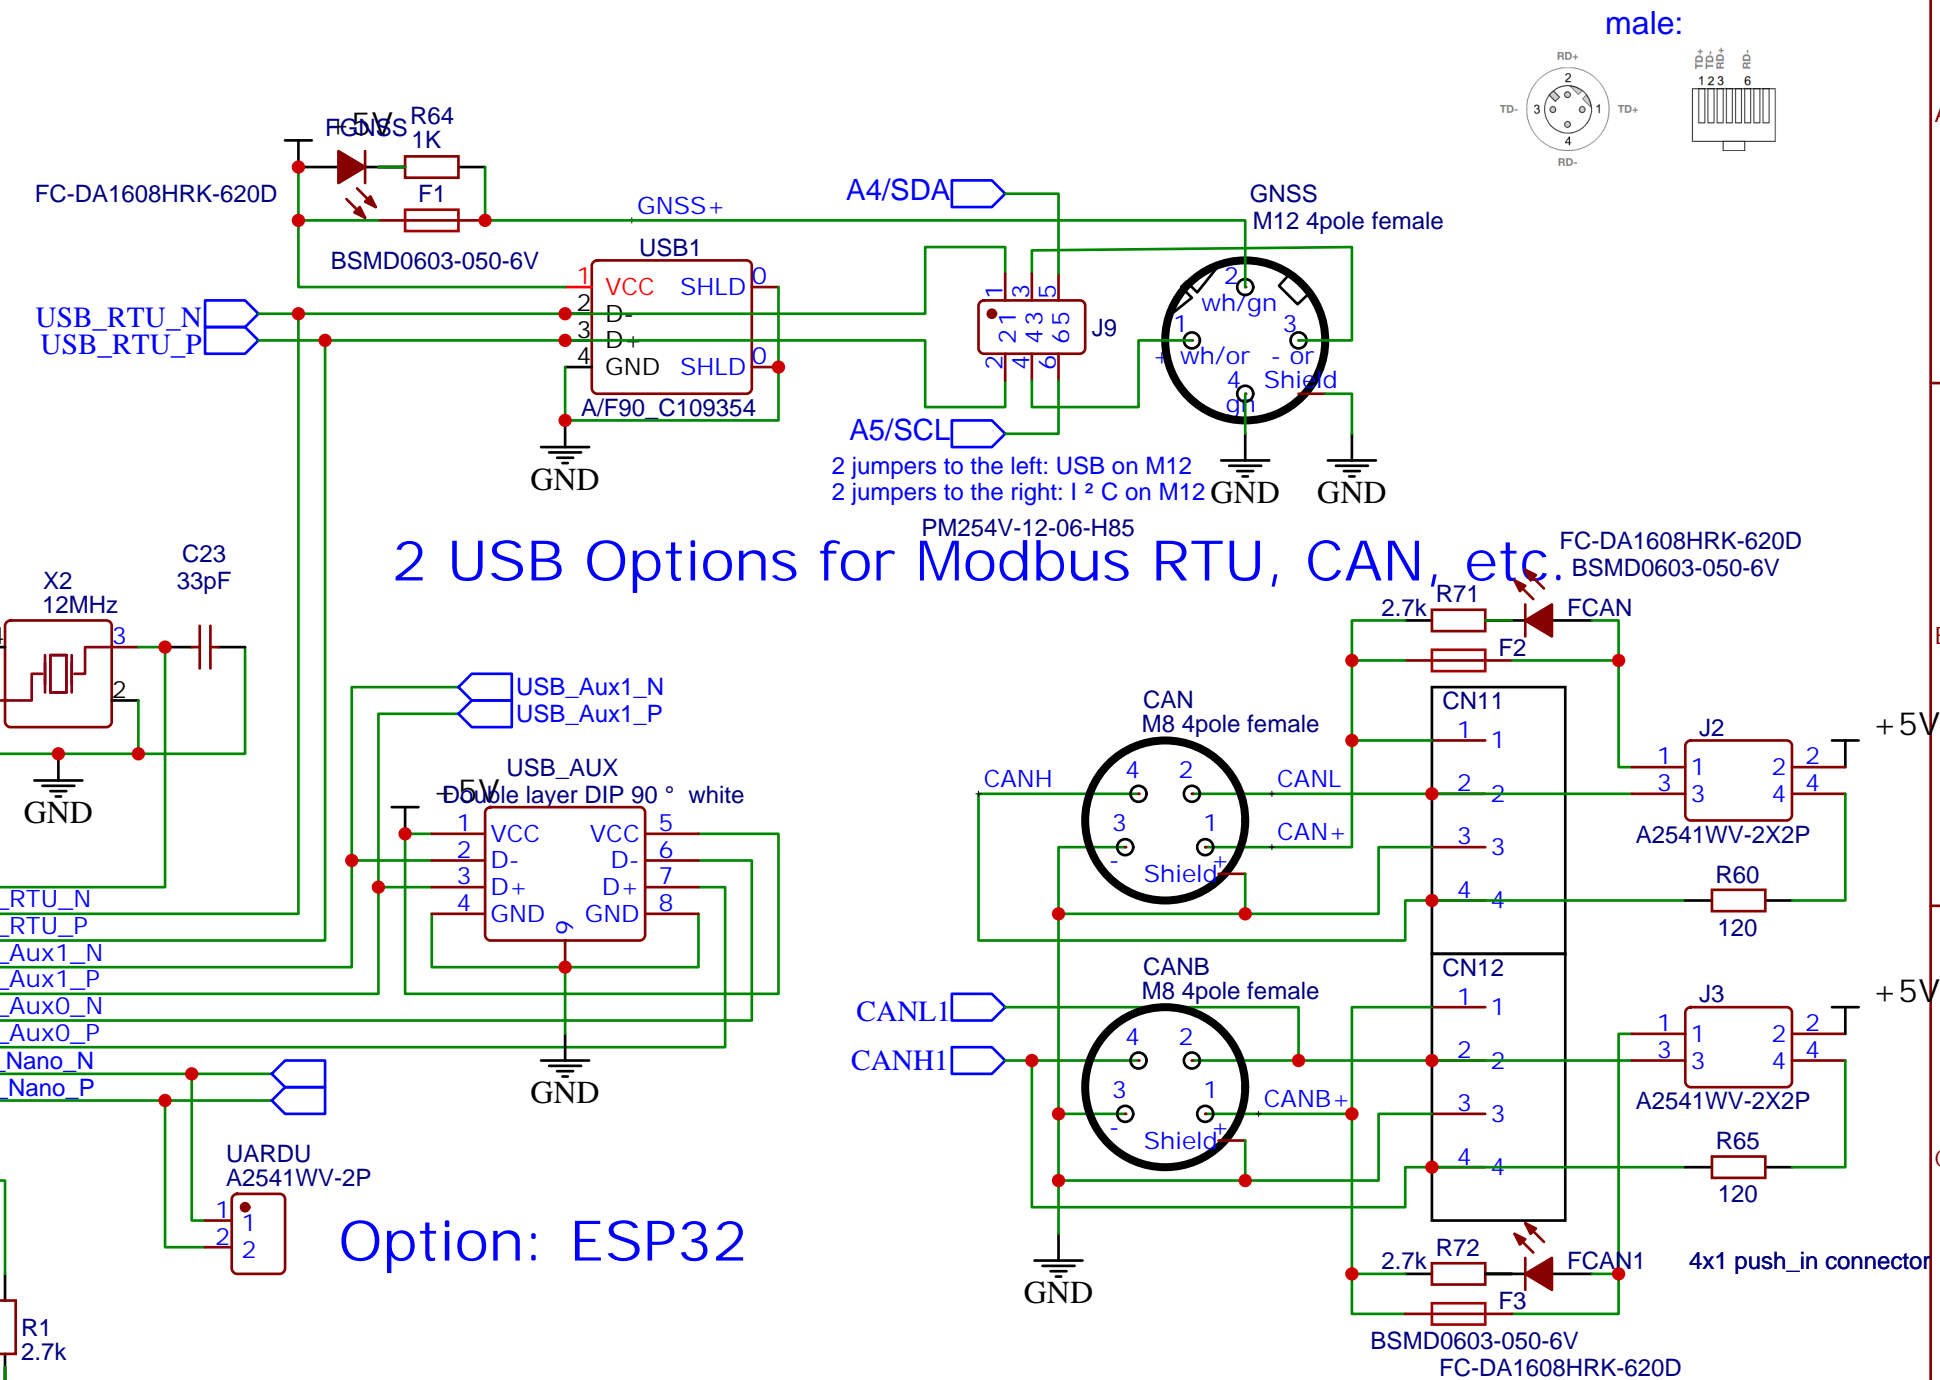

## Power Input Connector


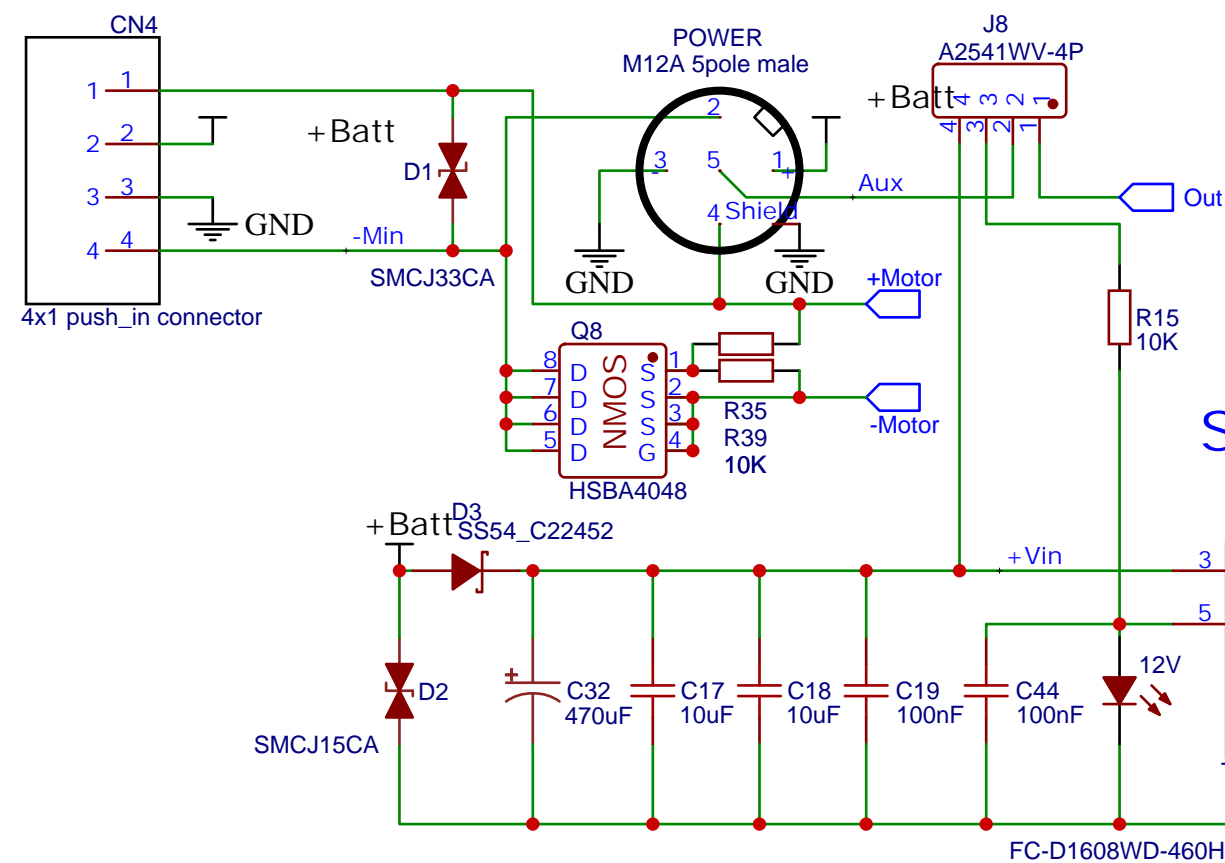


## Switch Mode Power Supply

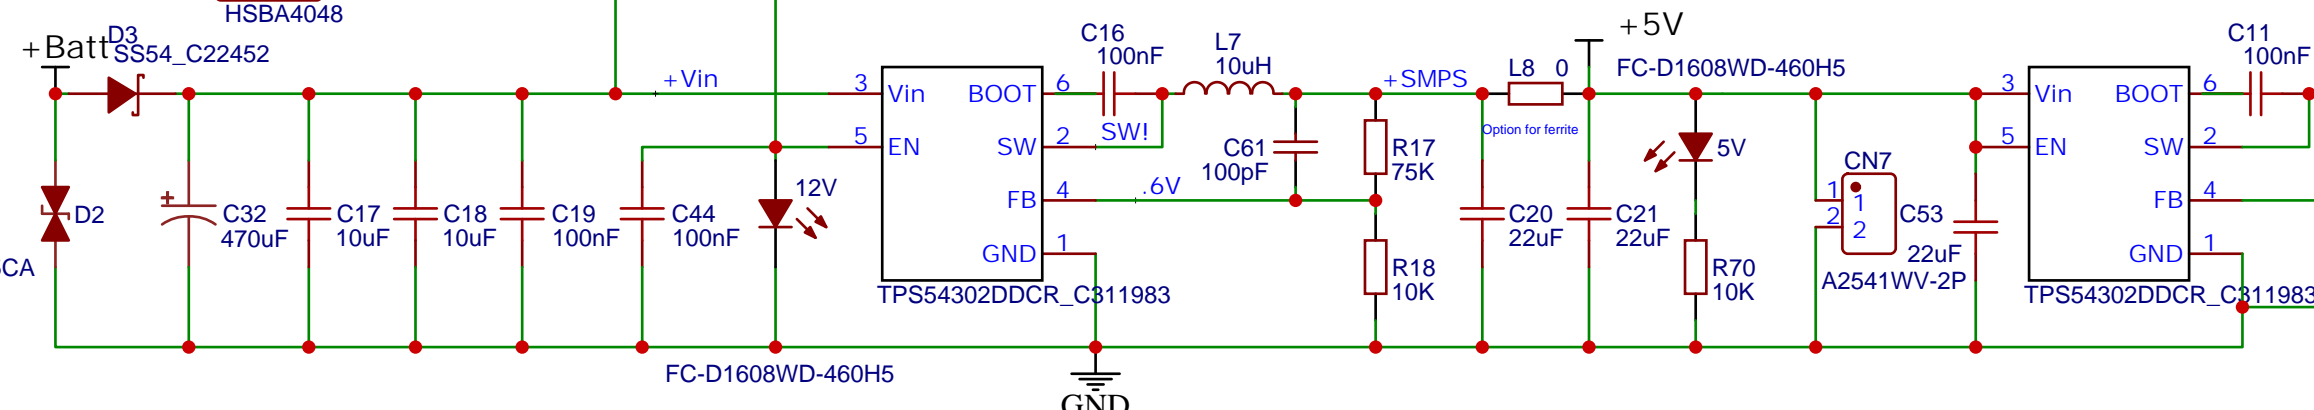


TITLE: Supply & USB		REV: 1.0
Company: agopengps.discourse.group		Sheet: 1/1
Date: 2020-12-11		Drawn By: GoRoNb

## Nano

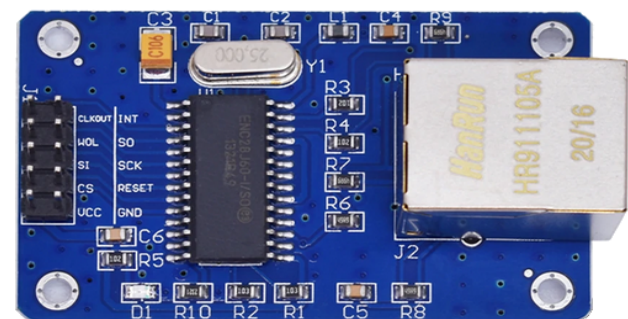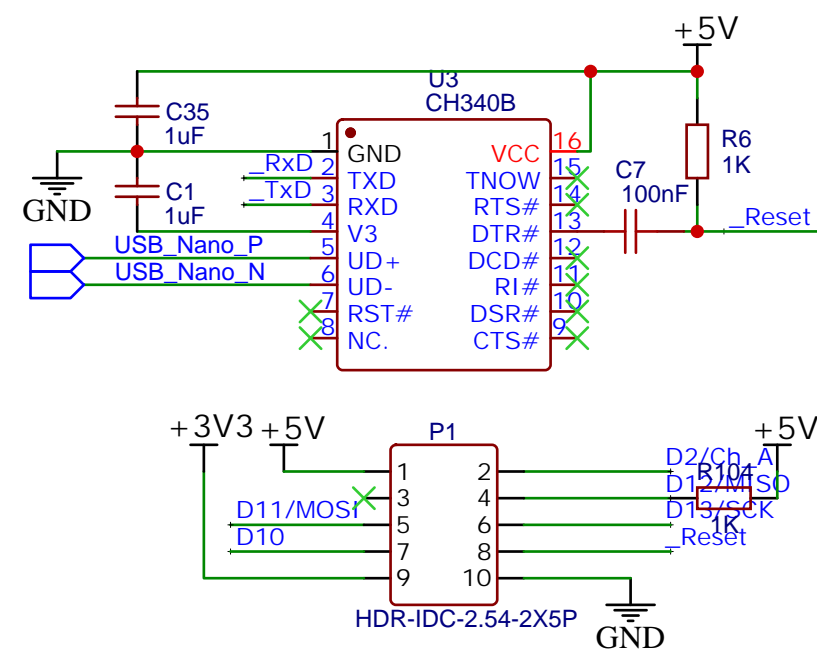


Cut CLKOUT before connecting!


## Whatever

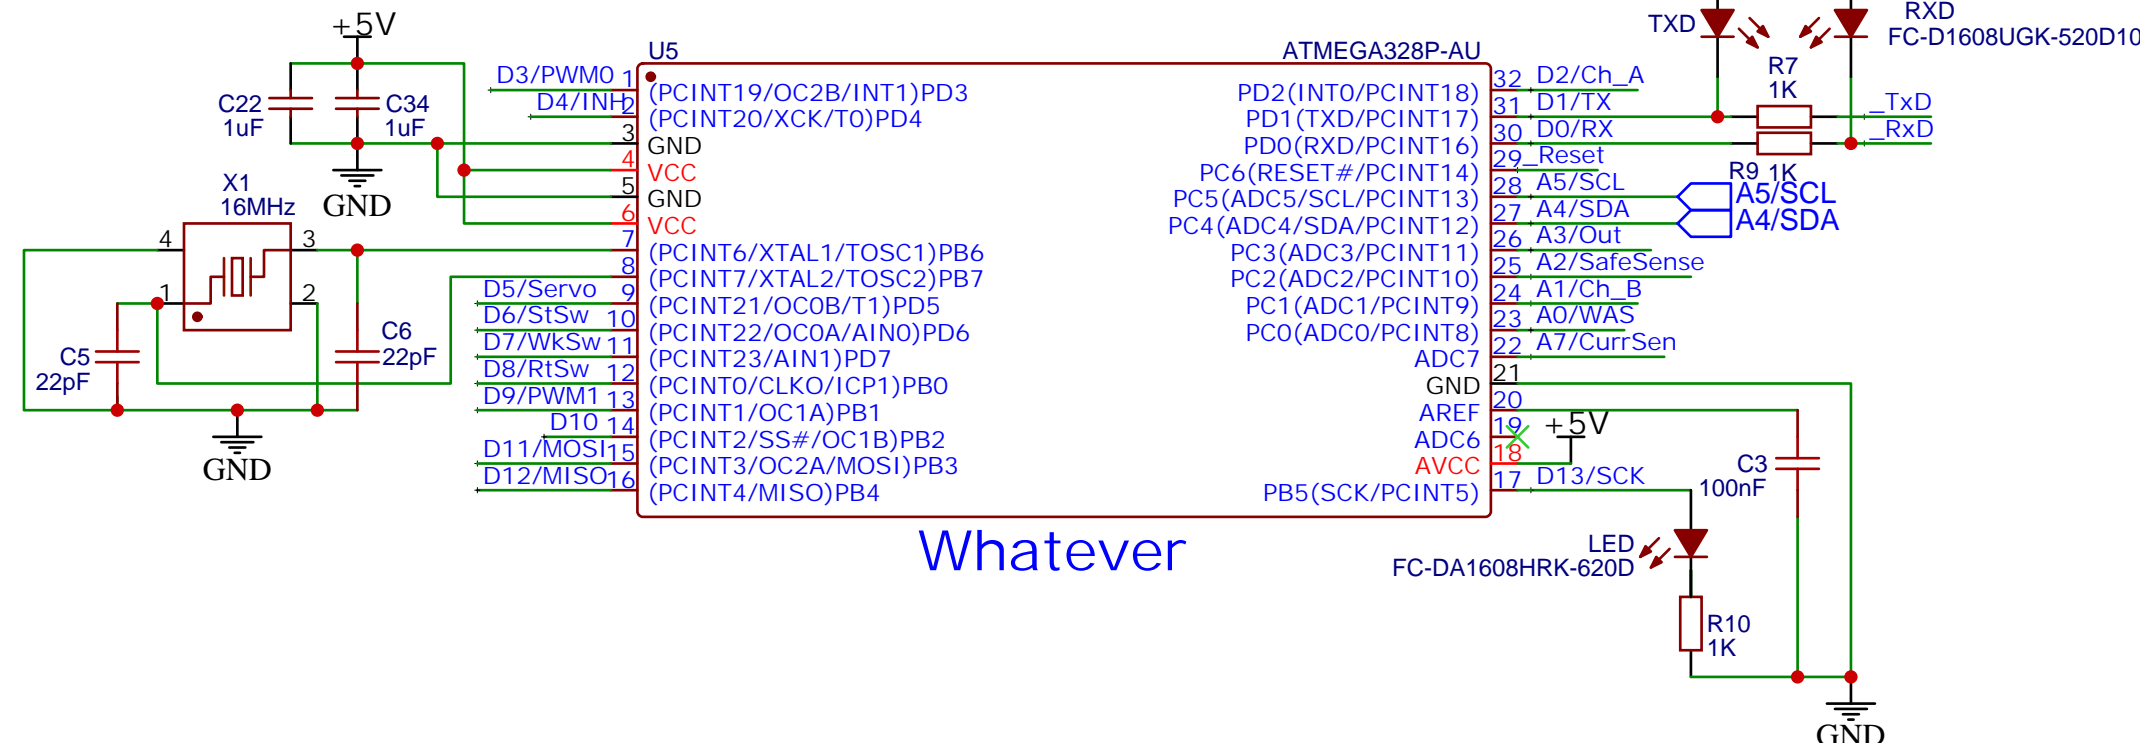


## Option: ESP32

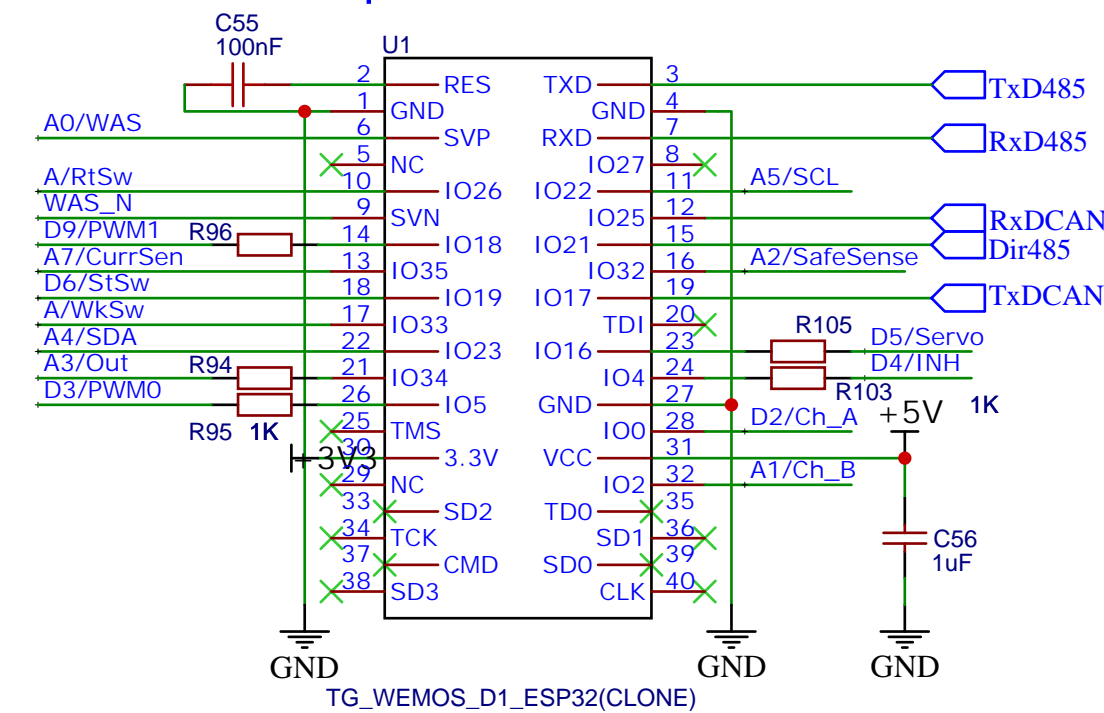


## H Bridge

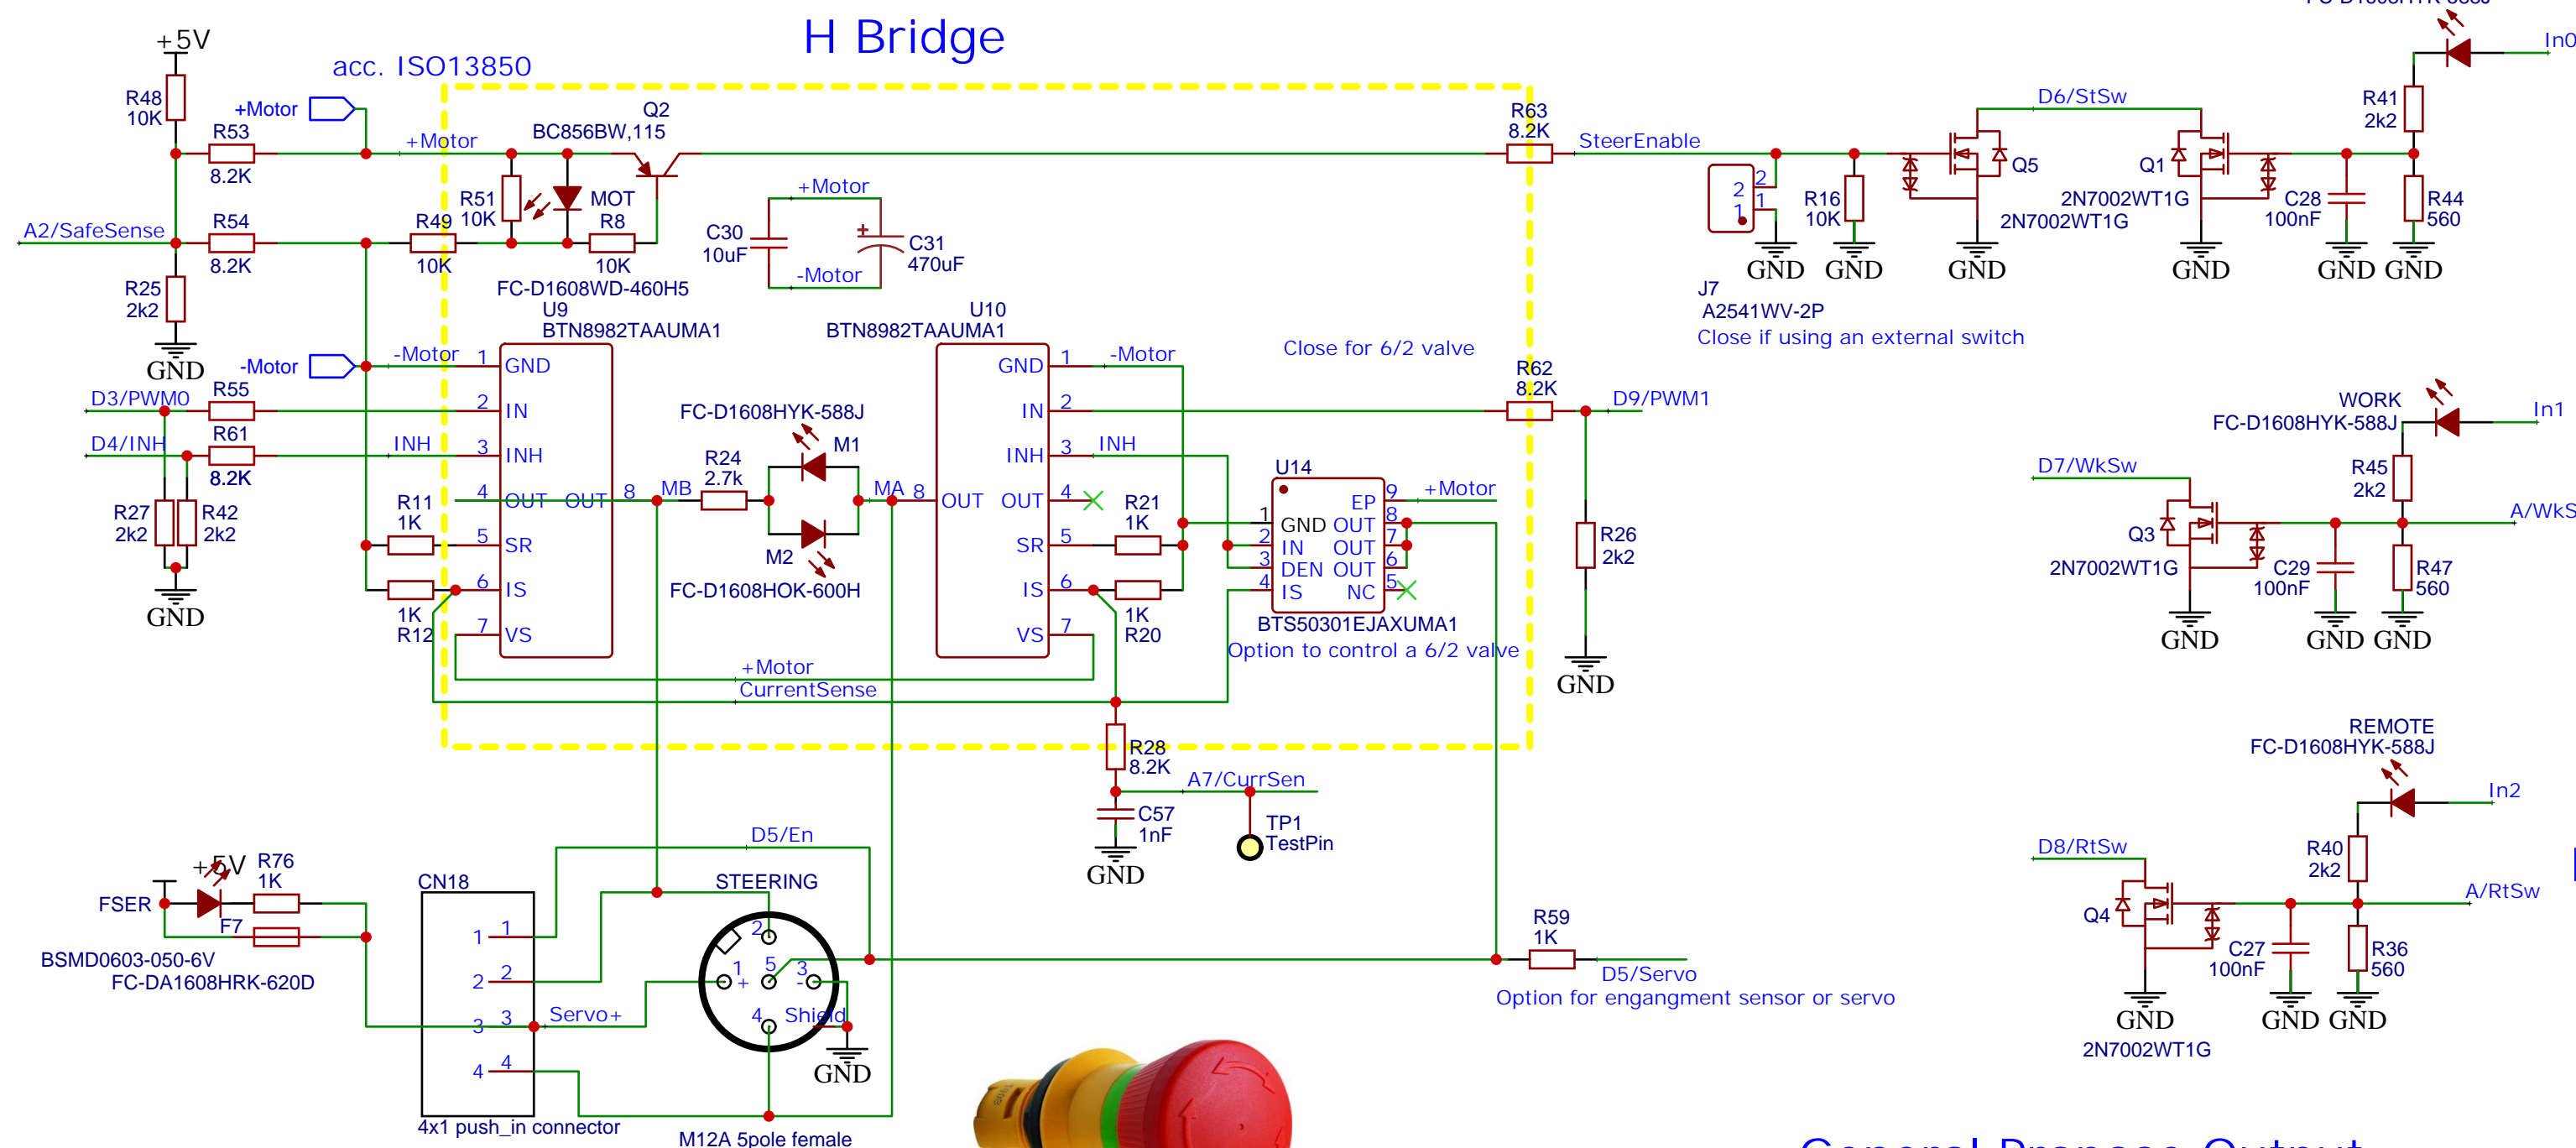

## Protected General Propose Inputs

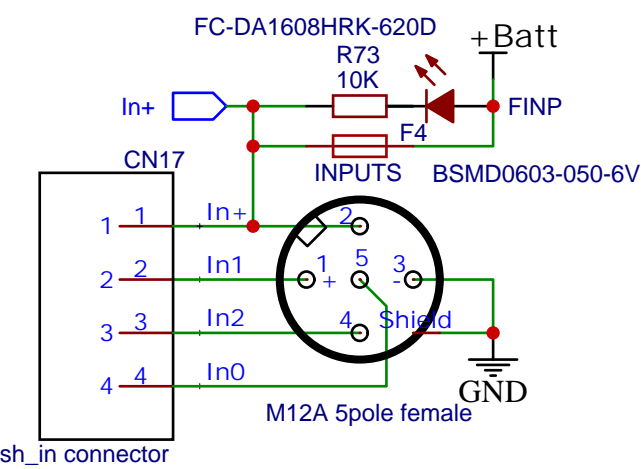


## General Propose Output

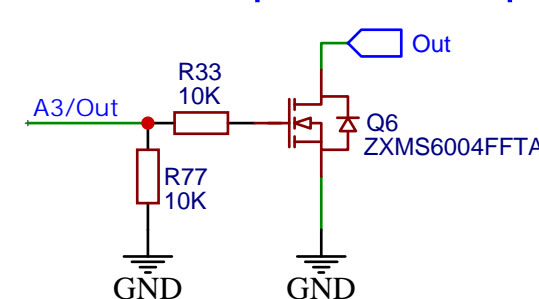

TITLE: $\mu$ C, Motor Driver, I/O		REV: 1.0
Company: agopengps.discourse.group		Sheet: 1/1
Date: 2020-12-11		Drawn By: GoRoNb


CANtact

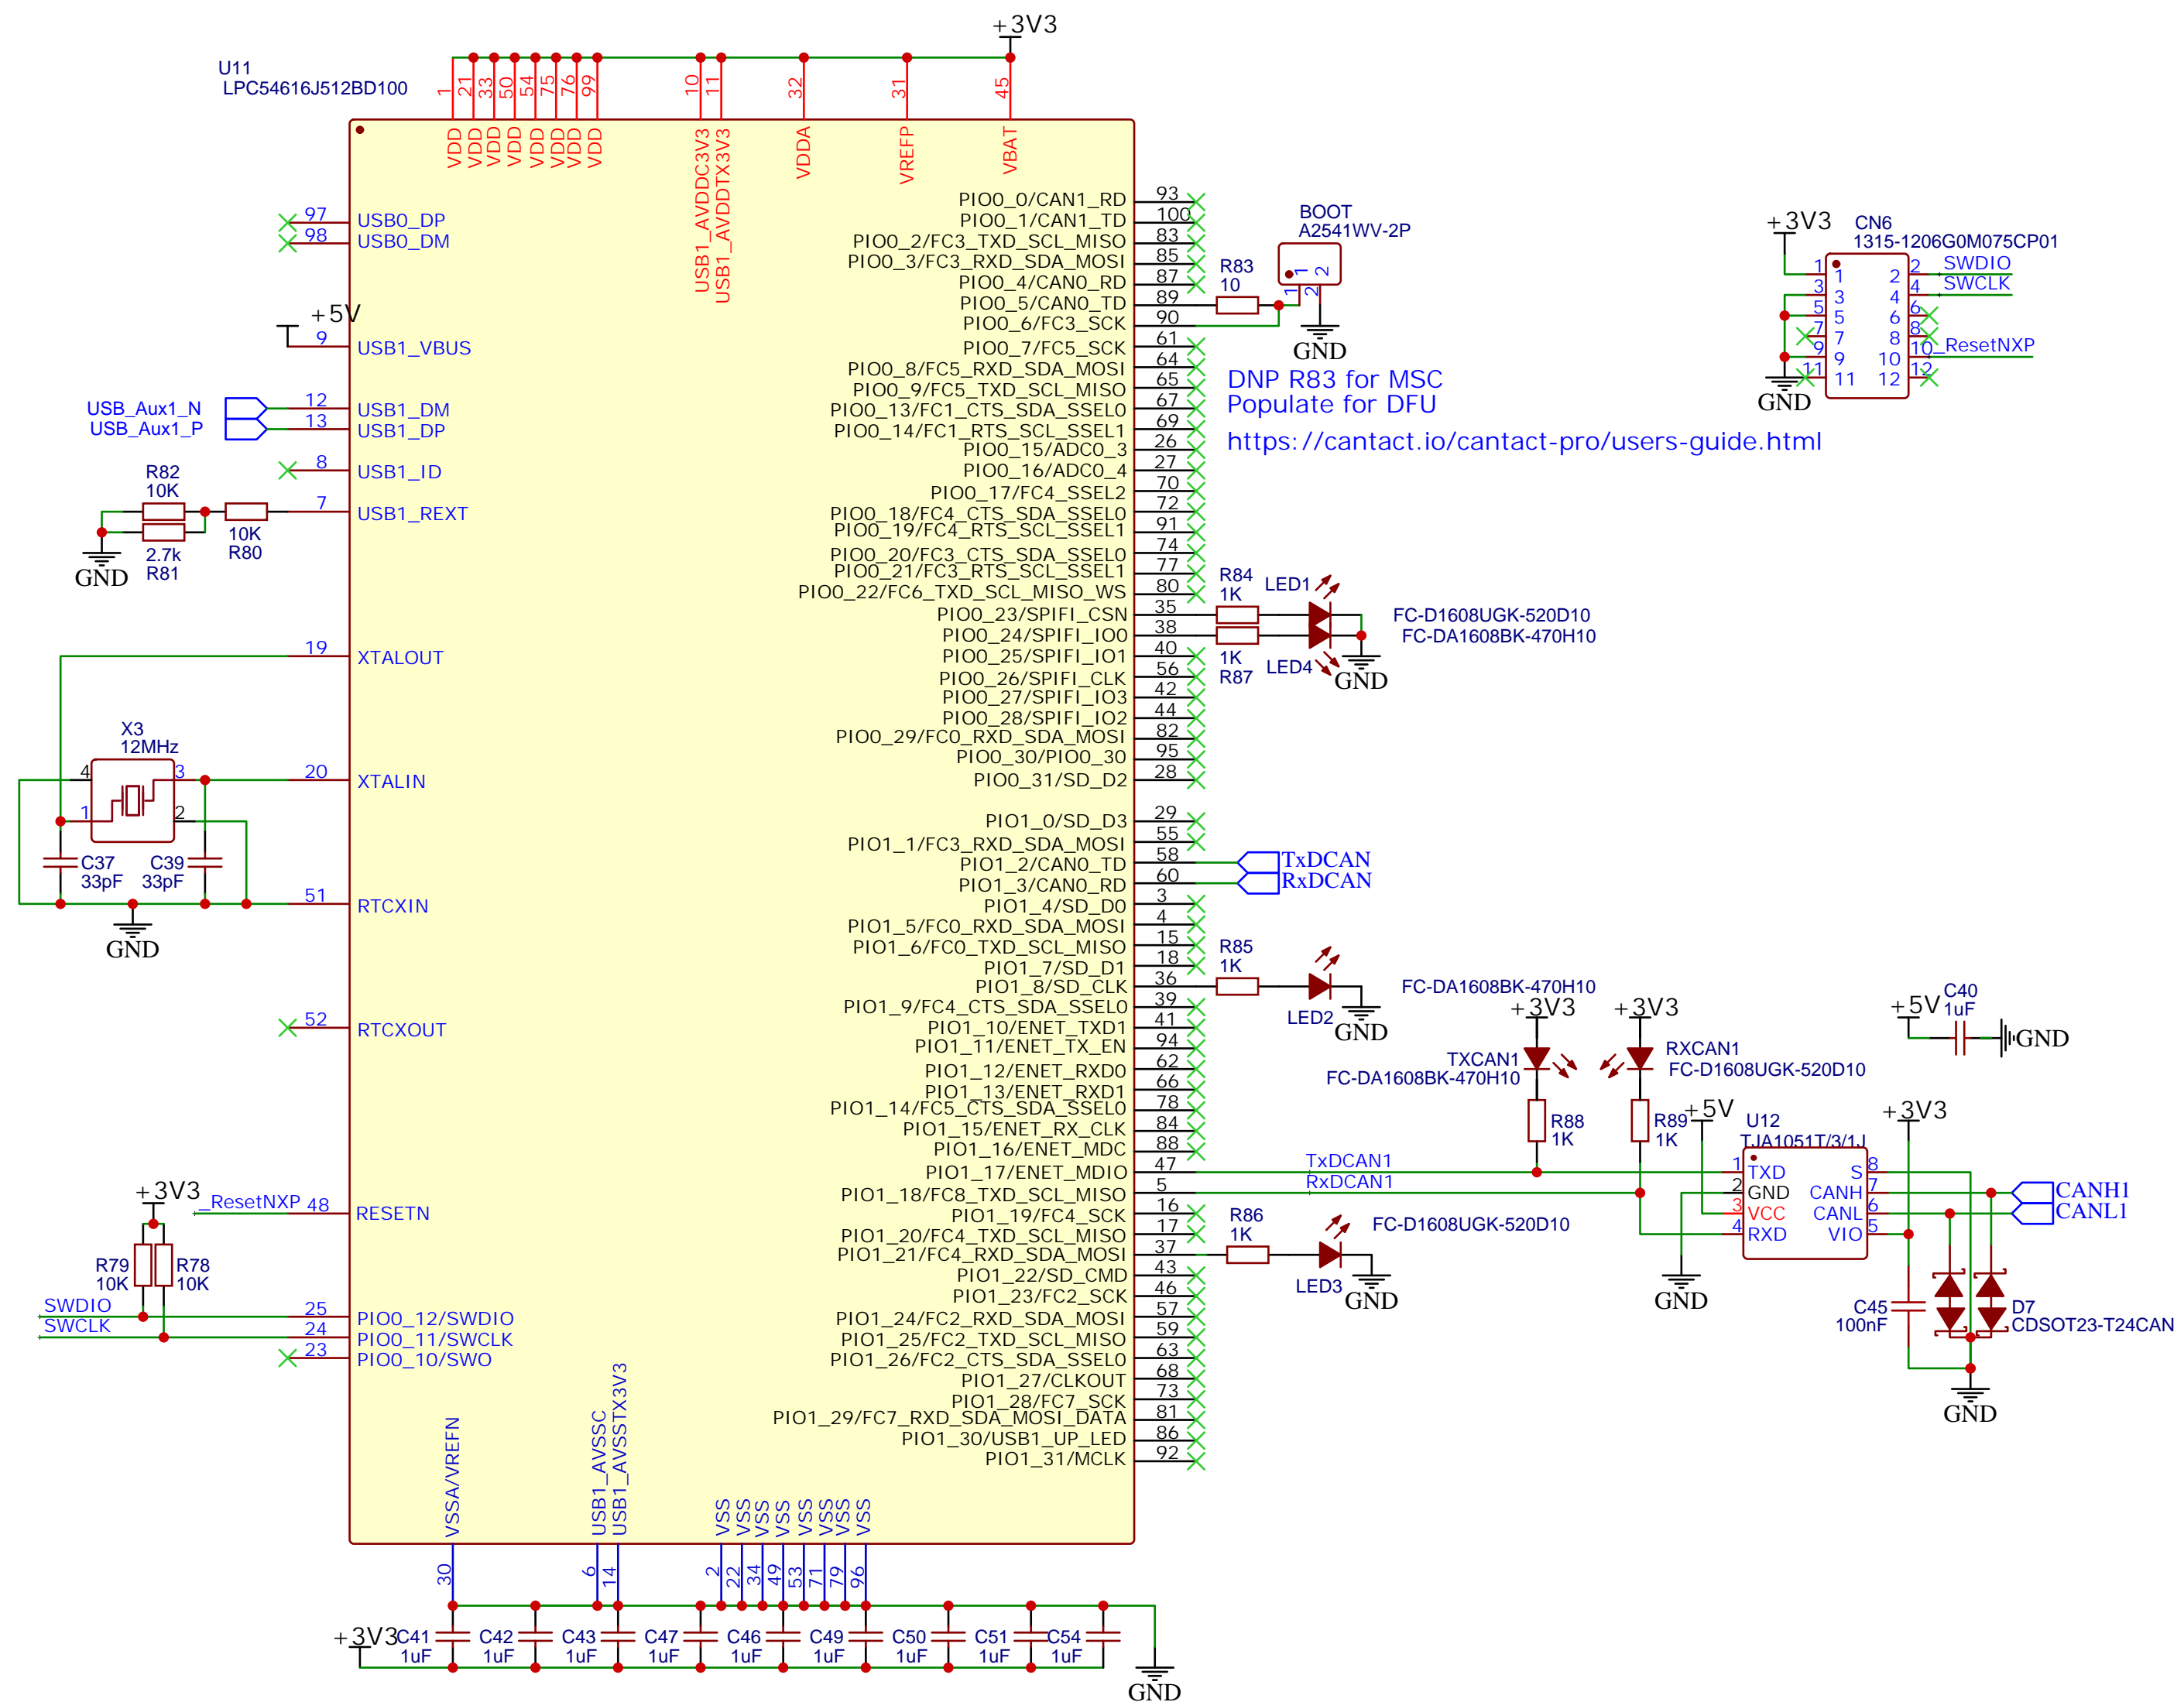


DNP R83 for MSC  
Populate for DFU  
<https://cantact.io/cantact-pro/users-guide.html>



## Wheel Angle Sensor

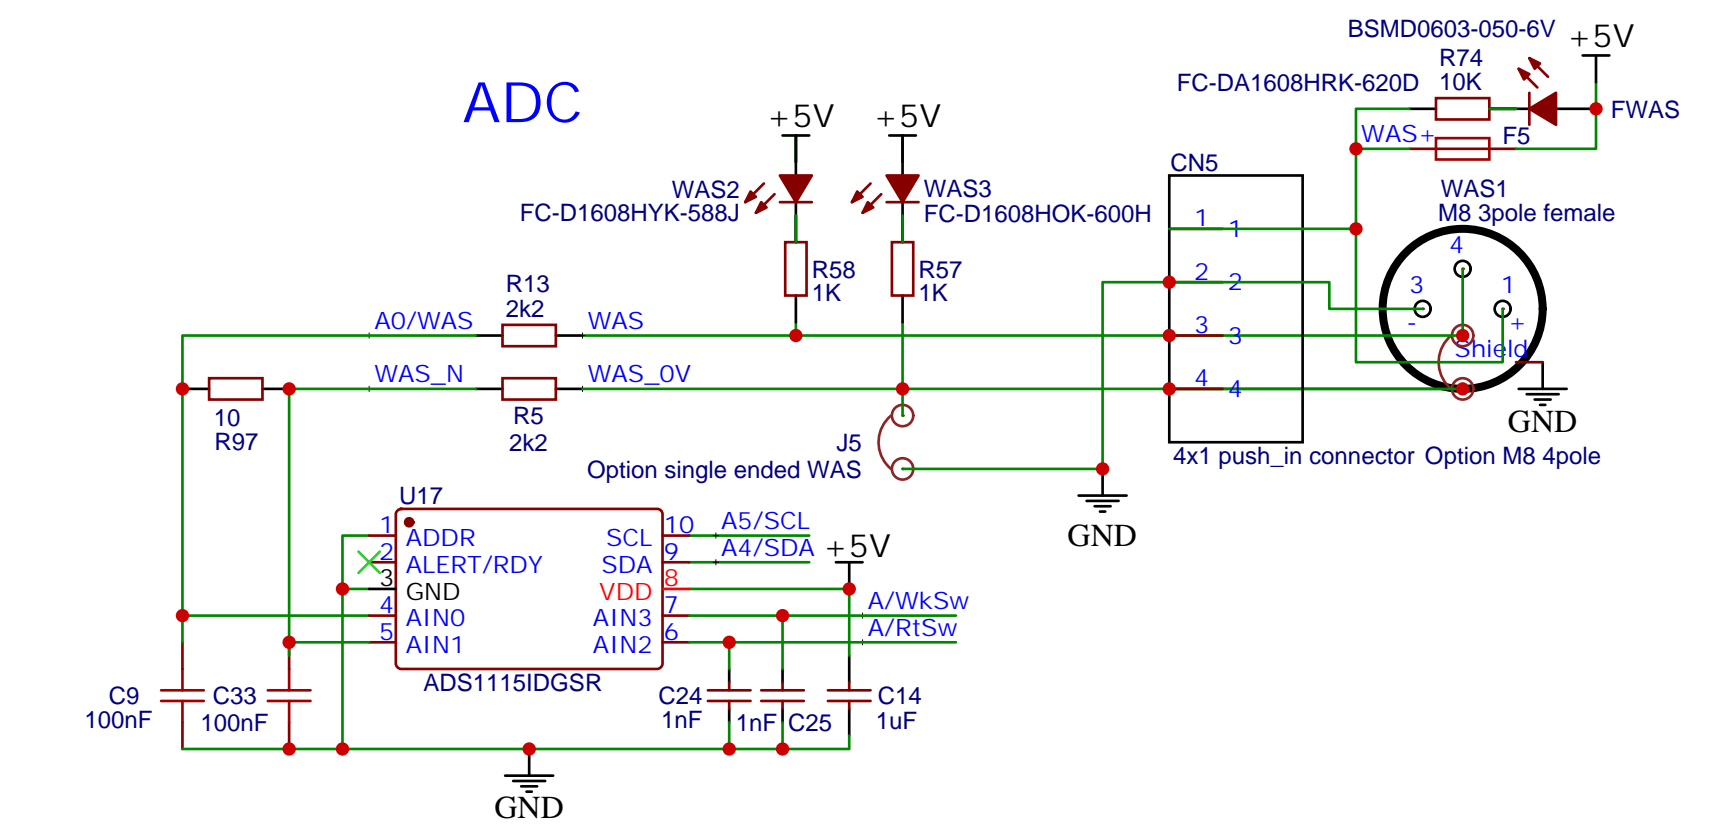

## QWIIC

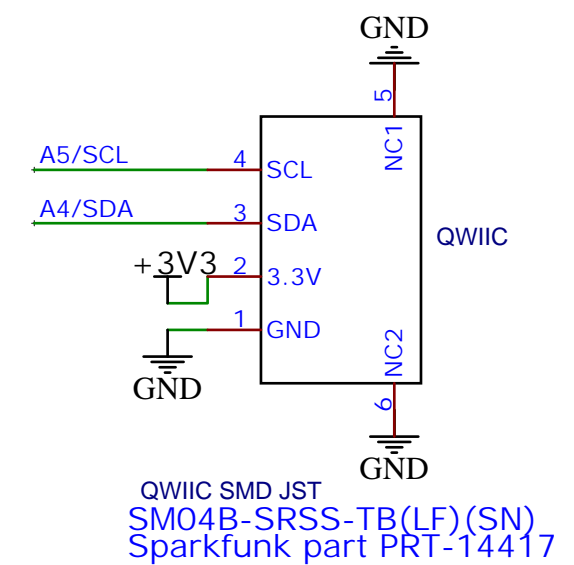

## Roll Sensor

