Chapter 5

Network Layer: The Control Plane

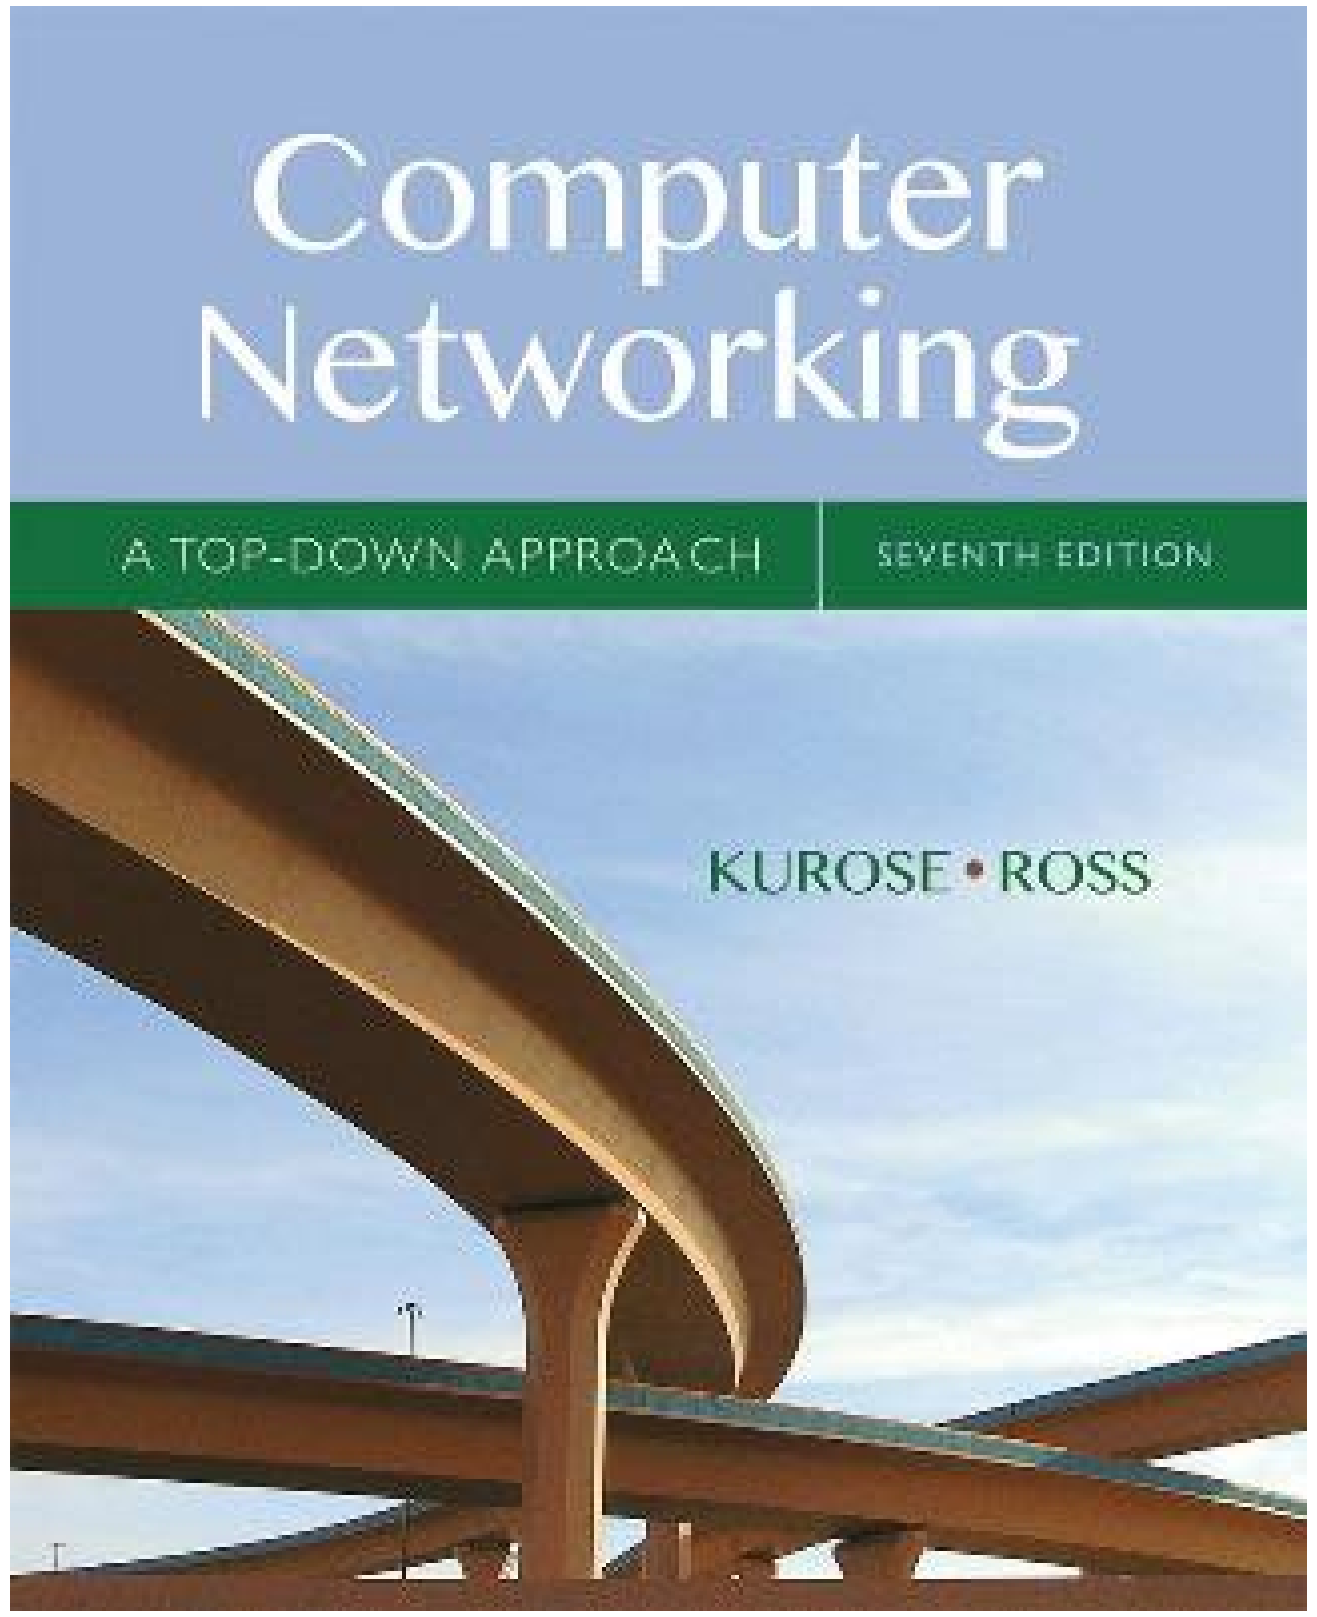

Computer Networking: A Top Down Approach

7th edition

Jim Kurose, Keith Ross

Pearson/Addison Wesley

April 2016

A note on the use of these Powerpoint slides:

We' re making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we' d like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR

Chapter 5: network layer control plane

chapter goals: understand principles behind network control plane

- traditional routing algorithms
- SDN controlllers
- Internet Control Message Protocol
- network management

and their instantiation, implementation in the Internet:

- OSPF, BGP, OpenFlow, ODL and ONOS controllers, ICMP, SNMP

Chapter 5: outline

- 5.1 introduction
- $\boxed{5.2}$ routing protocols
  - link state
  - distance vector
- 5.3 intra-AS routing in the Internet: OSPF + RIP
- 5.4 routing among the ISPs: BGP
- ~~5.5~~ The SDN control plane
- 5.6 ICMP: The Internet Control Message Protocol
- ~~5.7~~ Network management and SNMP

Network-layer functions

Recall: two network-layer functions:

- *forwarding:* move packets from router's input to appropriate router output

data plane

- *routing:* determine route taken by packets from source to destination

control plane

Two approaches to structuring network control plane:

- per-router control (traditional)
- logically centralized control (software defined networking)

Per-router control plane

Individual routing algorithm components *in each and every router* interact with each other in control plane to compute forwarding tables

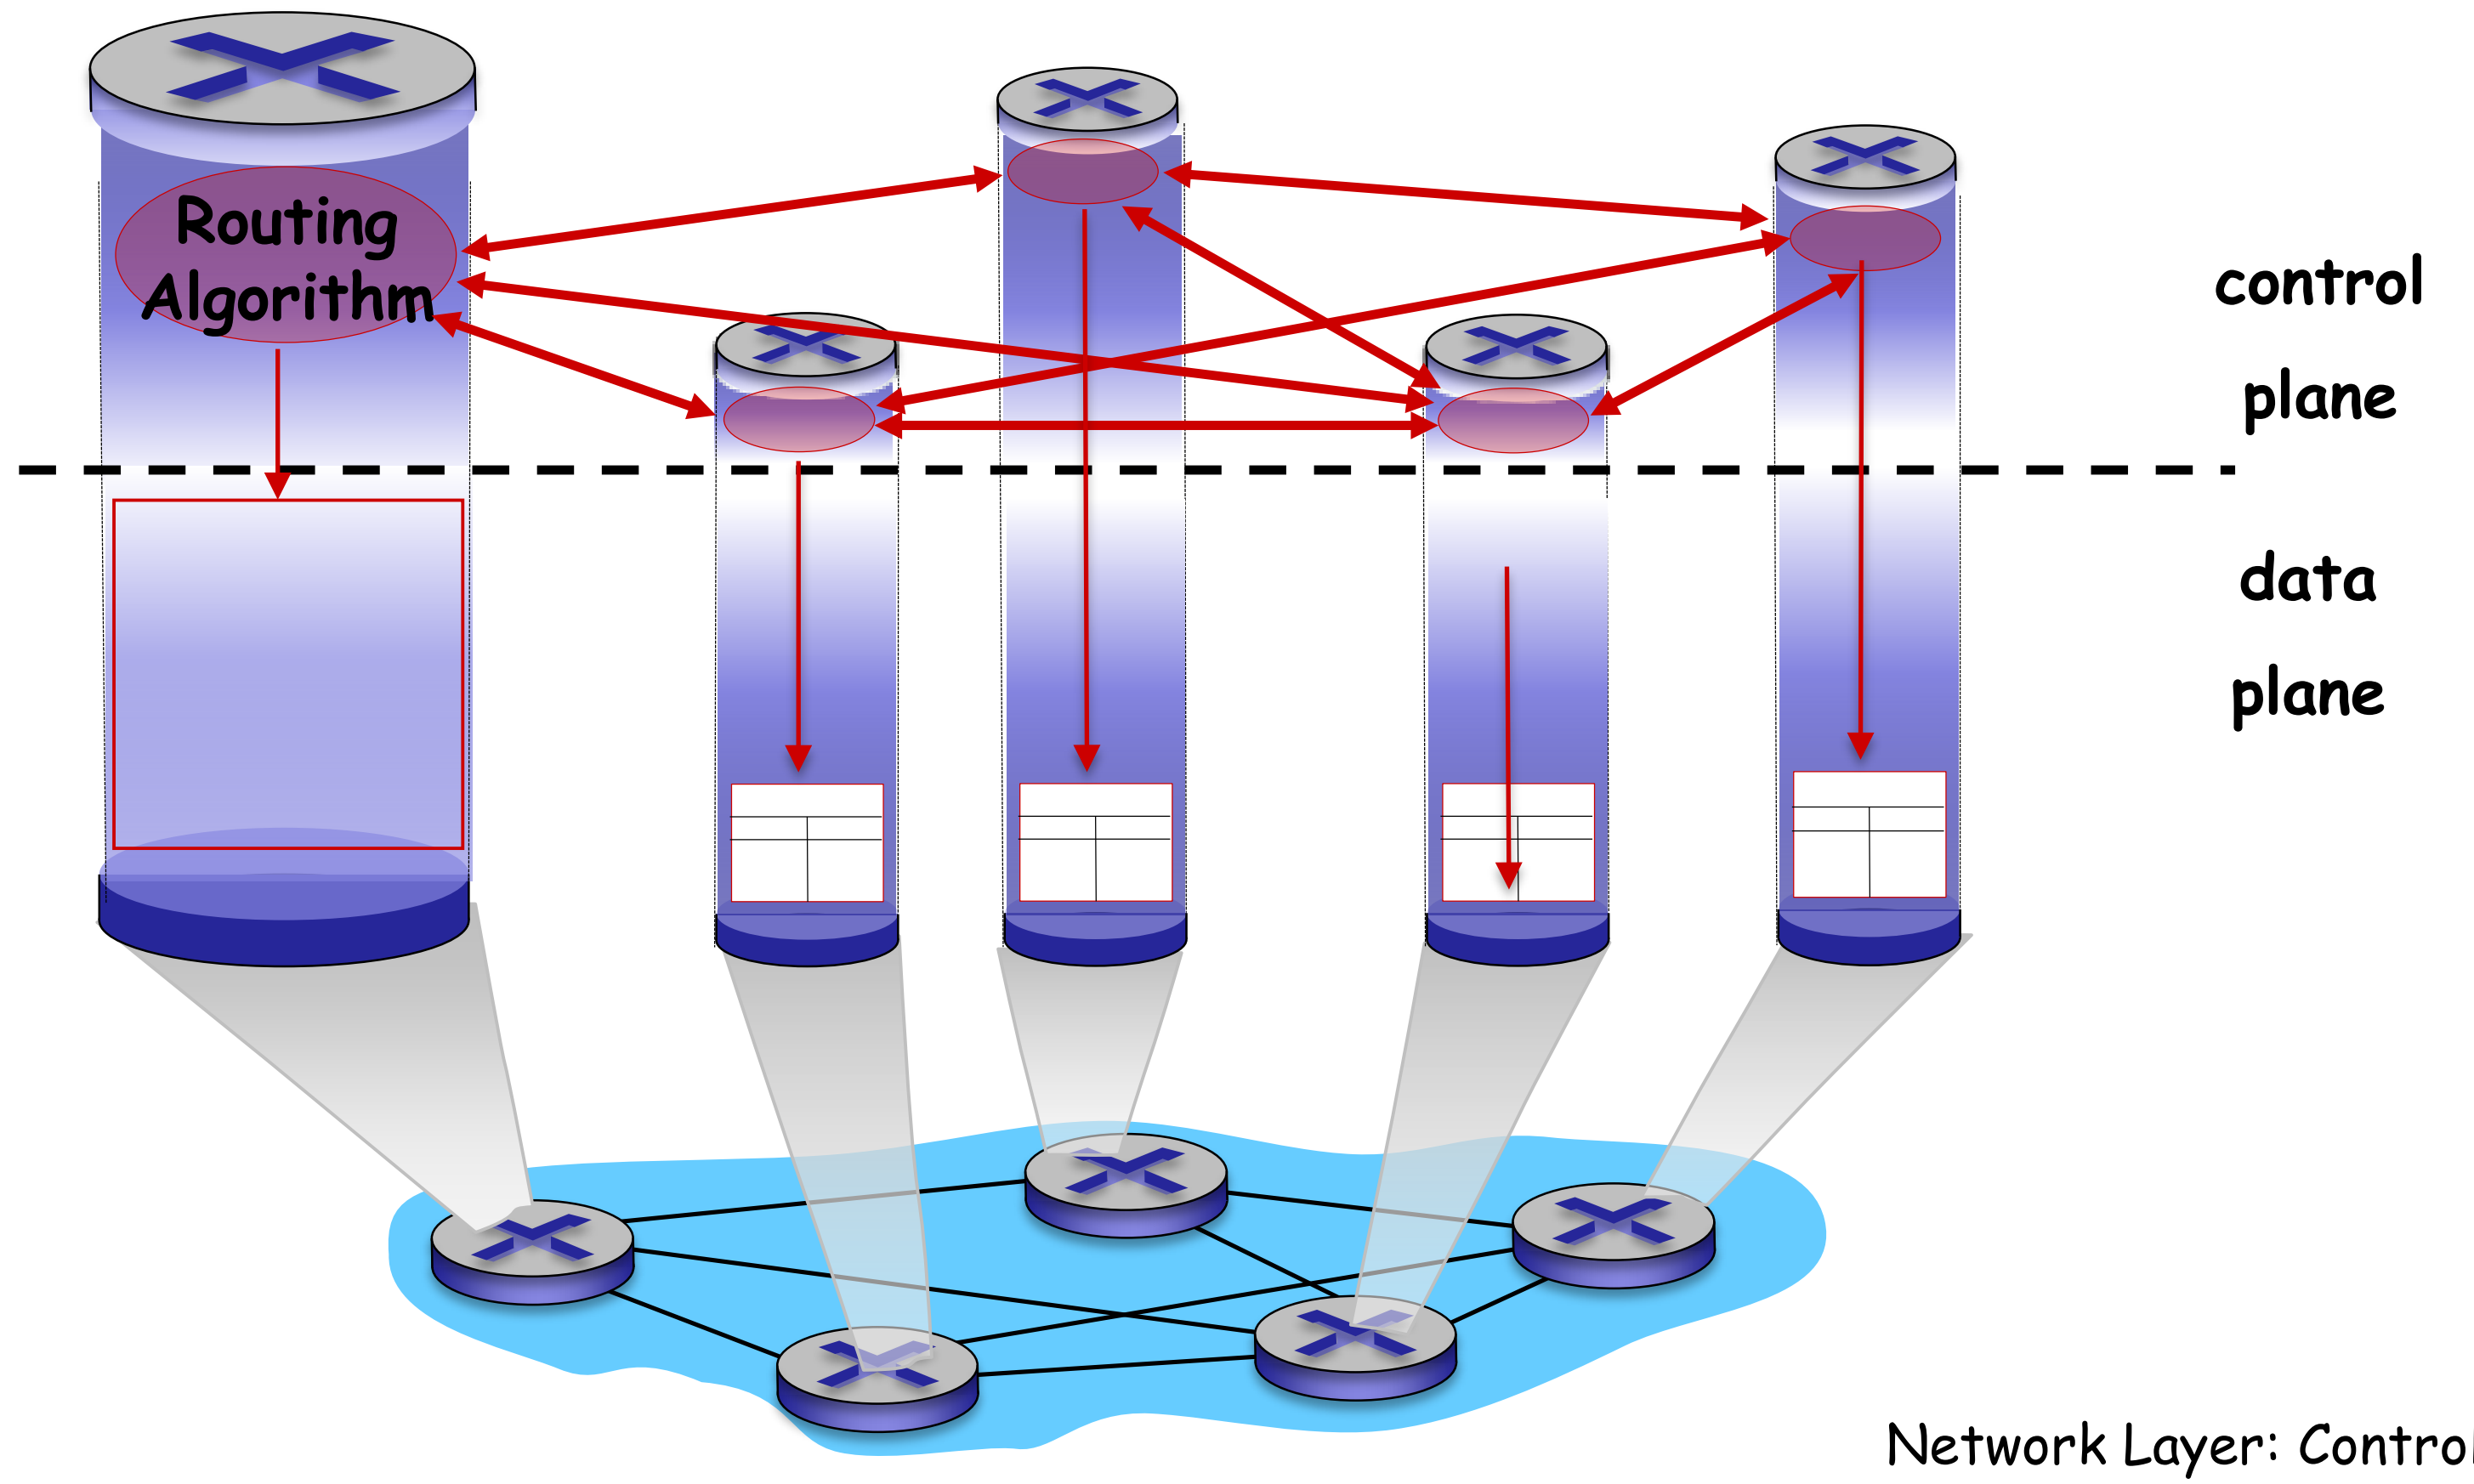

Logically centralized control plane

A distinct (typically remote) controller interacts with local control agents (CAs) in routers to compute forwarding tables

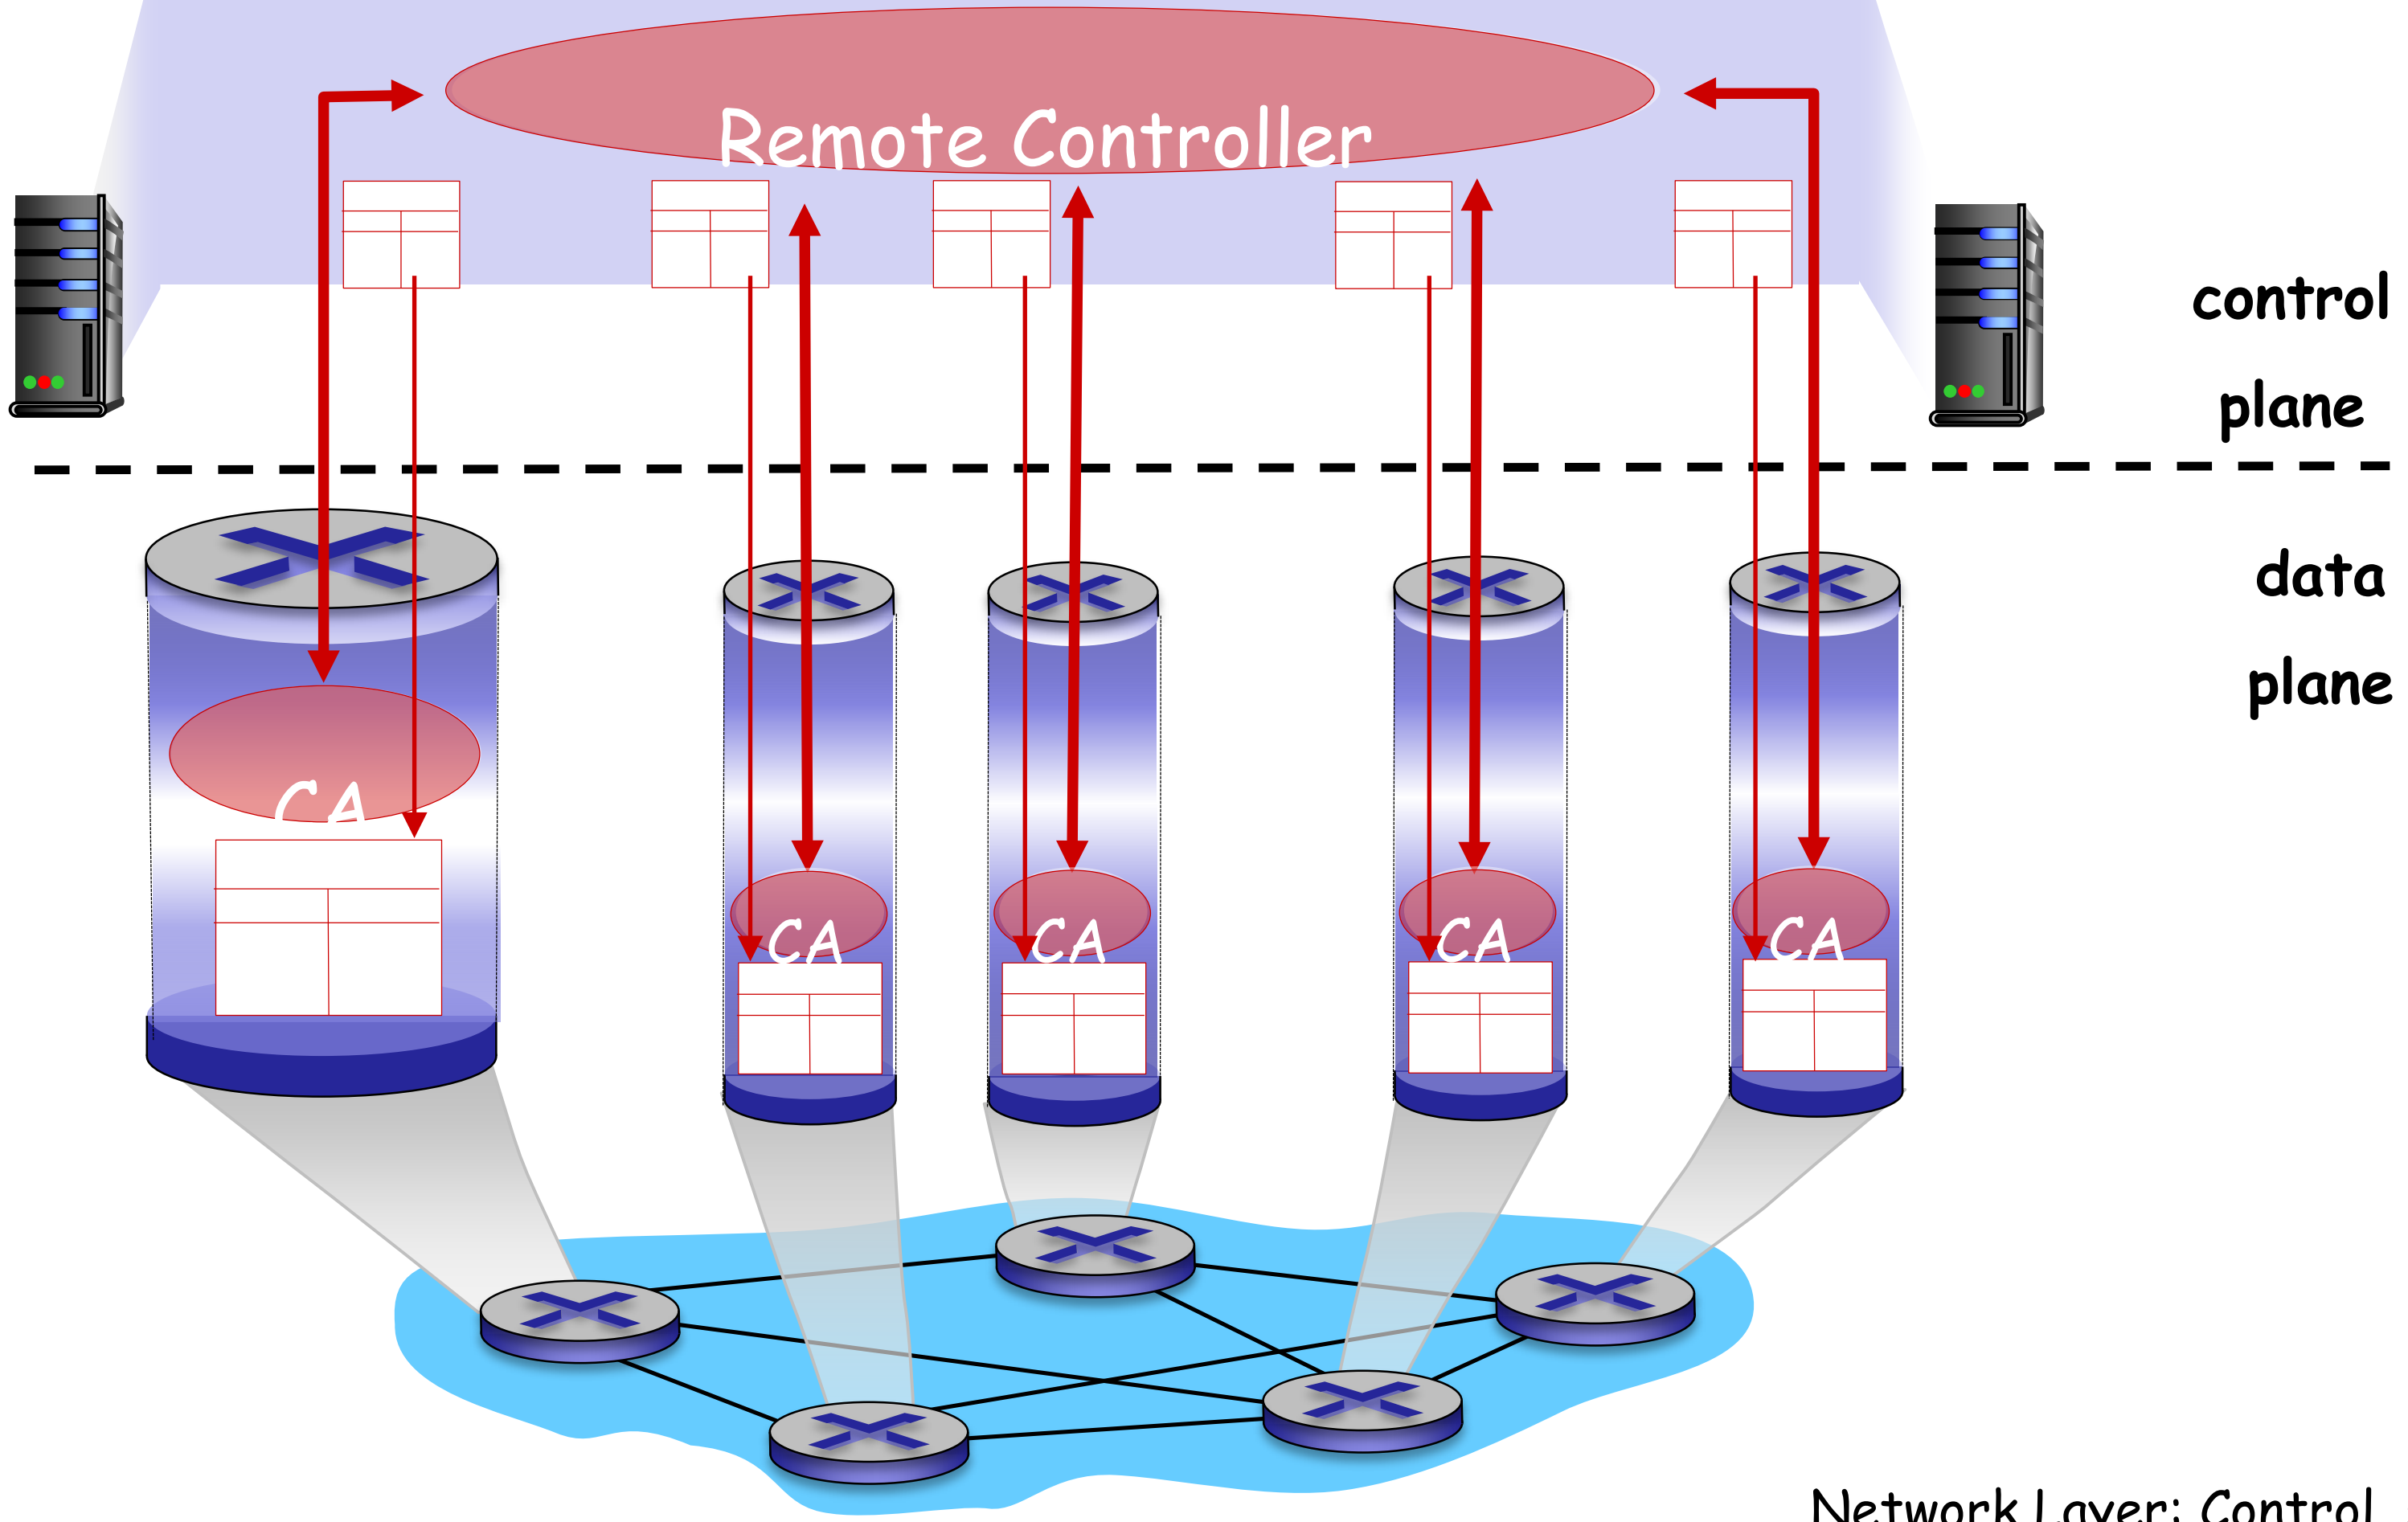

Chapter 5: outline

5.1 introduction

5.2 routing protocols

- link state
- distance vector

5.3 intra-AS routing in the Internet: OSPF

5.4 routing among the ISPs: BGP

5.5 The SDN control plane

5.6 ICMP: The Internet Control Message Protocol

5.7 Network management and SNMP

Routing protocols

Routing protocol goal: determine "good" paths (equivalently, routes), from sending hosts to receiving host, through network of routers

- path: sequence of routers packets will traverse in going from given initial source host to given final destination host
- "good": least "cost", "fastest", "least congested"
- routing: a "top-10" networking challenge!

Graph abstraction of the network

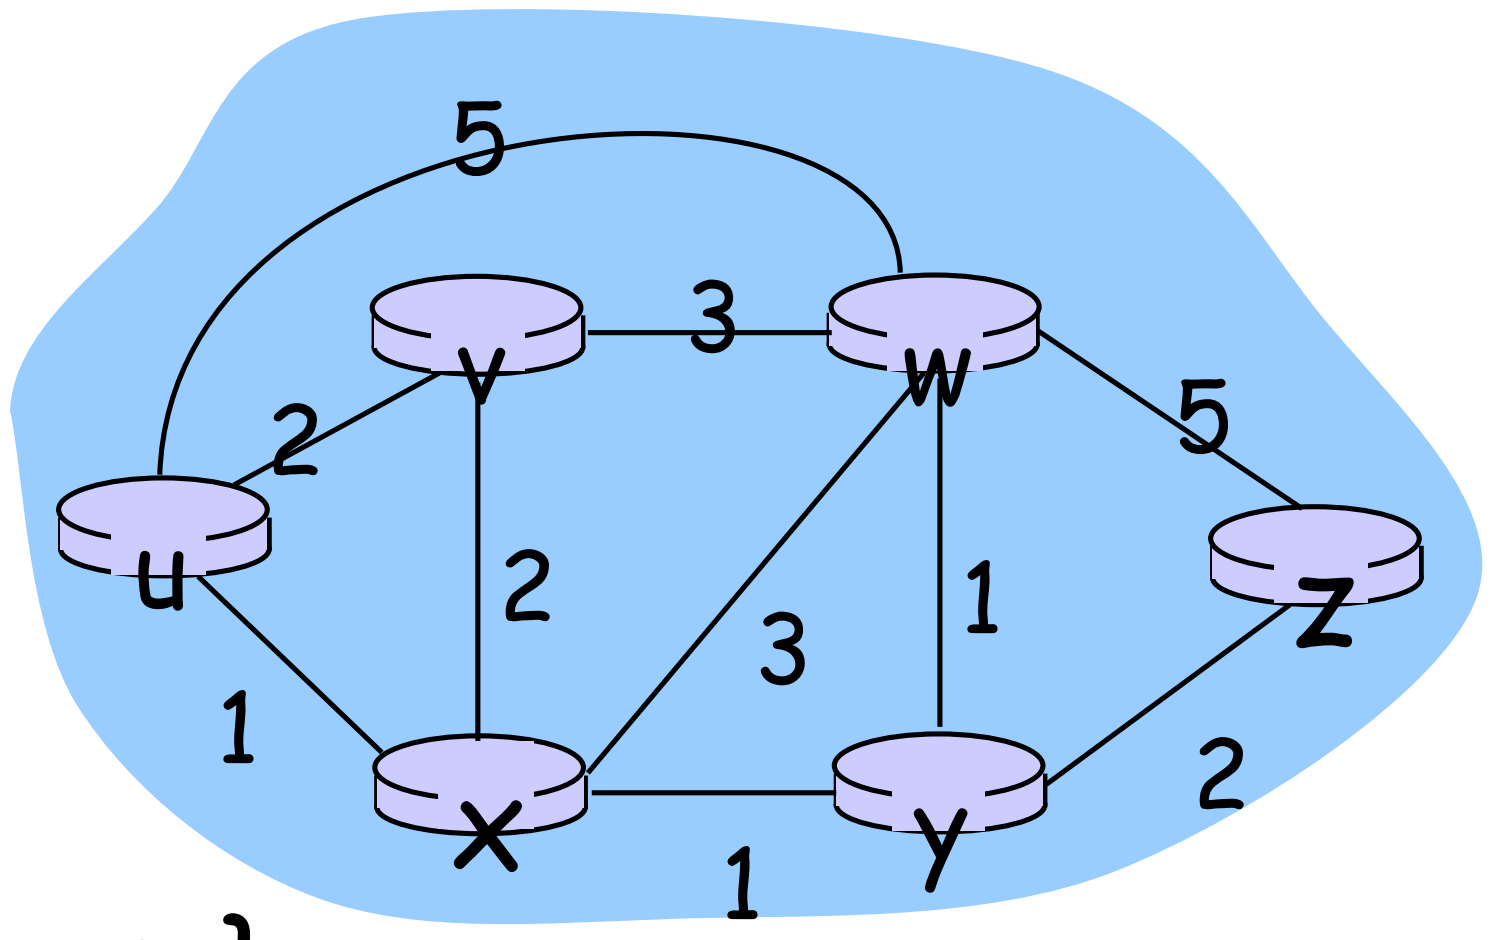

graph: $G = (N,E)$

N = set of routers = { u, v, w, x, y, z }

E = set of links ={ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }

aside: graph abstraction is useful in other network contexts, e.g., P2P, where *N* is set of peers and *E* is set of TCP connections

Graph abstraction: costs

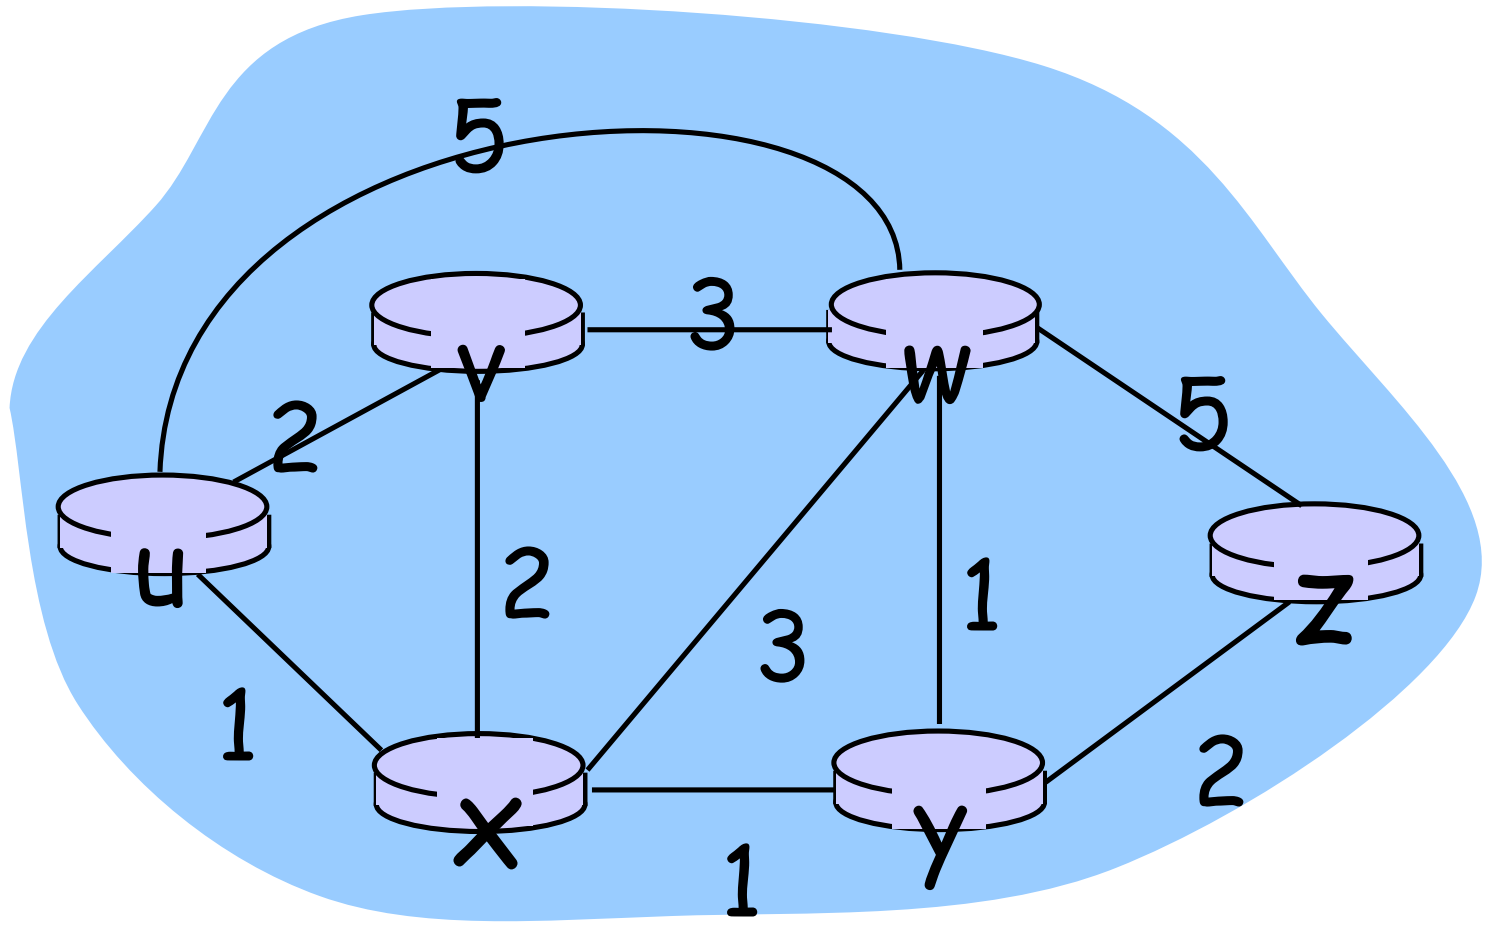

$c(x,x')$ = cost of link (x,x')

e.g., $c(w,z) = 5$

cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

cost of path $(x_1, x_2, x_3, \ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$

key question: what is the least-cost path between u and z ?

routing algorithm: algorithm that finds that least cost path

Routing algorithm classification

Q: global or decentralized information?

global:

- all routers have complete topology, link cost info
- "link state" algorithms

decentralized:

- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Q: static or dynamic?

static:

- routes change slowly over time

dynamic:

- routes change more quickly
  - periodic update
  - in response to link cost changes

Chapter 5: outline

5.1 introduction

5.2 routing protocols

- link state
- distance vector

5.3 intra-AS routing in the Internet: OSPF

5.4 routing among the ISPs: BGP

5.5 The SDN control plane

5.6 ICMP: The Internet Control Message Protocol

5.7 Network management and SNMP

A link-state routing algorithm

Dijkstra's algorithm

- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives *forwarding table* for that node
- iterative: after k iterations, know least cost path to k dest.'s

notation:

- **c(x,y):** link cost from node x to y; = ∞ if not direct neighbors
- **D(v):** current value of cost of path from source to dest. v
- **p(v):** predecessor node along path from source to v
- **N':** set of nodes whose least cost path definitively known

Dijsktra's algorithm

```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
        then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
      D(v) = min( D(v), D(w) + c(w,v) )
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'
```

Dijkstra's algorithm: example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	∞	∞
1	uw	6,w		5,u	11,w	∞
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy					12,y
5	uwxvyz					

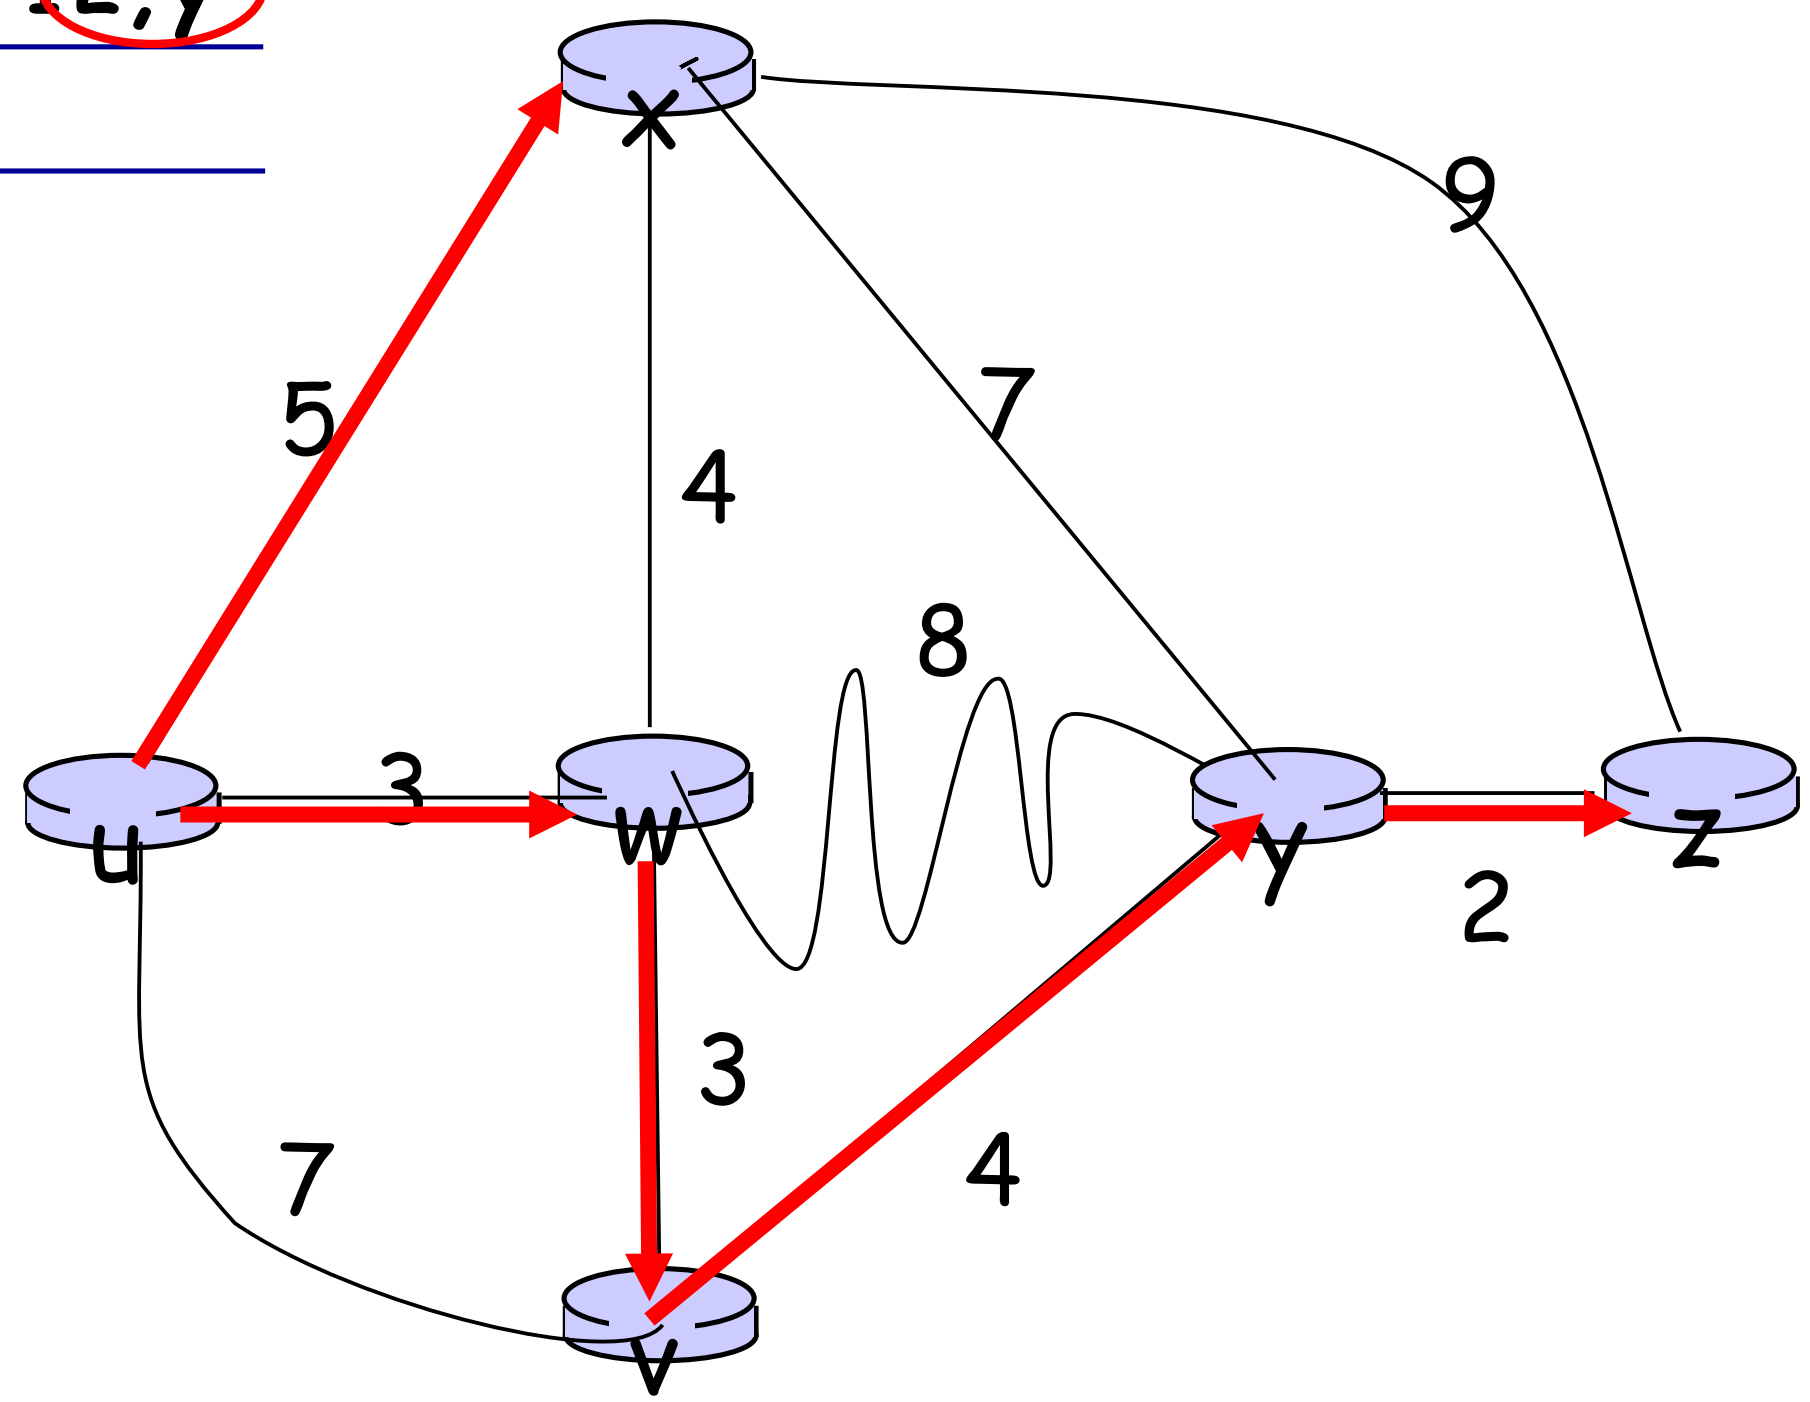

notes:

- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)

Dijkstra’s algorithm: another example

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					

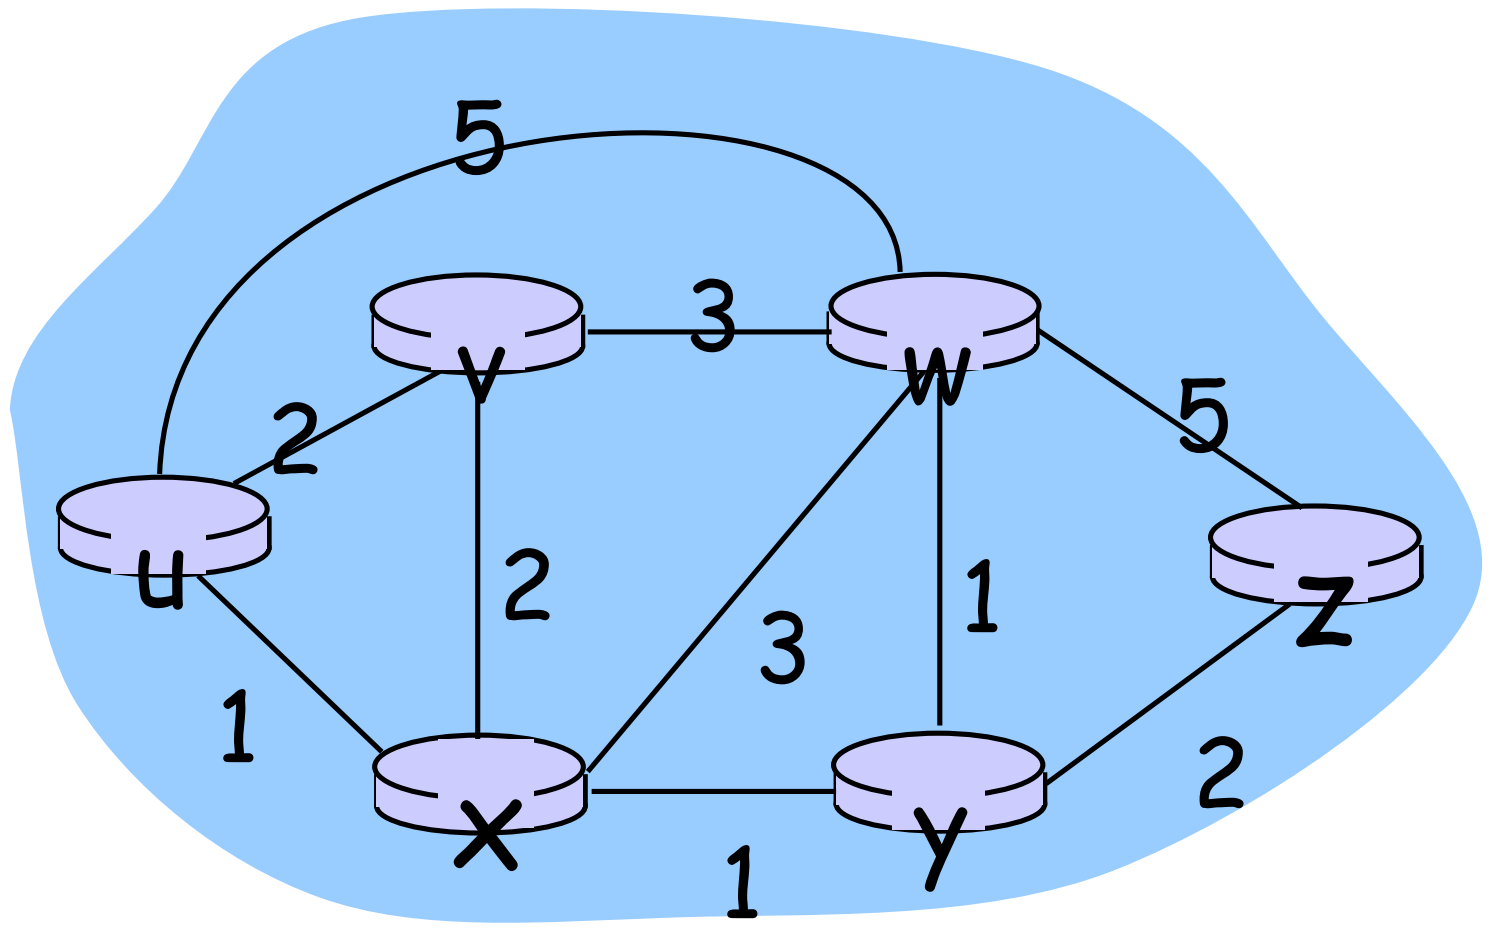

* Check out the online interactive exercises for more examples:

Dijkstra's algorithm: example (2)

resulting shortest-path tree from u:

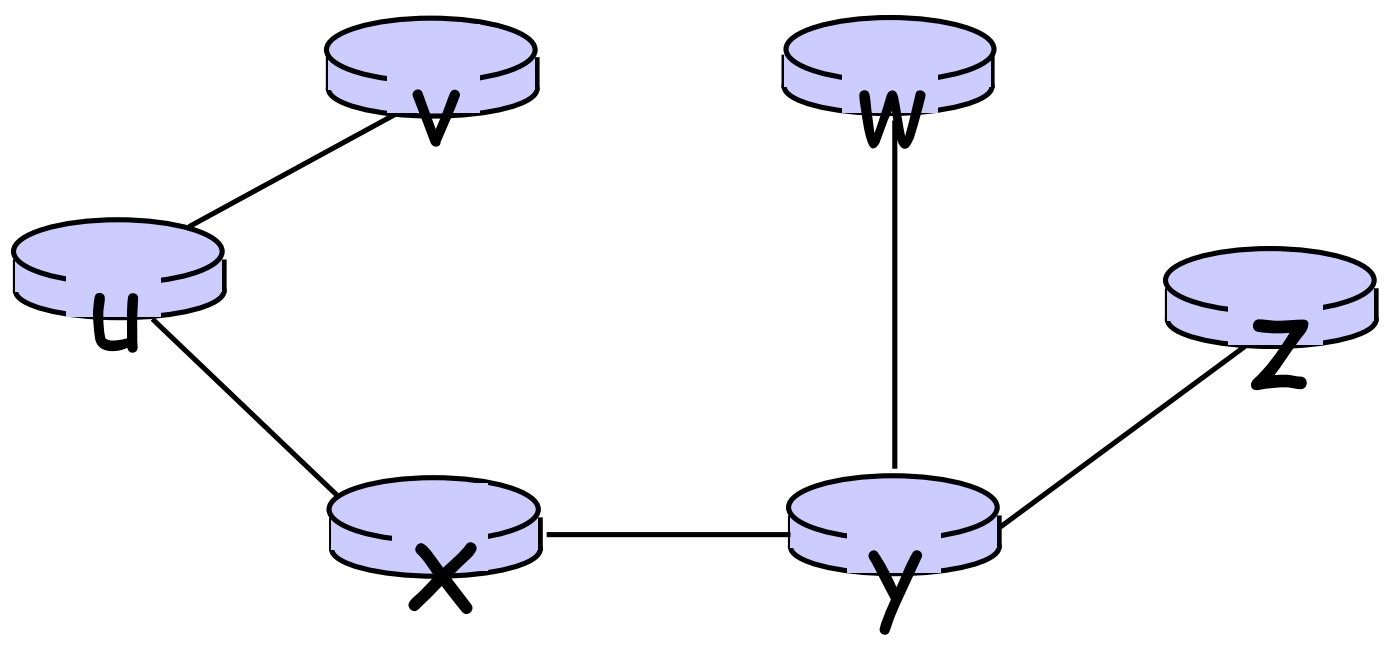

resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

Chapter 5: outline

5.1 introduction

5.2 routing protocols

- link state
- distance vector

5.3 intra-AS routing in the Internet: OSPF

5.4 routing among the ISPs: BGP

5.5 The SDN control plane

5.6 ICMP: The Internet Control Message Protocol

5.7 Network management and SNMP

Distance vector algorithm

Bellman-Ford equation (dynamic programming)

let

$d_x(y)$:= cost of least-cost path from x to y

then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

cost from neighbor v to destination y

cost to neighbor v

min taken over all neighbors v of x

Bellman-Ford example

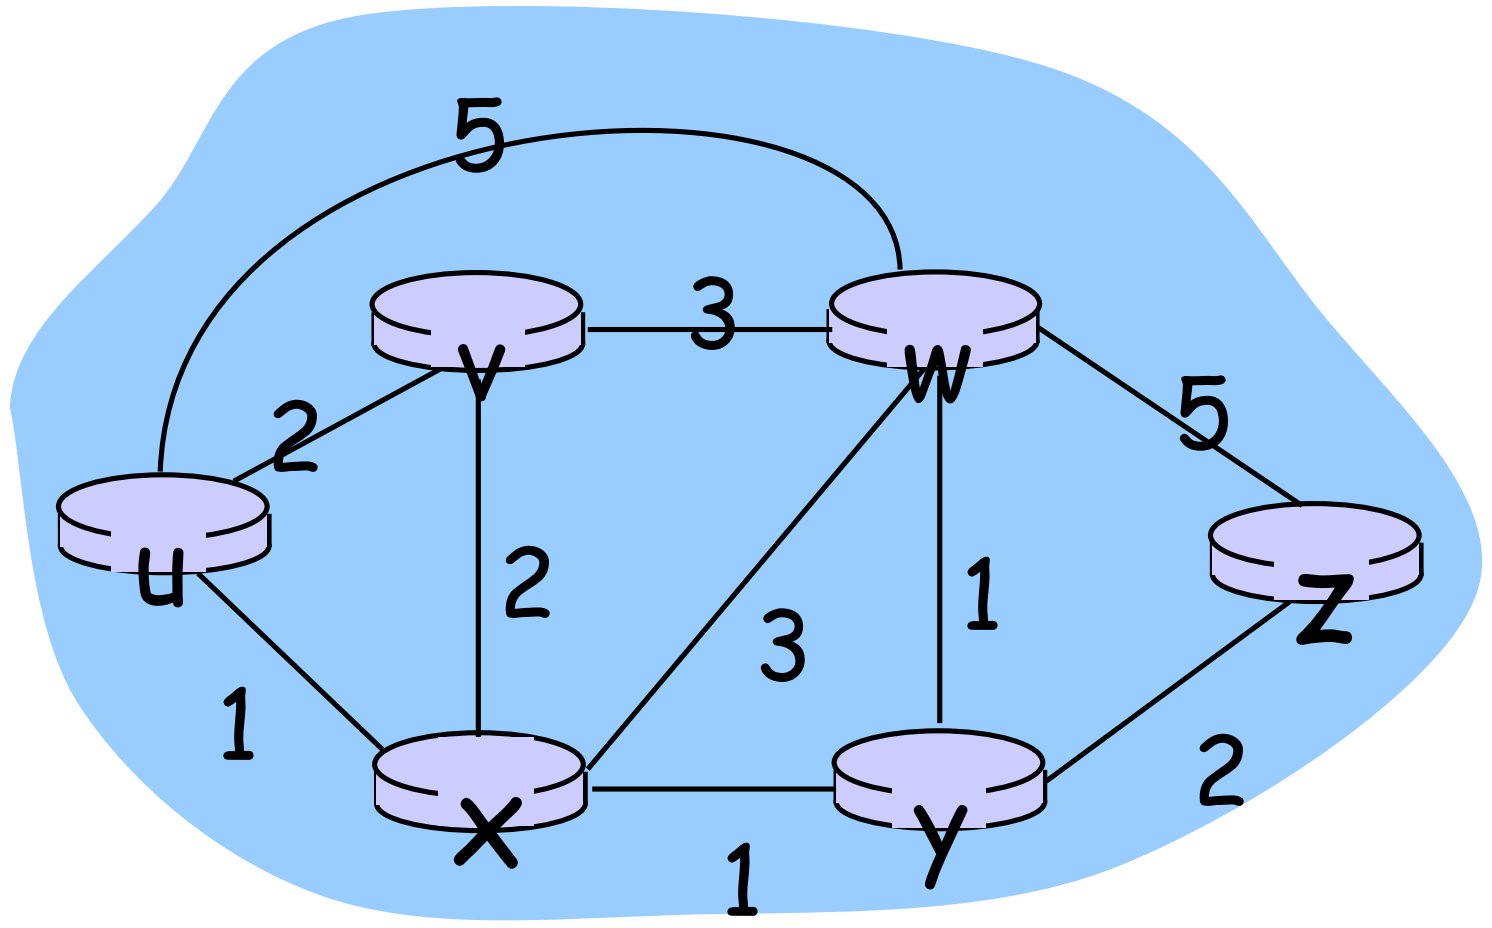

clearly, $d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

B-F equation says:

$$d_u(z) = \min \{ c(u,v) + d_v(z), \\ c(u,x) + d_x(z), \\ c(u,w) + d_w(z) \}$$

$$= \min \{2 + 5, \\ 1 + 3, \\ 5 + 3\} = 4$$

node achieving minimum is next hop in shortest path, used in forwarding table

Distance vector algorithm

- $D_x(y)$ = estimate of least cost from x to y
  - x maintains distance vector $D_x = [D_x(y): y \in N]$
- node x:
  - knows cost to each neighbor v: $c(x,v)$
  - maintains its neighbors' distance vectors. For each neighbor v, x maintains

    $D_v = [D_v(y): y \in N]$

Distance vector algorithm

key idea:

- from time-to-time, each node sends its own distance vector estimate to neighbors
- when x receives new DV estimate from neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v\{c(x,v) + D_v(y)\} \quad \text{for each node } y \in N$$

- under minor, natural conditions, the estimate $D_x(y)$ *converge to the actual least cost* $d_x(y)$

Distance vector algorithm

iterative, asynchronous: each local iteration caused by:

- local link cost change
- DV update message from neighbor

distributed:

- each node notifies neighbors *only* when its DV changes
  - neighbors then notify their neighbors if necessary

each node:

wait for (change in local link cost or msg from neighbor)

recompute estimates

if DV to any dest has changed, ***notify*** neighbors

$$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\}$$
$$= \min\{2+0\ ,\ 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\}$$
$$= \min\{2+1\ ,\ 7+0\} = 3$$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

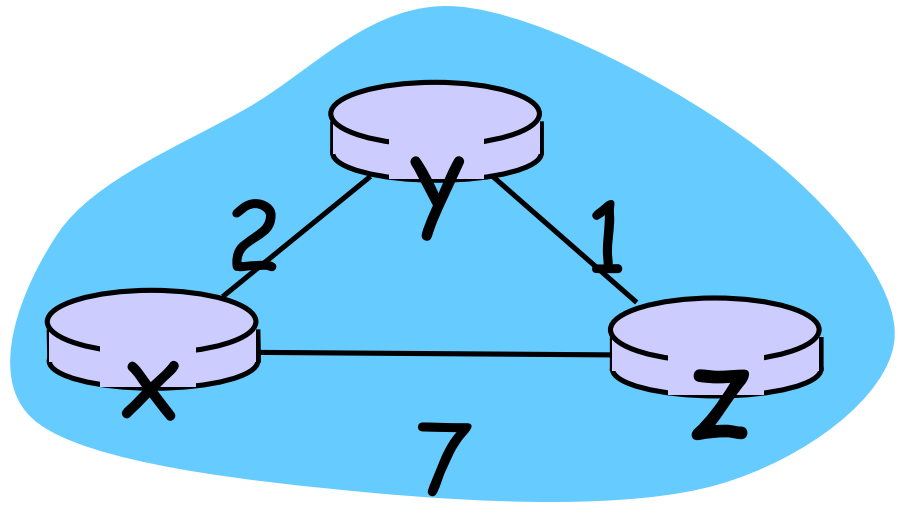

time

$$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\}$$
$$= \min\{2+0\ ,\ 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\}$$
$$= \min\{2+1\ ,\ 7+0\} = 3$$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	3	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

time

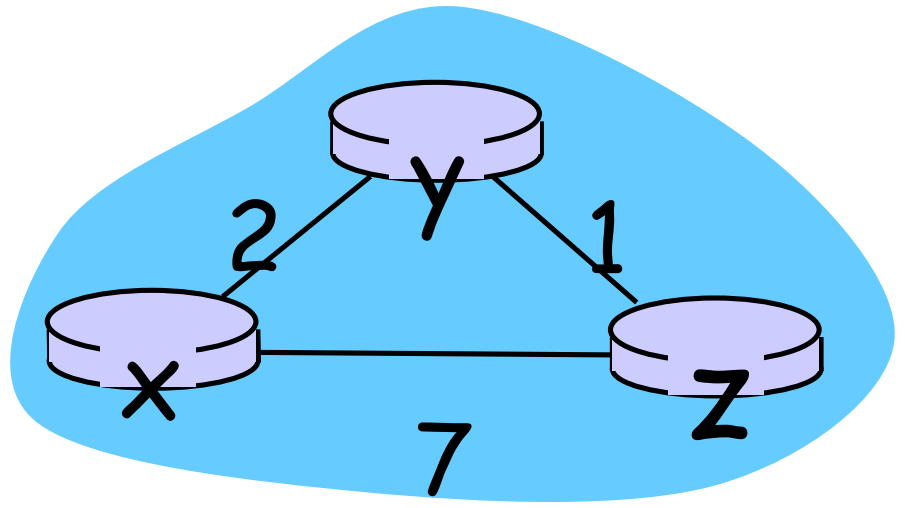

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- updates routing info, recalculates distance vector
- if DV changes, notify neighbors

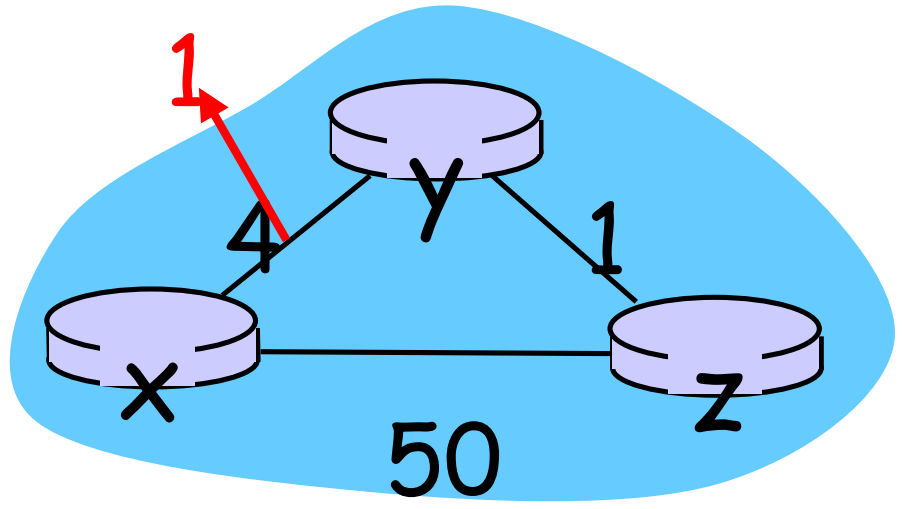

"good news travels fast"

t_0 : y detects link-cost change, updates its DV, informs its neighbors.

t_1 : z receives update from y, updates its table, computes new least cost to x , sends its neighbors its DV.

t_2 : y receives z' s update, updates its distance table. y' s least costs do *not* change, so y does *not* send a message to z.

* Check out the online interactive exercises for more examples:

http://gaia.cs.umass.edu/kurose_ross/interactive/

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- *bad news travels slow* - "count to infinity" problem!
- 44 iterations before algorithm stabilizes: see text

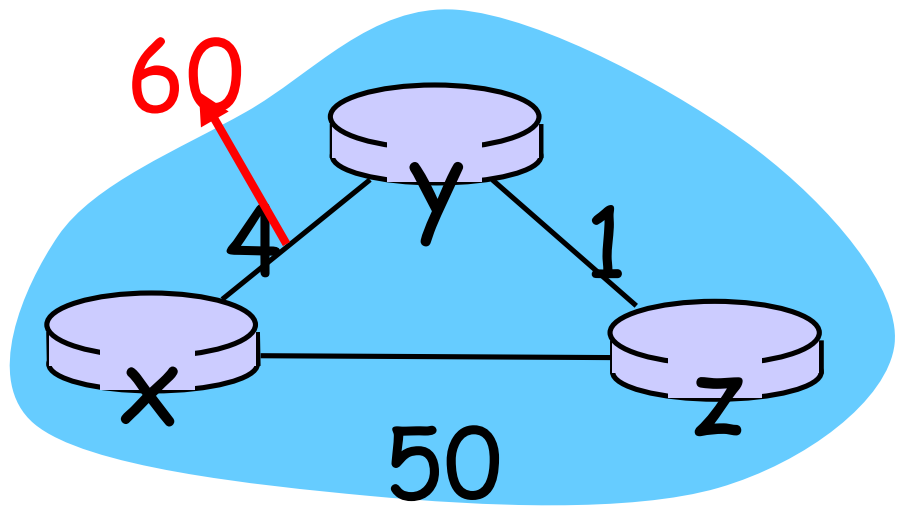

poisoned reverse:

- If Z routes through Y to get to X :
  - Z tells Y its (Z' s) distance to X is infinite (so Y won' t route to X via Z)
- will this completely solve count to infinity problem?

Comparison of LS and DV algorithms

message complexity

- *LS:* with n nodes, E links, O(nE) msgs sent
- *DV:* exchange between neighbors only
  - convergence time varies

speed of convergence

- *LS:* $O(n^2)$ algorithm requires O(nE) msgs
  - may have oscillations
- *DV:* convergence time varies
  - may be routing loops
  - count-to-infinity problem

robustness: what happens if router malfunctions?

LS:

- node can advertise incorrect *link* cost
- each node computes only its *own* table

DV:

- DV node can advertise incorrect *path* cost
- each node's table used by others
  - error propagate thru network

Hierarchical Routing

Our routing study thus far - idealization

- all routers identical
- network "flat"

… *not* true in practice

scale: with 200 million destinations:

- can't store all dest's in routing tables!
- routing table exchange would swamp links!

administrative autonomy

- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical Routing

- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
  - "intra-AS" routing protocol
  - routers in different AS can run different intra-AS routing protocol

<u>gateway router</u>

- at "edge" of its own AS
- has link to router in another AS

Interconnected ASes

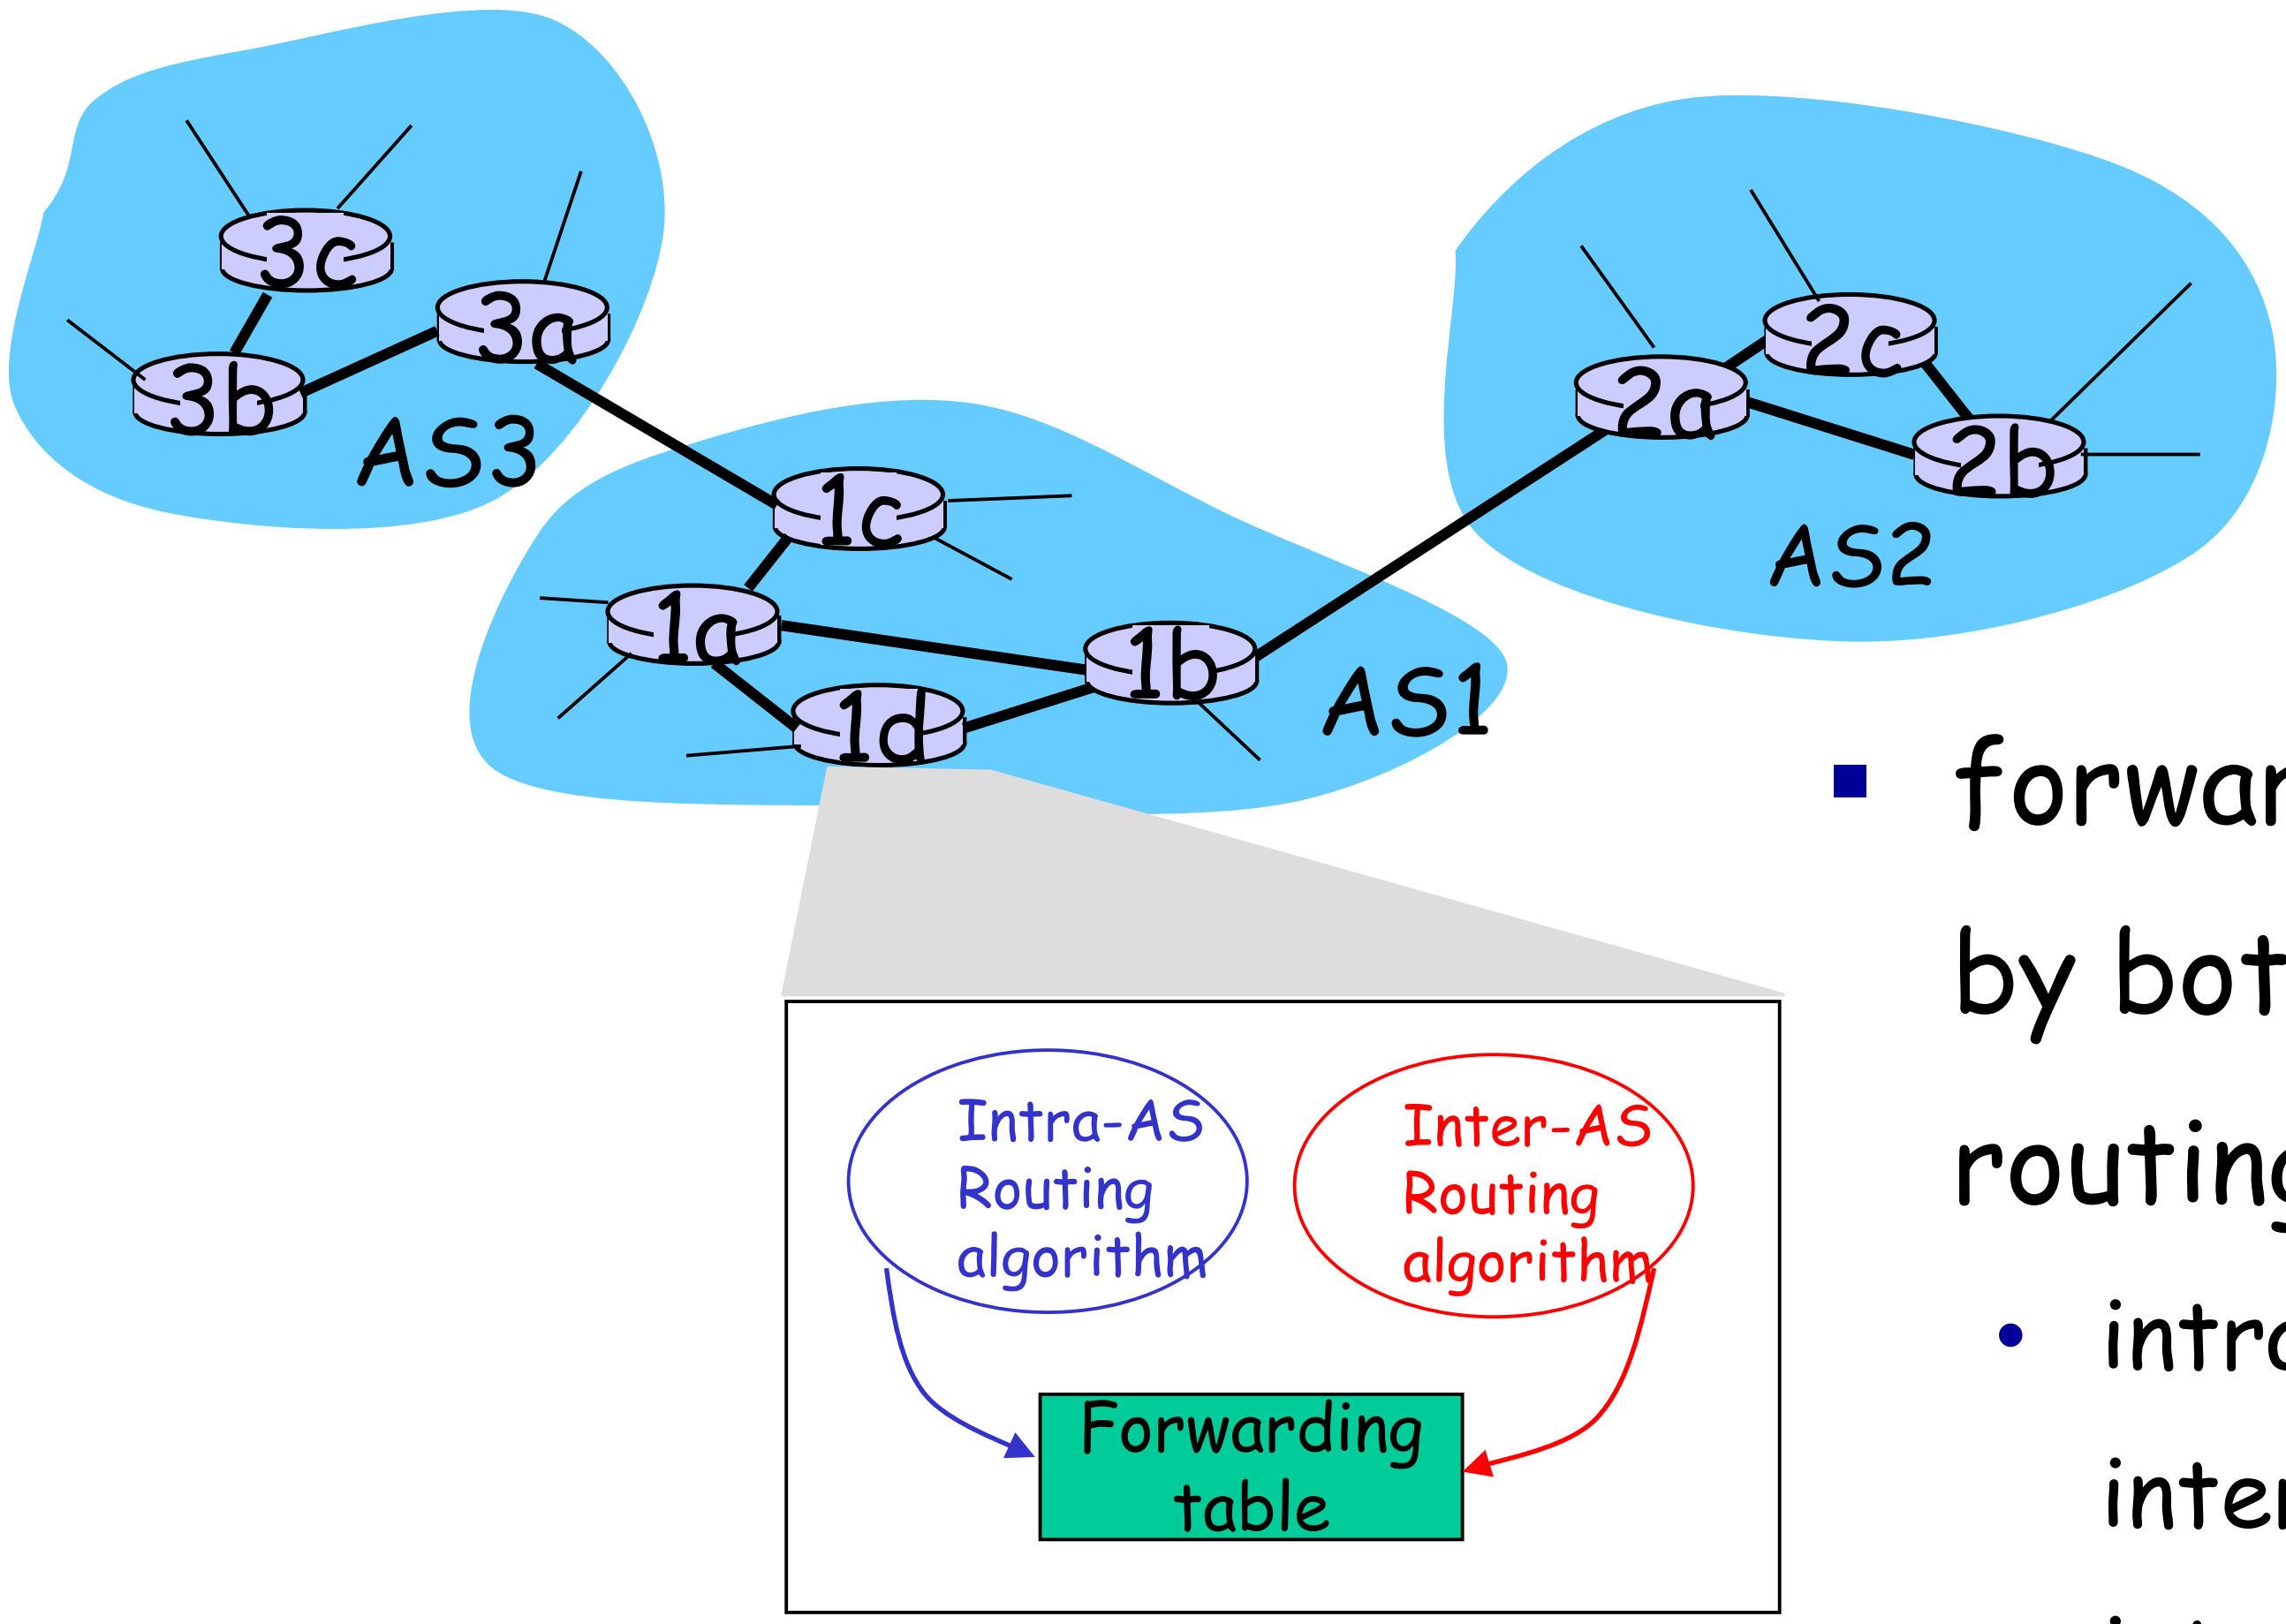

- forwarding table configured by both intra- and inter-AS routing algorithm
  - intra-AS sets entries for internal dests
  - inter-AS & intra-As sets entries for external dests

Inter-AS tasks

- suppose router in AS1 receives datagram destined outside of AS1:
  - router should forward packet to gateway router, but which one?

AS1 must:

1. learn which dests are reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

job of inter-AS routing!

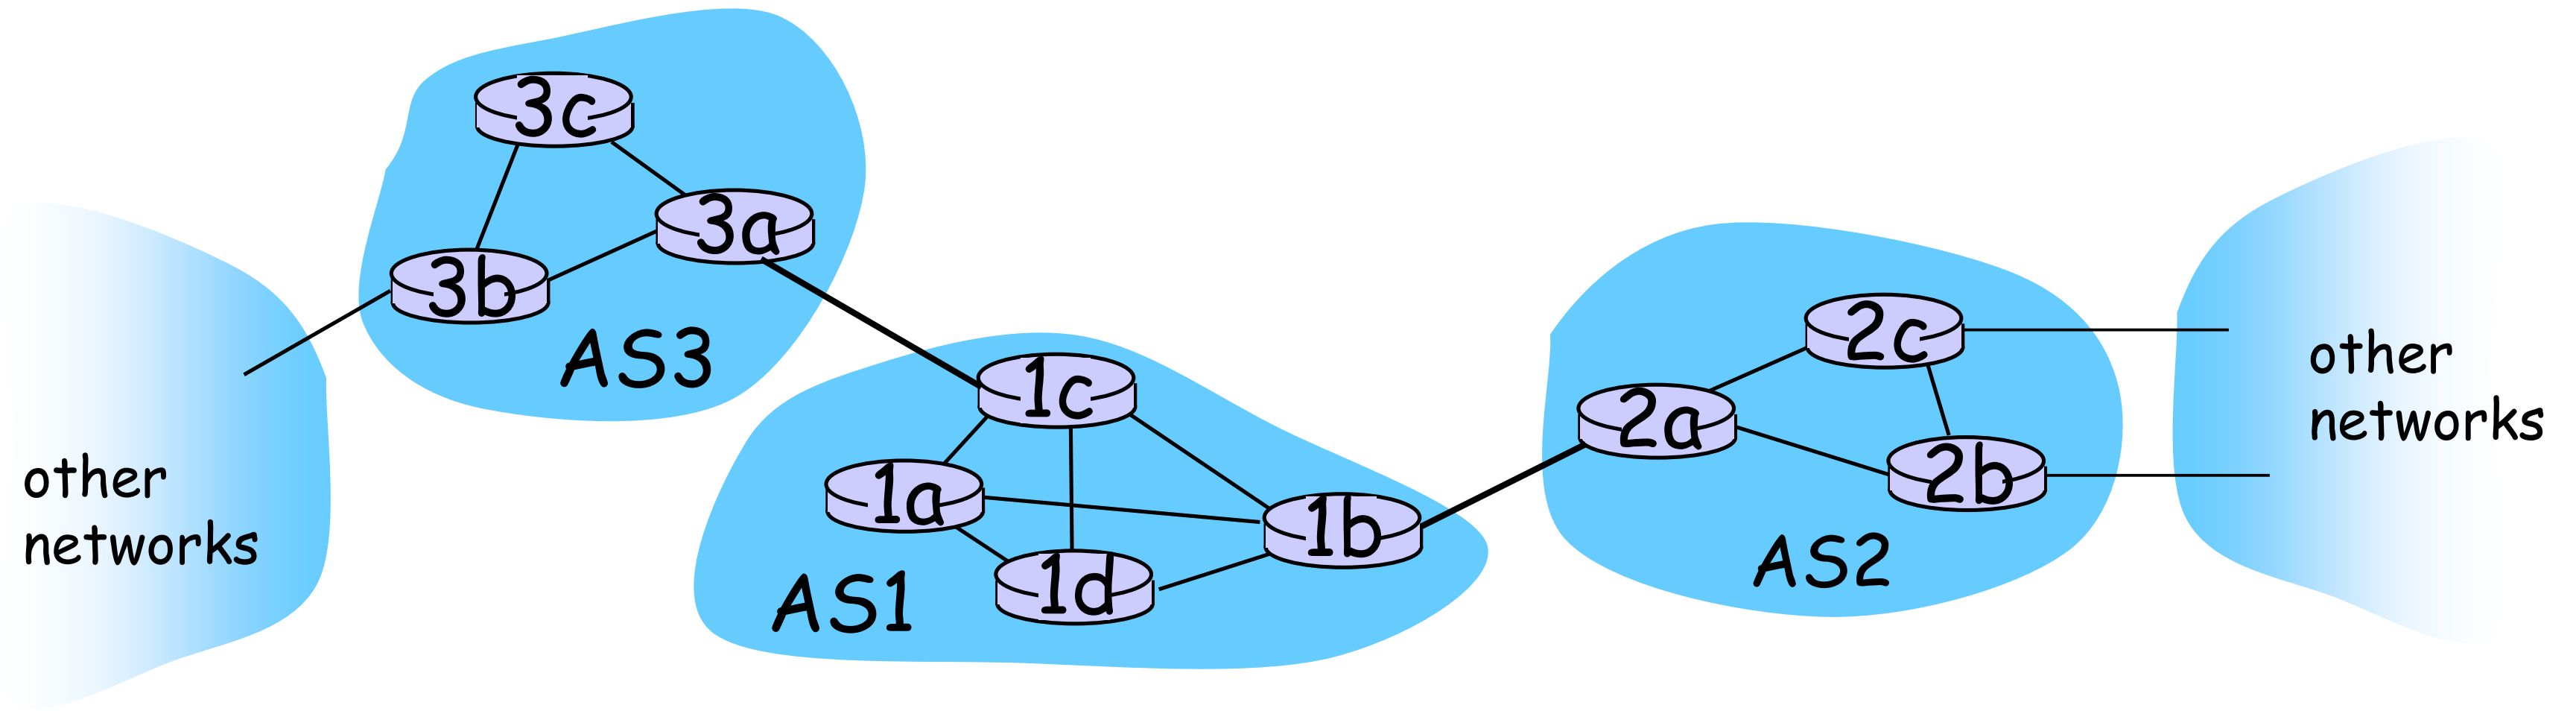

Example: Setting forwarding table in router 1d

- suppose AS1 learns (via inter-AS protocol) that subnet *x* reachable via AS3 (gateway 1c) but not via AS2.
  - inter-AS protocol propagates reachability info to all internal routers
- router 1d determines from intra-AS routing info that its interface *I* is on the least cost path to 1c.
  - installs forwarding table entry *(x,I)*

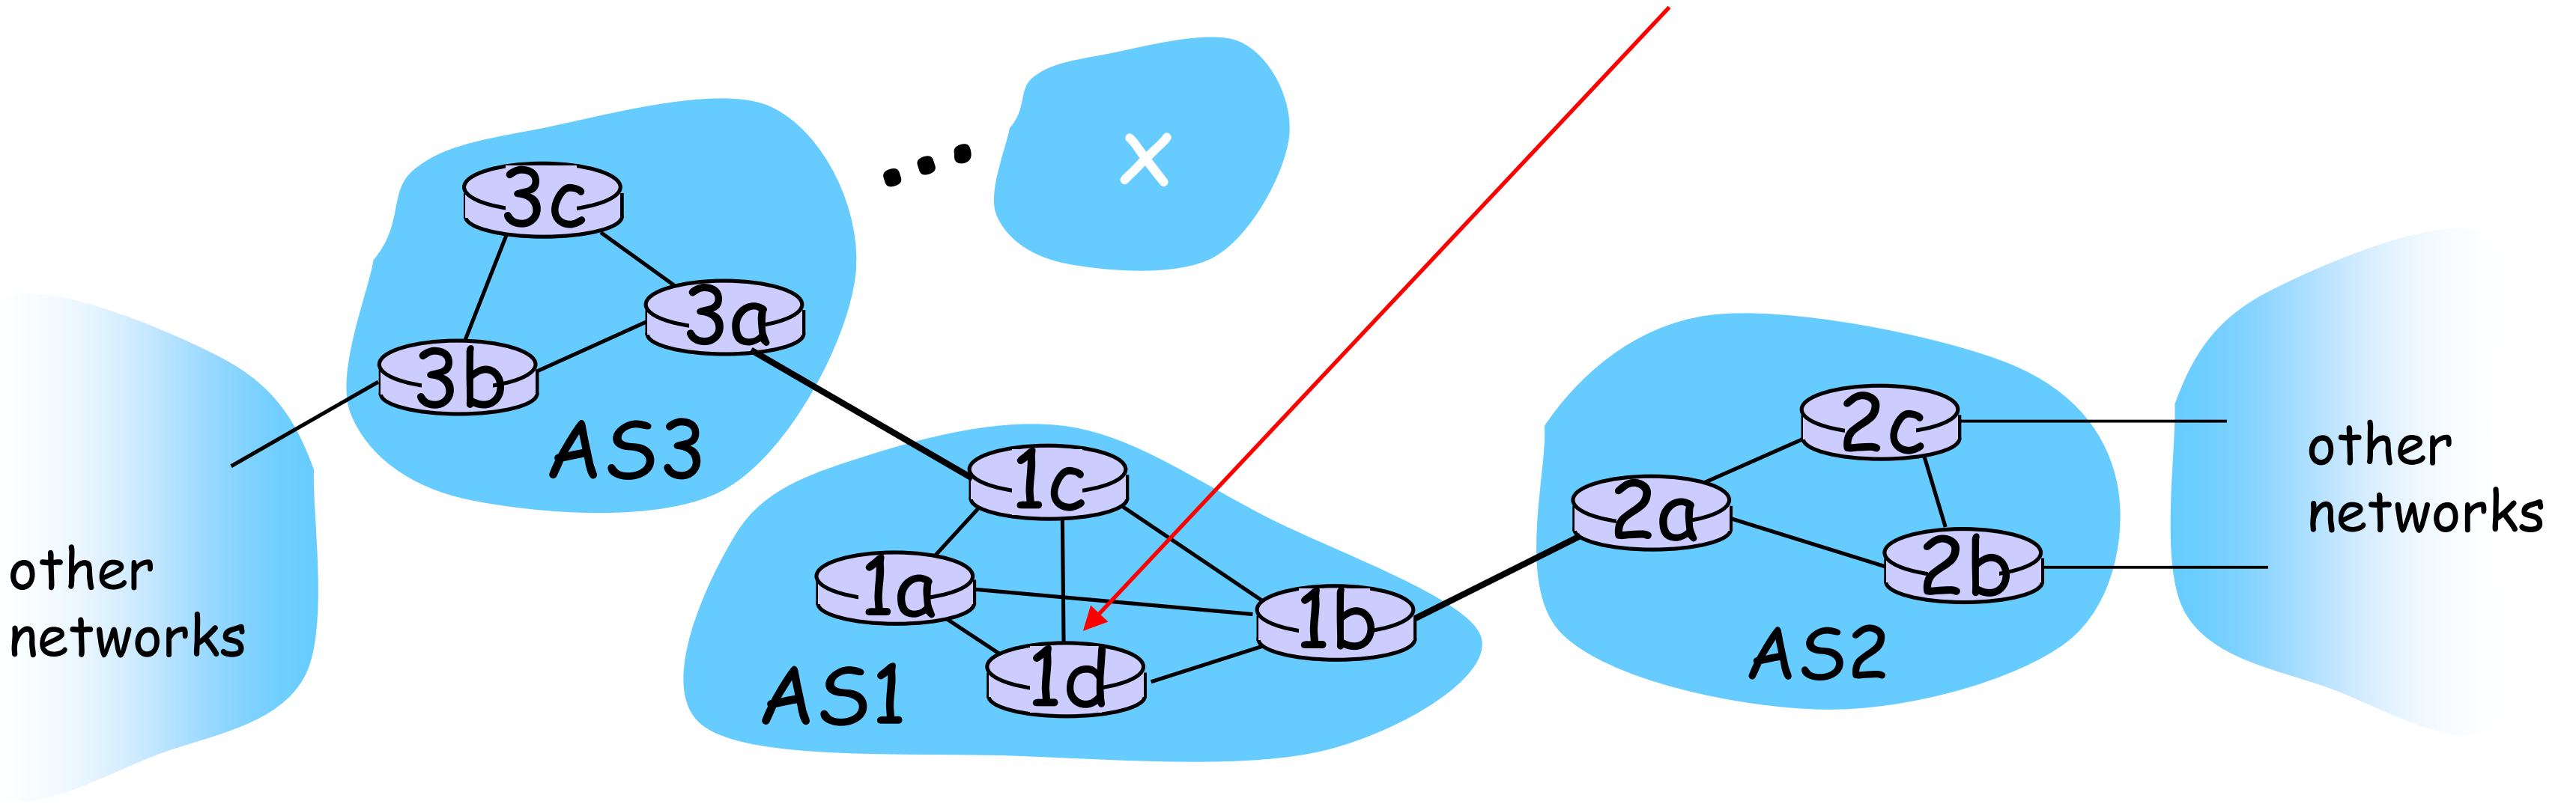

Example: Choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- to configure forwarding table, router 1d must determine which gateway it should forward packets towards for dest x
  - this is also job of inter-AS routing protocol!

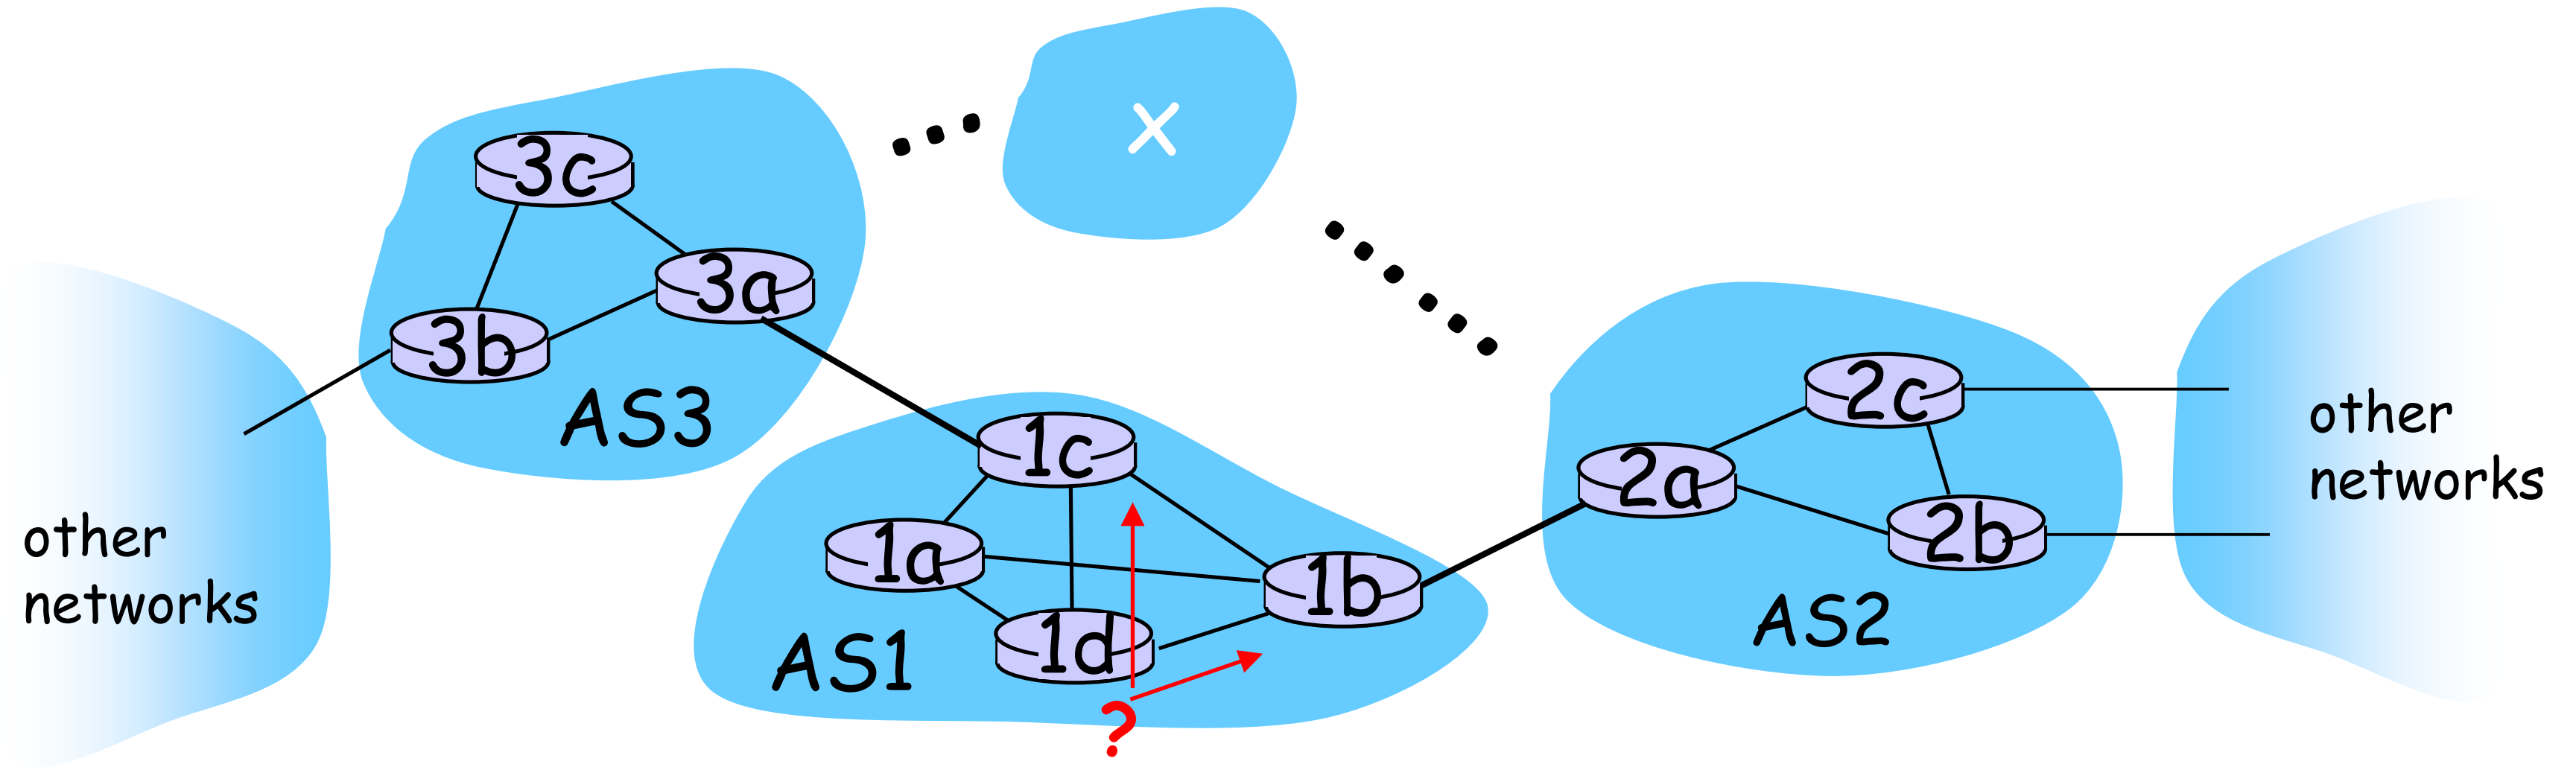

Example: Choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest x.
  - this is also job of inter-AS routing protocol!
- hot potato routing: send packet towards closest of two routers.

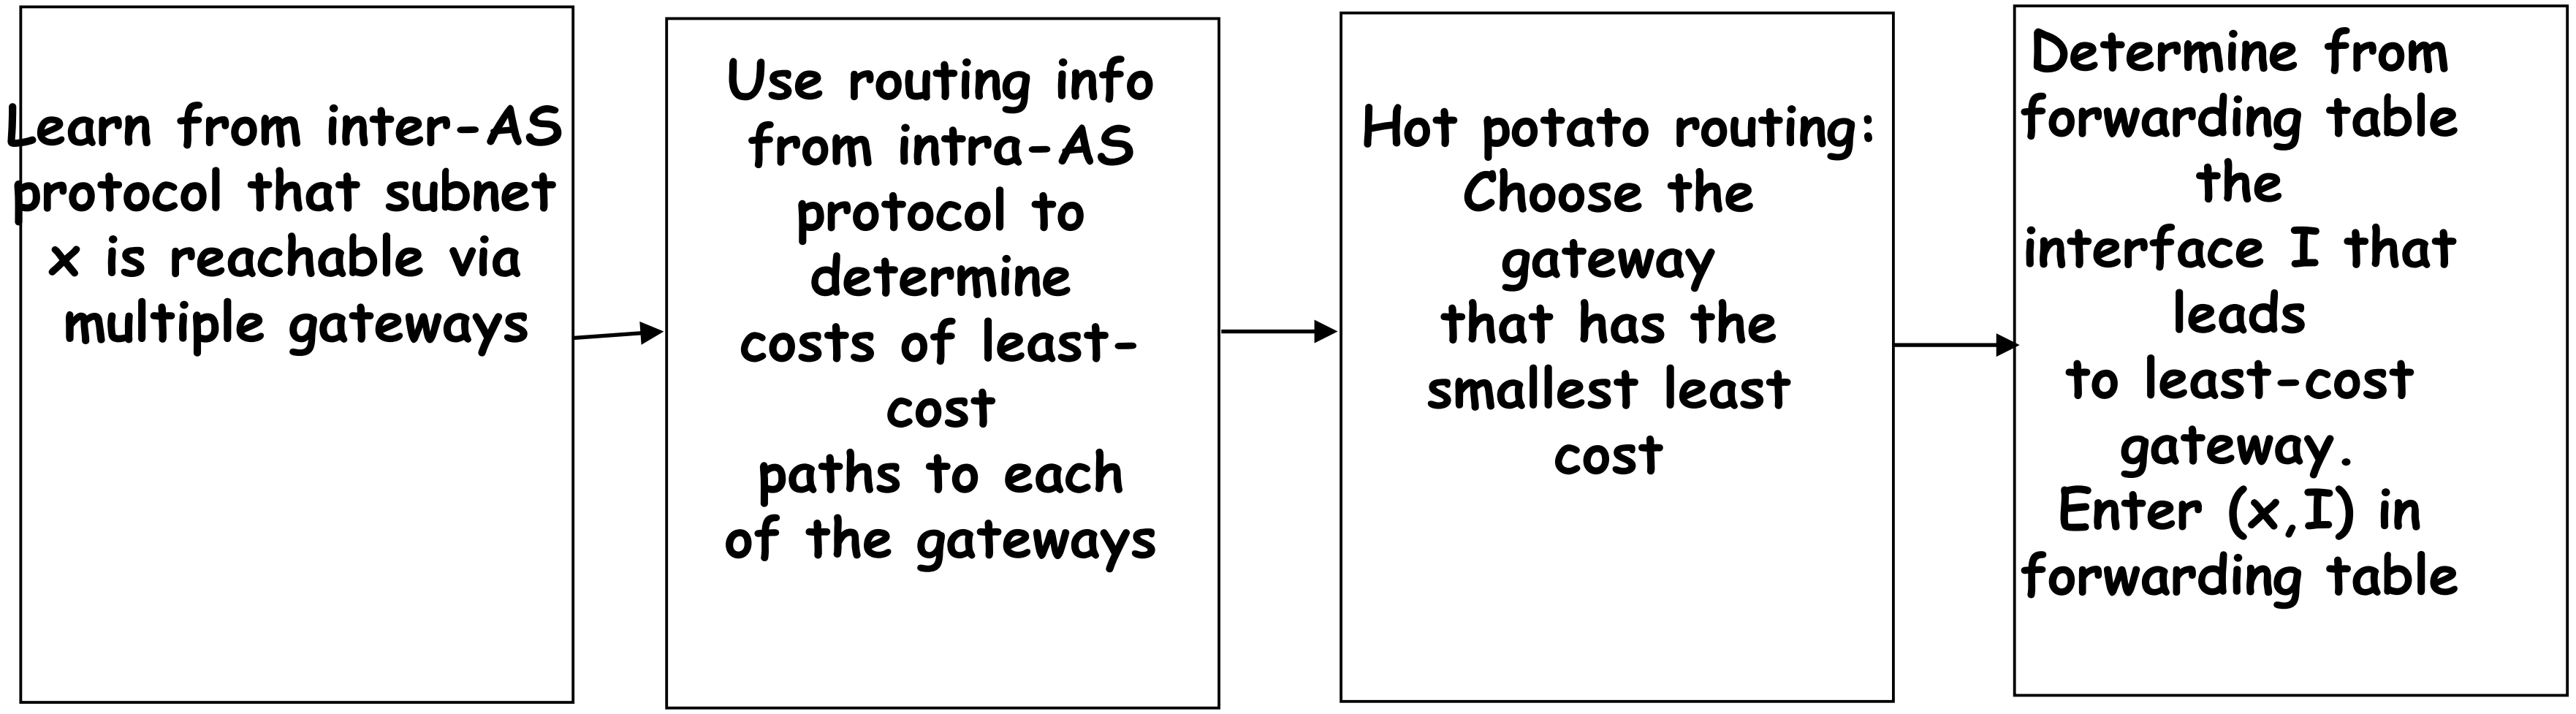

Intra-AS Routing

- also known as Interior Gateway Protocols (IGP)
- most common Intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

RIP (Routing Information Protocol)

- included in BSD-UNIX distribution in 1982
- distance vector algorithm
  - distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka advertisement)
  - each advertisement: list of up to 25 destination *subnets* *(in IP addressing sense)*

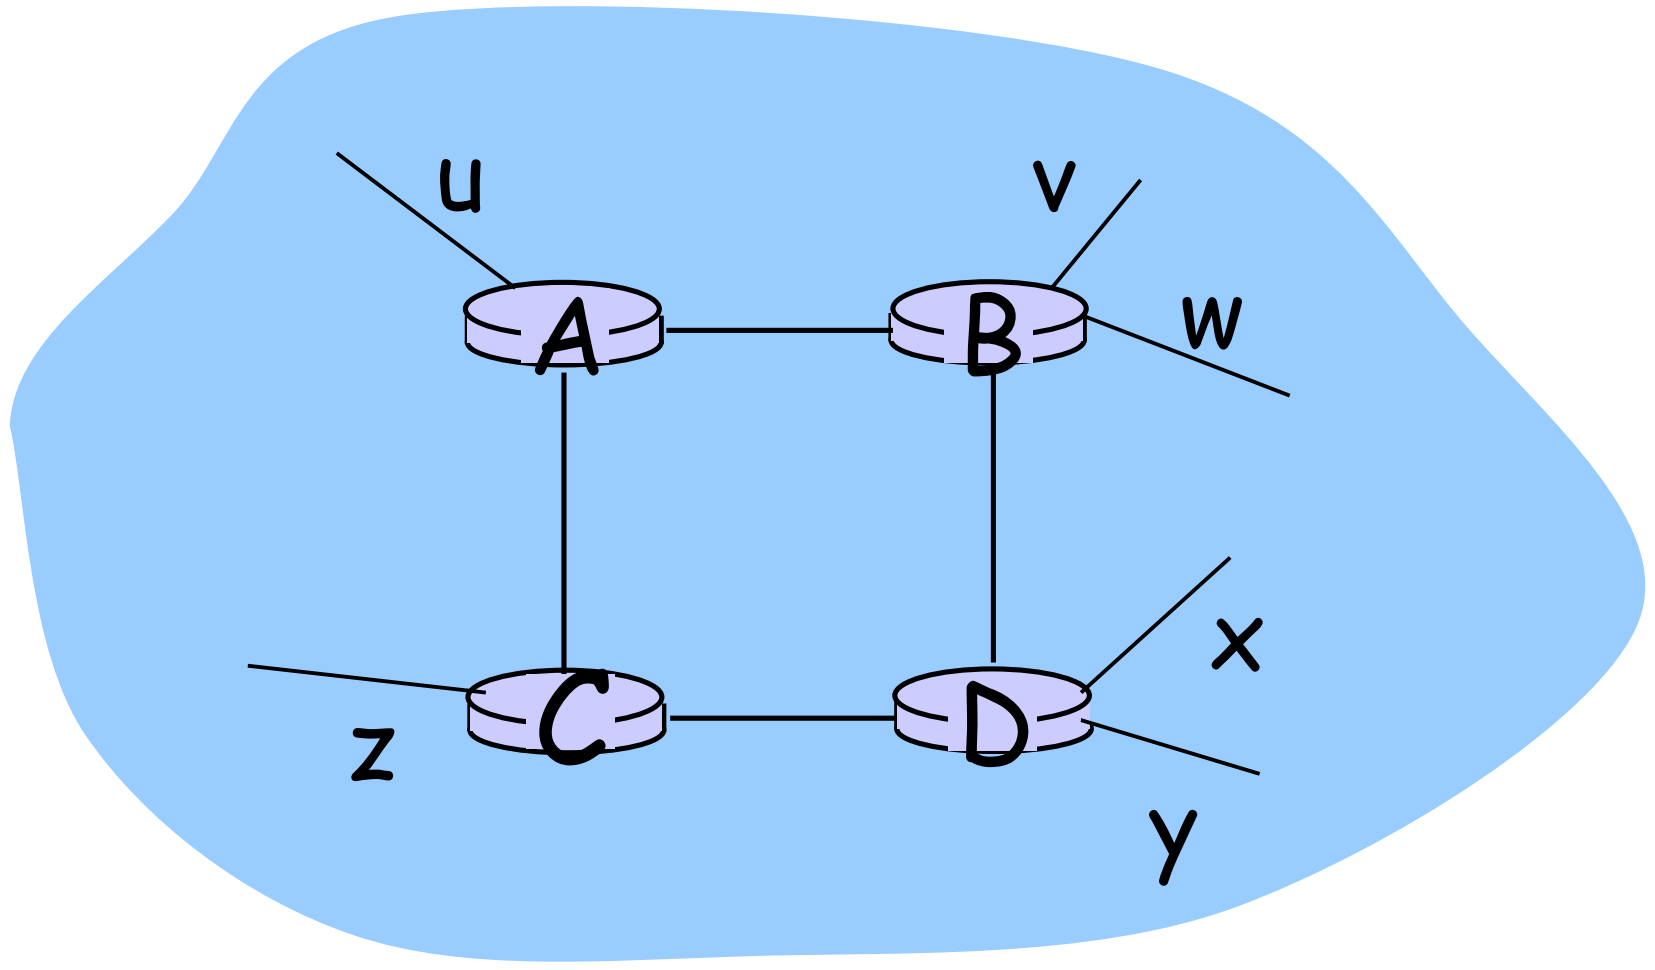

from router A to destination subnets:

subnet	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP: Example

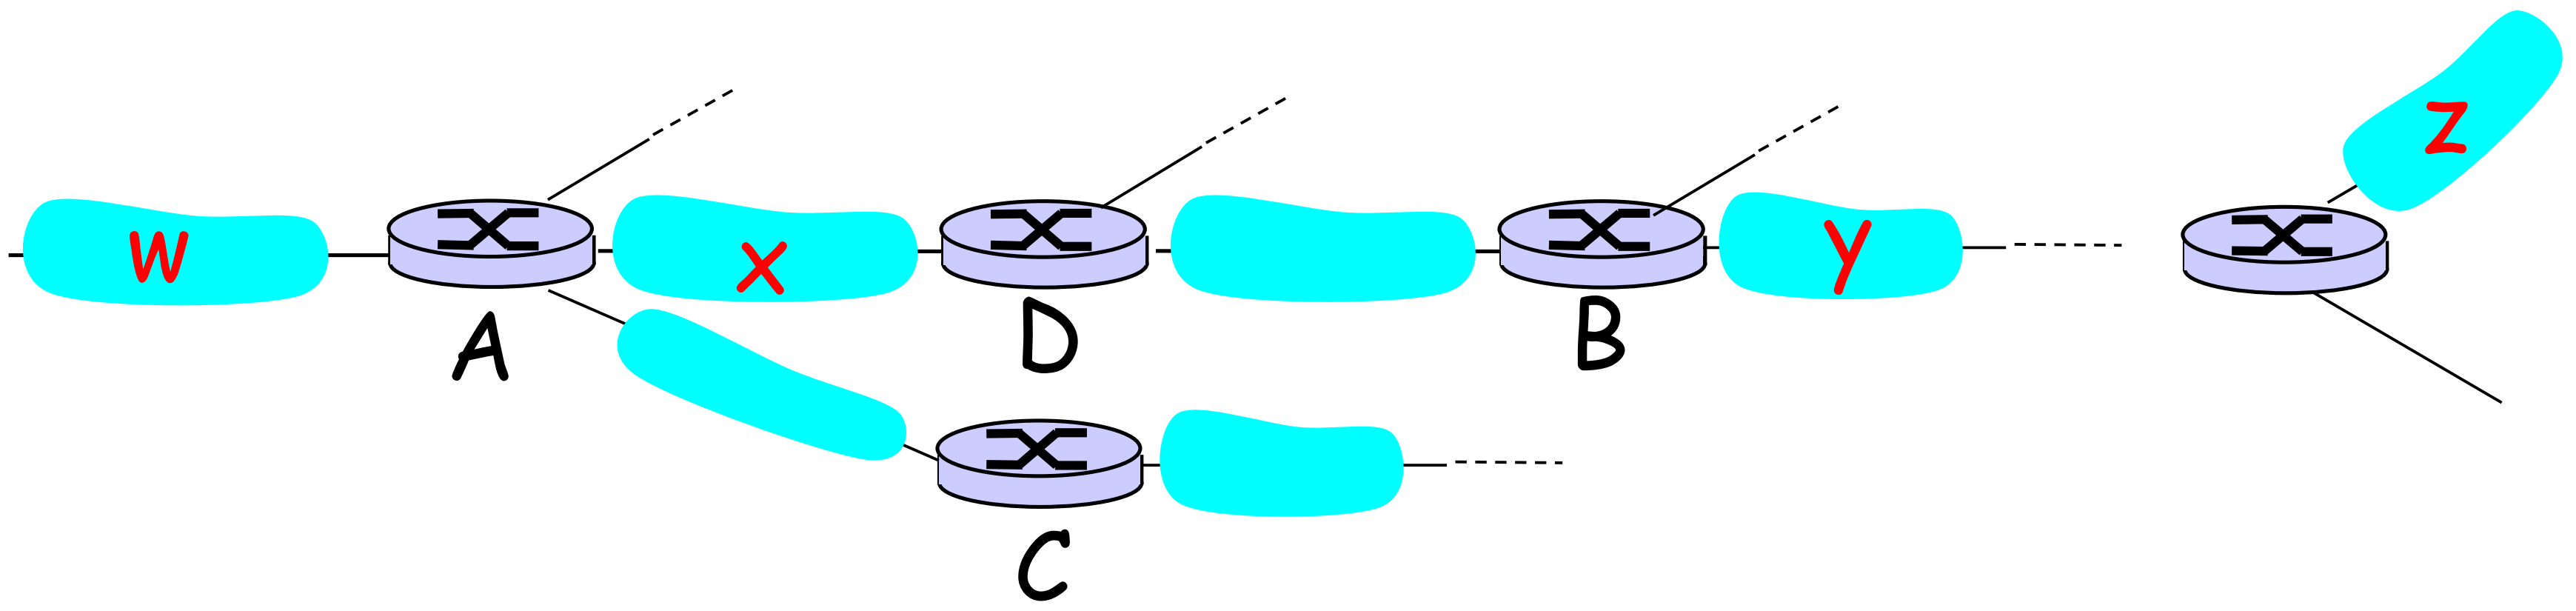

routing table in router D

destination subnet dest	next router	# hops to
w	A	2
y	B	2
z	B	7
x	--	1
….	….	….

RIP: Example

A-to-D advertisement

dest	next	hops
w	-	1
x	-	1
z	C	4
....	...	

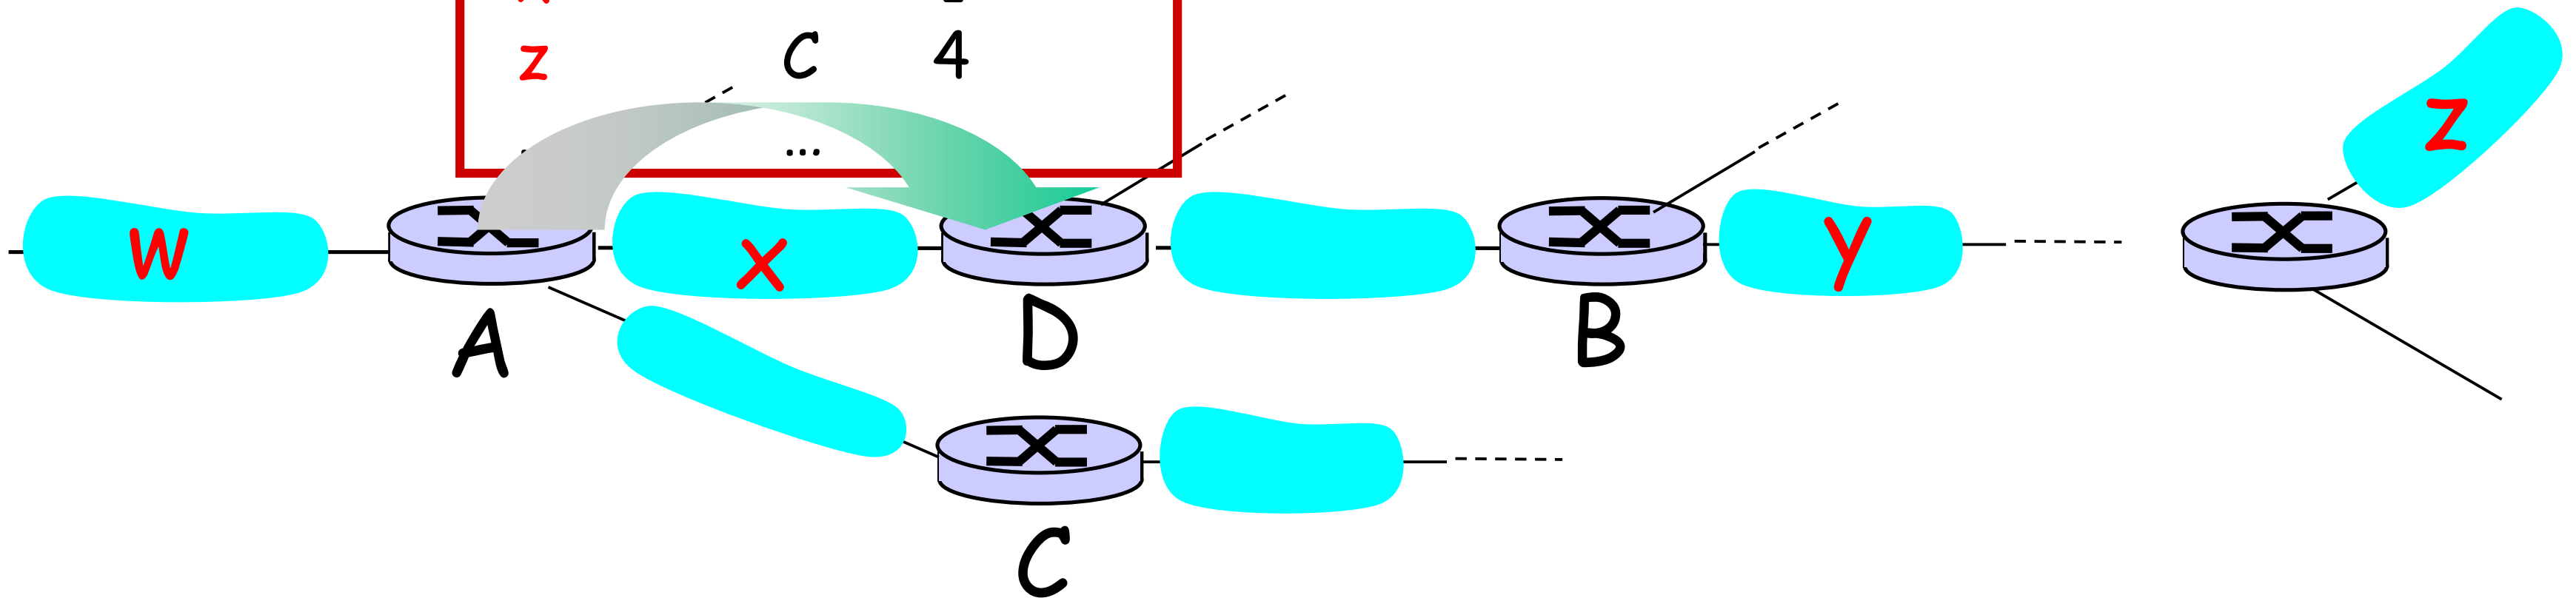

routing table in router D

destination subnet dest	next router	# hops to
w	A	2
y	~~B~~ A	~~2~~ 5
z	B	7
x	--	1
....	....	....

RIP: Link Failure and Recovery

If no advertisement heard after 180 sec --> neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- *poison reverse* used to prevent ping-pong loops (infinite distance = 16 hops)

RIP Table processing

- RIP routing tables managed by **application-level** process called route-d (daemon)
- advertisements sent in UDP packets, periodically repeated

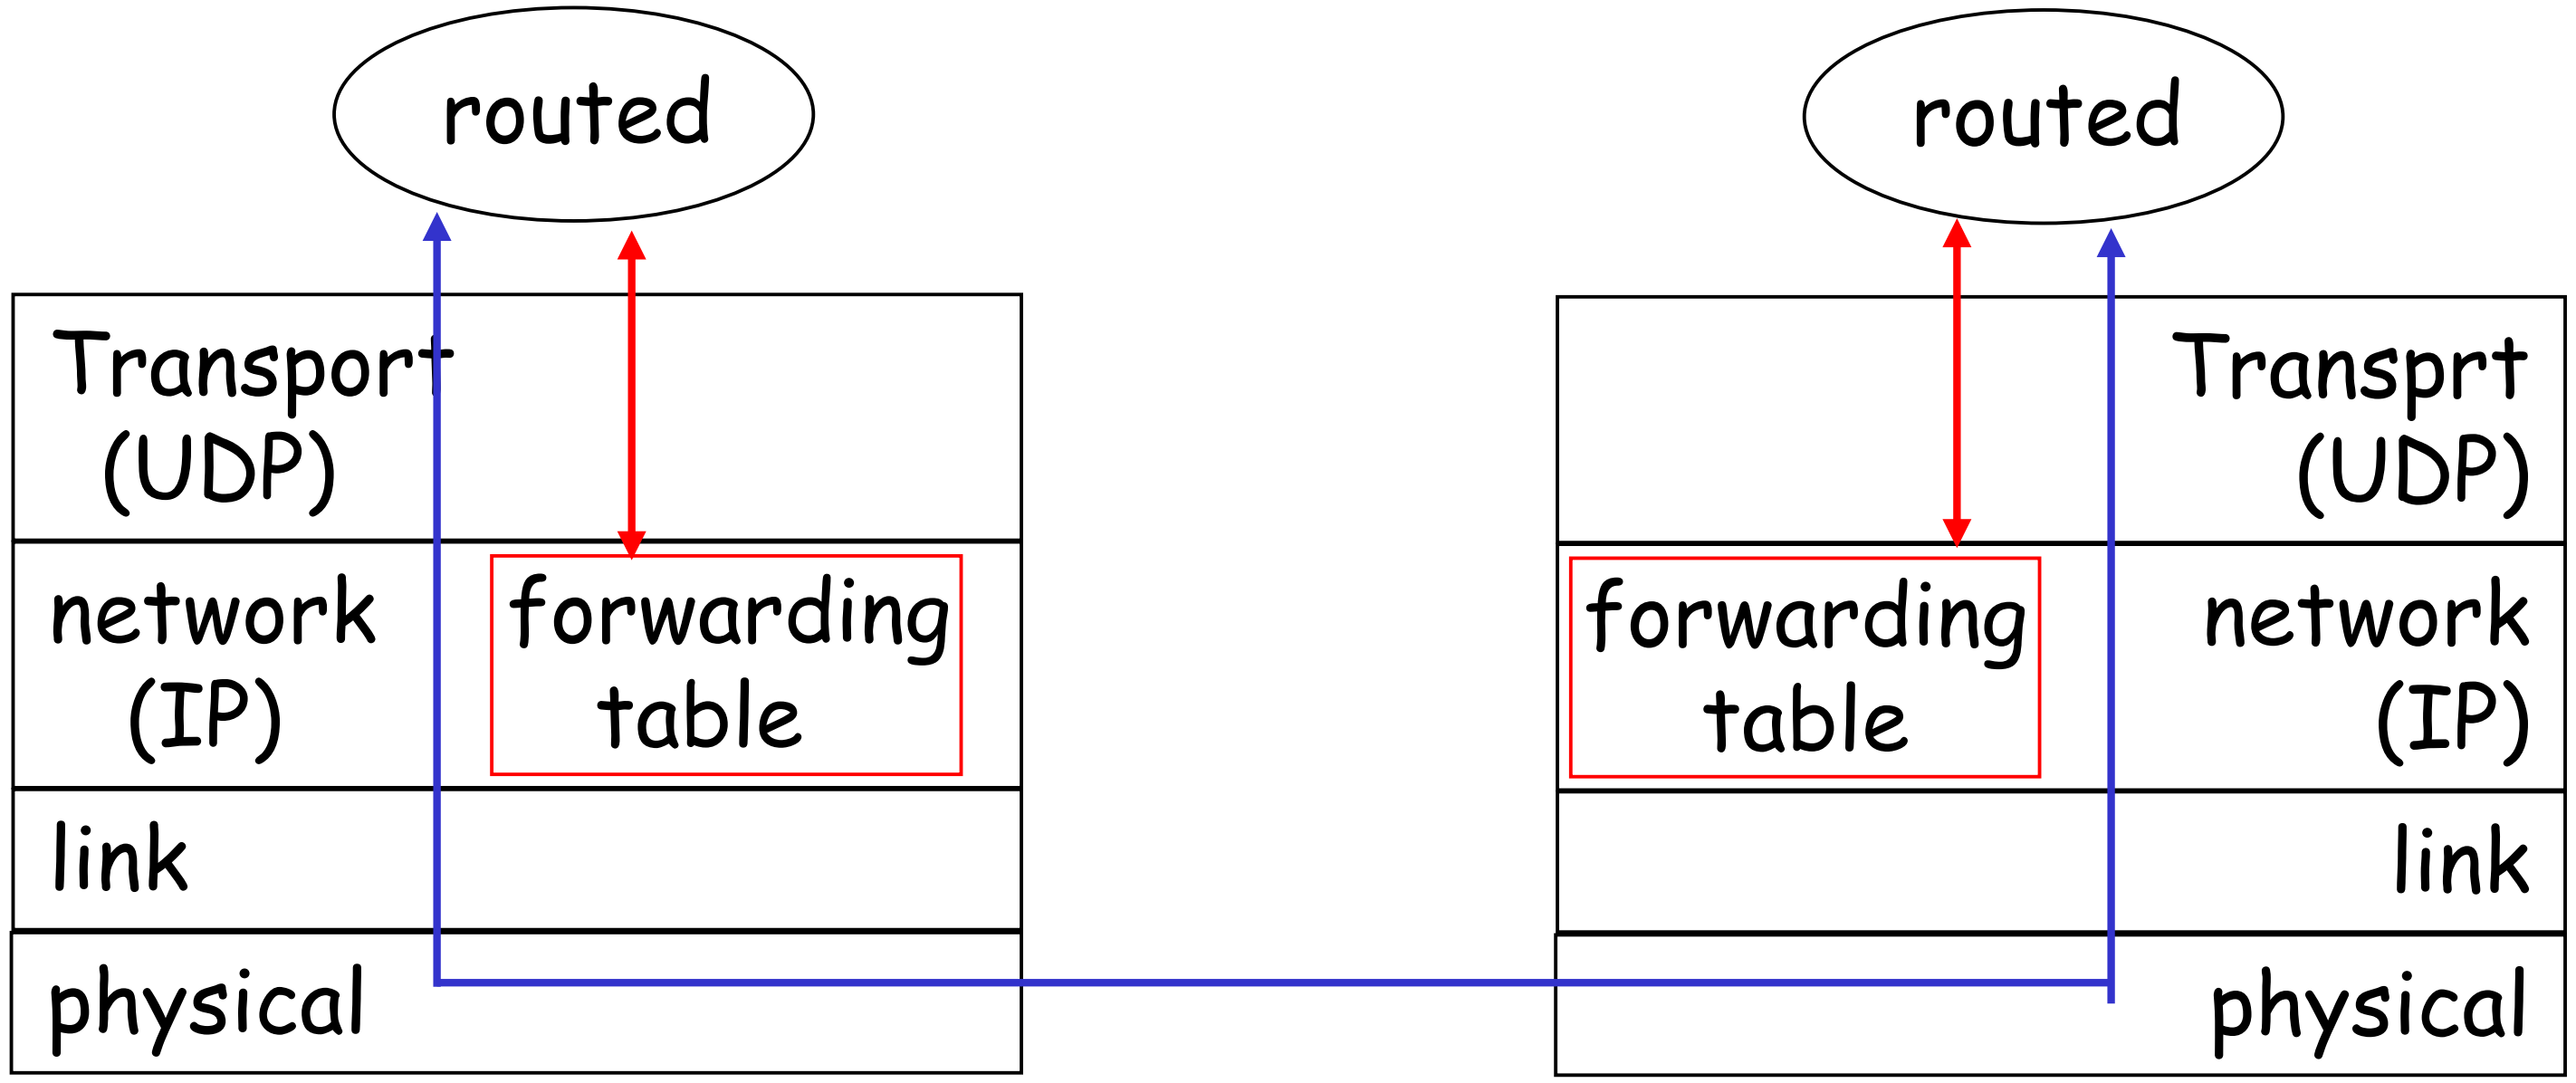

OSPF (Open Shortest Path First)

- "open" : publicly available
- uses link-state algorithm
  - link state packet dissemination
  - topology map at each node
  - route computation using Dijkstra's algorithm
- router floods OSPF link-state advertisements to all other routers in *entire* AS
  - carried in OSPF messages directly over IP (rather than TCP or UDP
  - link state: for each attached link
- *IS-IS routing* protocol: nearly identical to OSPF

OSPF "advanced" features

- *security:* all OSPF messages authenticated (to prevent malicious intrusion)
- multiple same-cost paths allowed (only one path in RIP)
- for each link, multiple cost metrics for different TOS (e.g., satellite link cost set low for best effort ToS; high for real-time ToS)
- integrated uni- and multi-cast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- hierarchical OSPF in large domains.

Hierarchical OSPF

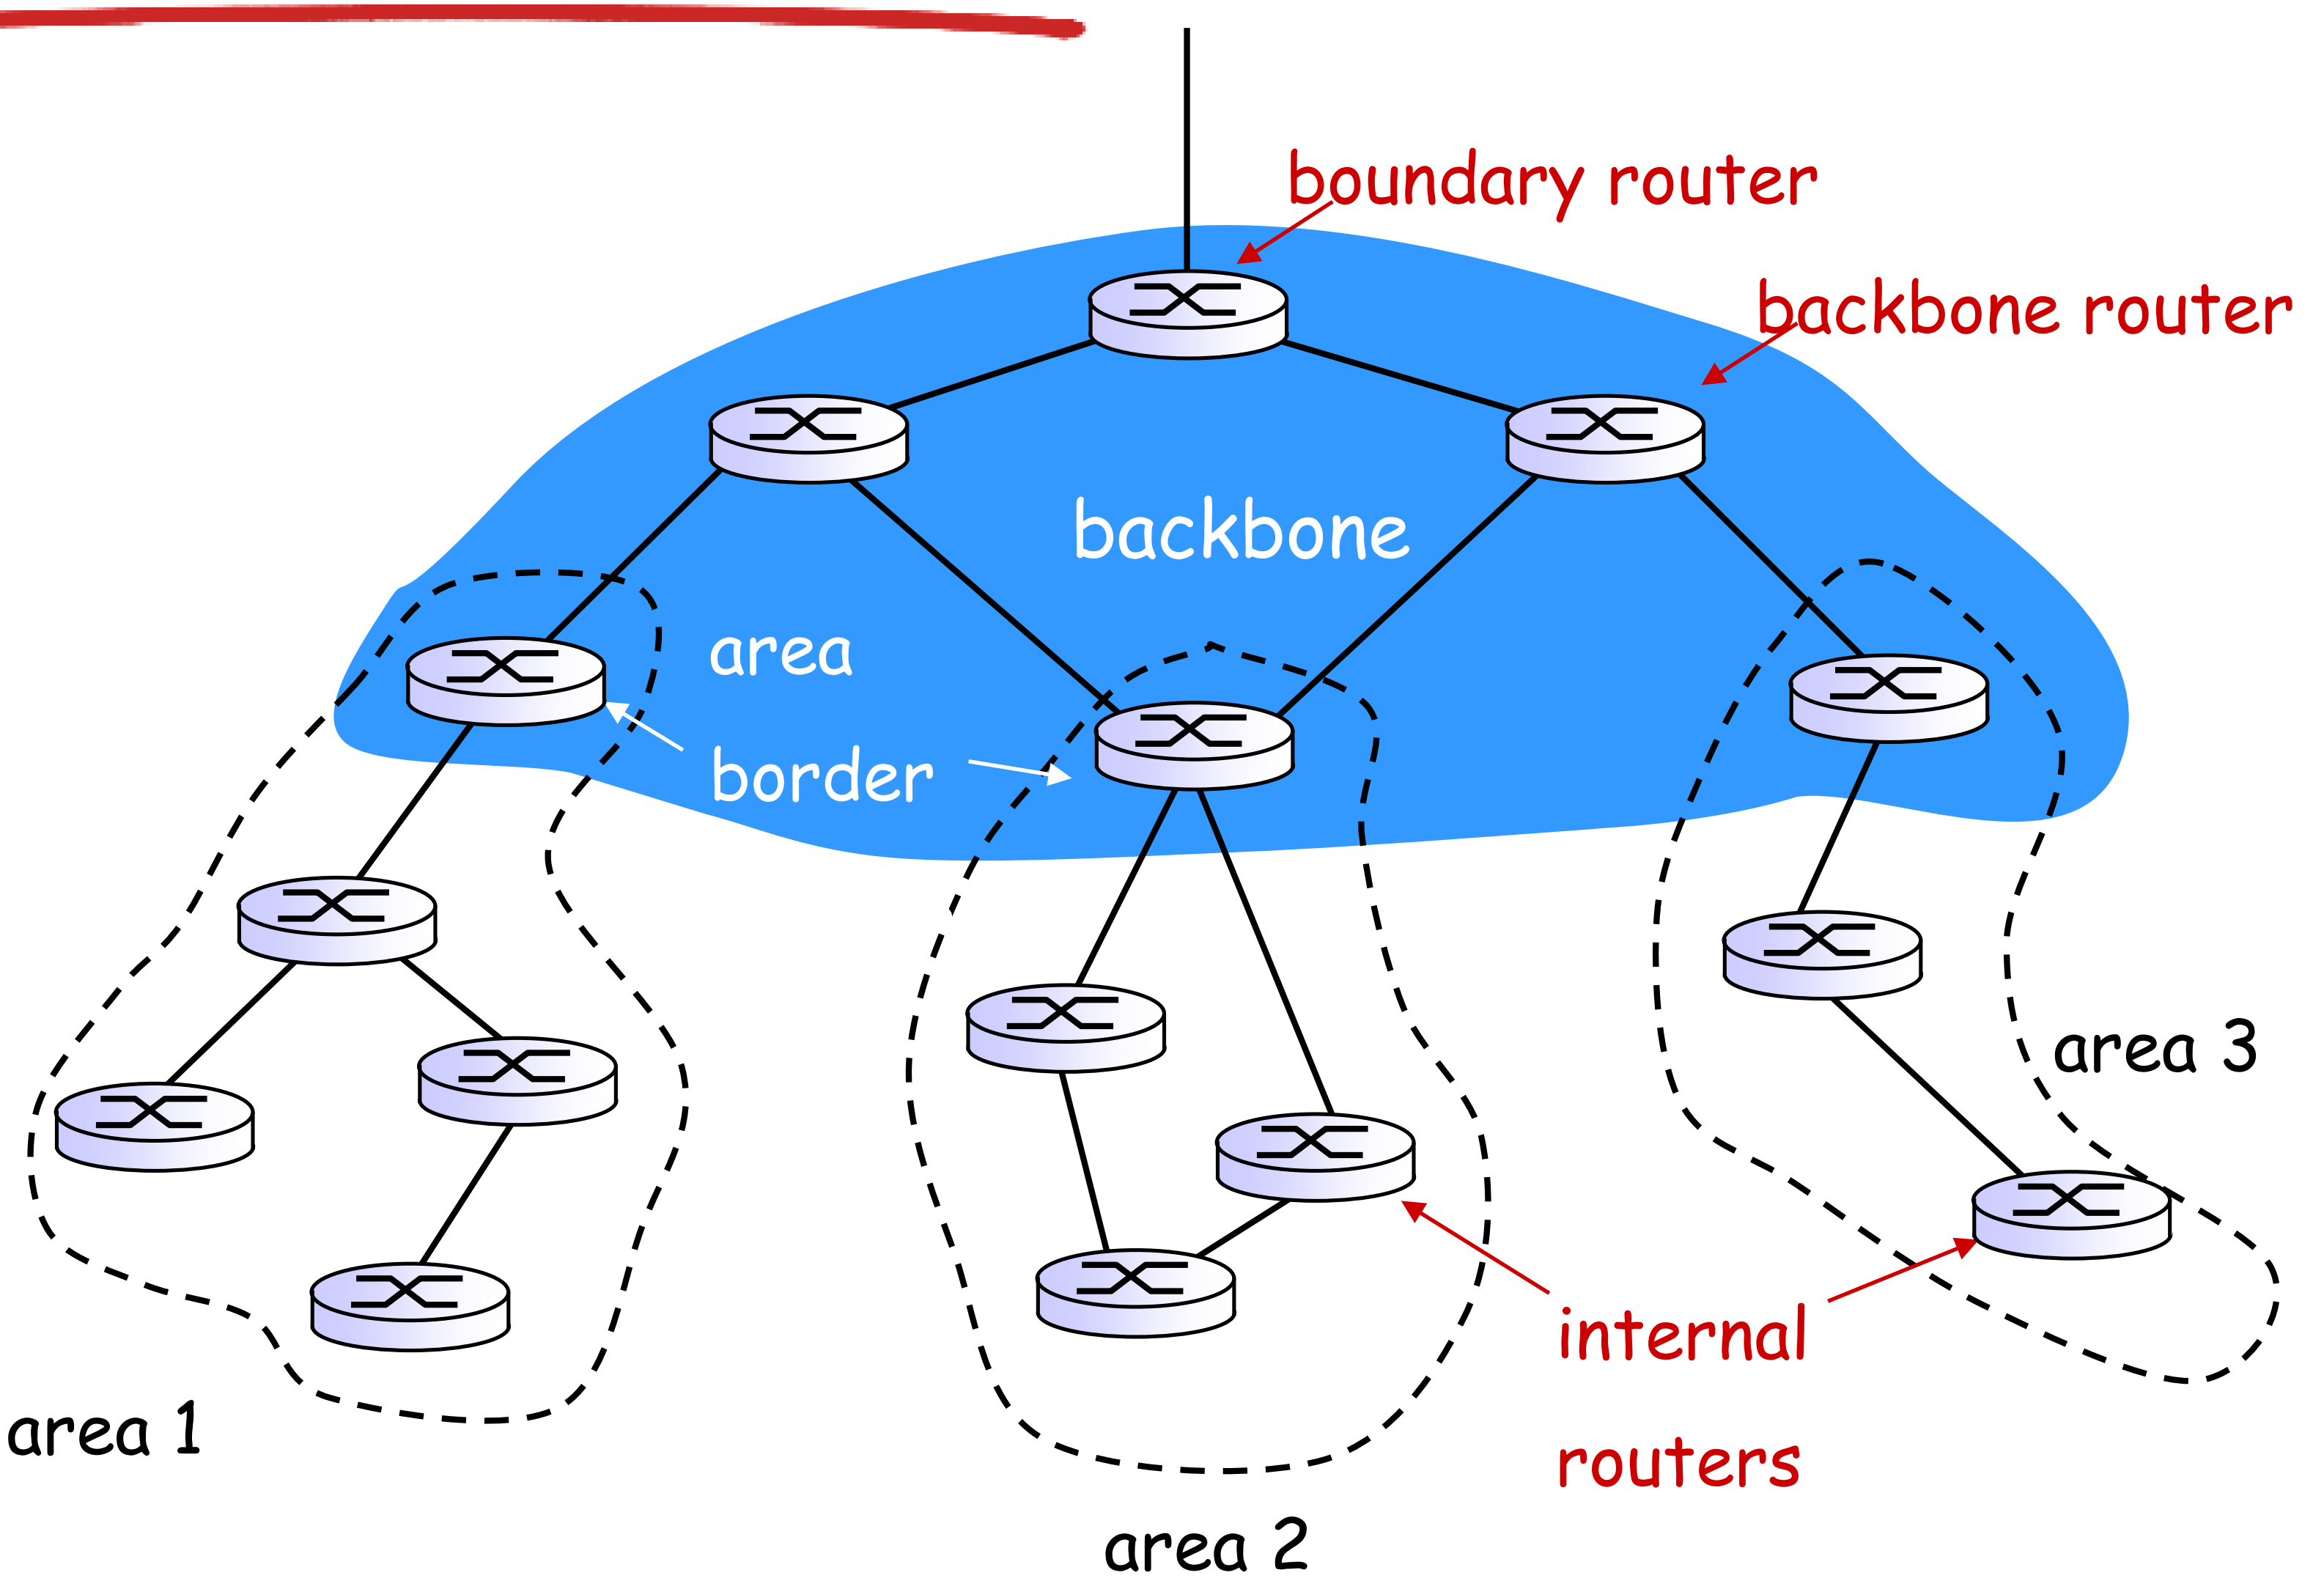

Hierarchical OSPF

- *two-level hierarchy:* local area, backbone.
  - link-state advertisements only in area
  - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- *area border routers:* "summarize" distances to nets in own area, advertise to other Area Border routers.
- *backbone routers:* run OSPF routing limited to backbone.
- *boundary routers:* connect to other AS' es.

Chapter 5: outline

5.1 introduction

5.2 routing protocols

- link state
- distance vector

5.3 intra-AS routing in the Internet: OSPF

5.4 routing among the ISPs: BGP

5.5 The SDN control plane

5.6 ICMP: The Internet Control Message Protocol

5.7 Network management and SNMP

Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): *the* de facto inter-domain routing protocol
  - "glue that holds the Internet together"
- BGP provides each AS a means to:
  - eBGP: obtain subnet reachability information from neighboring ASes
  - iBGP: propagate reachability information to all AS-internal routers.
  - determine "good" routes to other networks based on reachability information and *policy*
- allows subnet to advertise its existence to rest of Internet: *"I am here"*

eBGP, iBGP connections

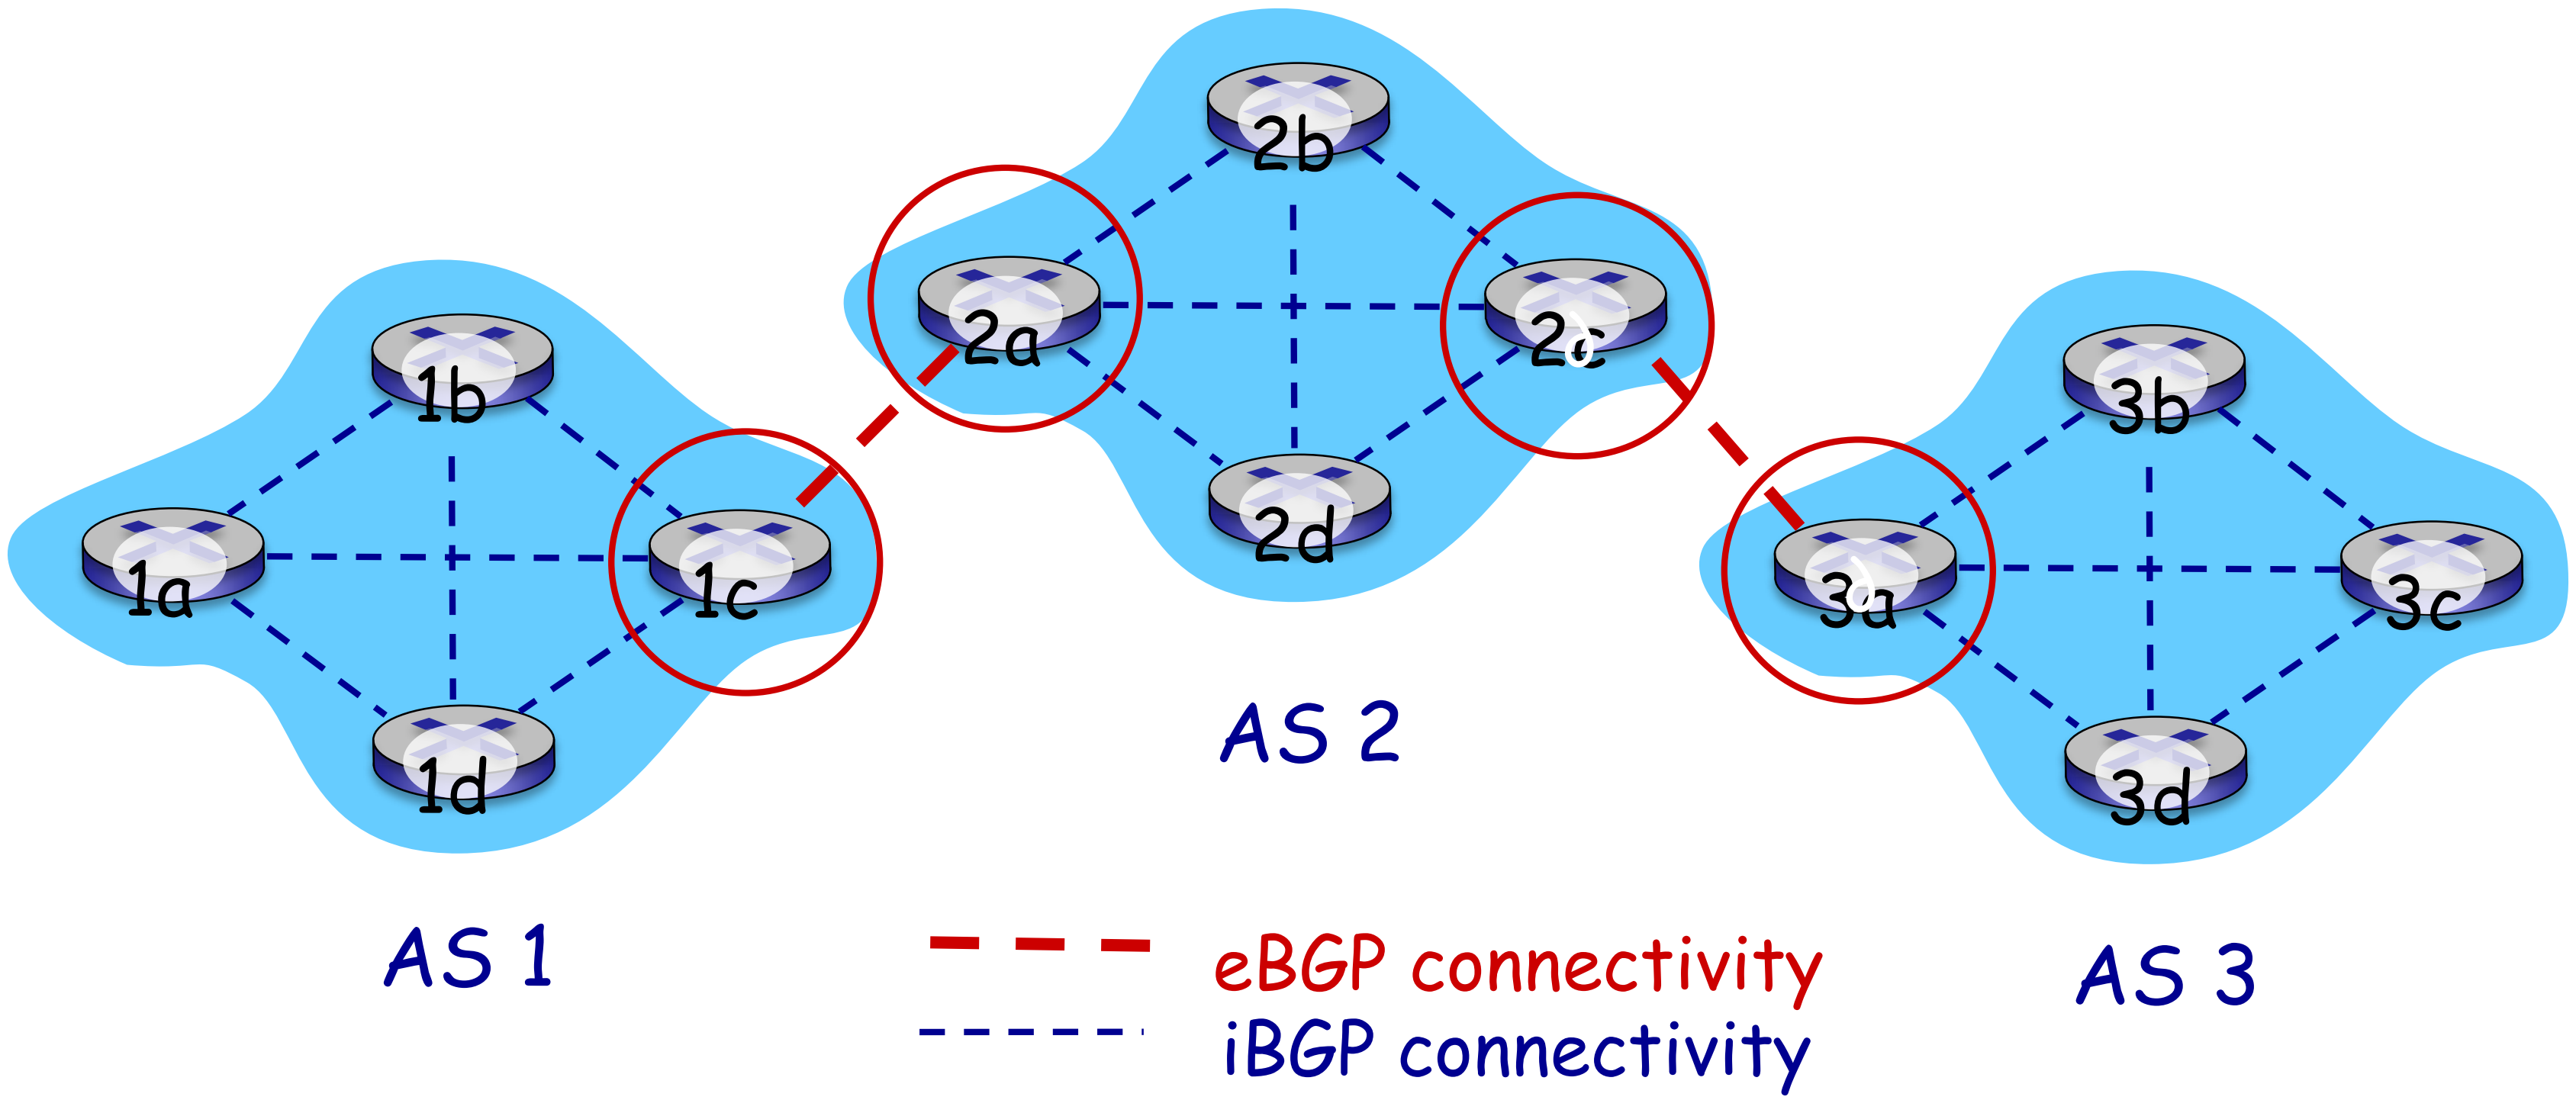

gateway routers run both eBGP and iBGP protools

BGP basics

- BGP session: two BGP routers ("peers") exchange BGP messages over semi-permanent TCP connection:
  - advertising *paths* to different destination network prefixes (BGP is a "path vector" protocol)
- when AS3 gateway router 3a advertises path AS3,X to AS2 gateway router 2c:
  - AS3 *promises* to AS2 it will forward datagrams towards X

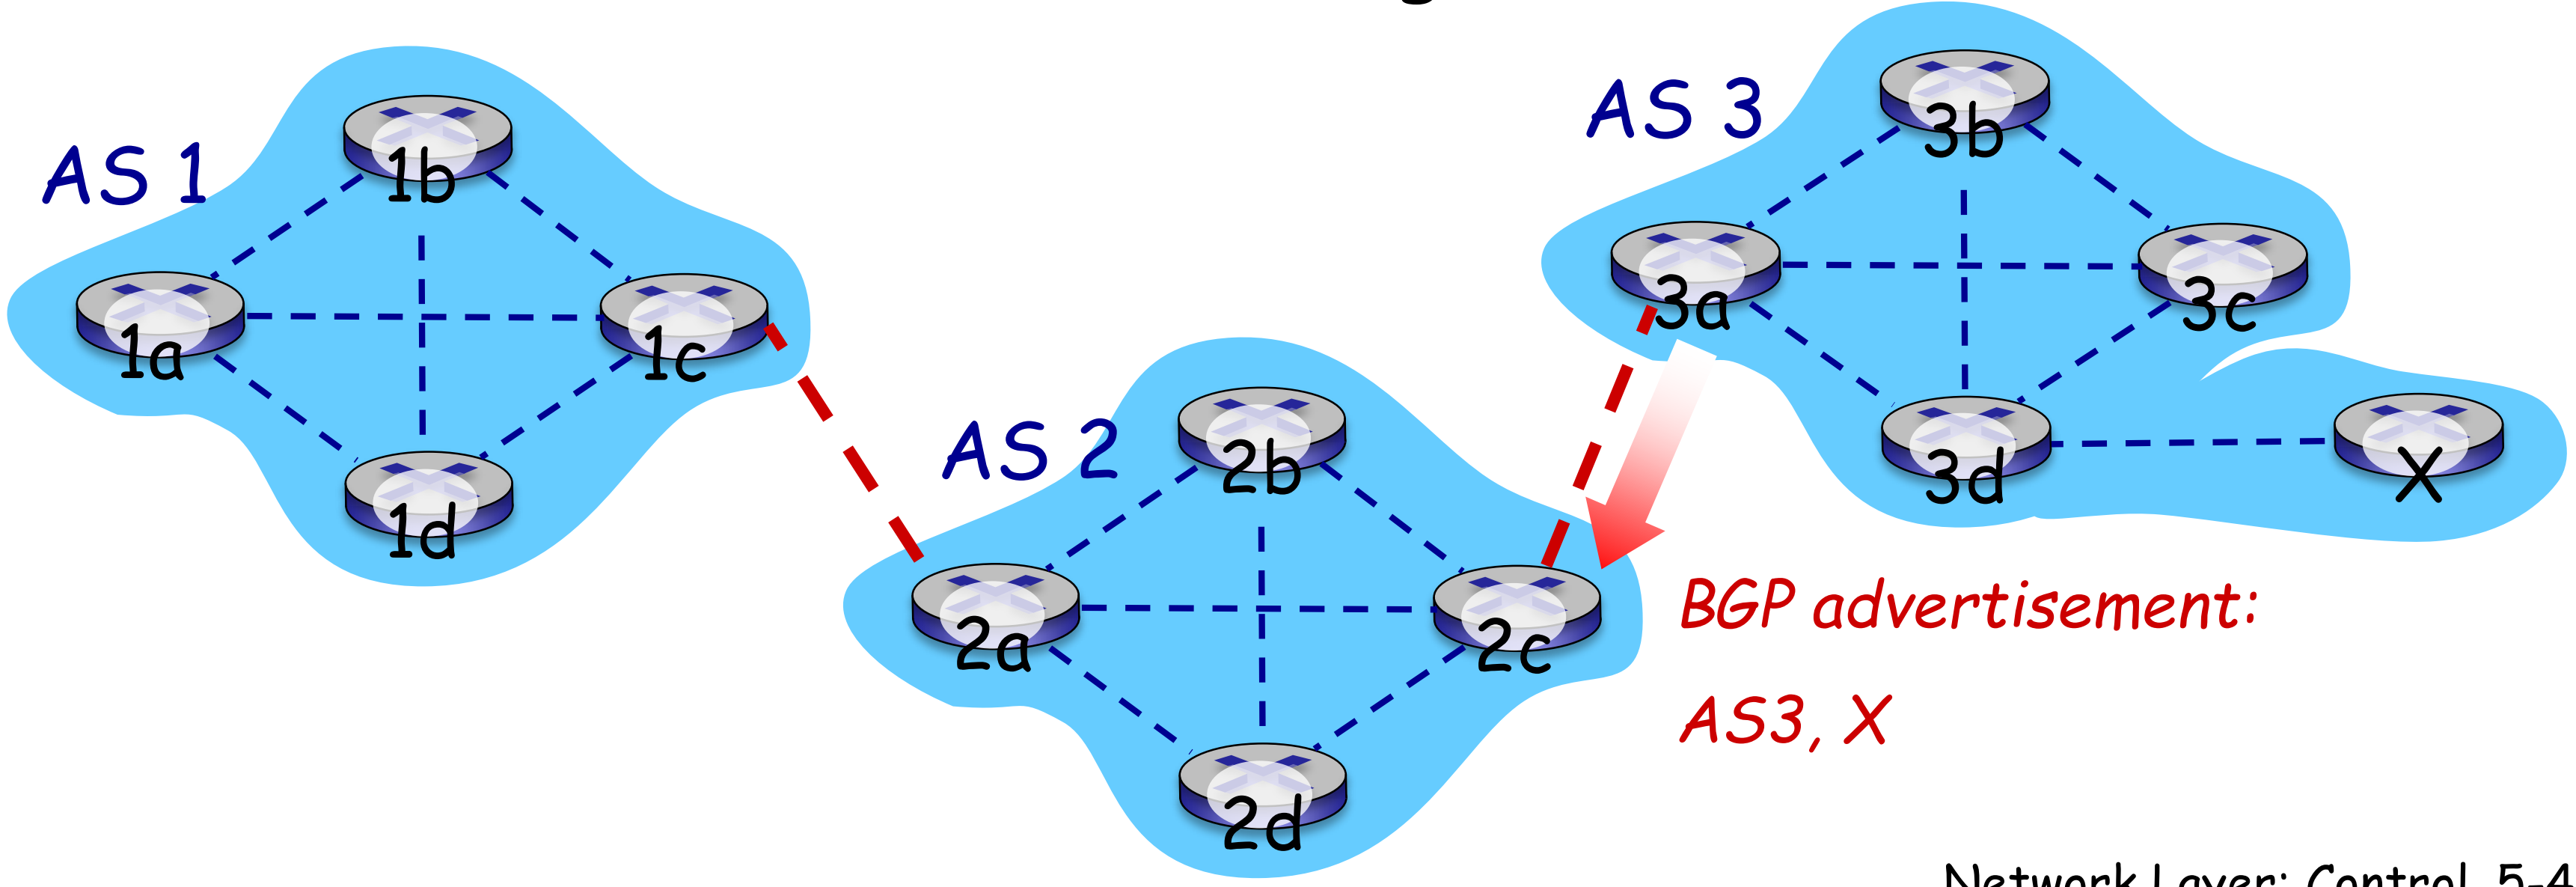

Path attributes and BGP routes

- advertised prefix includes BGP attributes
  - prefix + attributes = "route"
- two important attributes:
  - AS-PATH: list of ASes through which prefix advertisement has passed
  - NEXT-HOP: indicates specific internal-AS router to next-hop AS
- *Policy-based routing:*
  - gateway receiving route advertisement uses *import policy* to accept/decline path (e.g., never route through AS Y).
  - AS policy also determines whether to *advertise* path to other other neighboring ASes

BGP path advertisement

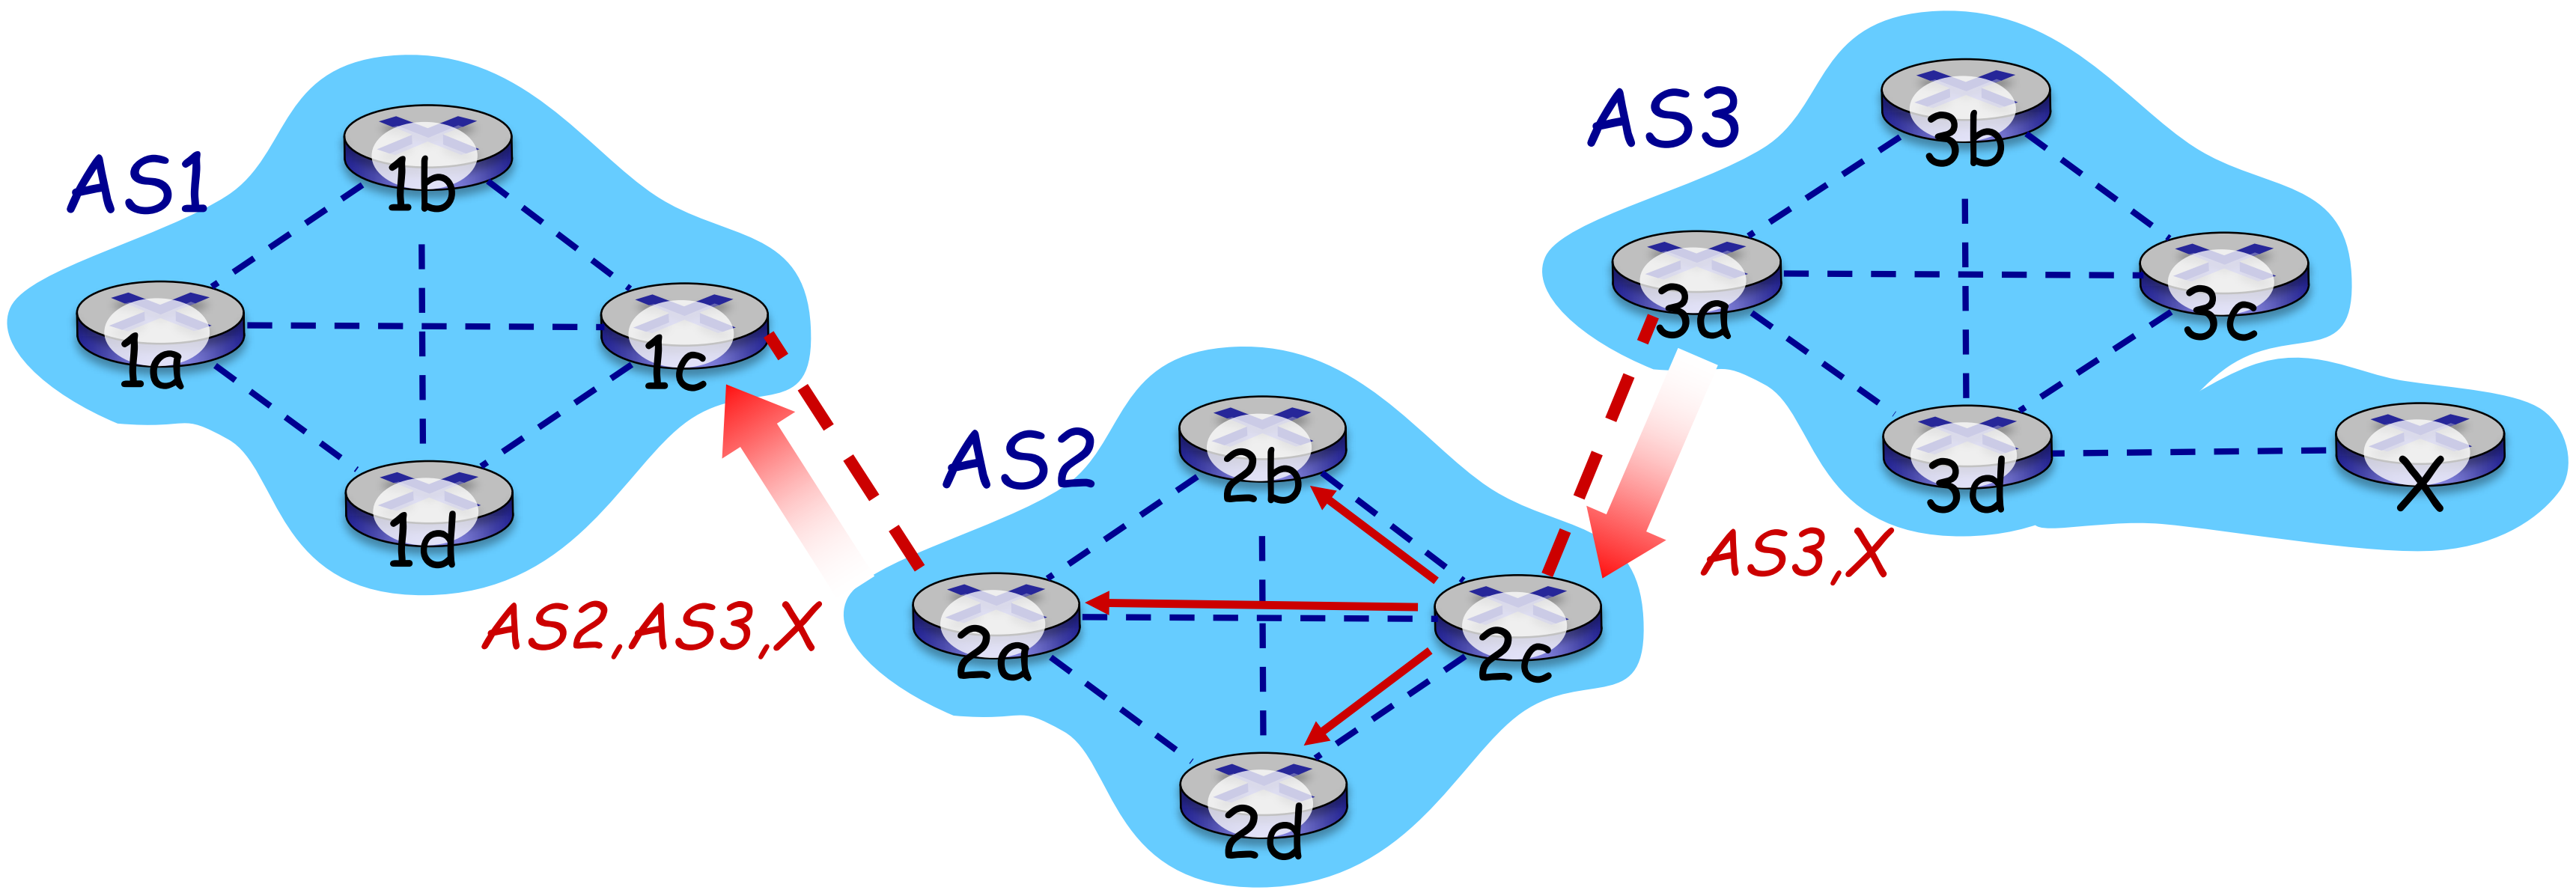

- AS2 router 2c receives path advertisement **AS3,X** (via eBGP) from AS3 router 3a
- Based on AS2 policy, AS2 router 2c accepts path AS3,X, propagates (via iBGP) to all AS2 routers
- Based on AS2 policy, AS2 router 2a advertises (via eBGP) path **AS2, AS3, X** to AS1 router 1c

BGP path advertisement

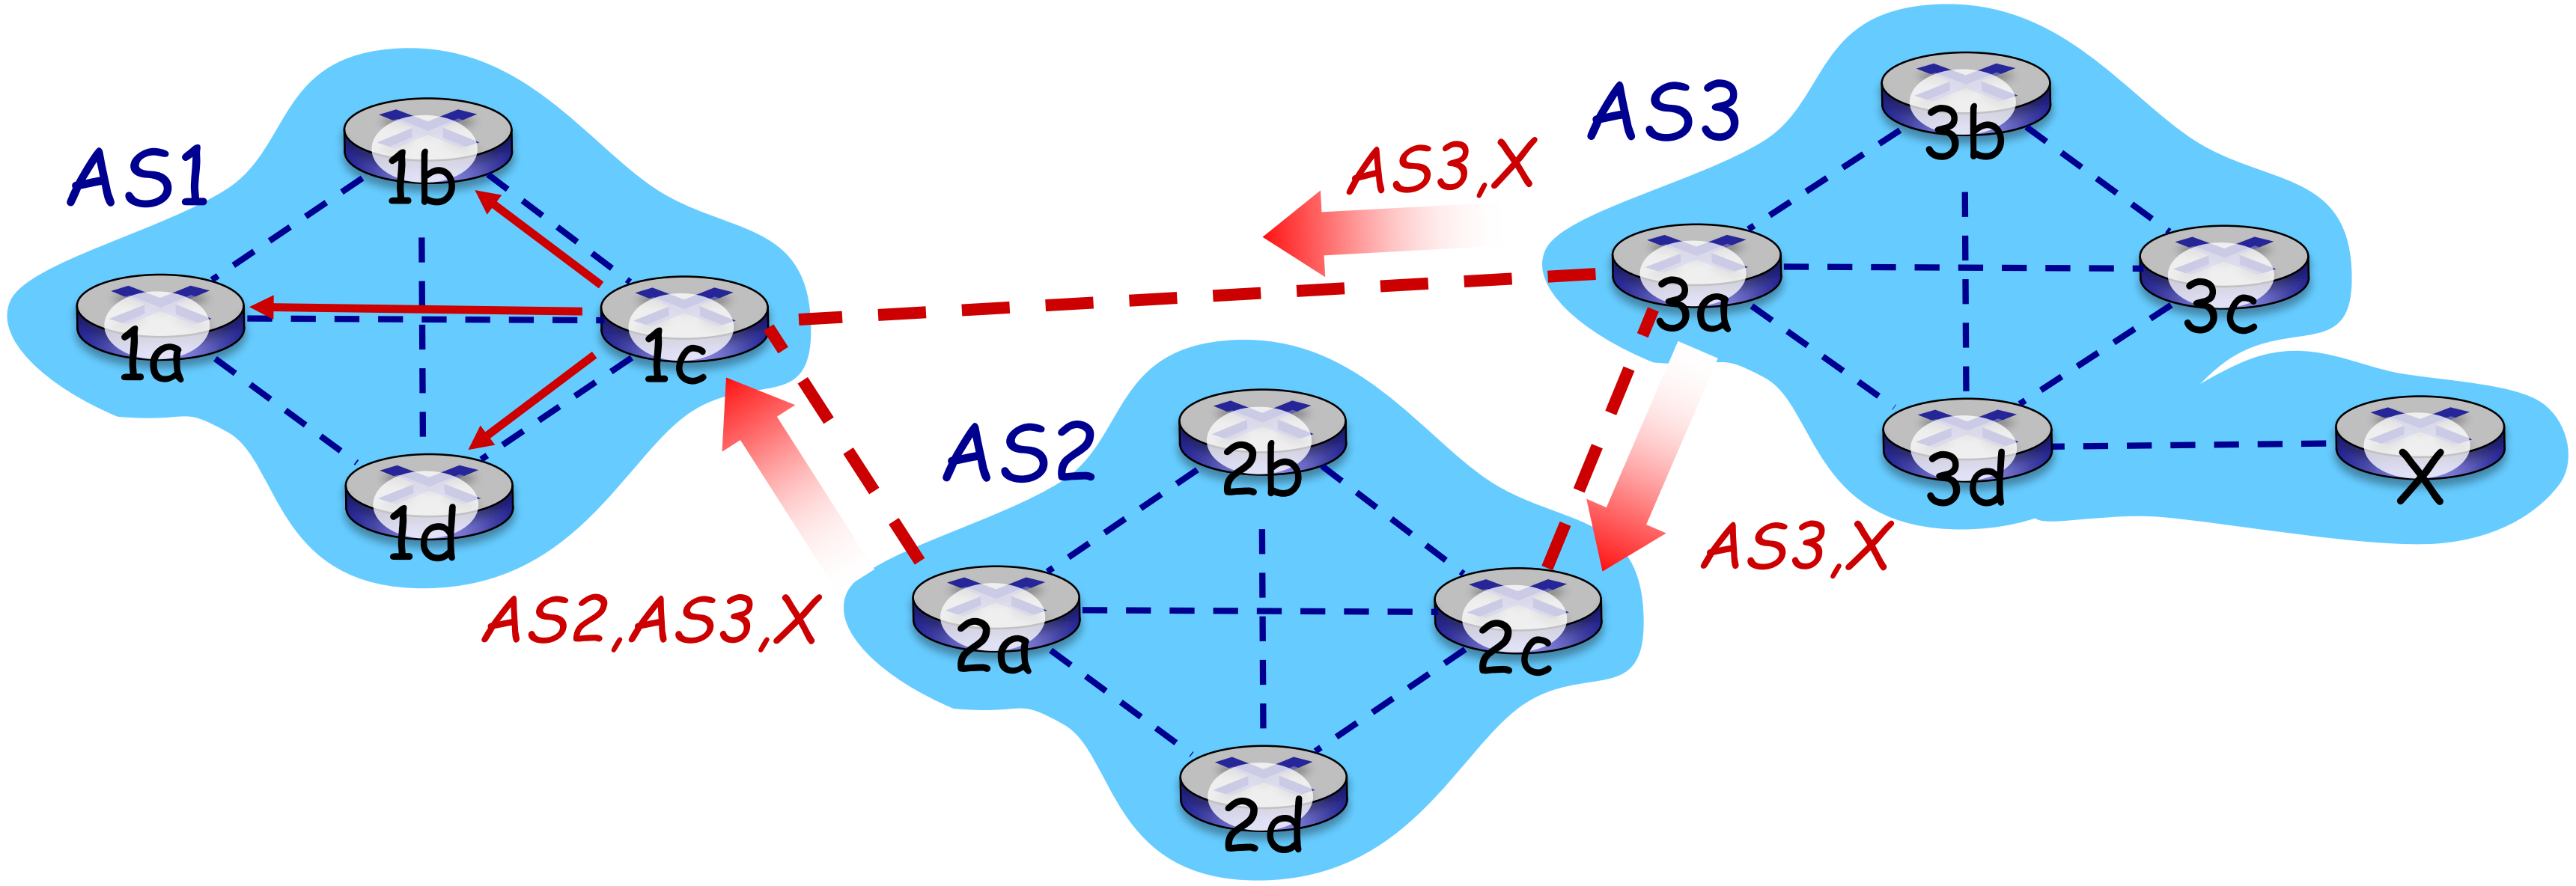

gateway router may learn about multiple paths to destination:

- AS1 gateway router 1c learns path *AS2,AS3,X* from 2a
- AS1 gateway router 1c learns path *AS3,X* from 3a
- Based on policy, AS1 gateway router 1c chooses path *AS3,X, and advertises path within AS1 via iBGP*

BGP messages

- BGP messages exchanged between peers over TCP connection
- BGP messages:
  - OPEN: opens TCP connection to remote BGP peer and authenticates sending BGP peer
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE: keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

BGP, OSPF, forwarding table entries

Q: how does router set forwarding table entry to distant prefix?

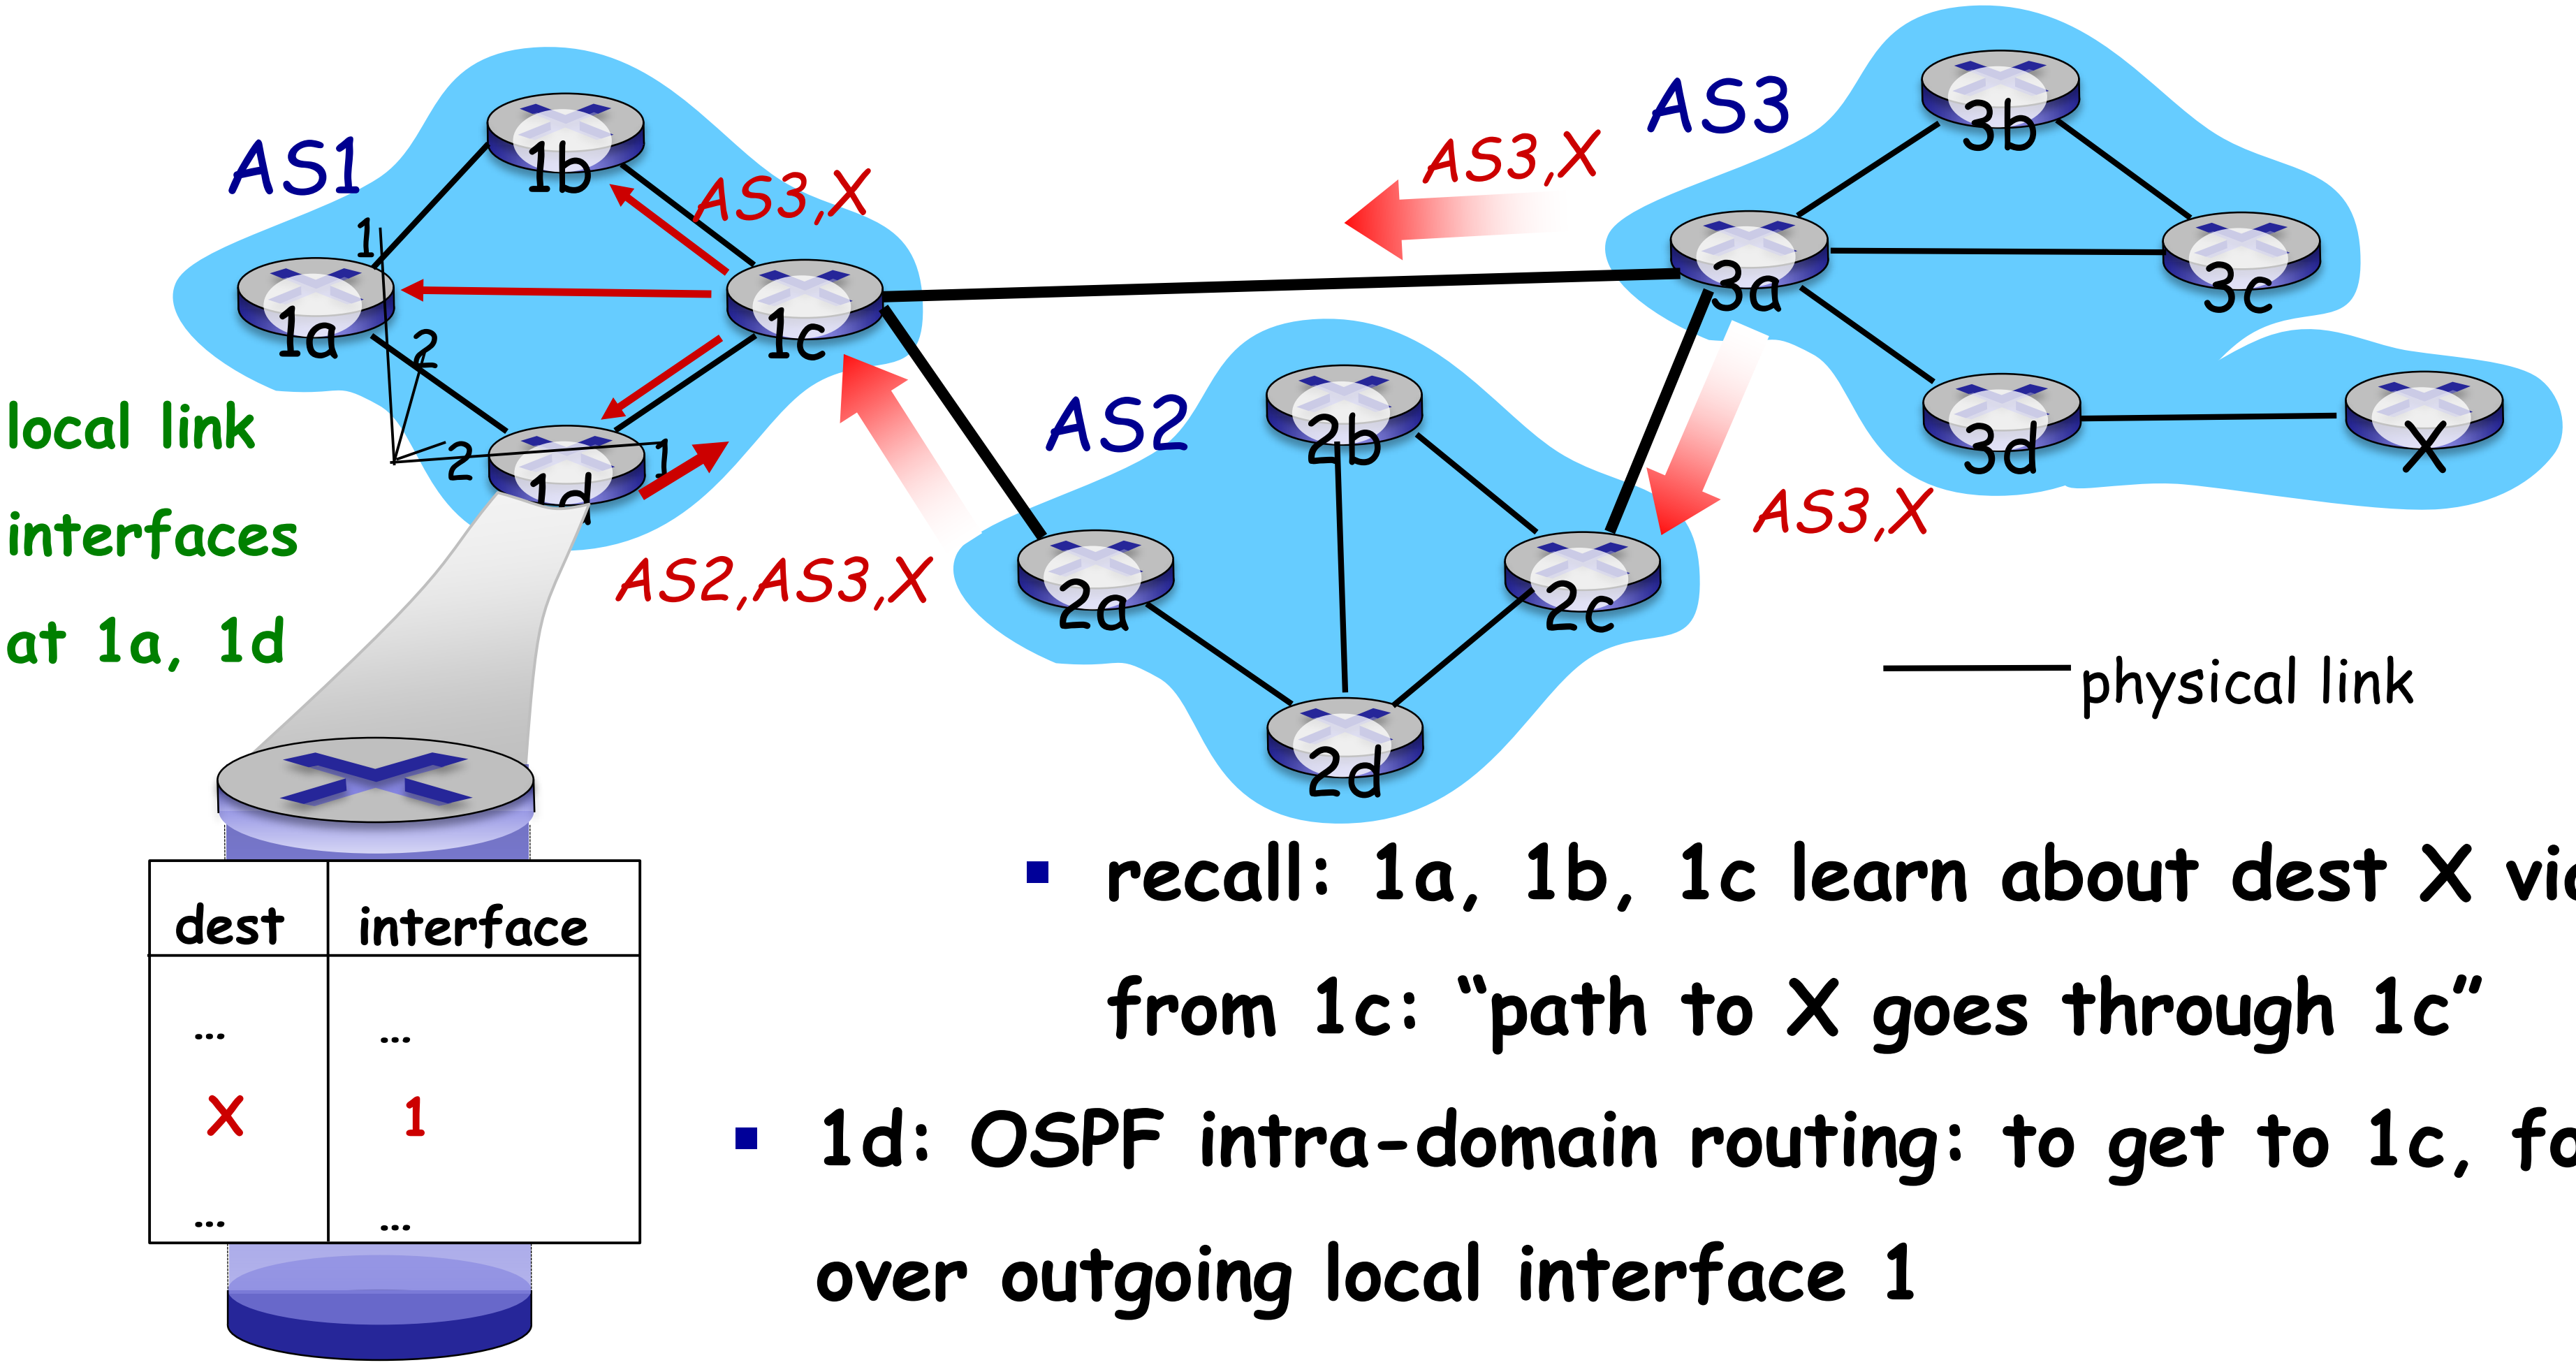

dest	interface
…	…
X	1
…	…

- recall: 1a, 1b, 1c learn about dest X via iBGP from 1c: "path to X goes through 1c"
- 1d: OSPF intra-domain routing: to get to 1c, forward over outgoing local interface 1

BGP, OSPF, forwarding table entries

Q: how does router set forwarding table entry to distant prefix?

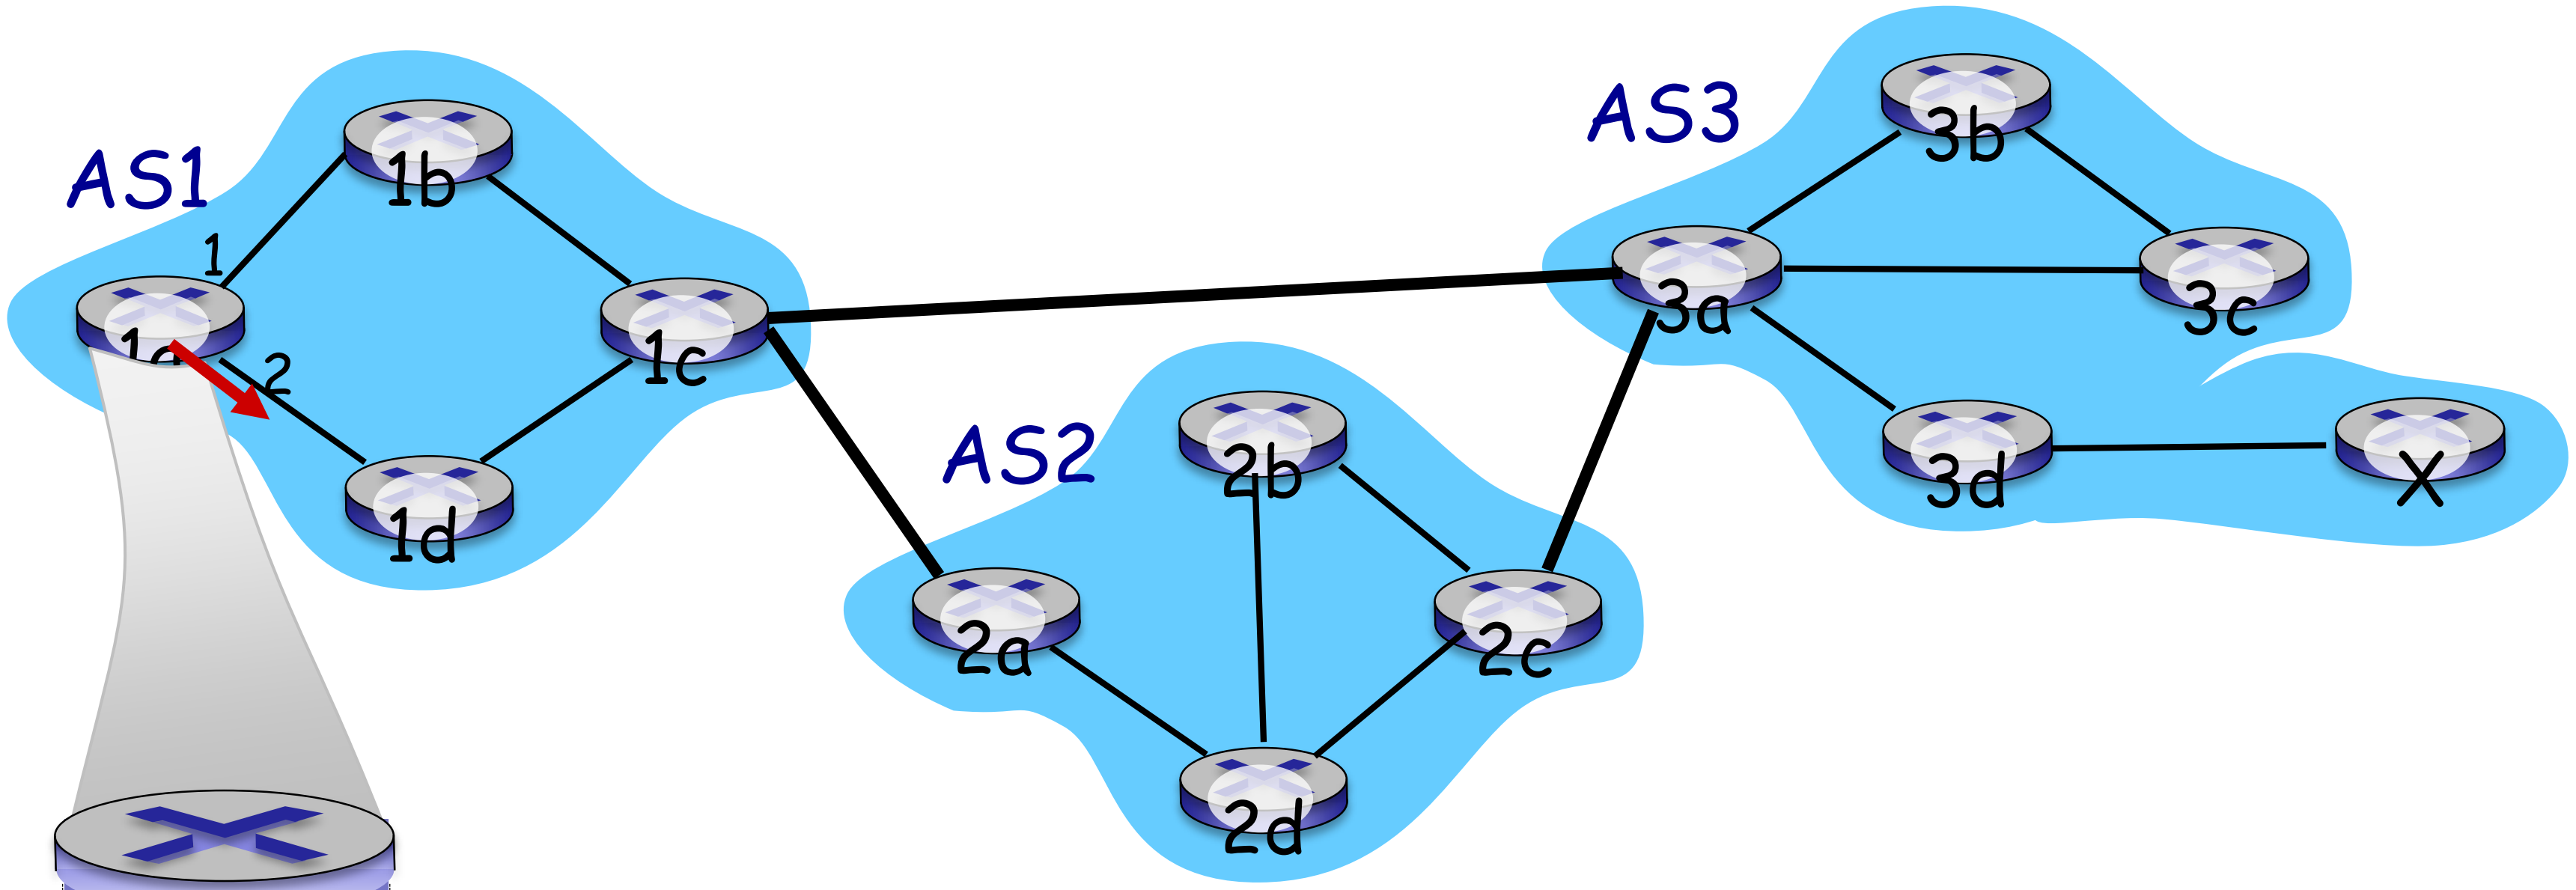

dest	interface
…	…
X	2
…	…

- recall: 1a, 1b, 1c learn about dest X via iBGP from 1c: "path to X goes through 1c"
- 1d: OSPF intra-domain routing: to get to 1c, forward over outgoing local interface 1
- 1a: OSPF intra-domain routing: to get to 1c, forward over outgoing local interface 2

BGP route selection

- router may learn about more than one route to destination AS, selects route based on:
  1. local preference value attribute: policy decision
  2. shortest AS-PATH
  3. closest NEXT-HOP router: hot potato routing
  4. additional criteria

Hot Potato Routing

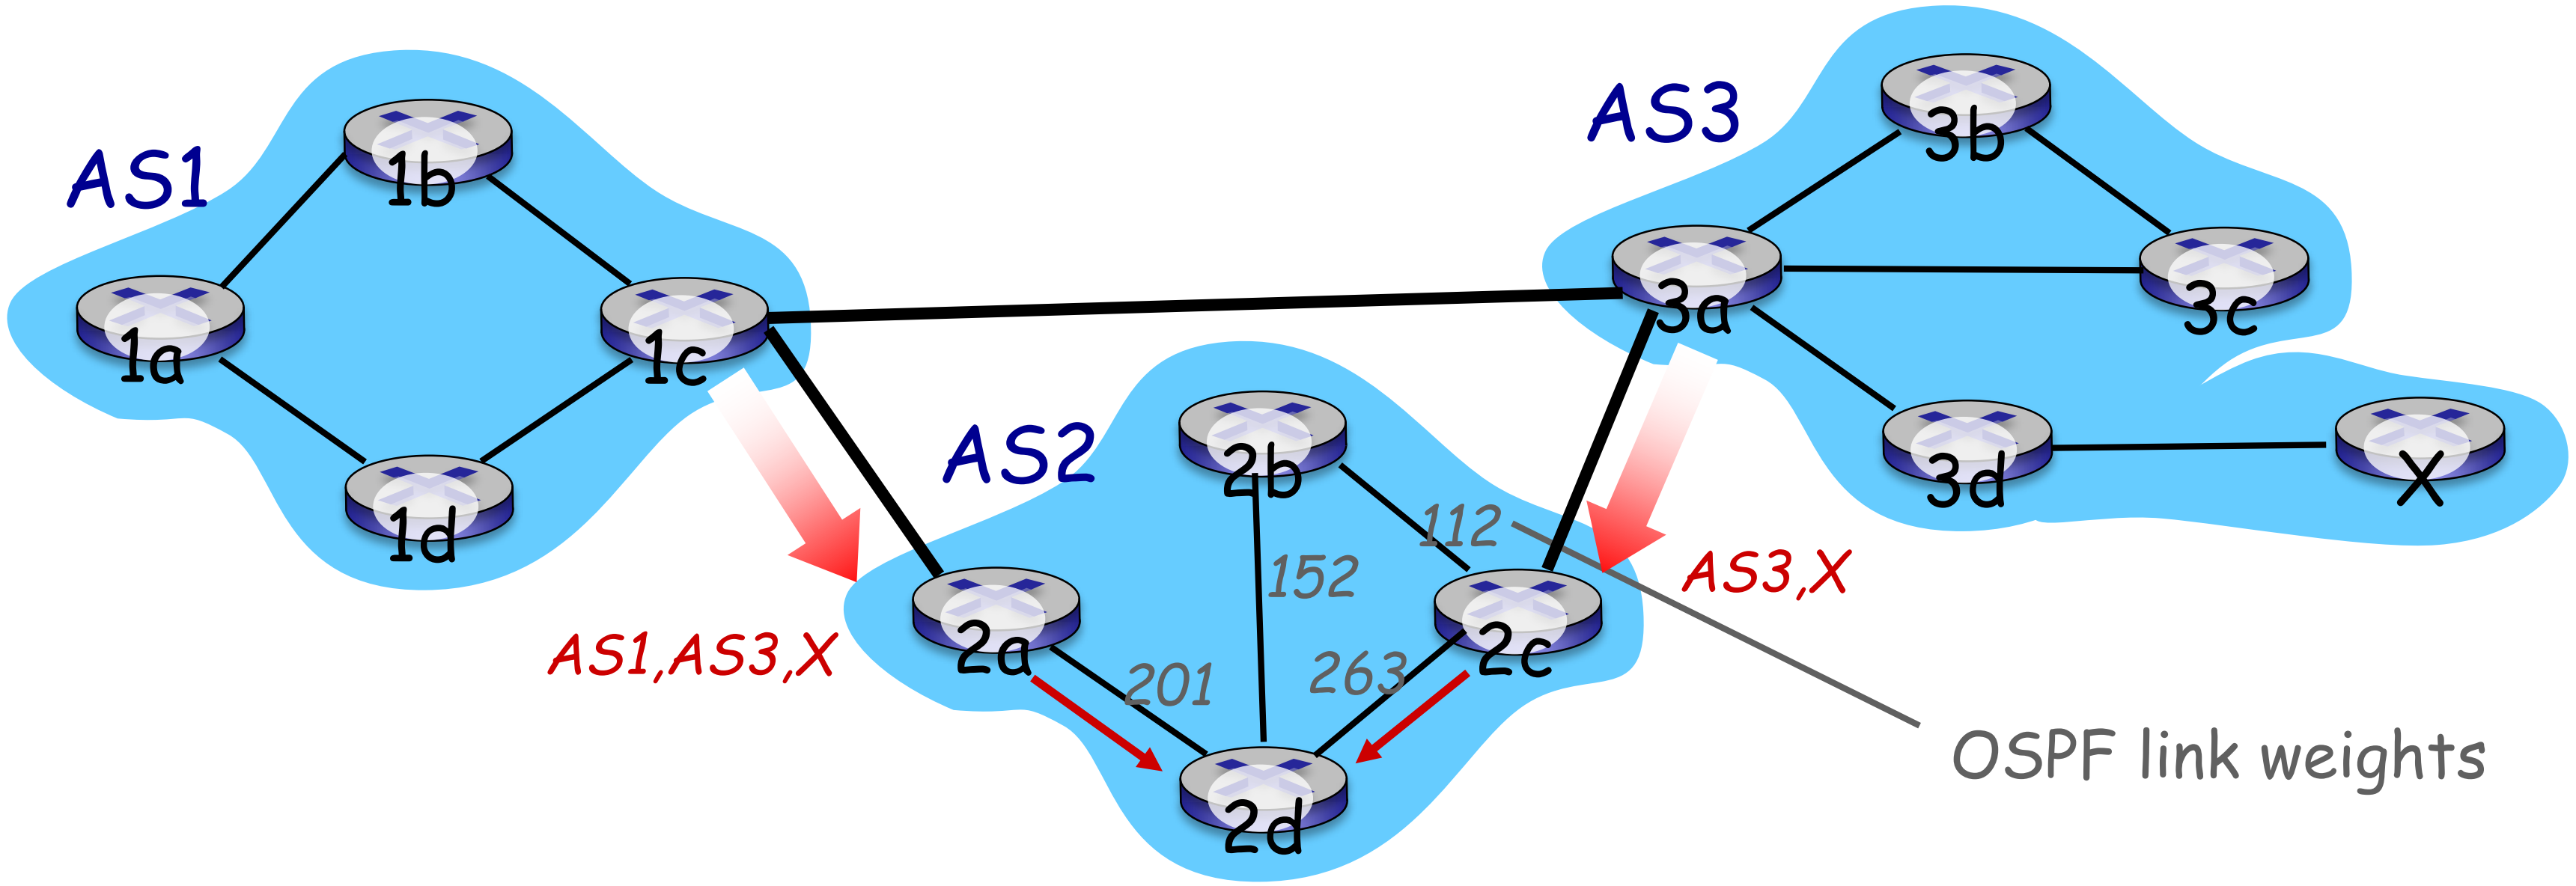

- 2d learns (via iBGP) it can route to X via 2a or 2c
- *hot potato routing:* choose local gateway that has least intra-domain cost (e.g., 2d chooses 2a, even though more AS hops to X): don't worry about inter-domain cost!

BGP: achieving policy via advertisements

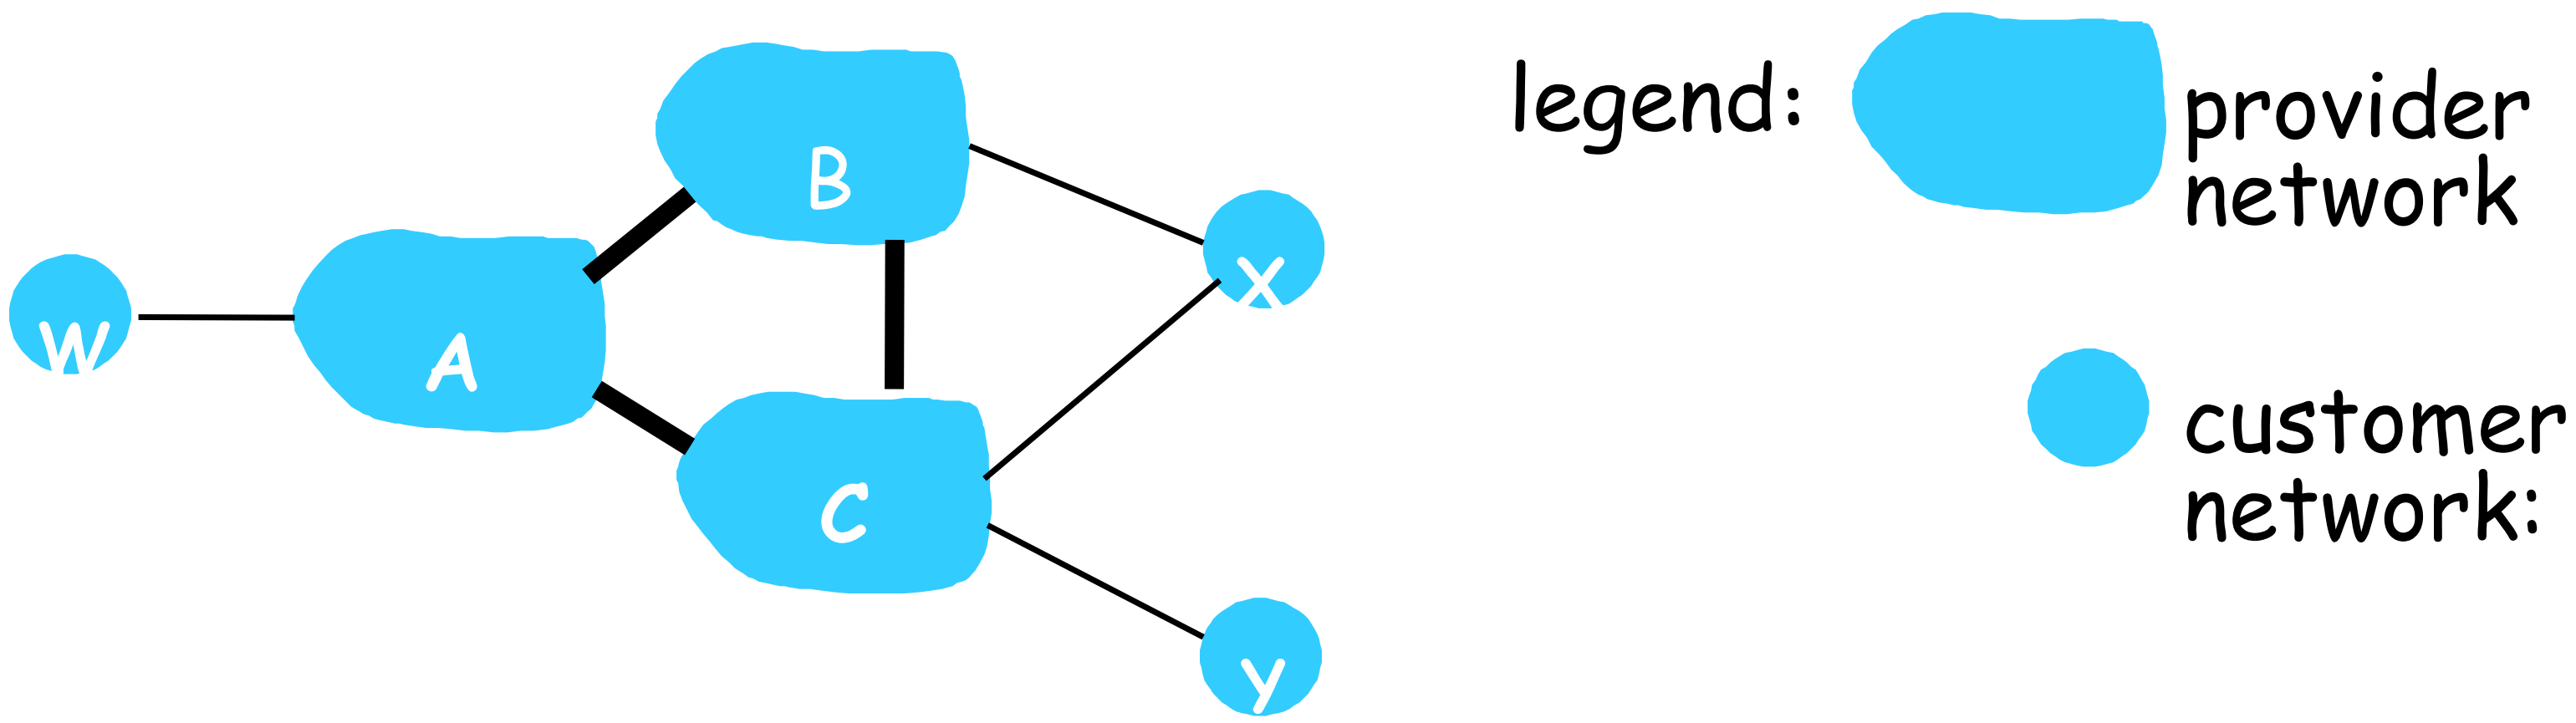

Suppose an ISP only wants to route traffic to/from its customer networks (does not want to carry transit traffic between other ISPs)

- A advertises path Aw to B and to C
- B *chooses not to advertise* BAw to C:
  - B gets no "revenue" for routing CBAw, since none of C, A, w are B's customers
  - C does not learn about CBAw path
- C will route CAw (not using B) to get to w

BGP: achieving policy via advertisements

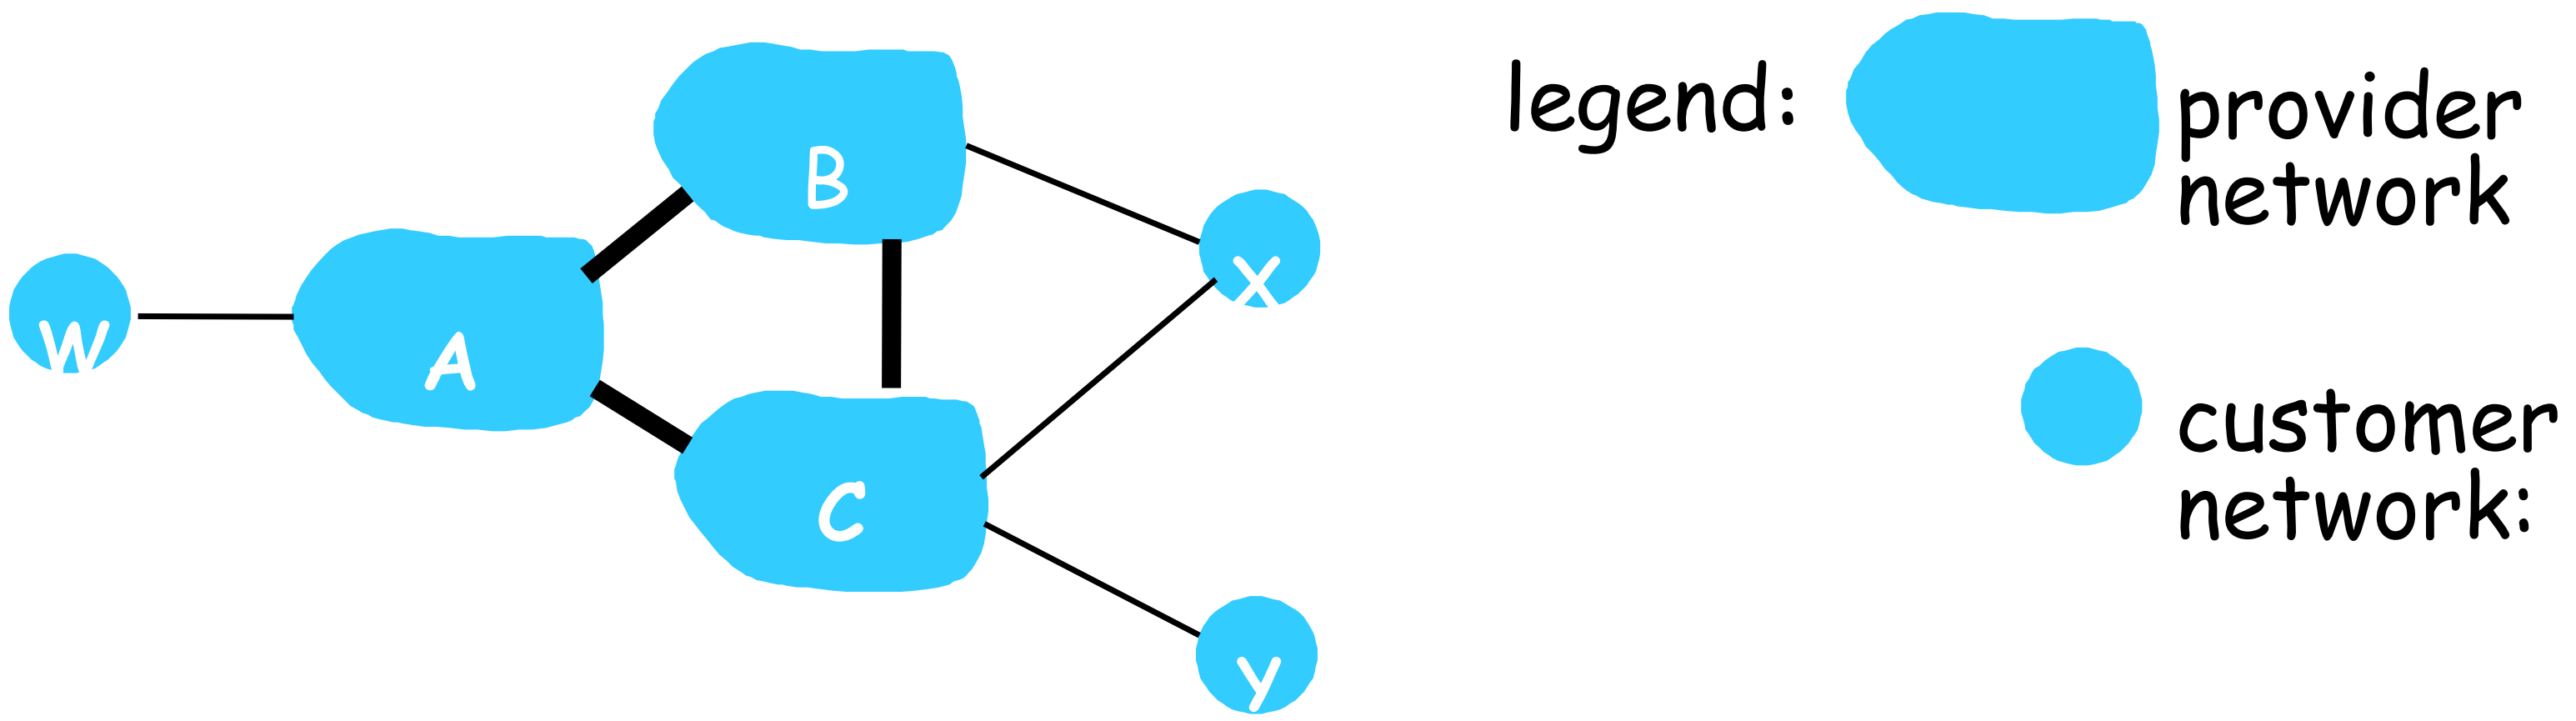

Suppose an ISP only wants to route traffic to/from its customer networks (does not want to carry transit traffic between other ISPs)

- A,B,C are *provider networks*
- X,W,Y are customer (of provider networks)
- X is *dual-homed:* attached to two networks
- *policy to enforce:* X does not want to route from B to C via X
  - .. so X will not advertise to B a route to C

Why different Intra-, Inter-AS routing ?

policy:

- inter-AS: admin wants control over how its traffic routed, who routes through its net.
- intra-AS: single admin, so no policy decisions needed

scale:

- hierarchical routing saves table size, reduced update traffic

performance:

- intra-AS: can focus on performance
- inter-AS: policy may dominate over performance

Chapter 5: outline

5.1 introduction

5.2 routing protocols

- link state
- distance vector

5.3 intra-AS routing in the Internet: OSPF

5.4 routing among the ISPs: BGP

5.5 The SDN control plane

5.6 ICMP: The Internet Control Message Protocol

5.7 Network management and SNMP

ICMP: internet control message protocol

- used by hosts & routers to communicate network-level information
  - error reporting: unreachable host, network, port, protocol
  - echo request/reply (used by ping)
- network-layer "above" IP:
  - ICMP msgs carried in IP datagrams
- ICMP message: type, code plus first 8 bytes of IP datagram causing error

Type	Code	description
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Traceroute and ICMP

- source sends series of UDP segments to destination
  - first set has TTL =1
  - second set has TTL=2, etc.
  - unlikely port number
- when datagram in *n*th set arrives to nth router:
  - router discards datagram and sends source ICMP message (type 11, code 0)
  - ICMP message include name of router & IP address

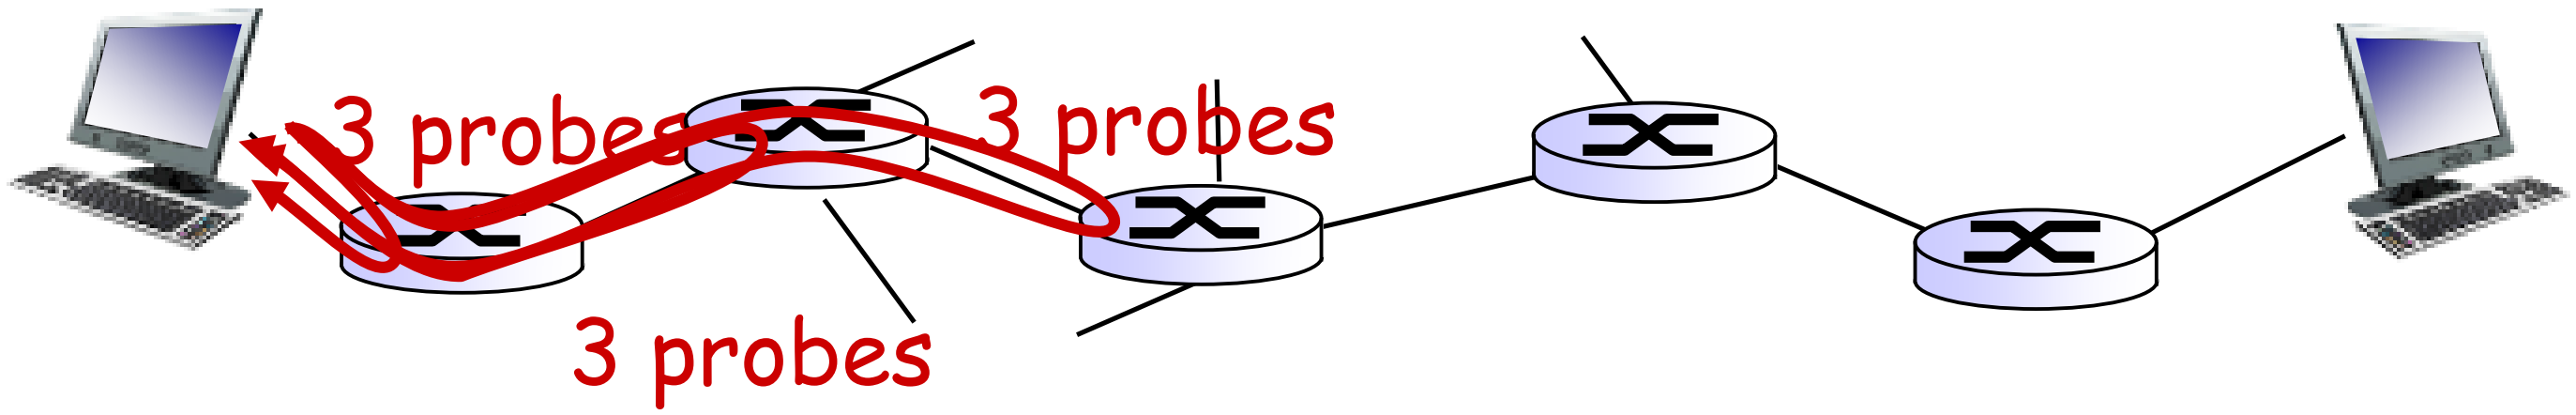

- when ICMP message arrives, source records RTTs

stopping criteria:

- UDP segment eventually arrives at destination host
- destination returns ICMP "port unreachable" message (type 3, code 3)
- source stops