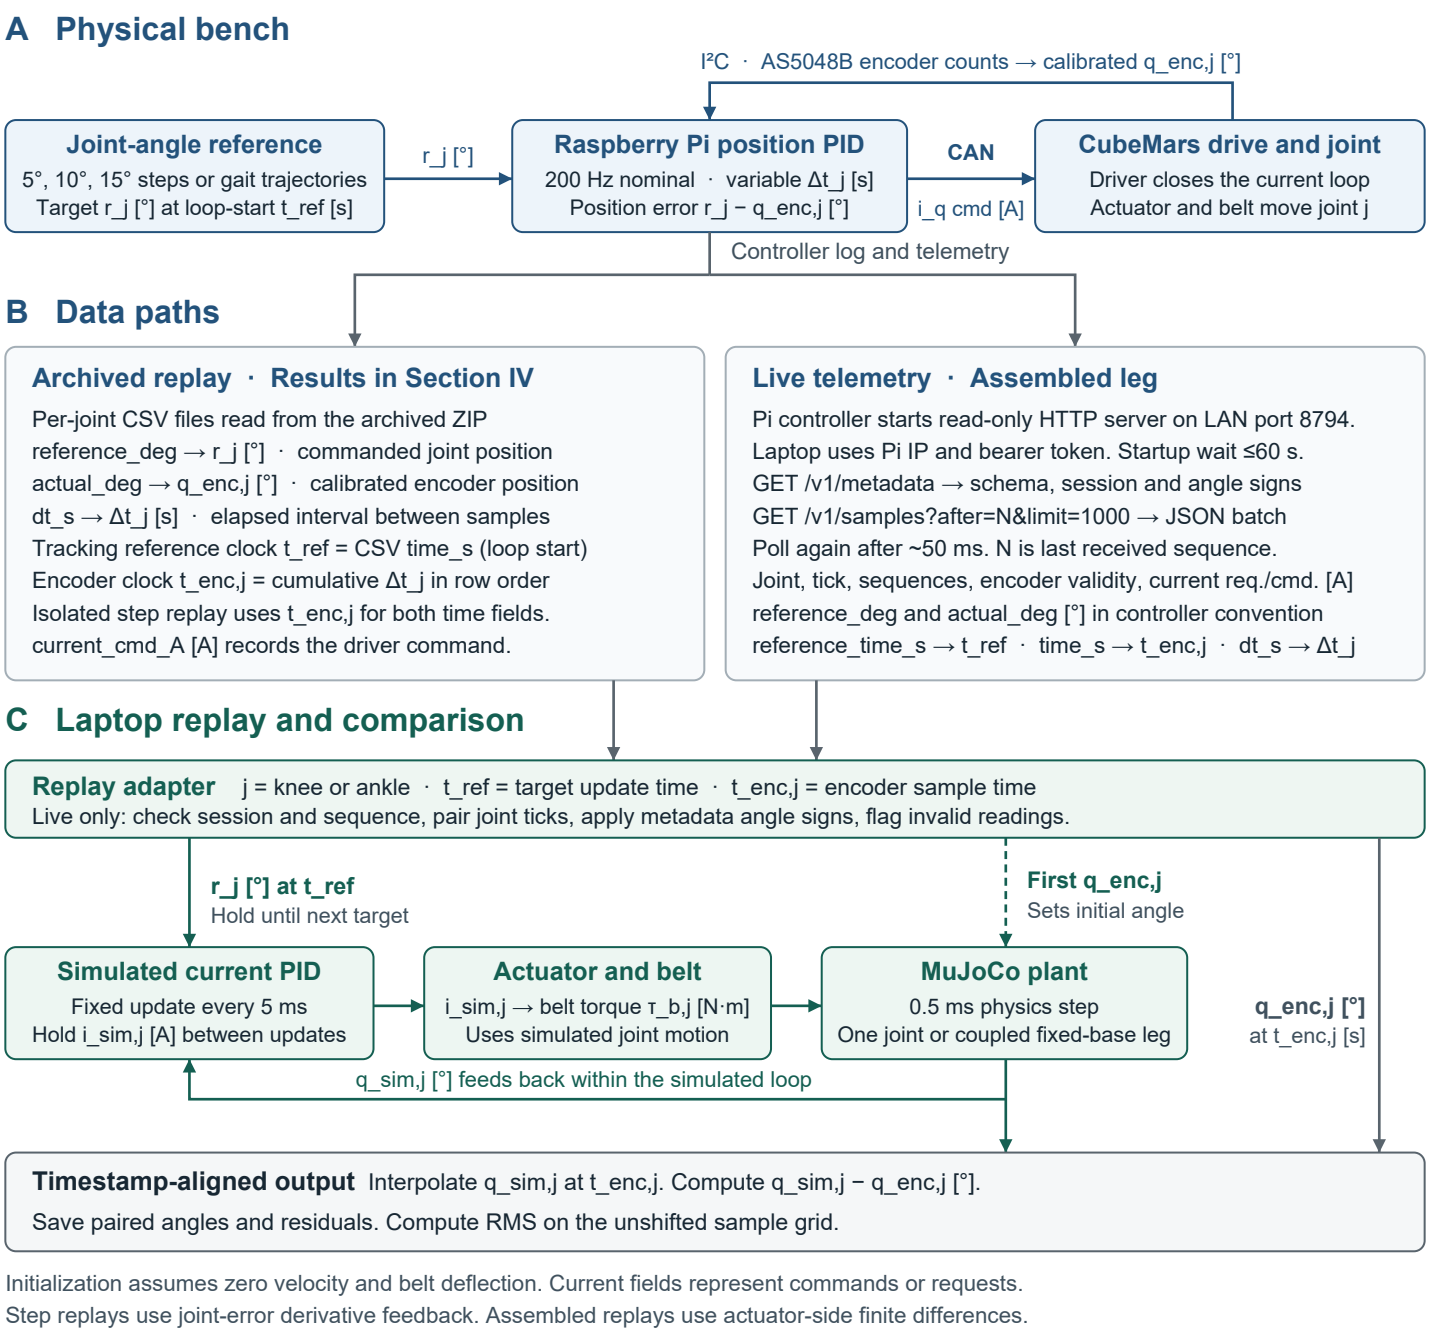


Initialization assumes zero velocity and belt deflection. Current fields represent commands or requests.
Step replays use joint-error derivative feedback. Assembled replays use actuator-side finite differences.