Expt No: 09 Implementation of Subnetting in CISCO Packet Tracer Simulator

Date: 1/10/26


AIM:

To implement the subnetting in Cisco Packet Tracer Simulator

Procedure:

* Open Cisco Packet Tracer and Create a new network topology
* Add the required routers, switches and PCs to workspace
* Connect the devices using appropriate copper cables
* Use the network 192.168.1.0/24 and divide into 12T network
* Configure the router interfaces with the required IP address and Subnet mask 255.255.255.224
* Use enable and config terminal in the router CLI
* Enter the Interface Configuration terminal and assign IP using
  i> ip address <IPaddress> 255.255.255.
  ii> no shutdown
* Configure the required switch port in access mode
* Assign each PC its IP address, Subnet mask and default gateway
* Repeat the Configuration all required Subnet
* Use the Ping Command to test Connectivity between PC's and the routers.

The Pink is Successful, the network is Configured Successfully.

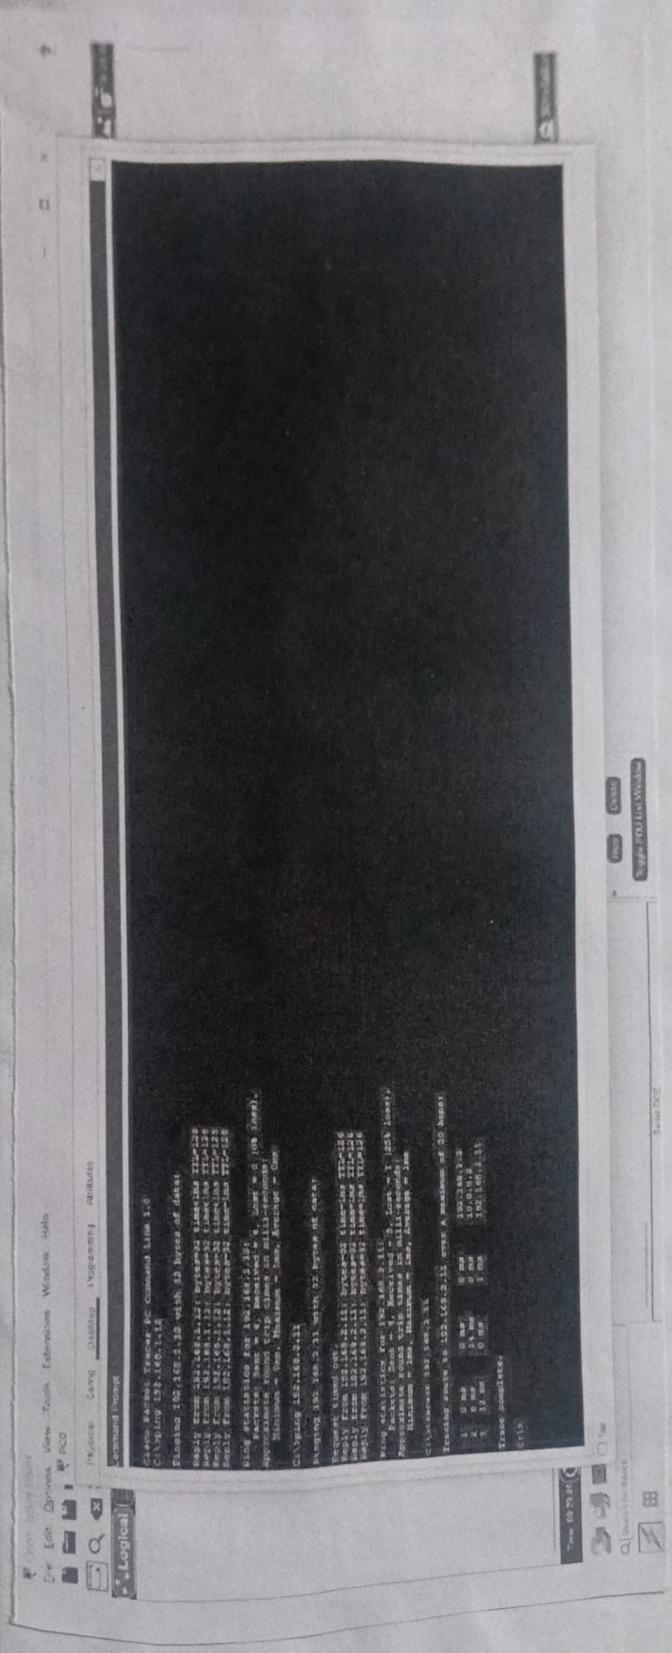

RESULT :

The Ping is Successfully, & network is configured Successfully.