


REV.	ECN NO.	MODIFY CONTENT	DATE
1	S0905048	Initial release	5/20/09
2	S0907005	Change The Switch Pin	7/01/09


GENERAL	TOLERANCE	FILE NO.	PART NO.	DRAWN	MATERIAL	SCALE
X: ±0.50	x: ± 5°	114-00841	2	Ray lee	DATE	5:1
.X: ±0.38	.x: ± 2°			Jane	2009/05/20	MM
.XX: ±0.25	.xx: ± 1°			Henry Wang		

DATE	UNIT	INDUSTRY
5/20/09	MM	Amphenol Shouhmin Industry

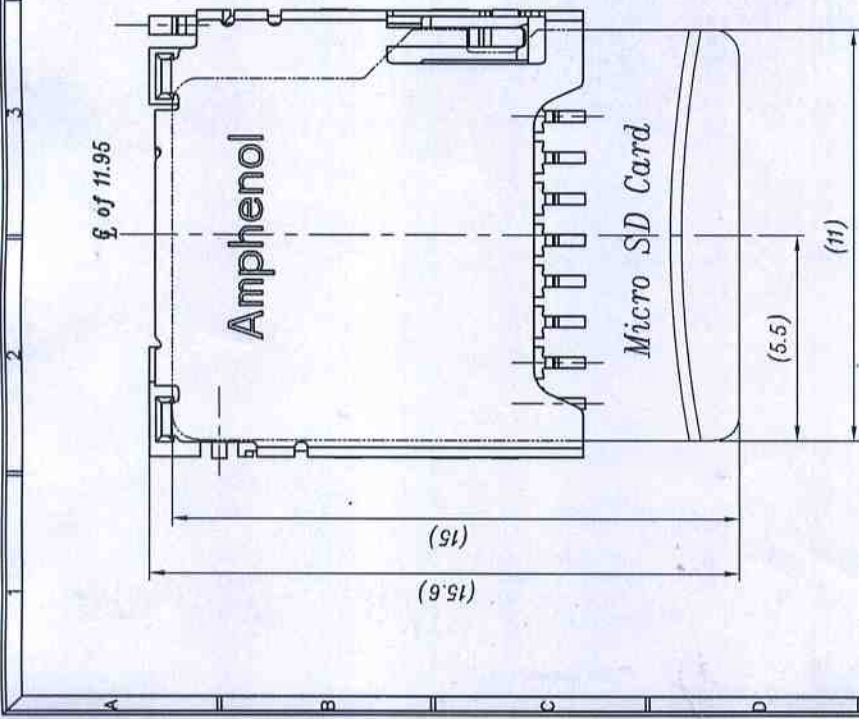

PIN Assignments

PIN NO.	Micro SD
1	Date Line [Bit 2]
2	Card Detect / Date Line [Bit 3]
3	Command/Response
4	Supply voltage
5	Clock
6	Supply voltage ground
7	Date Line [Bit 0]
8	Date Line [Bit 1]

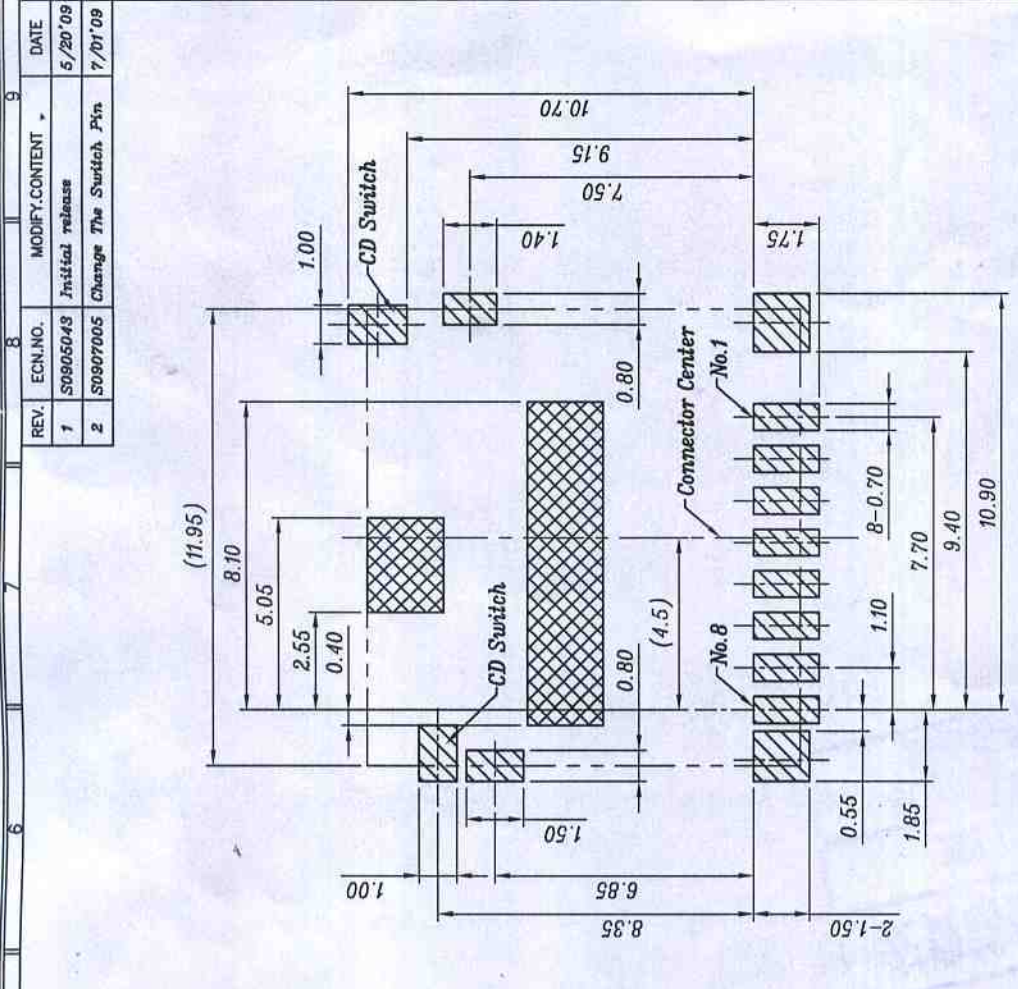

RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ±0.05

- Connector Area
- PAD Area
- Pattern Prohibited Area

- Note:**
- Material:**
Housing: LCP Black UL 94V-0
Contact: Copper alloy
Shell: Stainless steel
 - Plating:**
Contact Area: Plating Au
Solder tail: Plating Tin
Shell: Plating weldable Ni
 - Tail Coplanarity 0.12mm Max.
 - The Part must compliant AMSI'S ROHS SPEC.

GENERAL	TOLERANCE	FILE NO.	PART NO.	DRAWN	MATERIAL	SCALE
X: ±0.50	x: ± 5°	114-00841	2	Ray lee	DATE	5:1
.X: ±0.38	.x: ± 2°			Jane	2009/05/20	MM
.XX: ±0.25	.xx: ± 1°			Henry Wang		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[1140084168](#)