


File: Power.sch

HW Guide Pg 21. Can boot from  
"USART on pins PA14/PA15 or PA9/PA10"



LED\_MOSI — 0Ω R104 — MOSI-IN MOSI-OUT X

LED\_CLK — 0Ω R105 — SCK-IN SCK-OUT X

File: LEDArray.sch







Diagram showing the connection of the TSSP58P38 module (U102) to the 3V3 supply and GND. The module pins are labeled 1 (OUT), 2 (GND), and 3 (Vss). The IR\_RX signal is connected to pin 2.



Rev:  
Id: 1/3

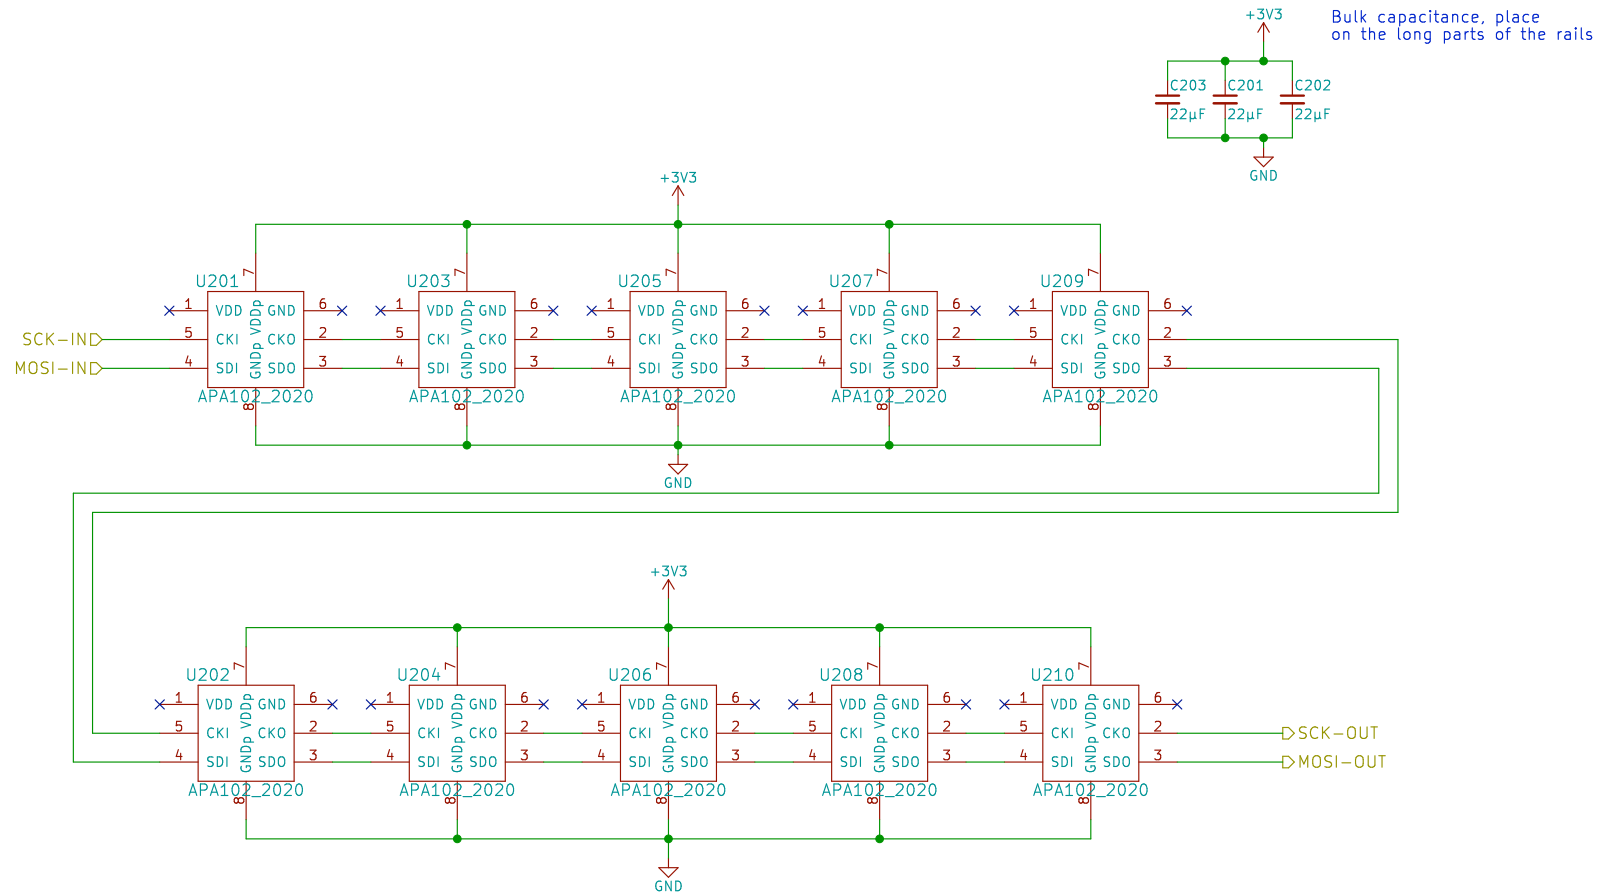



Rev:  
Id: 3/3