


~	One among the following is the insect and mollusk which is not responsible for the decay of timber?	1/1
0	a) Marine borers	
•	b) Snake	~
0	c) Termites	
0	d) Woodboring beetle	
×	There are two main natural forces responsible for causing defects in timber: abnormal growth and	0/1
•	a) rupture of tissues	×
0	b) insects	
0	c) frost	
0	d) rain	
Corre	ect answer	
•	d) rain	
/	is a skilled trade in which the primary work performed is the cutting, shaping and installation of building materials.	1/1
0	a) Masonry	
0	b) Plumber	
0	c) Architecture	
•	d) Carpentry	✓


✓ A is a carpenter who does fine and detailed work specializing in the making of cabinets made from wood, wardrobes, dressers, storage chest, and other furniture designed for storage.	1/1
a) Scenic carpenter	
b) Log builder	
c) Trim carpenter	
(a) Cabinetmaker	✓
✓ The vertical timbers include and wall studs.	1/1
a) logs	
O b) sheds	
c) posts	✓
O d) plank	
✓ Wood contains water in three forms- vapour, bound or hygroscopic water and	1/1
a) contact water	
b) capillary water	
c) free water	✓
d) bulk water	

Rough lumber is supplied in standard sizes, mostly for the construction industry.	1/1
a) False	✓
b) True	
X Laminated veneer lumber (LVL) comes in 1 34 inch thicknesses with depths such as 9 12, 11 78, 14, 16, 18, and 24 inches, and are often doubled or tripled up.	0/1
a) False	
b) True	×
Correct answer	
a) False	
X Laminated veneer lumber (LVL) comes in 134 inch thicknesses with depths such as 912, 1178, 14, 16, 18, and 24 inches, and are often doubled or tripled up.	0/1
a) False	
b) True	×
Correct answer	
a) False	

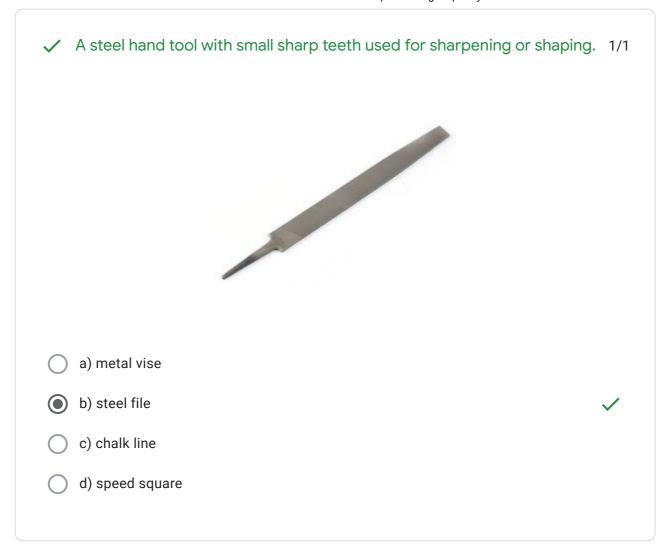

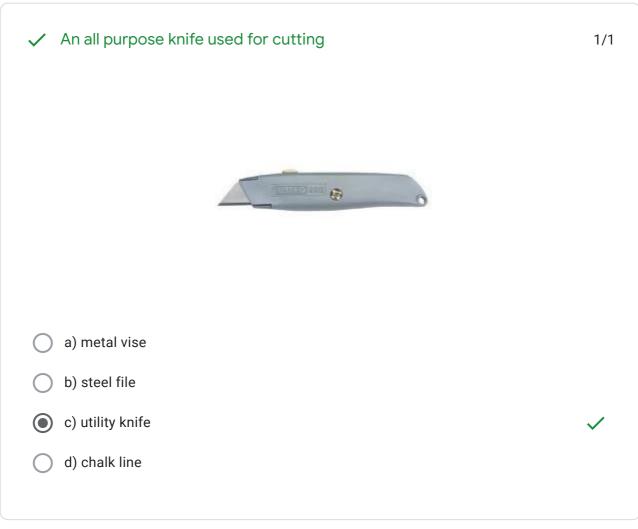


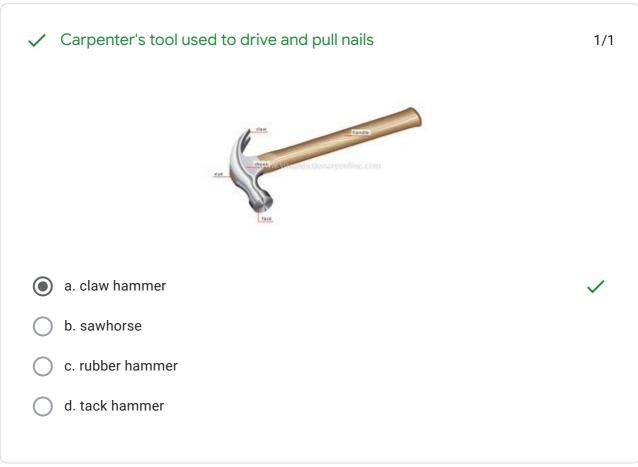

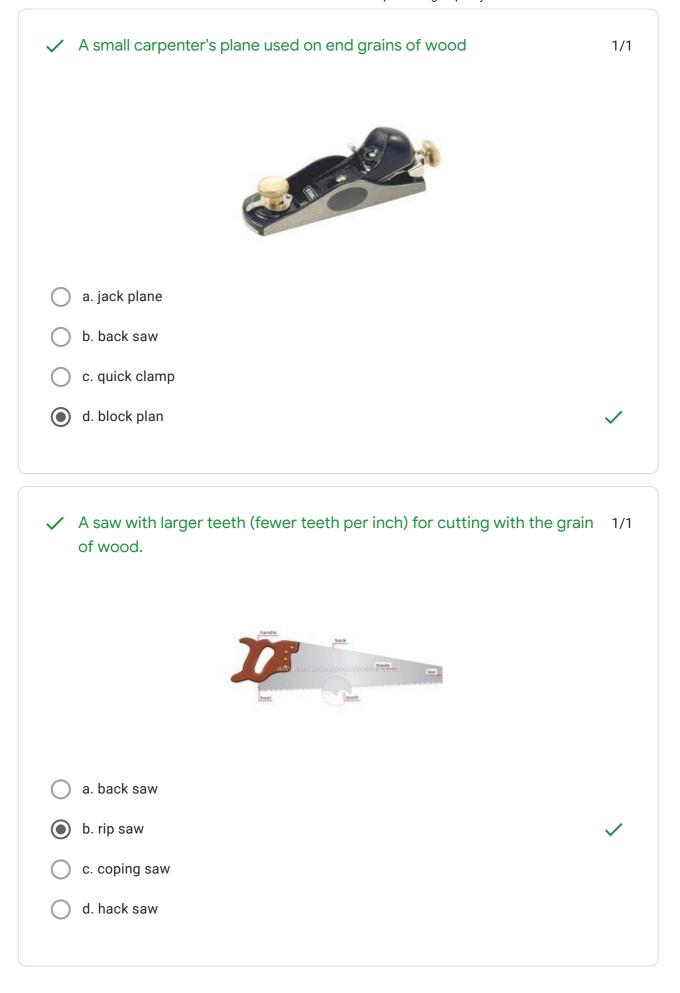

✓	A saw with very fine teeth and is often used in a miter box for cutting angles. The thin blade is reinforced with a ridge of thicker metal along the back of the saw. It cannot cut deeper than the ridge.	1/1
0	a. nail set	
0	b. rip saw	
0	c. hack saw	
•	d. back saw	✓



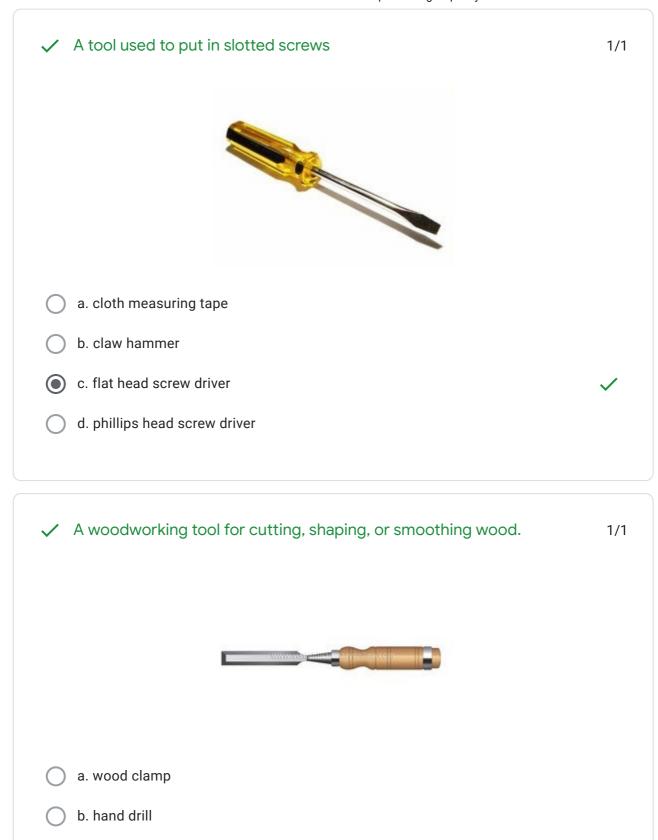



c. face shield

d. wood chisel

✓ Woodworking tool used to mark a line at 90 degrees to the edge of the 1/1 wood or finding "square".





- a. rip saw
- b. speed square
- c. try square
- d. jack plane

An adjustable device used to hold wood for forming or cutting 1/1




- a. wood chisel
- b. surveyor's tape
- c. wood worker's vise
- d. carpenter's square

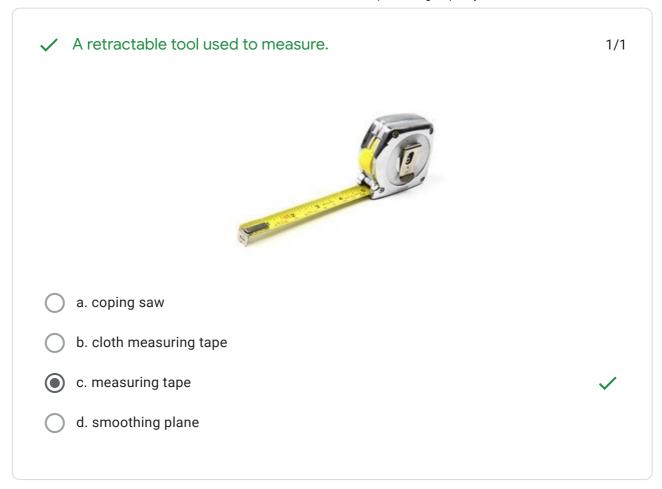

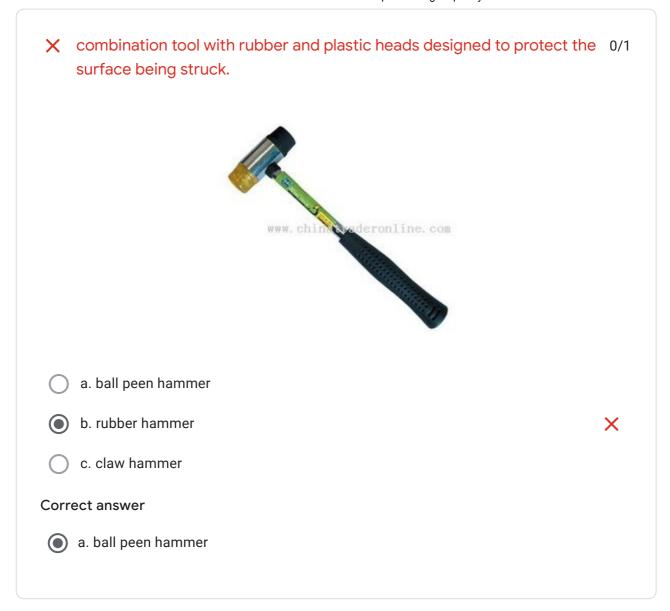

✓ A flexible tool commonly used by a seamstress to measure shapes that 1/1 may not be straight, such as the waist on a person. a. measuring tape

- b. coping saw
- c. smoothing plane
- d. cloth measuring tap

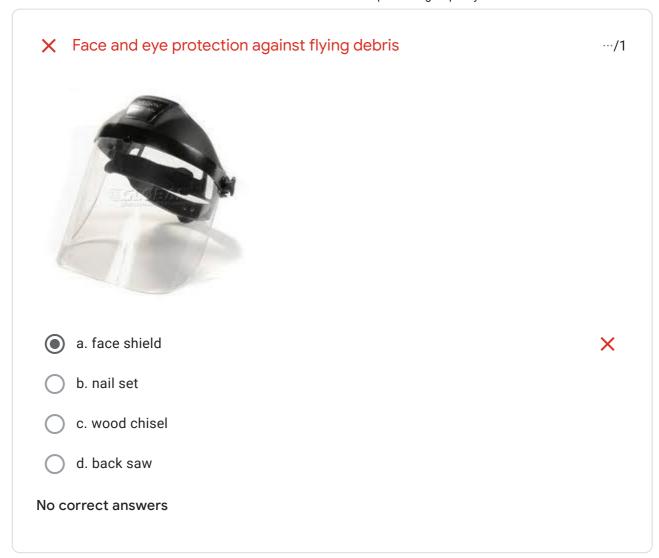

This form was created inside of SRM Institute of Science and Technology.

Google Forms