

C-TVI-7242A


Vandal Dome IR Camera



Key features

- HD1080P Video Output
- Adopt HDTVI Technology
- True Day/Night
- Smart IR
- 131ft(40m) IR distance
- OSD Menu via UTC technology with DigiGuard TVI DVR
- IP66 weatherproof

Dimensions

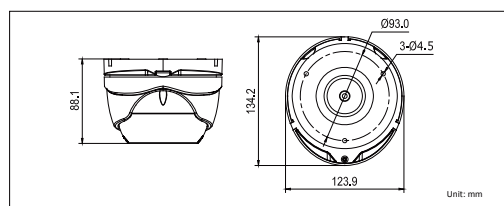

| C-TVI-7242A | |
|-------------------------------|---|
| Camera | |
| Image Sensor | 1 / 2.7" Sensor |
| Signal System | NTSC/PAL(Euro Version) |
| Effective Pixels | 1930(H)*1088(V) |
| Min. Illumination | 0.1 Lux @(F1.2,AGC ON), 0 Lux with IR |
| Shutter speed | NTSC:1/30 s(PAL:1/25 s) to 1/50,000 s |
| Lens | 2.8-12mm Angle of View: 102° - 35° |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Frame Rate | NTSC:1080p@30fps/PAL:1080p@25fps |
| HD Video Output | 1 Analog HD output |
| S / N Ratio | More than 52dB |
| Menu | |
| Camera ID | On/off (0-255) |
| AGC | Support |
| D/N Mode | Color/BW/Auto/EXT |
| White Balance | Auto/User/Push/8000K/6000K/4200K/3200K/HOLD |
| Privacy Mask | On/Off, maximum 2 zones |
| Motion Detection | On/Off |
| BLC | Support |
| Anti-flicker | On/off |
| Language | English, Chinese |
| Function | Mirror |
| General | |
| Working Temperature /Humidity | -40 ° F - 140 ° F (-40 ° C - 60 ° C) Humidity 90% or less (non-condensing) |
| Power Supply | 12V DC |
| Power Consumption | Max. 4W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 131ft(40m) |
| Dimensions | 5.3" × 4.9" × 3.5" (134.2×123.9× 88.1 mm) |
| Weight | 1.8lb(800g) |