



# SEIRVD49


## 700TVL Infrared Vandalproof DOME

Weatherproof, 3 Axis Gimbal


### Features:

- 1/3" Sony Super HAD CCD (Effio-E, D-WDR)
- 700TVL High Resolution
- 2.8~12mm Varifocal Lens
- External Lens Adjustment
- 30M IR distance
- Auto White Balance ( AWB )
- 3-Axis Gimbal Dome
- DC12V
- Vandalproof and Weatherproof Housing
- Available Color : Black & White

### Dimensions:



93mm

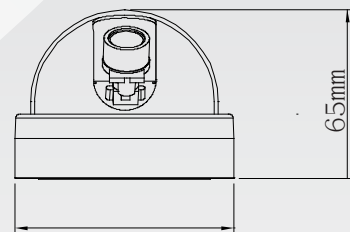



## SEIRVD49

# 700TVL Infrared Vandalproof DOME

### Specifications:

	<b>SEIRVD49</b>
<b>Image Sensor</b>	1/3" SONY ICX673AK CCD
<b>Horizontal Resolution</b>	700TV Lines Low Illumination, Effio, ATR, OSD, DNR
<b>Pixels</b>	PAL:1020(H)×596(V), NTSC:1020(H)×508(V)
<b>TV System</b>	PAL/NTSC
<b>IR LED</b>	φ 5 X 36 PCS
<b>IR Series Distance</b>	30 M
<b>Lens</b>	2.8-12mm Manual Zoom Lens (2M Pixels)
<b>Sync System</b>	Internal
<b>Usable Illumination</b>	0.001Lux/F2.0
<b>S/N Ratio</b>	≥54dB (AGC OFF)
<b>Gamma Correction</b>	0.45
<b>Video Out</b>	Composite Signal (1.0Vp-p, 75Ω)
<b>Scanning System</b>	PAL:625 Lines, 50 Field/Sec;NTSC:525 Lines, 60 Field/Sec
<b>Electronic Shutter Time</b>	Auto:PAL 1/50-1/100,000Sec;NTSC 1/60-1/100,000Sec
<b>Operation Temperature</b>	-10℃ ~ +50℃ RH95% Max
<b>Storage Temperature</b>	-20℃ ~ +60℃ RH95% Max
<b>White Balance</b>	Auto
<b>Power Source</b>	DC12V 400mA
<b>Dimension</b>	φ 131 x 93(H) mm
<b>Weight</b>	800g