

Mini DualDrive™

A scaled-down version of the original DualDrive™ tooth geometry. Standard belt width: 2032mm/80".


Smooth Top Mini DualDrive™ Belts											
Product & Color		Shore Hardness	Temperature Range***	Coefficient of Friction on UHMW	Thickness		Minimum Pulley Diameter*		Maximum Pull Force**		Certifications
					mm		mm	Inch	kg/cm	lbs/in	
FMB-MDD	Blue		-20°C to 70°C -5°F to 158°F	0.28	2.5		48	1.89	4	22.4	FDA/USDA/EU
Impression Top Mini DualDrive™ Belts											
FMB-MDD-ITO50	Blue		-20°C to 70°C -5°F to 158°F	0.28	2.5		48	1.89	4	22.4	FDA/USDA/EU

Note:

* Minimum Pulley Diameter – Normal Flex. Dimensions are relevant for an ambient temperature above 0°C / 32°F.

** Maximum Pull Force – in kg/cm width & lb/in width.

***To determine the allowable Pull force, check the "Temperature Correction Factor" table. Declaration of Conformity in compliance with Food Contact Regulations: EU No.-10/2011 amended by 2017/752, 1935/2004 and 2023/2006 and FDA Art. 21. CFR.177.2600. Compatible with HACCP principles.

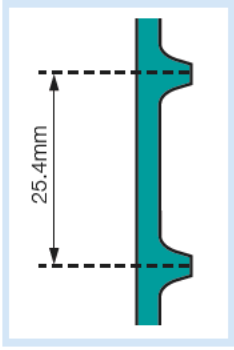

Pitch size for reference only



MDD Sprocket



MDD Sprocket

· [Volta Belting Technology Ltd.](#)