


## Pololu 12V Step-Up Voltage Regulator U3V12F12



Pololu item #: 2117 **1121** in stock

Price break	Unit price (US\$)
1	3.95
5	3.49
25	3.25
100	2.99

Quantity:

Add to cart

backorders allowed

Add to wish list

The compact (0.32"×0.515") U3V12F12 switching step-up (or boost) voltage regulator takes an input voltage as low as 2.5 V and efficiently boosts it to 12 V. The pins have a 0.1" spacing, making this board compatible with standard solderless breadboards and perfboards.

Select options:


**Description** **Specs (10)** **Pictures (7)** **Resources (1)** **FAQs (0)** **On the blog (0)**

### Overview

These boost (step-up) voltage regulators generate higher output voltages from input voltages as low as 2.5 V. They are switching regulators (also called switched-mode power supplies (SMPS) or DC-to-DC converters) and have a typical efficiency between 80% to 90%. The available output current is a function of the input voltage, output voltage, and efficiency (see *Typical Efficiency and Output Current* section below), but the input current can typically be as high as 1.4 A. This regulator is available with a fixed 5 V, 9 V, or 12 V output:

Select options:

The regulator's thermal shutdown prevents damage from overheating, but it does **not** have short-circuit or reverse-voltage protection.

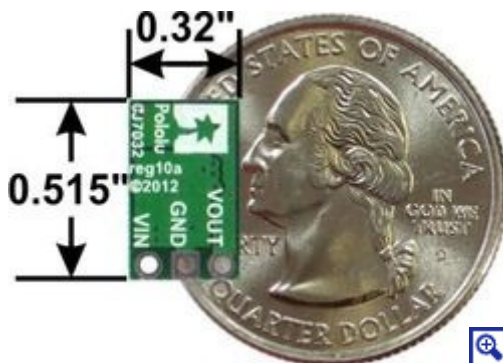

## Features

- input voltage: 2.5 V – VOUT
- fixed 5 V, 9 V, or 12 V output with 4% accuracy
- 1.4 A switch allows for input currents up to 1.4 A
- 2 mA typical no-load quiescent current
- integrated over-temperature shutoff
- small size: 0.515" × 0.32" × 0.1" (13 × 8 × 3 mm)




## Using the Regulator

### Connections

The boost regulator has three connections: input voltage (VIN), ground (GND), and output voltage (VOUT).




The input voltage, VIN, must be at least 2.5 V and should not exceed the output voltage, VOUT. Please be wary of destructive LC spikes that might cause the input voltage to exceed VOUT (see below for more information).

The three connections are labeled on the back side of the PCB, and they are arranged with a 0.1" spacing along the edge of the board for compatibility with solderless [breadboards](#), [connectors](#), and other prototyping arrangements that use a 0.1" grid. You can solder wires directly to the board or solder in either the 3×1 [straight male header strip](#) or the 3×1 [right-angle male header strip](#) that is included.

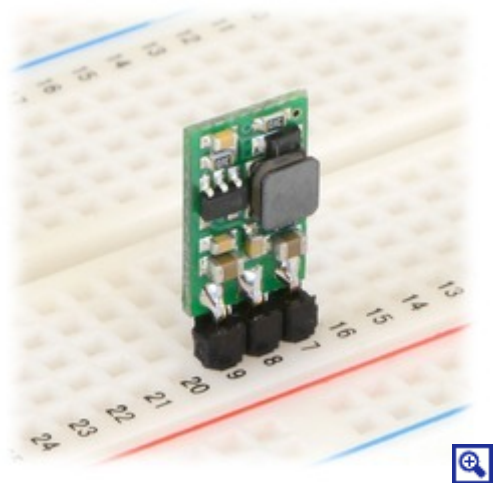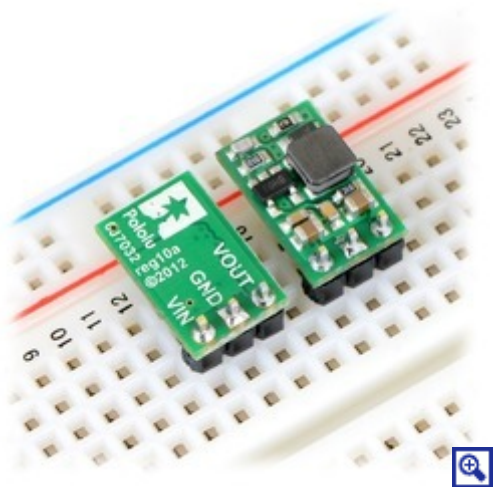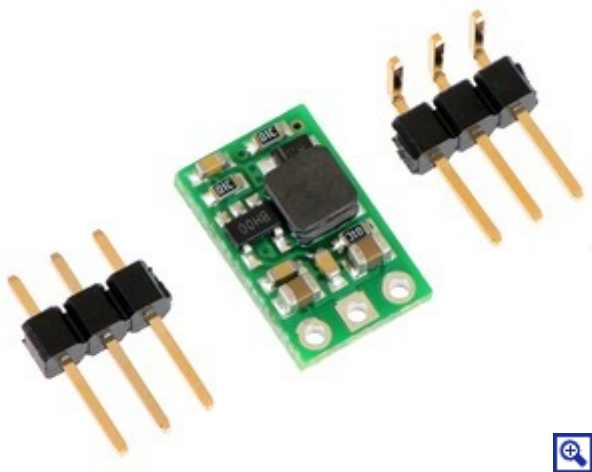

## Typical Efficiency and Output Current

The efficiency of a voltage regulator, defined as (Power out)/(Power in), is an important measure of its performance, especially when battery life or heat are concerns. As shown in the graphs below, this switching regulator typically has an efficiency of 80 to 90%.

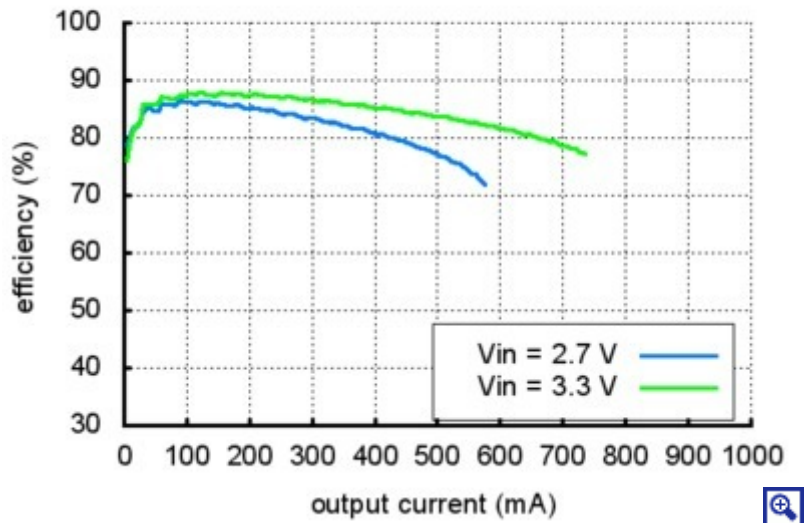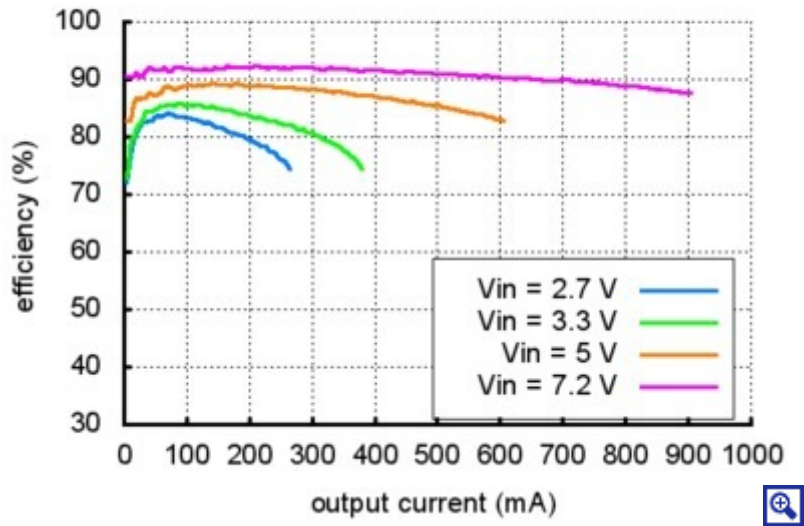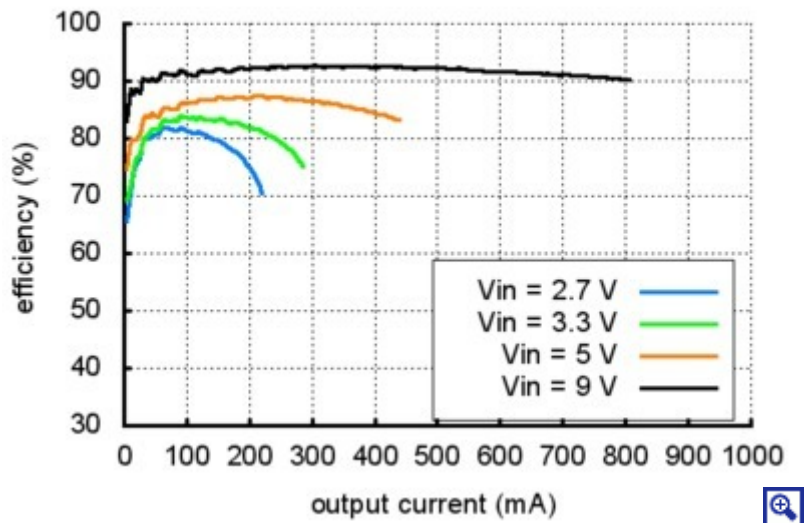Pololu U3V12F5 Regulator Efficiency ( $V_{out} = 5\text{ V}$ )Pololu U3V12F9 Regulator Efficiency ( $V_{out} = 9\text{ V}$ )Pololu U3V12F12 Regulator Efficiency ( $V_{out} = 12\text{ V}$ )

The maximum achievable output current is approximately proportional to the ratio of the input voltage to the output voltage. If the *input* current exceeds the switch current limit (typically somewhere between 1.4 and 2 A), the output voltage will begin to drop. Additionally, the maximum output current can depend on other factors, including the ambient temperature, air flow, and heat sinking.

## LC Voltage Spikes

When connecting voltage to electronic circuits, the initial rush of current can cause damaging voltage spikes that are much higher than the input voltage. In our tests with typical power leads (~30" test clips), input voltages above 10 V caused voltage spikes in excess of 20 V. You can suppress such spikes by soldering a 33 $\mu$ F or larger electrolytic capacitor close to the regulator between VIN and GND.

More information about LC spikes can be found in our application note, [Understanding Destructive LC Voltage Spikes](#).

## People often buy this product together with:



[Pololu 9V Step-Up Voltage Regulator U3V12F9](#)



[Pololu 5V Step-Up Voltage Regulator U3V12F5](#)

## Related products



[Pololu 5V Step-Up Voltage Regulator U3V12F5](#)



[Pololu 9V Step-Up Voltage Regulator U3V12F9](#)



[Pololu Adjustable Step-Up Voltage Regulator U1V11A](#)



[Pololu 5V Step-Up Voltage Regulator U1V11F5](#)



[Pololu Adjustable Boost Regulator 2.5-9.5V](#)



[Pololu Adjustable Boost Regulator 4-25V](#)



[Pololu 5V, 600mA Step-Down Voltage Regulator D24V6F5](#)



[Pololu Adjustable Step-Up/Step-Down Voltage Regulator S7V8A](#)



[Pololu 5V Step-Up/Step-Down Voltage Regulator S10V4F5](#)



[Rocker Switch: 3-Pin, SPDT, 10A](#)



[Toggle Switch: 3-Pin, SPDT, 5A](#)



[Mini Pushbutton Power Switch with Reverse Voltage Protection, LV](#)



[Mini Pushbutton Power Switch with Reverse Voltage Protection, SV](#)



[TPS2113A Power Multiplexer Carrier with USB Micro-B Connector](#)



[3-AA Battery Holder, Enclosed with Switch](#)



[0.1" \(2.54mm\) Crimp Connector Housing: 1x3-Pin 25-Pack](#)



[0.100" \(2.54 mm\) Female Header: 1x3-Pin, Straight](#)



[0.100" \(2.54 mm\) Breakaway Male Header: 1x40-Pin, Straight, Black](#)



[400-Point Breadboard](#)

## Related categories



[Step-Up Voltage Regulators](#)



[Regulators and Power Supplies](#)



[Battery Holders](#)



[Batteries](#)



[Premium Jumper Wires](#)



[Wires with Pre-crimped Terminals](#)



[Solderless Breadboards](#)