GRAVITY

ELEVATING SOLUTIONS



GRAVITY | VERTICAL SYSTEM

CABLE LIFELINE FOR VERTICAL WORKS



The Gravity Vertical System is a vertical safety line that can be installed quickly and easily. The Vertical System is modular and provides integrable anchors, making it the ideal companion for works on pylones, windmills and any vertical structure.

EN353-1:2014 | PPE Regulation 2016/425

CE DEKRA apave

OSHA 19010.29 | AS/NZS 1891.3:2020

ANSI A14.3

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved


EASILY ACCESS AND WORK VERTICALLY

The Gravity Vertical System has been tested and certified according to European and North American standards.


- Crimping-free system
- Openable glider
- Continuous connection over intermediate anchors
- Span between anchors: 10m (32’8”)
- For stainless steel cables, approved on galvanized cables
- Cable vibration absorption system
- Intermediate anchors clipped on the cable, can easily be retrofitted on a lifeline.

Multi-User:

Apart from the above mentioned features, each lifeline can accommodate between 1 and 4 simultaneous users, making the system customizable to the client’s needs and operations, with built-in capacity that exceeds most other brands on the market.

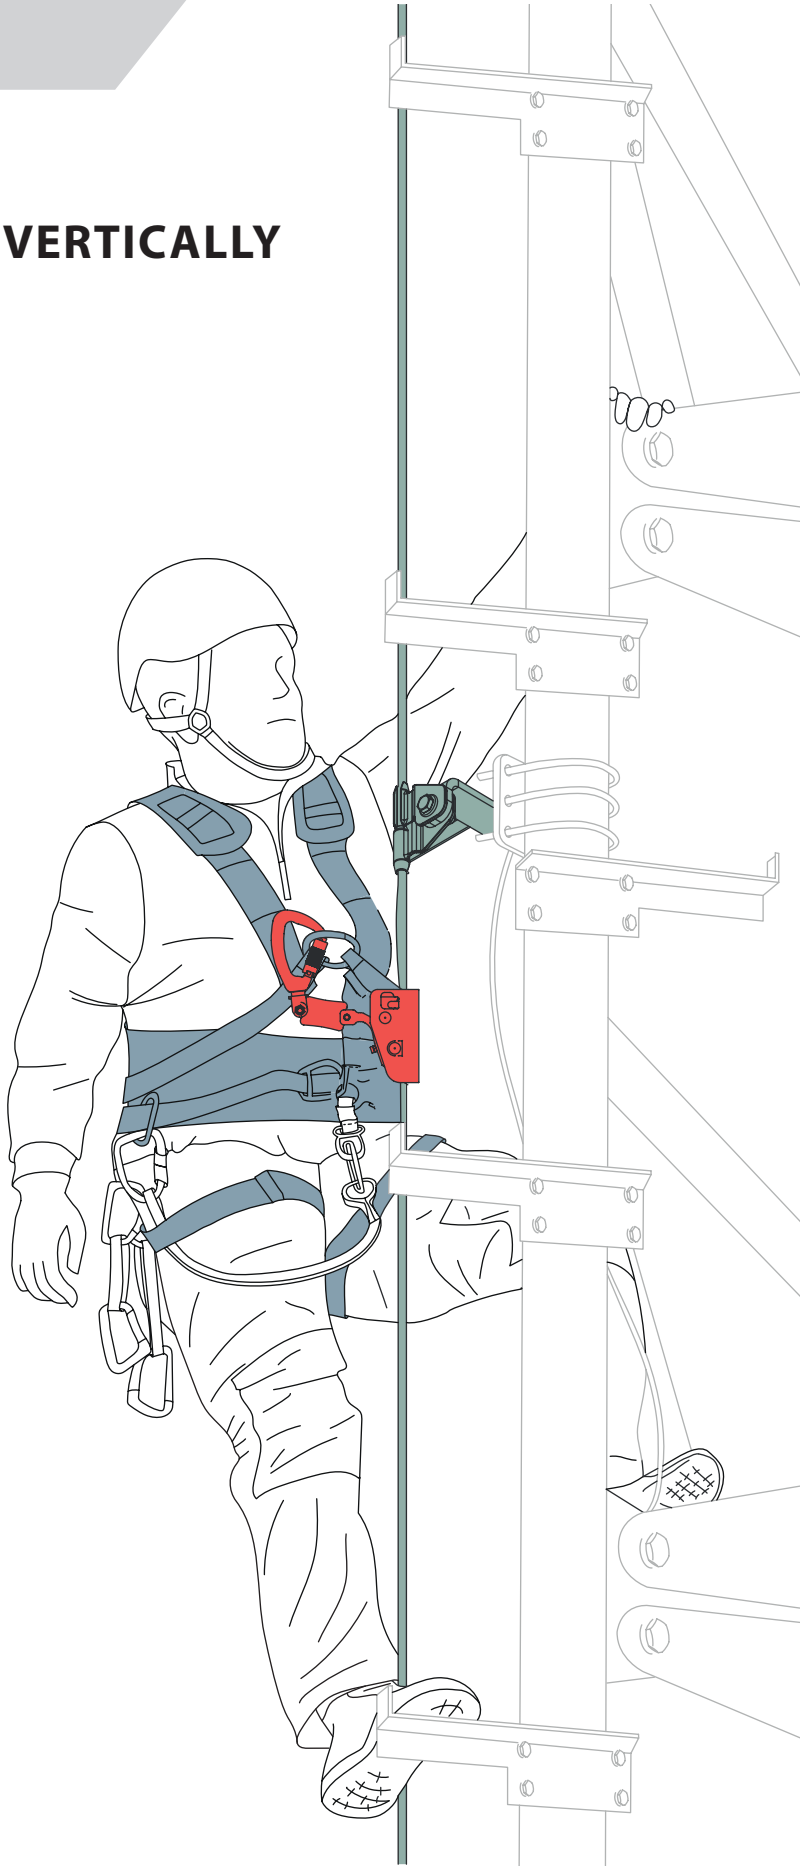


Applications:

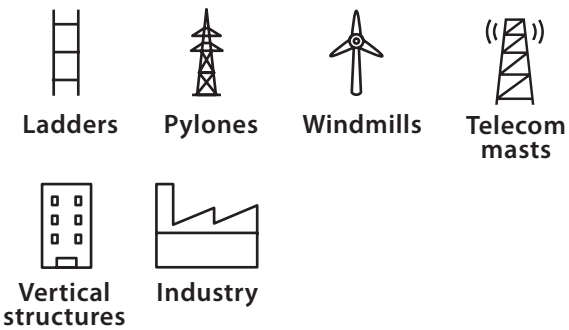


Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

ABSORBER ON THE LIFELINE

x1 | AISI 304

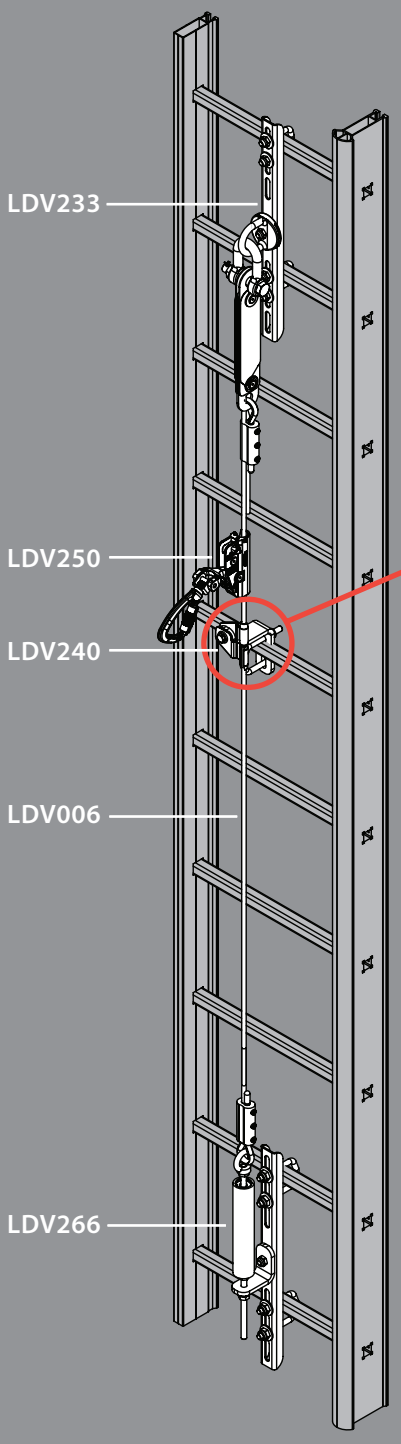


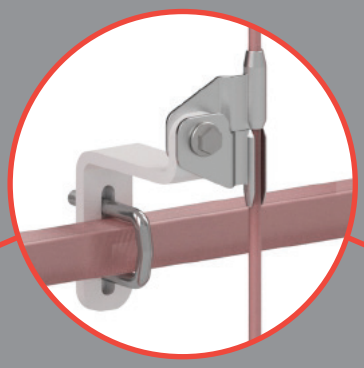

Intermediate anchors clipped on the cable, can easily be retrofitted on a lifeline.
Span between anchors 10m (32'8")

ABSORBER ON THE GLIDER

x4 | AISI 304

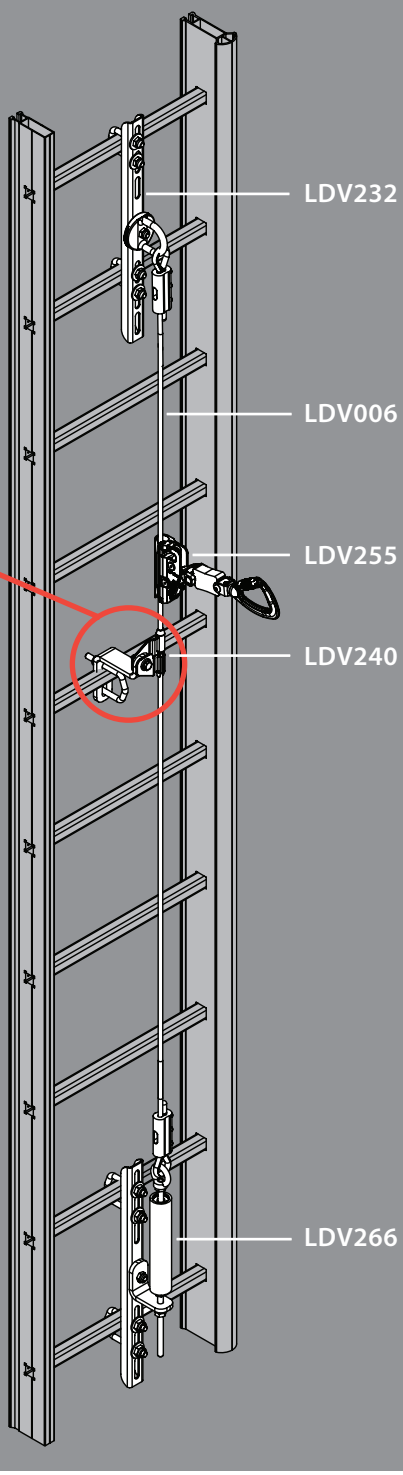

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

EASY MOUNTING IN THREE STEPS

1. Install the Top Anchor


LDV232 or LDV233 (with energy absorber)






2. Install the intermediate anchors

LDV240



★ Intermediate anchors clipped on the cable, can easily be retrofitted on a lifeline


a) Position on cable perpendicularly



2D Frontal view




b) Rotate 90° vertically

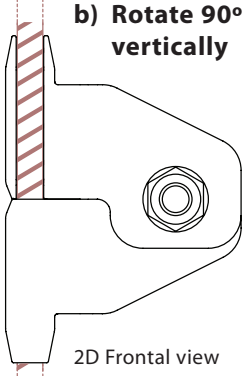


2D Frontal view


c) Secure to an anchor on rung

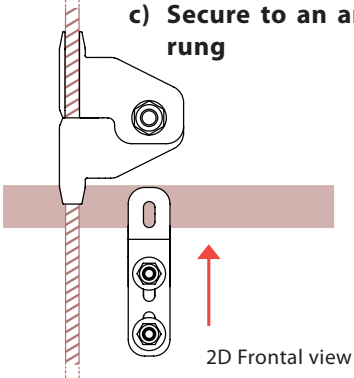

2D Frontal view

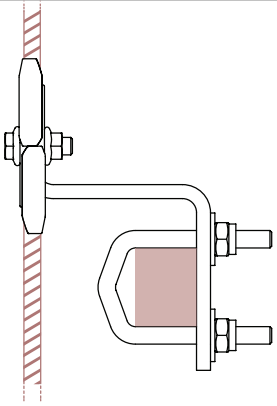

2D Lateral view

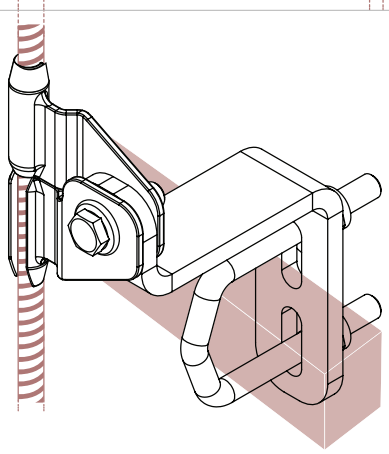

3D Diagonal view

3. Install the bottom anchor and tension


LDV266




Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

BOTTOM TENSIONER INDICATOR


When tensionning the lifeline, take the colour code into account. Green indicates proper tension, red too high tension and no colour insufficient tension.

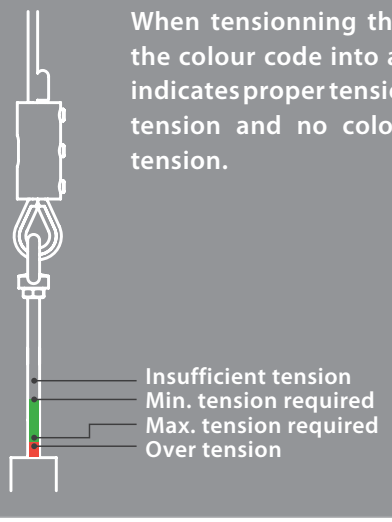

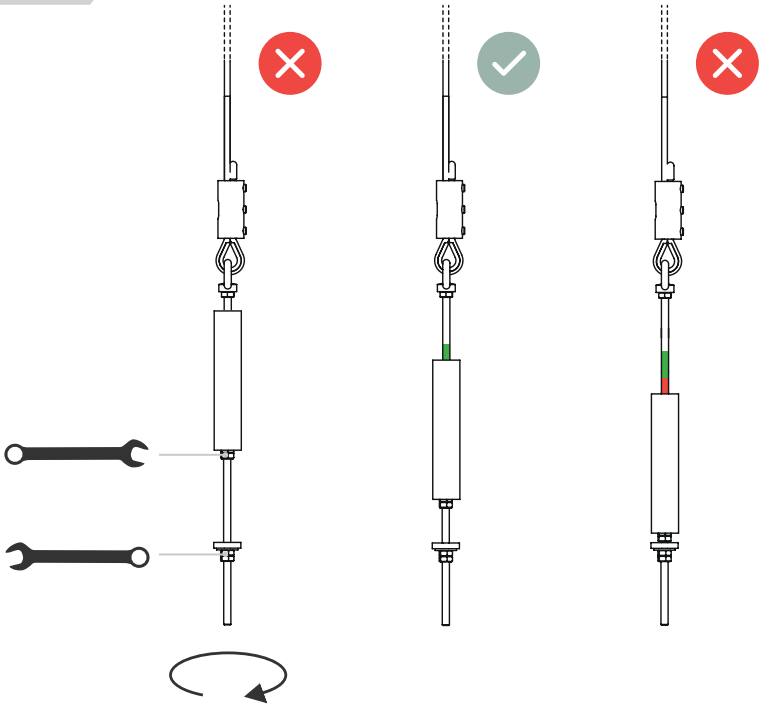

THE FALL ARRESTING GLIDER ZIP!

An automatic brake mechanism is integrated in the glider. The glider follows the operator without manipulation in any direction (up and down). The glider can be opened by the user. A clip-lock system avoids handling errors.

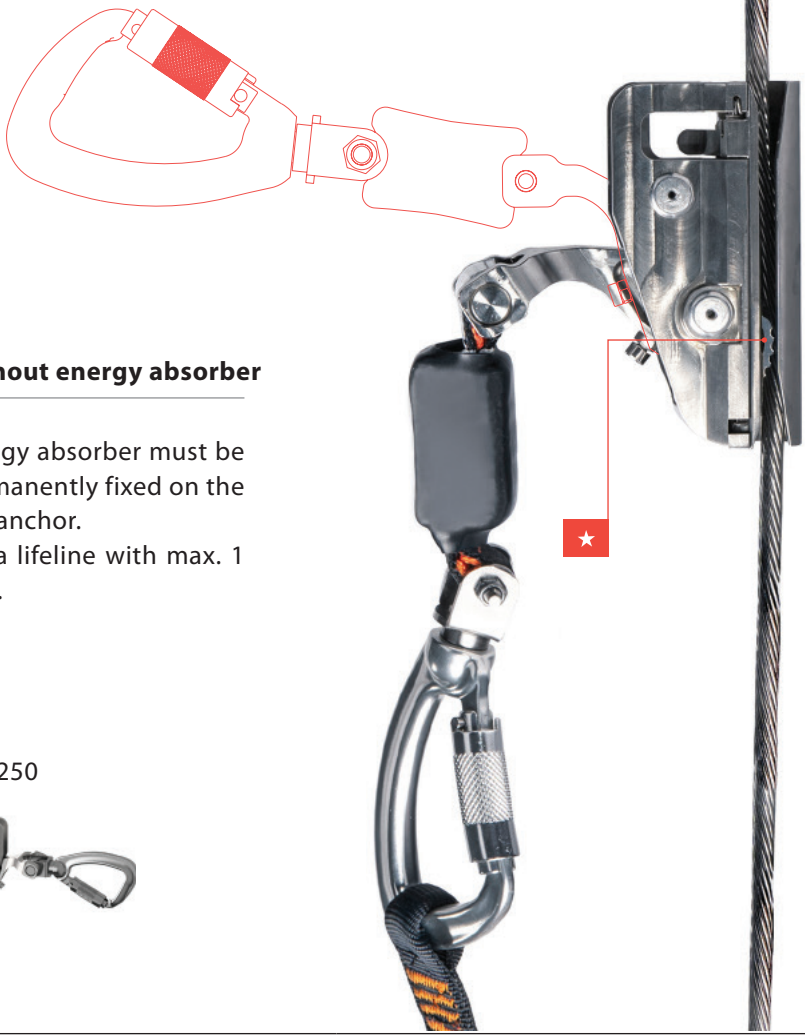

With energy absorber

Energy absorber fixed on the glider. The glider locks instantly in case of a fall, triggering the energy absorption device.
For a lifeline with up to 4 users simultaneously.

LDV255



Without energy absorber


Energy absorber must be permanently fixed on the top anchor.
For a lifeline with max. 1 user.

LDV250



Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

ASSEMBLY AND DISMANTLING

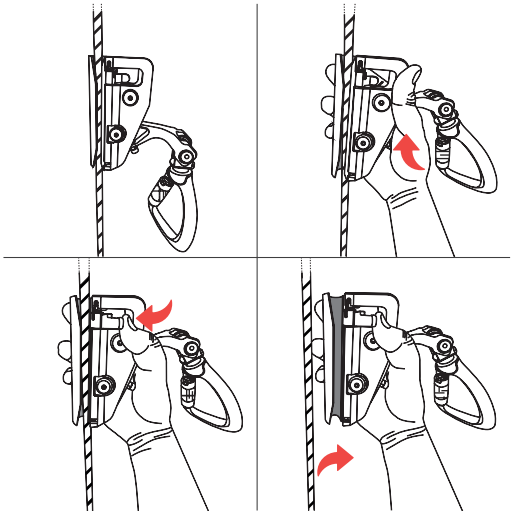

Assembly:
Rotate the cam upwards and introduce the Gravity glider on the wire cable, the security will automatically be opened by pushing the Gravity glider on the wire cable.

Dismantling:
Rotate the cam upwards, push the trigger to open the security and take the Gravity glider out of the line.



GLIDER ENCLOSURE

The Glider is available as either removable or stored on the system as captive gliders that are protected against the elements by a unique Gravity Glider enclosure.

That means maximum durability and lifespan as the most vulnerable parts of the system is properly protected against the elements, including UV exposure.



Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

MOUNTING AND USER EQUIPMENT

A Anchorage

Structure capable of supporting a fall arrest situaton.

Gravity lifeline systems

The Gravity Vertical System is available in two configurations: with energy absorber on top of the lifeline or with energy absorber on the glider. Both systems are suitable for intensive use in complex environments. All components are in stainless steel for greater durability.

Fixing brackets


Gravity has designed an entire range of fixing assemblies suitable for various rung sizes.
The internal engineering department also offers bespoke fixation assemblies on demand.

B Connecting Devices

PPE connecting the operator to the system, restraining them in case of a fall. The PPE are designed to limit the energy transmitted to the user to a maximum of 6KN.

Gravity PPE

LDV255:
Glider without energy absorber, to be combined with a lifeline fitted with energy absorber on its top anchor.
LDV250:
Glider with energy absorber. Compatible with all systems.

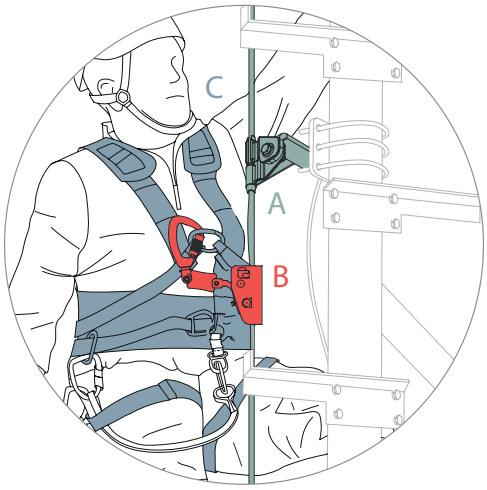

C Body Support

A safety harness is a personal protective equipment (PPE) that is designed to catch a person in the event of a fall. Our Fall Arrest harness diffuses fall arrest energy across the shoulders, thighs and pelvis.



Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

ANCHORAGE ELEMENTS - EN353-1: 201



Vertical System extension on ladder without energy absorber
NSV018

Kg 10,0 | b 22,0 | AISI 304




Vertical System extension on ladder with energy absorber
NSV021

Kg 11,4 | b 25,1 | AISI 304



Stainless steel cable
LDV006 (7x7)
LDV005 (1x19)

Kg 0,3 | b 0,66 | AISI 304

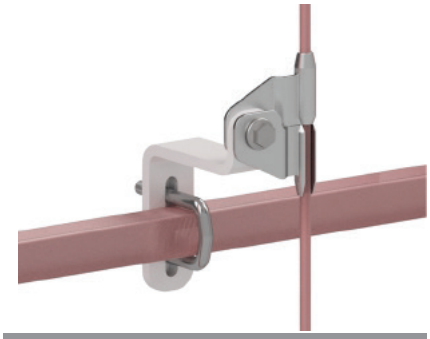

Intermediate anchor on ladder between rungs
LDV241

Kg 0,6 | b 1,3 | AISI 304



Top anchor on ladder without energy absorber
LDV232

Kg 1,6 | b 3,5 | AISI 304



Top anchor on ladder with energy absorber
LDV233

Kg 3,0 | b 6,6 | AISI 304



Bottom anchor on ladder fitted with tensioner
LDV266

Kg 2,3 | b 5,1 | AISI 304



BODY SUPPORT

Gravity Gear Fall Arrest Full Body Harness

- EN361:2012

2 anchor points, lightweight harness. Sizes M, L or XL
M-L: GB01GGFAH
XL: GB01GGFAH#XL

x1 | Kg 2,2 | b 4,8


Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved


GRAVITY QUALITY SYSTEM


The Gravity Quality System ensures that the Gravity Vertical System is installed correctly before it is certified as safe for use.

A Gravity smartphone app is used to guide the installer through the process of installing and capturing the required data:

- **The data for each installation is reviewed by a Gravity technical team prior to approval and certification;**
- **Each lifeline is checked independently to guarantee correct installation, user safety and the dependability of the lifeline system;**
- **Gravity effectively manages the liability on behalf of the customer.**

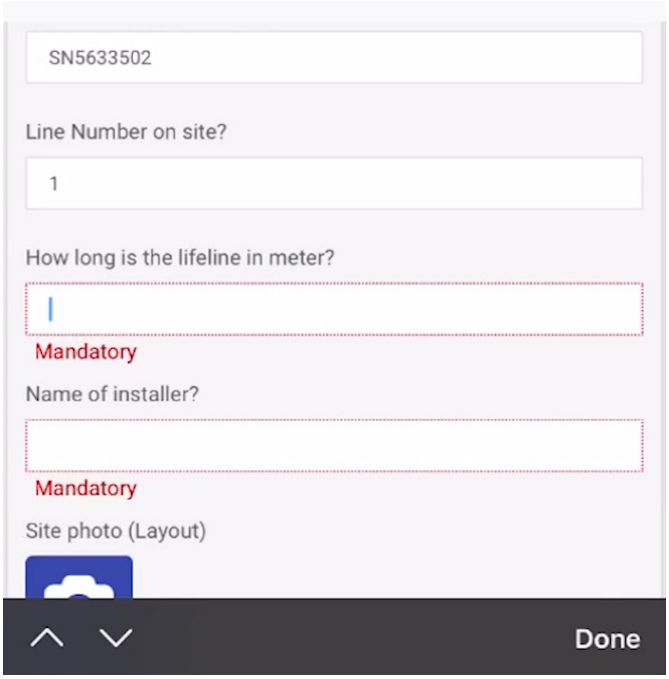

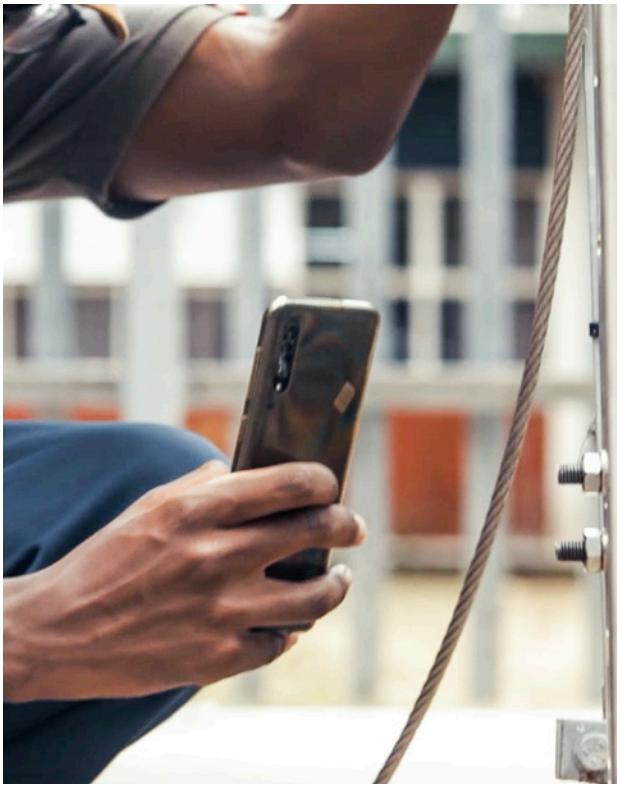

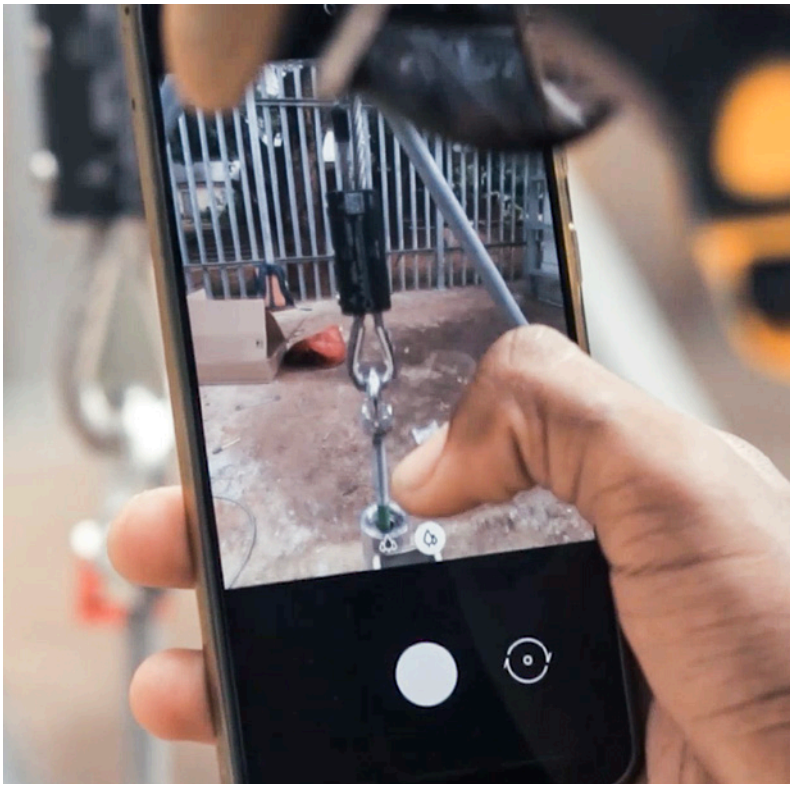

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

GRAVITY 'S VERTICAL SYSTEMS WORLDWIDE



CHOOSING GRAVITY MEANS

- One reference for global assistance
- Certified by notifying bodies as per latest European standard
- Quality control: ISO9001:2015. E.C. Quality of Production « Article 11B »
- Product liability insurance
- Warranty
- One-Stop-Shop

- Certified for up to 4 users at the same time
- Captive or Removable Gliders
- System with a permanently fixed, protective enclosure to keep the Gliders from exposure to the elements
- Virtual management and quality assurance system, ensuring correct installation and peace of mind
- Quick and easy to install. Requiring no special tools or equipment, saving time and costs

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved



TELECOM MAST
Luxembourg





SEVITRADE - LIQUID/SOLID BULK STORAGE
Sevilla, Spain

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved



ARCELOR MITTAL
Borcelik, Turkey








SIDERPERU GERDAU GROUP
Chimbote, Peru

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

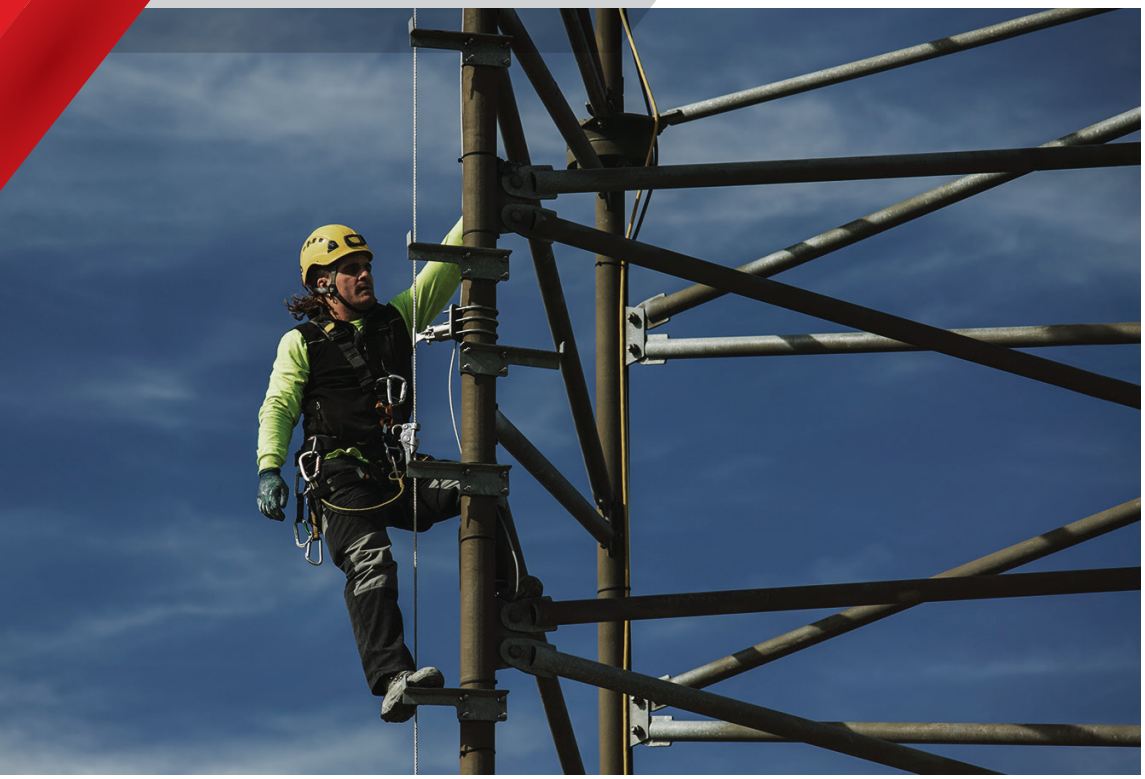






WEATHER TOWERS

Valle de Elorz, Spain

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved

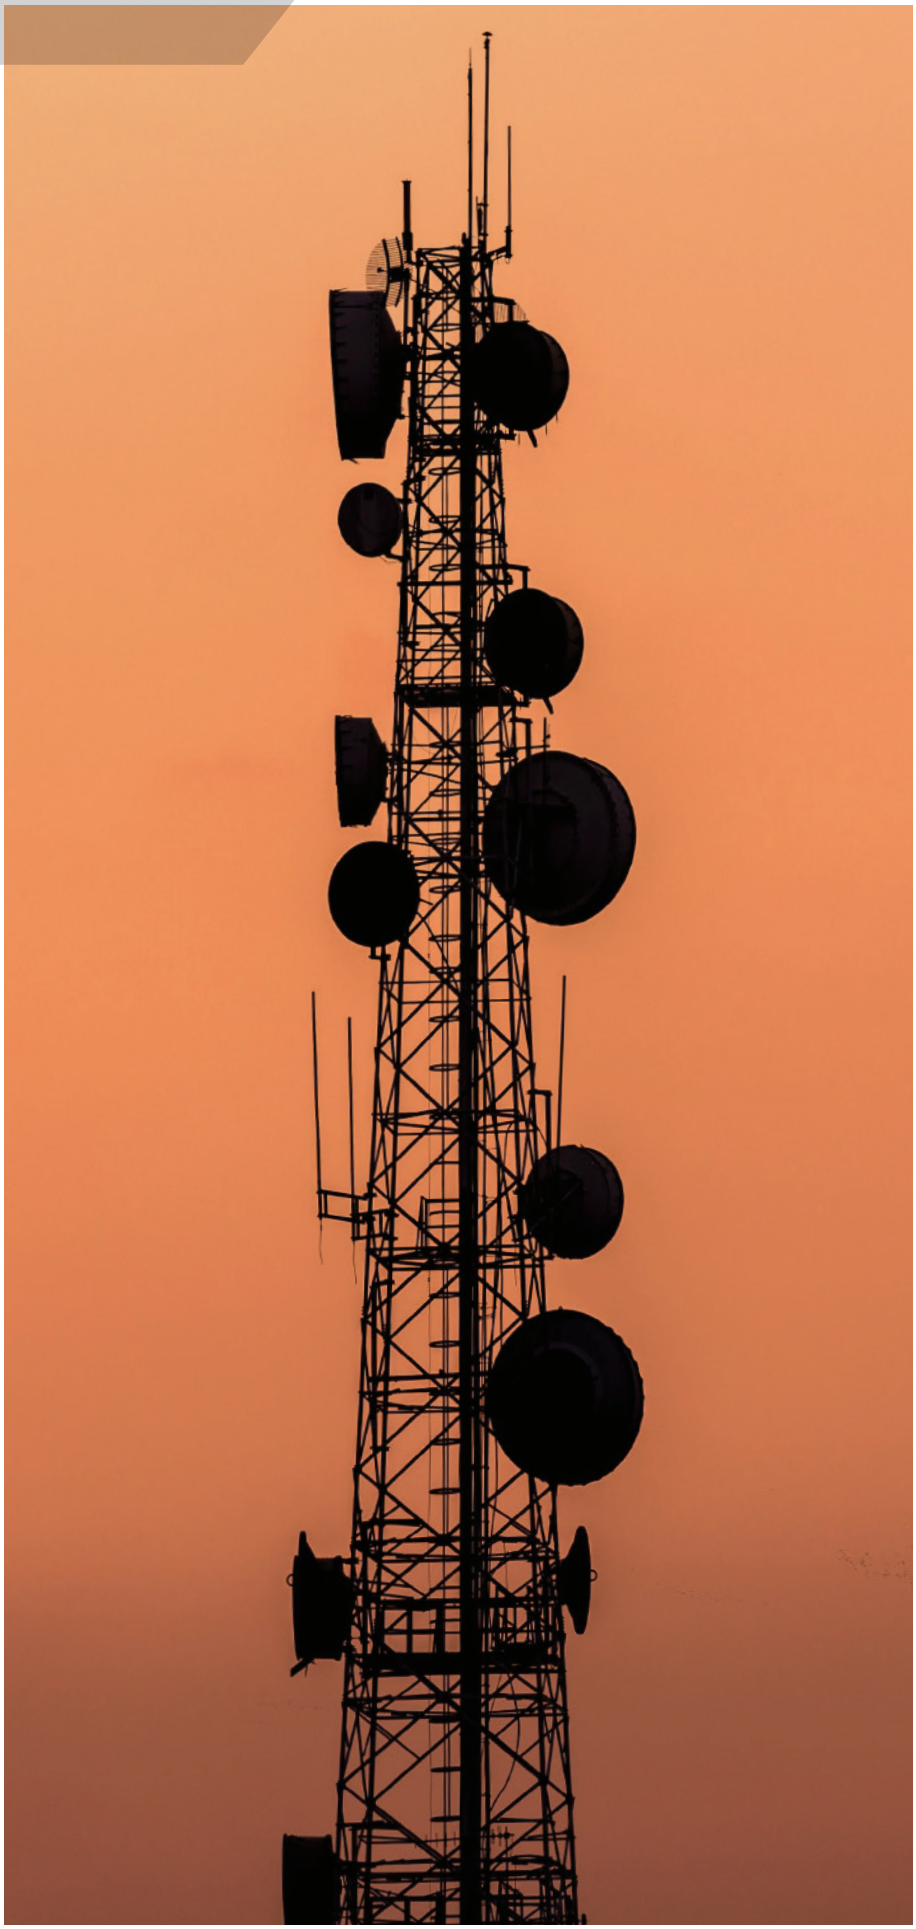

GRAVITY GROUP

Unit 11 Scientia Technopark,
Meiring Naude Road,
Pretoria,
South Africa

Local: (+27) 086 110 1213
Intl.: (+27) 012 349 1318

GRAVITY TRAINING

training@gravitygh.co.za

GRAVITY ACCESS

access@gravitygh.co.za

GRAVITY GEAR

gear@gravitygh.co.za

www.gravitygh.co.za

Follow us

GRAVITY
ELEVATING SOLUTIONS

FALLPROTEC
Height Safety Products

Copyright © 2020 Gravity Access (Pty) Ltd. All rights reserved