



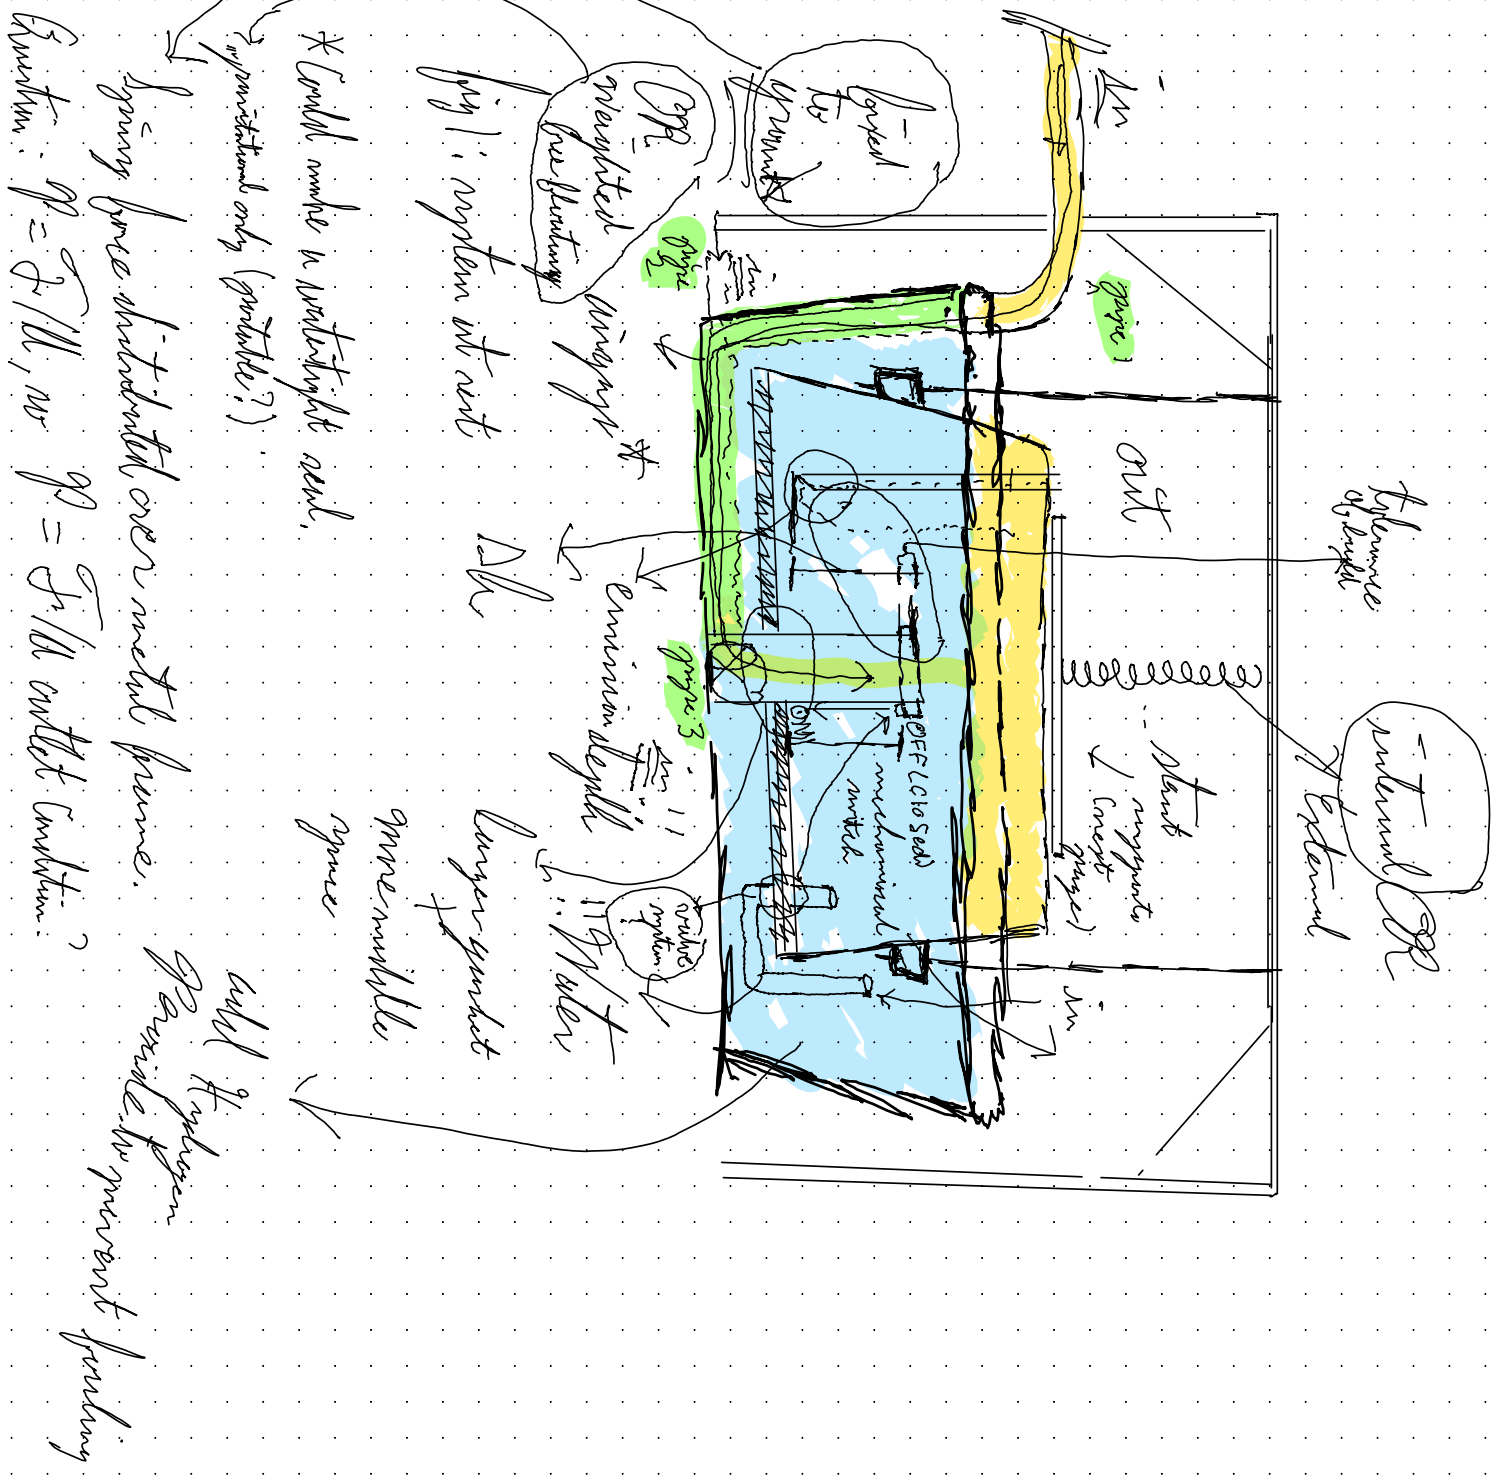

$Q^2 = \frac{1}{2} \frac{d^2}{dt^2} \frac{d^2}{dt^2}$

mol

$$\left(\text{kg m}^{-1} \text{s}^{-2} \right) \left(\text{m}^3 \right) = \left(\text{m} \right) \left(\text{kg m}^{-2} \text{s}^{-2} \text{m}^{-1} \right) \left(\text{m}^3 \right)$$

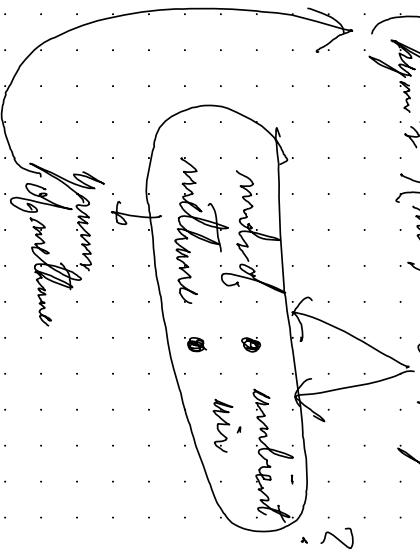

(ratio)

calculated by gradient pressure


$$\text{gradient pressure } \Delta p \rightarrow \Delta \bar{p} \text{ \& } \Delta \underline{\underline{p}} \text{ } \left(\Delta \underline{\underline{p}} \right)$$

get 136 yd / 34 yd per clear
27 yd per 108 yd black line for meeting

$$30.75'' \times 20.5'' \times 14.37'' \rightarrow$$

99 yd $\rightarrow$ 99 yd force integration with gradient (99°)
interface

Length of storage container

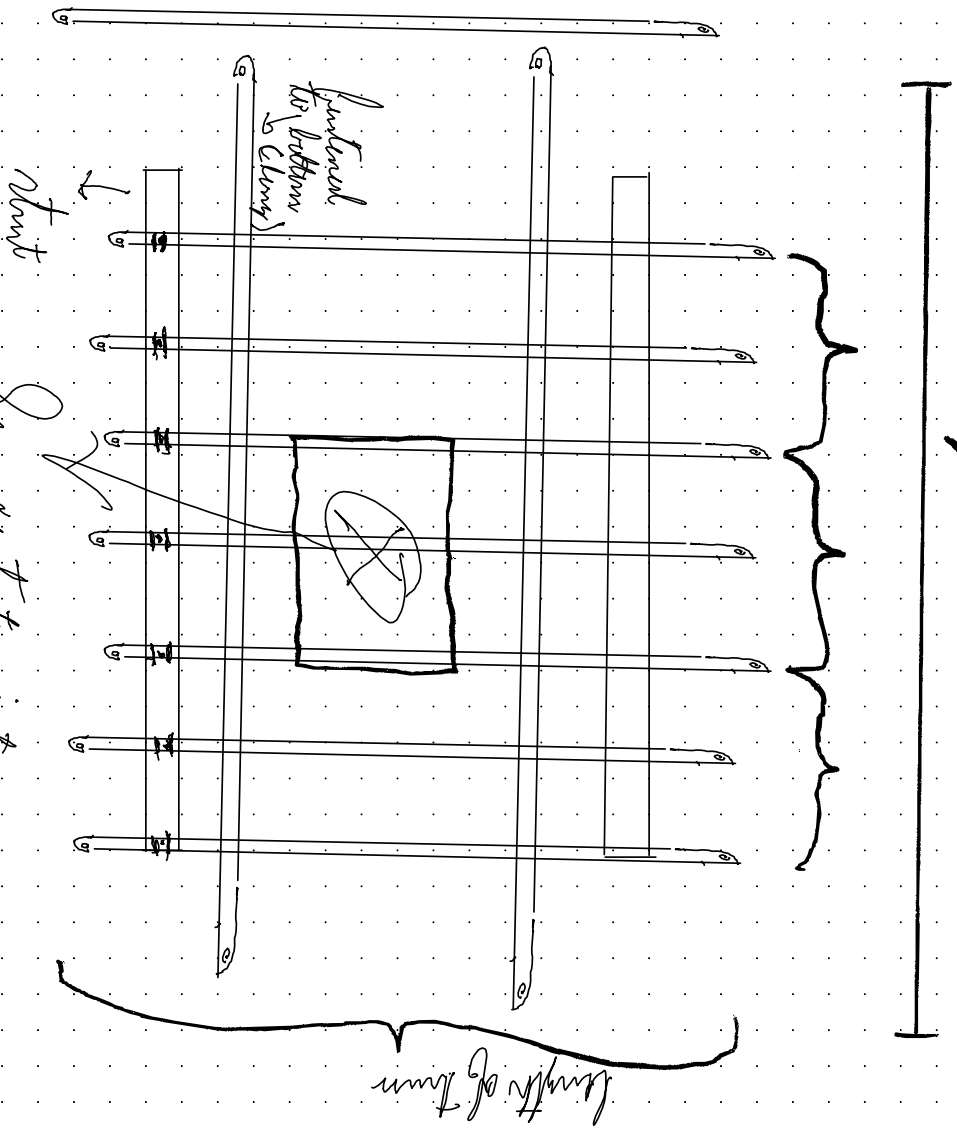

(linear interaction test?)