

(2.54 mm) .100"

<u>'IGER CLAW" SURFACE MOUNT SOCKET</u>

Mates with:

TSW, MTSW, TST, TSS, ZST, ZSS, DW, EW, ZW, TSM, HMTSW, HTSW, TSSH, BST, HTSS, TLW, MTLW

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SSM

Insulator Material: Black Liquid Crystal Polymer Contact Material: Phosphor Bronze

Priosprior English Plating: Au or Sn over 50 μ" (1.27 μm) Ni Current Rating (SSM/TSW): 5.2 A per pin (2 pins powered) Voltage Rating: 405 VAC / 572 VDC Operating Temp Range: -55 °C to +125 °C with Gold -55 °C to +105 °C with Tin

Insertion Depth: SV/DV is (4.34 mm) .171" to (7.24 mm) .285" or pass-through from top; (5.56 mm) .219" plus board thickness minimum from bottom; SH/DH is (4.34 mm) .171" to (6.35 mm) .250" Normal Force:

125 grams (1.21 N) average RoHS Compliant:

PROCESSING

Lead-Free Solderable:

-DH Coplanarity:


Less than 28 positions
(0.15 mm) .006" max*
More than 27 positions
(0.20 mm) .008" max*
-SH, -SV, -DV Coplanarity: (0.15 mm) .006" max* (.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Some lengths, styles and options are non-standard, non-returnable.

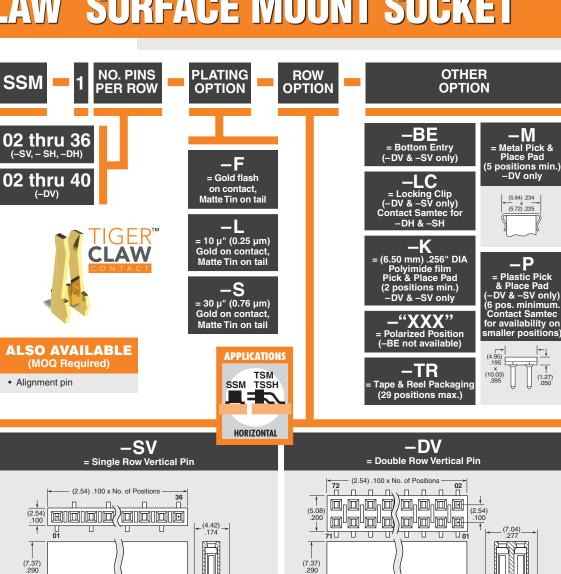

= Single Row Horizontal Pin (2.54) .100 x No. of Positions (0.89) .035 SQ TYP (8.13)

(0.51) .020 → | |-

(0.51) .020 →

(2.54) .100 →

= Double Row Horizontal Pin (2.54) .100 x No. of Positions (5.72) (2.54) .225 \(\psi \ .100\) (8.13) y (2.54).100 →

(0.51) .020 →

–DH

(2.54) .100 →

(1.27) .050 (1.42) .056

Due to technical progress, all designs, specifications and components are subject to change without notice **WWW.SAMTEC.COM**

<u>↓</u> (0.13) .005

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

SSM-107-L-DV-LC SSM-108-L-DV SSM-105-S-DV SSM-108-F-DV SSM-109-L-DV-LC SSM-105-L-DV-LC SSM-116-L-SV-BE SSM-110-L-DV SSM-103-L-DV SSM-106-L-SV SSM-108-S-SV-LC SSM-114-L-SV-BE SSM-120-L-DV-LC SSM-114-L-DV-LC SSM-106-L-DV-BE-LC-K SSM-125-L-DV-LC SSM-106-L-DV SSM-130-L-DV-LC SSM-105-L-DV-P-TR SSM-120-S-DV-LC SSM-107-L-DV SSM-105-L-DV SSM-108-L-DV-LC SSM-114-S-SV-P SSM-104-L-DH-LC SSM-103-L-DH-LC SSM-102-L-DH-TR SSM-104-L-SH SSM-104-L-SV SSM-108-L-SH SSM-113-L-DH SSM-132-L-DV SSM-116-L-SV SSM-105-S-DH SSM-105-L-DV-K SSM-105-L-DH SSM-110-L-DV-A SSM-109-L-DV-BE-LC SSM-116-L-DV-LC SSM-105-S-DV-LC SSM-106-S-DV-K SSM-106-L-SV-P-TR SSM-110-L-DV-LC SSM-115-L-SV SSM-115-L-DH SSM-125-L-DV-BE SSM-120-L-DV-K SSM-107-F-DV SSM-107-L-DH SSM-109-S-SH-TR SSM-120-S-SH SSM-112-L-DV SSM-116-L-SH SSM-116-LM-DV SSM-106-S-SV-LC SSM-116-L-DV-K-TR SSM-120-L-SV-K SSM-109-L-SV SSM-102-S-DV-LC SSM-102-L-DV-BE SSM-102-S-DV-TR SSM-107-S-DV-006 SSM-113-L-DV SSM-113-S-SV-LC SSM-115-L-DV-LC SSM-120-L-SV-LC SSM-110-L-DV-P SSM-114-L-DH SSM-117-L-SV-BE-LC SSM-121-L-DH SSM-125-L-DV-P-TR SSM-120-L-DV-LC-P SSM-107-S-SV-LC SSM-108-S-SV-LC-P SSM-123-L-DV-LC SSM-136-S-DV-LC-K SSM-102-L-DV-BE-LC SSM-102-L-DV-LC SSM-103-L-DV-P-TR SSM-105-L-DH-009 SSM-102-S-DV-K-TR SSM-104-T-DV SSM-110-L-DV-BE-A-P-TR SSM-107-L-DV-BE-LC-K SSM-108-L-DV-K-TR SSM-105-L-DV-K-TR SSM-107-S-DV-LC SSM-114-L-DV-BE SSM-108-L-DV-LC-K SSM-107-S-DV SSM-115-S-DV-LC SSM-105-L-DV-M SSM-135-S-DH SSM-118-L-DV-LC SSM-114-S-DV SSM-121-L-SV-BE SSM-103-L-SH SSM-104-S-DH SSM-102-F-SV SSM-102-S-SH