



2 Fixing prohibited areas

U-bolts and double-ended brackets are prohibited in the following areas.

•Area from the front end of a sub frame side members to 50mm posterior to a kick-up point.

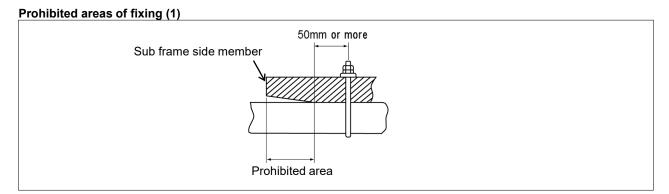

- Areas within 100mm anterior or posterior to each cross member, gusset or spring bracket.
- Check "1-9 CHASSIS FRAME DRAWINGS" of target vehicle for cross member shapes and details.

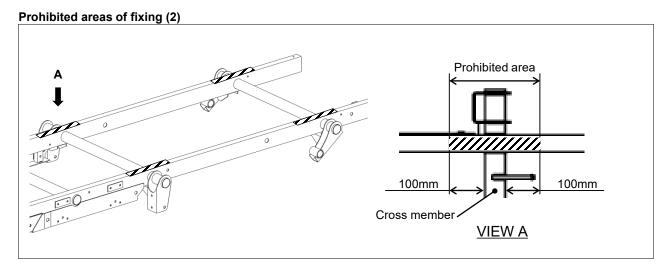

 Areas within 100mm anterior or posterior to rear suspension components or edge of its reinforcement.