


1-6 MARGIN FOR MOVEMENT OF THE AXLES AND THE TIRES

Based on the dimensional data in the table below, determine position and dimension of the rear fender and the tire housing with reasonable clearances to the tires. For chained tires, add 30mm to "A", "B" and "C".

Single tire vehicle

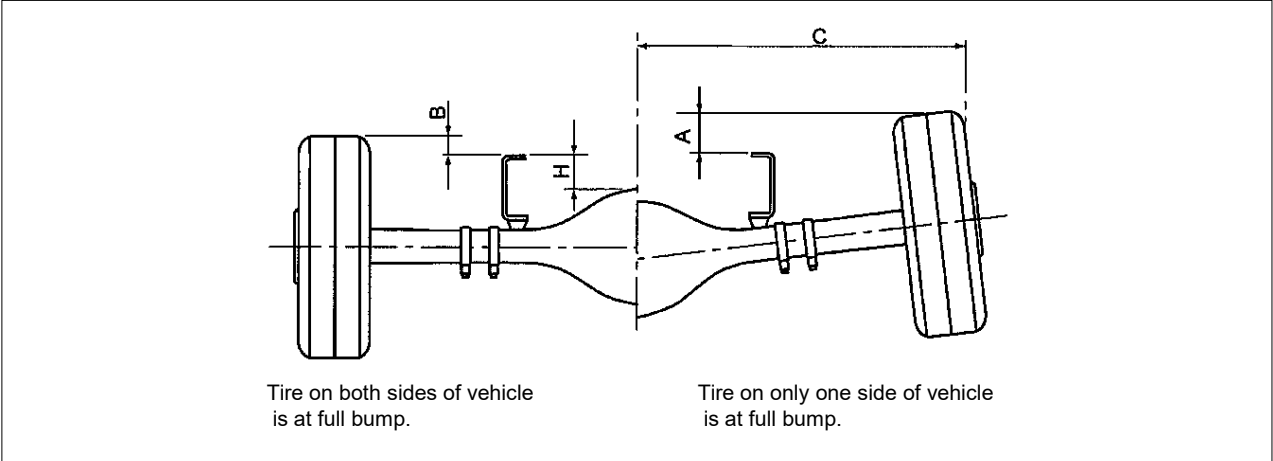

Unit: mm

Vehicle model	Chassis frame depth at rear axle	Tire	A	B	C	H
PHR54AU	100	195R14C	186	135	786	80