


REV	DESCRIPTION	DRAWN BY:	DATE
3X	INCREASED HORIZONTAL BRICK RETENTION SLOT HEIGHT AND ADDED MISSING SLOT DIMENSIONS (SHEETS 2 AND 6).	R. GRANTHAM, 06/23/22	

938.24 [36.939] REF
OVERALL DEPTH

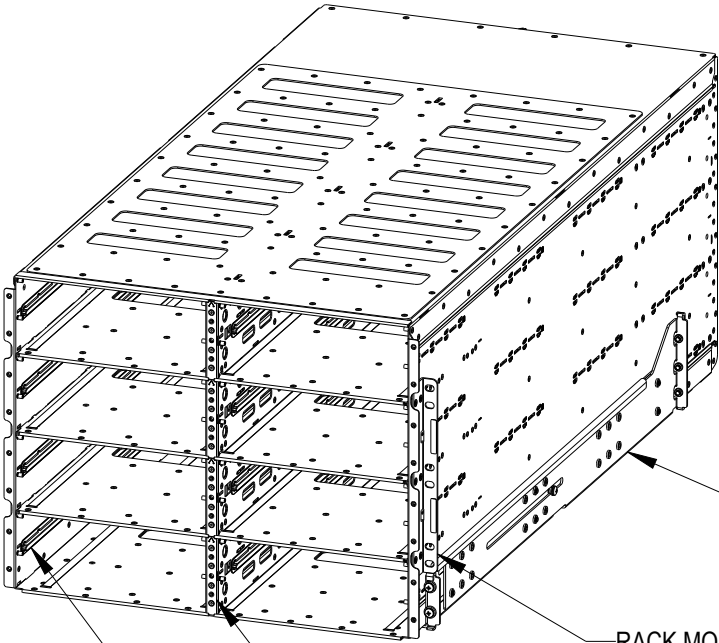

RACK INSTALLATION SUPPORT
ADJUSTABLE RAIL KIT

RACK MOUNTING RAIL

REMOVABLE CENTER DIVIDERS

PLASTIC BRICK RAILS

354.98±0.25
[13.976±0.009]
OVERALL HEIGHT

40
[1.6]

MATERIAL:			UNLESS OTHERWISE SPECIFIED TOLERANCE					OPEN 19		
NONE			MM (PRIMARY)							
FINISH:			INCHES (SECONDARY)							
NONE			X	±2	(X)	±.1				
			X	±8	(XX)	±.03				
			XX	±38	(XXX)	±.015				
			HOLE DIA	±0.13	HOLE DIA	±.005				
			ANGULAR				±1.5°			
DESIGNED BY:		DATE:	WEIGHT:		C CONTROL CHARACTERISTICS			PART DESCRIPTION		
R. GRANTHAM		14 FEB 2022	-					O19V2 8RU CAGE FORM SPEC		
DRAWN BY:		DATE:	SHEET:		THIRD ANGLE PROJECTION	SIZE	SCALE	DOCUMENT NUMBER	REV	
R. GRANTHAM		15 JUNE 2022	1/6			B	0.125	O19V2 8RU CAGE	3X	


4 3 2 1

D

C

B

A

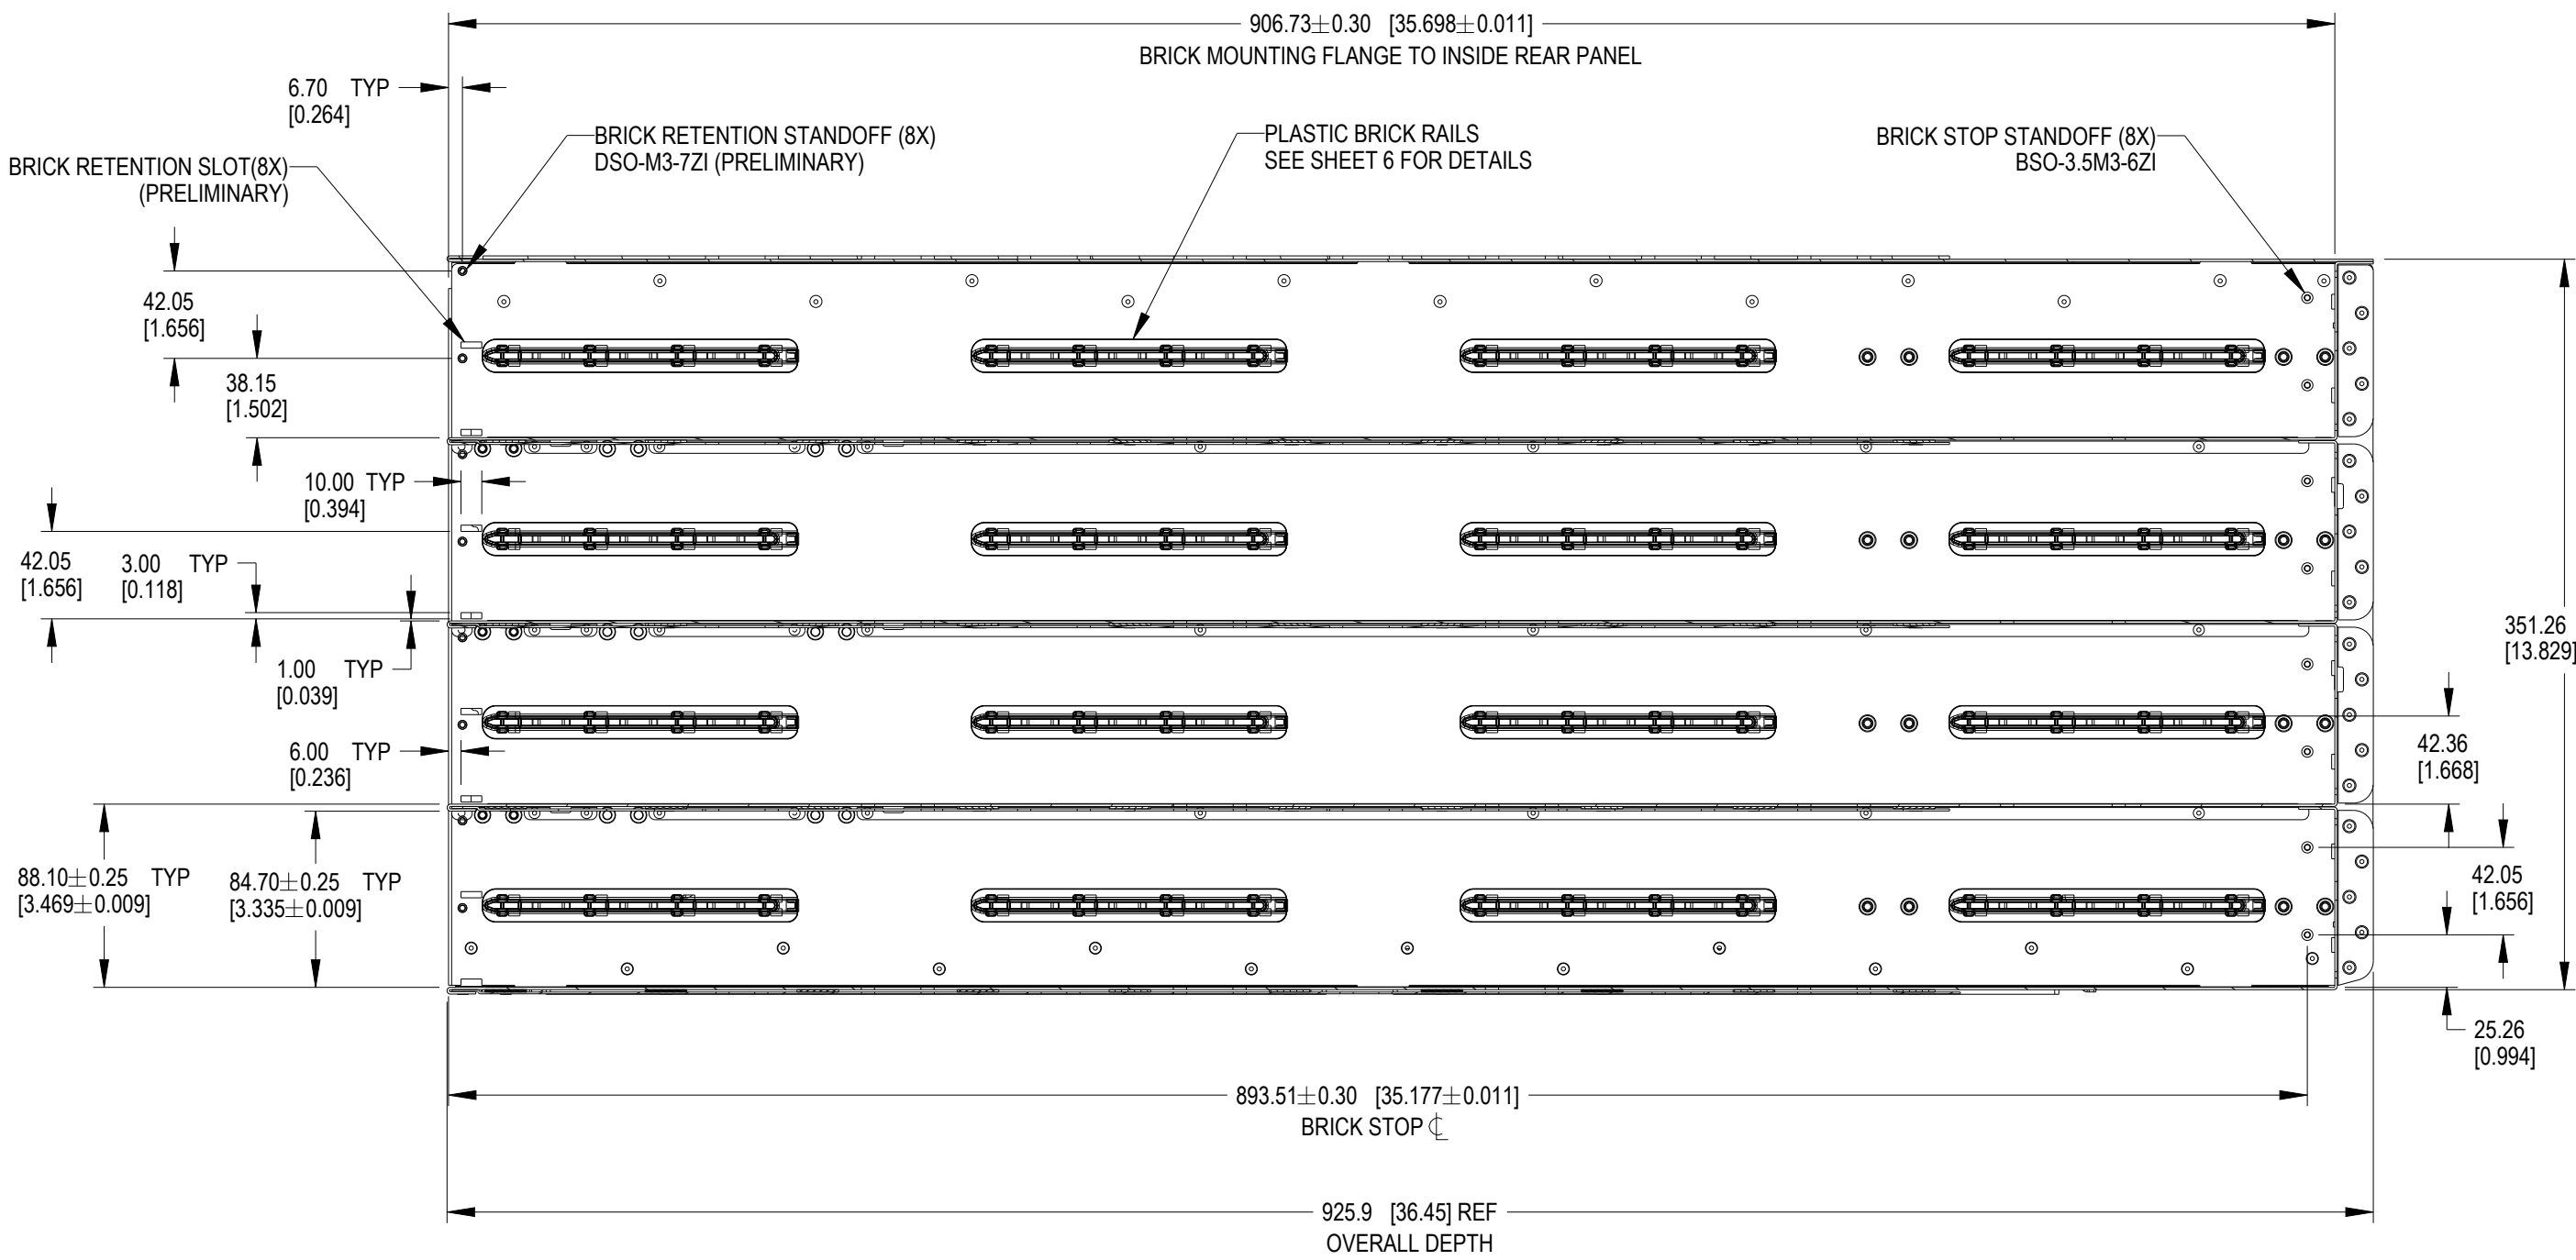

4 3 2 1

4

3

2

1

D

D

C

C

B

B

A

A

SEE DETAIL E
(SHEET 5)SEE DETAIL F
(SHEET 5)SEE DETAIL G
(SHEET 5)FORMED RIDGE - PROTECTION FOR
PLASTIC GUIDE/SLIDES DURING
INSTALLATION - TYP BOTH SIDES
TOP AND BOTTOM

BRICK COOLING AIRFLOW OPENING (8X)

BRICK COOLING AIRFLOW OPENING (8X)

BRICK COOLING AIRFLOW OPENING (8X)

COOLING PORT OPENING (16X)

88.10 REF TYP
[3.469]42.05±0.13 TYP
[1.656±0.005]23.00±0.20 TYP
[0.906±0.007]47.28±0.20
[1.861±0.007]88.10 REF TYP
[3.469]42.05±0.13 TYP
[1.656±0.005]15.38±0.20 TYP
[0.606±0.007]228.78±0.20
[9.007±0.007]228.78±0.20
[9.007±0.007]228.78±0.20
[9.007±0.007]

SECTION B-B

85.28±0.20
[3.357±0.007]17.33±0.20 TYP
[0.682±0.007]37.88±0.20
[1.491±0.007]88.10 REF TYP
[3.469]42.05±0.13 TYP
[1.656±0.005]

BRICK COOLING AIRFLOW OPENING (8X)

POWER CONNECTOR CUTOUT (16X)

BRICK COOLING AIRFLOW OPENING (8X)

DATA CONNECTOR CUTOUT (16X)

OPEN 19	SHEET 3/6	SIZE B	SCALE 0.500	DOCUMENT NUMBER O19V2 8RU CAGE	REV 3X
---------	--------------	-----------	----------------	-----------------------------------	-----------

4

3

2

1

D

D

C

C

B

B

A

A

906.73 [35.698]
BRICK FACE MOUNTING FLANGE TO INSIDE OF REAR CAGE

215.02±0.25
[8.465±0.009]

13.76±0.20
[0.542±0.007]

443.80±0.25
[17.472±0.009]

215.02±0.25
[8.465±0.009]

925.94 REF
[36.454]

SECTION C-C
ROTATED 90° CW

D

C

B

A

D

C

B

A

4

3

2


1

4

3

2

1

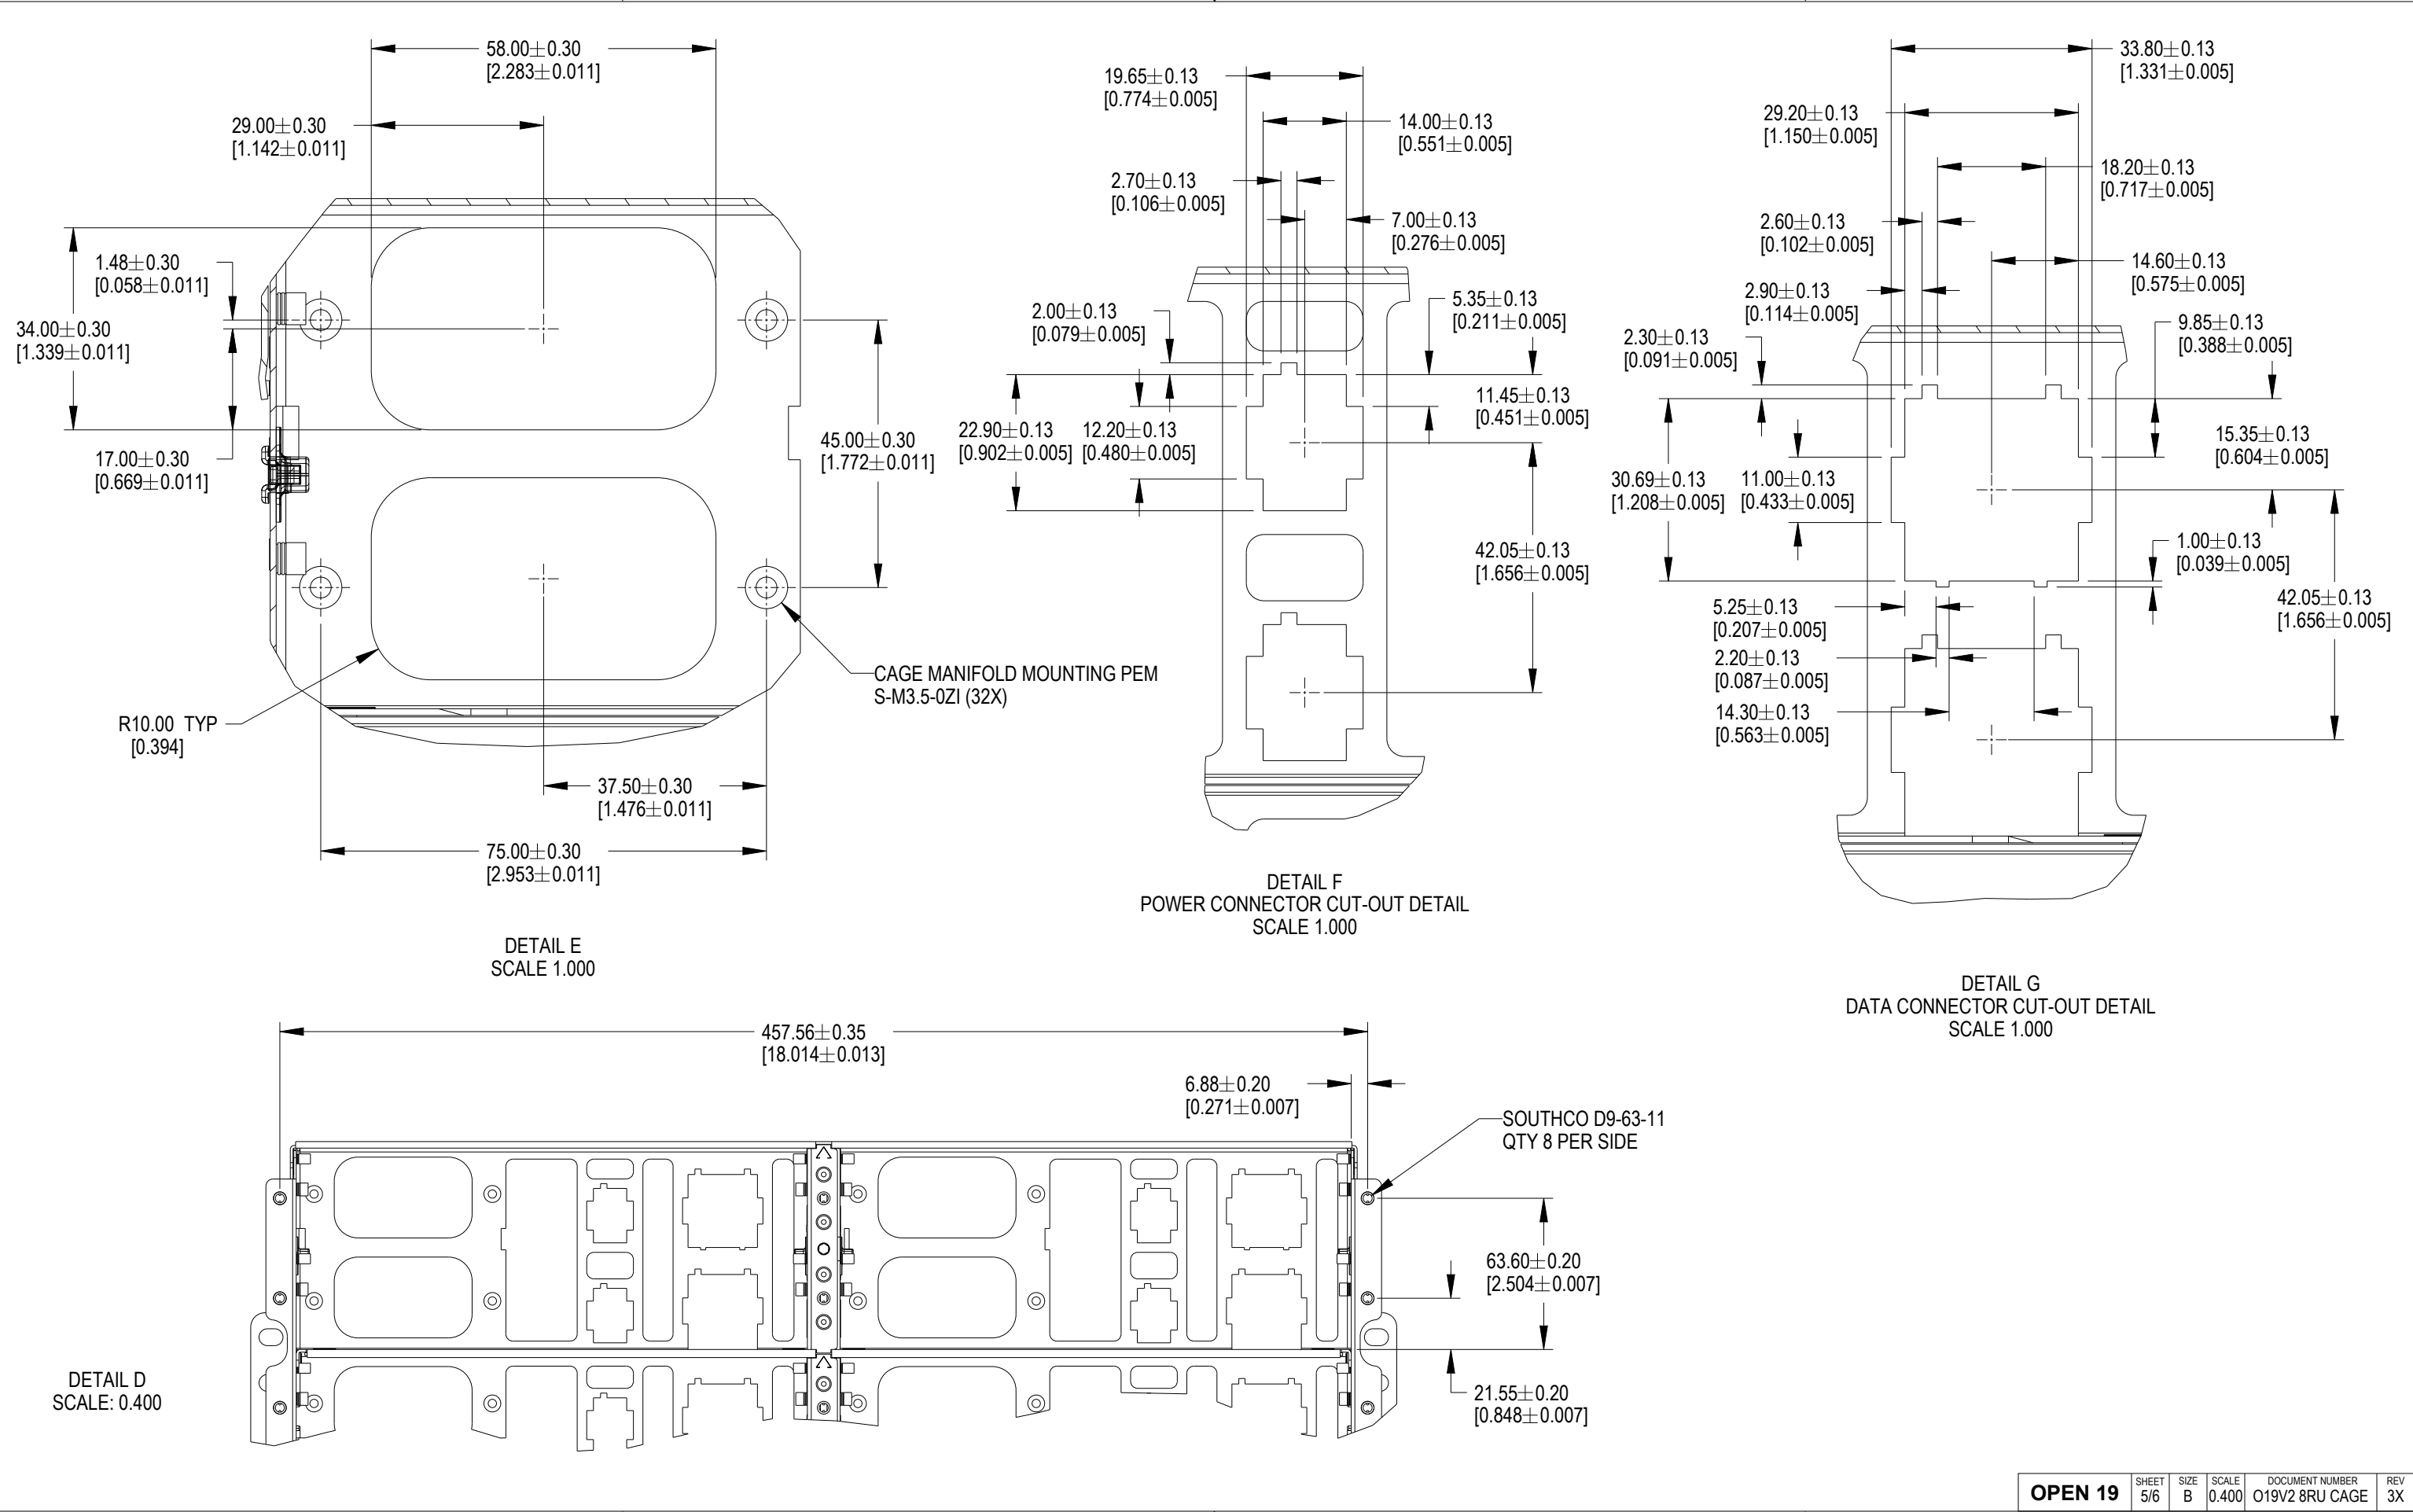

D

C

B

A

D

C

B

A

4

3

2


1

4


3

2

1

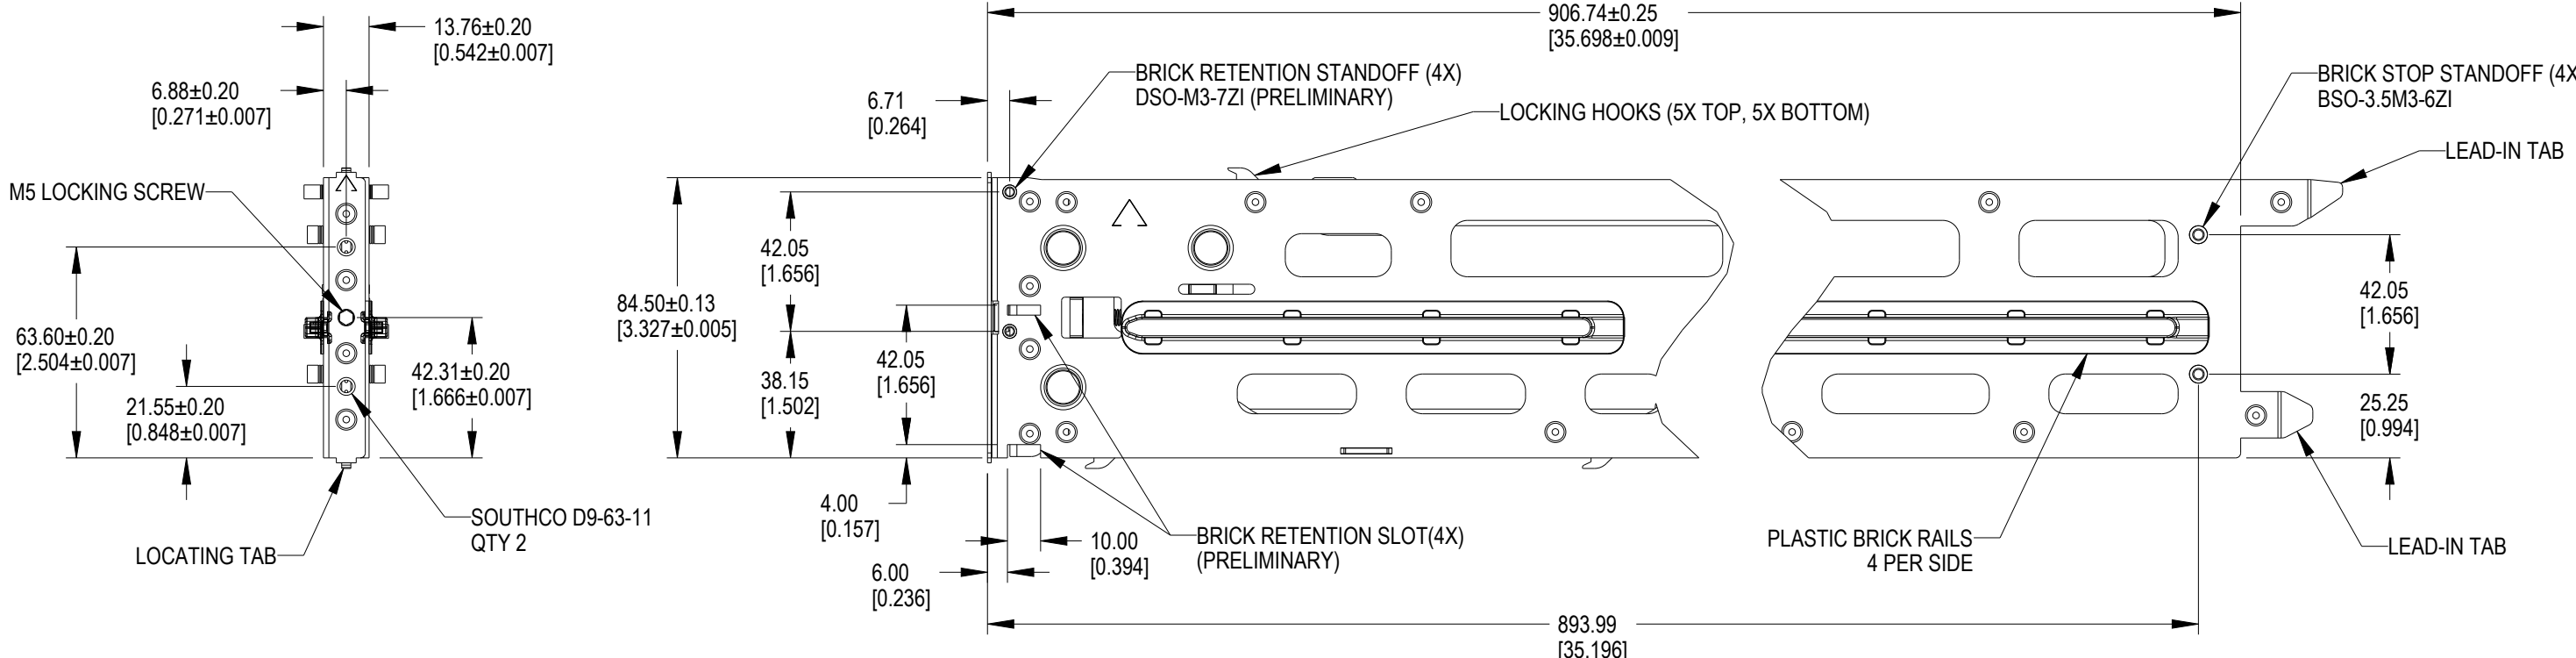

CENTER DIVIDER DETAILS
SCALE 0.500

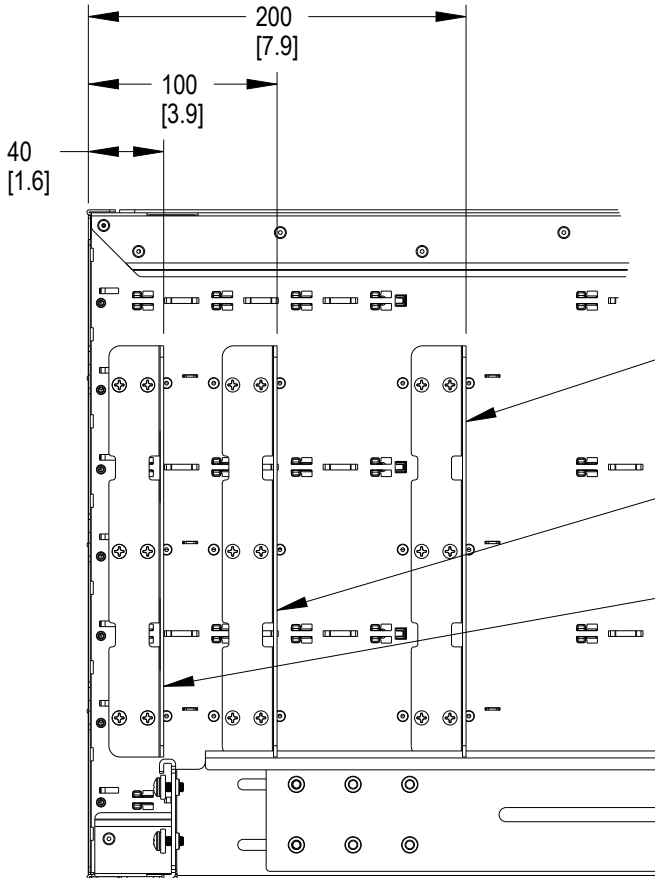

FRONT MOUNTING BRACKET LOCATIONS
TYPICAL BOTH SIDES OF CAGE