




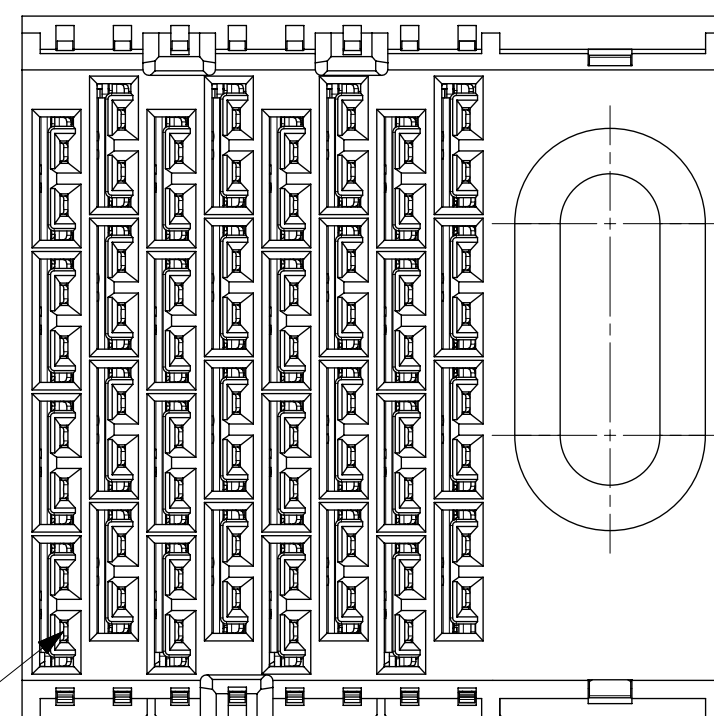

- NOTCH INDICATE
UNIQUE
END COLUMN

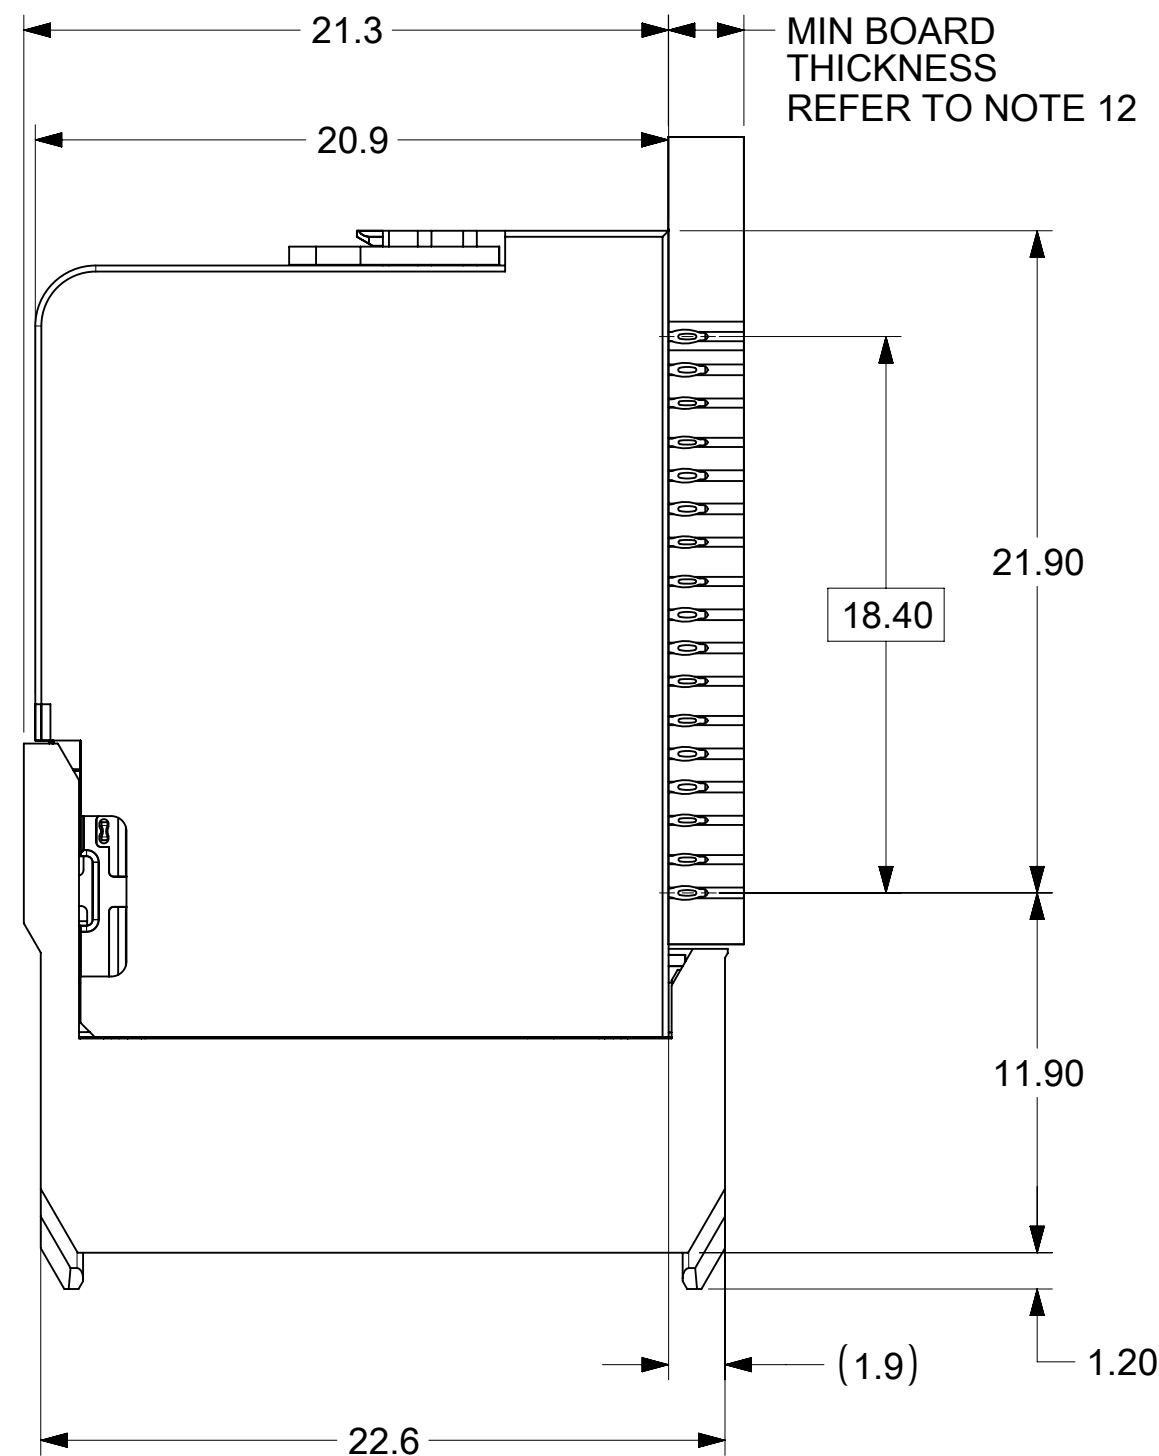

- NOTES:
1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP)
GLASS-FILLED, UL94V-0
TERMINALS - HIGH PERFORMANCE COPPER ALLOY
 2. FINISH: 30uIN GOLD IN CONTACT AREA.
SELECTIVE TIN ON PCB TAILS.
NICKEL OVERALL.
 3. REFER TO MOLEX PRODUCT SPECIFICATION 172740-9990 FOR PERFORMANCE SPECIFICATIONS.
 4. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF MOLEX COSMETIC SPEC PS-45499-002.
 5. PRODUCT WILL BE PACKAGED PER PK-78888-085.
 6. SEE SHEET 2 FOR HOLE PATTERN DIMENSIONS.
 7. MATES WITH IMPEL CABLE SERIES 730650.
 8. REFER TO IMPEL PLUS PCB ROUTING GUIDE AS-172730-990 FOR ANTIPAD, ROUTING RECOMMENDATIONS, AND ADDITIONAL PCB INFORMATION.
 9. WHEN STACKING MODULES END TO END, THE MINIMUM COLUMN TO COLUMN HOLE SPACING IS 10.52 MM.
 10. COMPONENT PLACEMENT AND TRACE KEEP OUT ZONE;
DO NOT PLACE ANY OTHER COMPONENT OR ROUTE
ANY TOP LAYER TRACES IN THIS AREA.
 11. CONNECTOR IS SUPPLIED WITH TWO 2-32 THREAD FORMING SCREWS. REFER TO TABLE ON SHEET 2 FOR MOLEX PART NUMBER.
 12. WHEN USING THE SUPPLIED 2-32 THREAD FORMING SCREWS, REFER TO TABLE ON SHEET 2 FOR THE APPLICABLE BOARD THICKNESS RANGE.


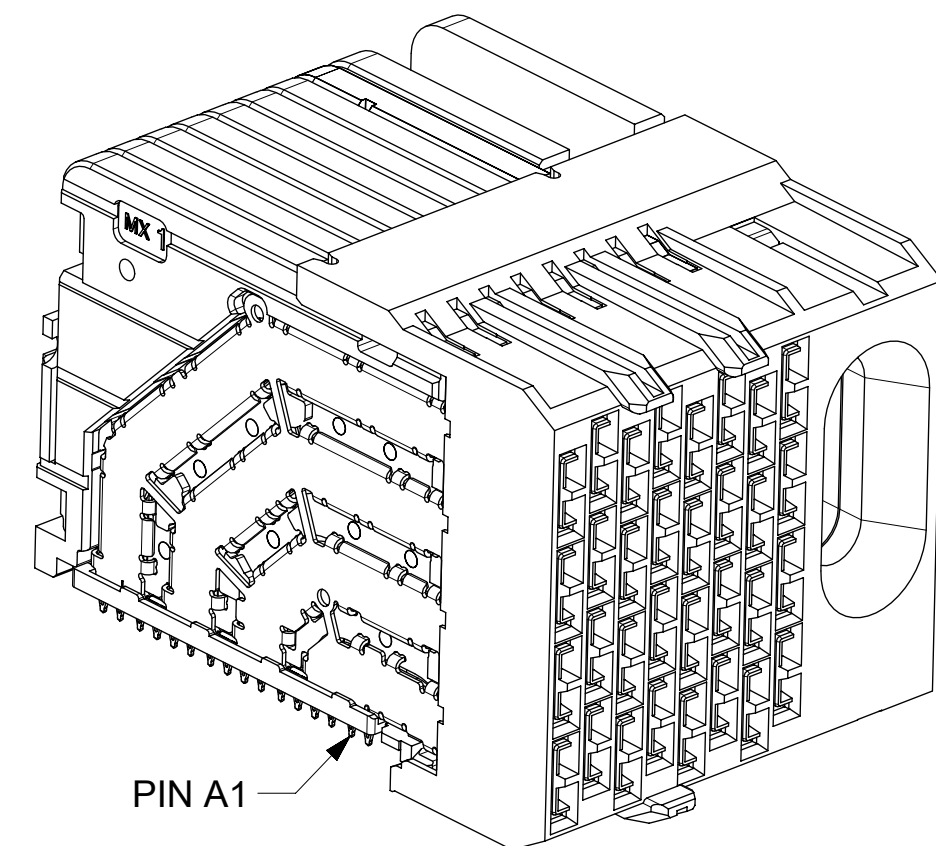


PIN A1

THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS mm		SCALE NTS		CURRENT REV DESC: 1. AMEND "QSP" TO "QSPF" ON PIN OUT TABLE, SHEET 2. 2. ADD "PCB EDGE" NOTE ON SHEET 2 C6 EC NO: 714548 DRWN: JLTAN062022/07/06 CHK'D: YLLIM2022/07/18 APPR: DWLEE012022/07/18 INITIAL REVISION: DRWN: JLTAN062022/04/12 APPR: DWLEE012022/06/27				molex					
GENERAL TOLERANCES (UNLESS SPECIFIED)		IMPEL PLUS 4PX8C CUSTOM RIGHT GUIDED DC SPI (OPEN19 V2)											
ANGULAR TOL ± °		PRODUCT CUSTOMER DRAWING											
4 PLACES ±		DOCUMENT NUMBER 2040669001-SD						DOC TYPE PSD	DOC PART 000	REVISION A1			
3 PLACES ±													
2 PLACES ± 0.13													
1 PLACE ± 0.25													
0 PLACES ±													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION 		DRAWING C-SIZE		SERIES 204066		MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 3	

IMPEL PLUS DC MATED TO DATA CABLE

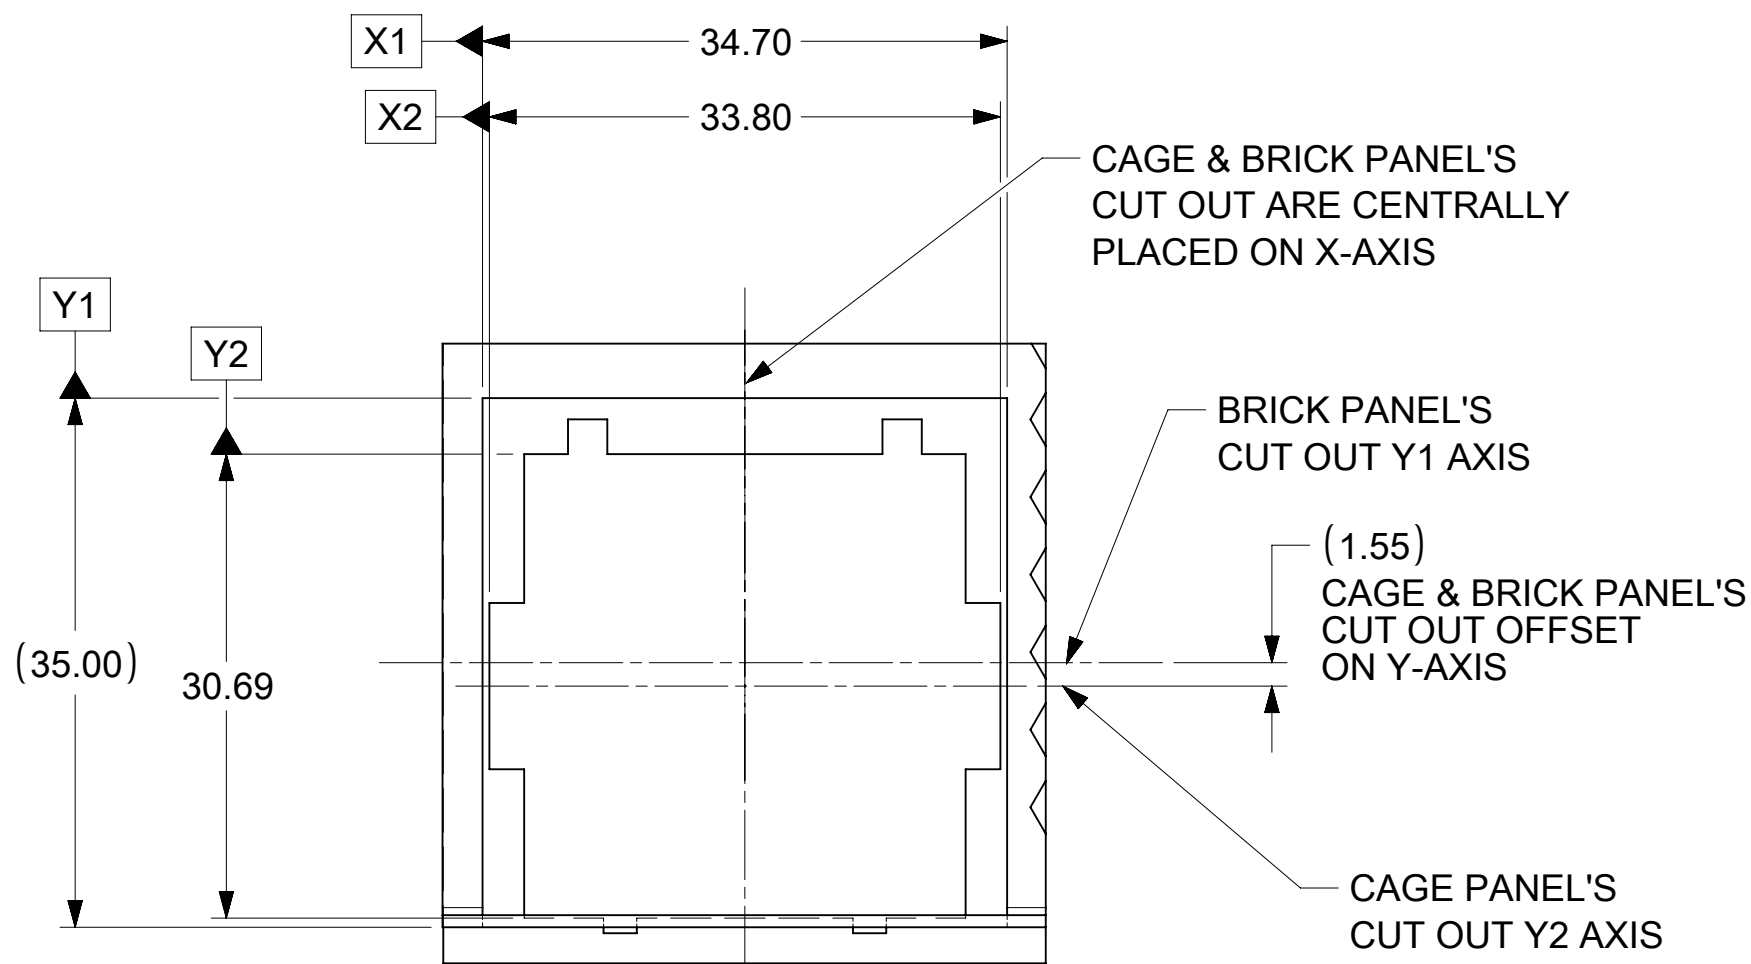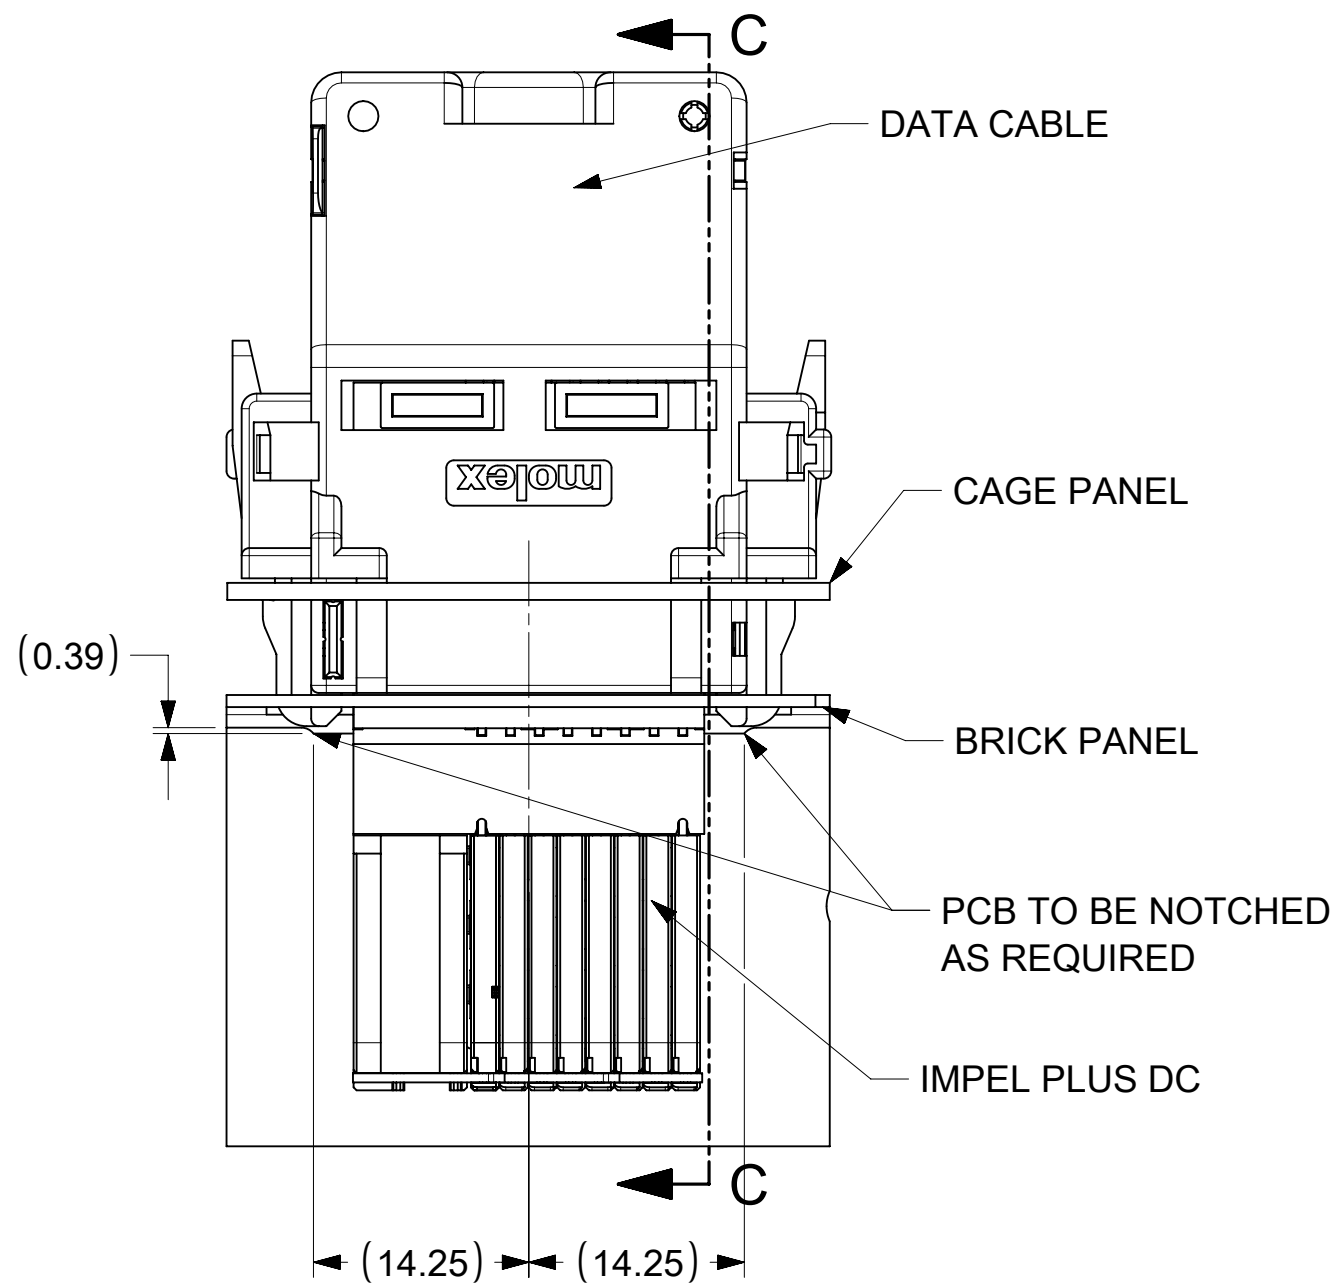


VIEW D
RECOMMENDED BRICK PANEL
CUT OUT PROFILE


IMPEL PLUS DC MATING PROFILE WITH RESPECT TO PANEL

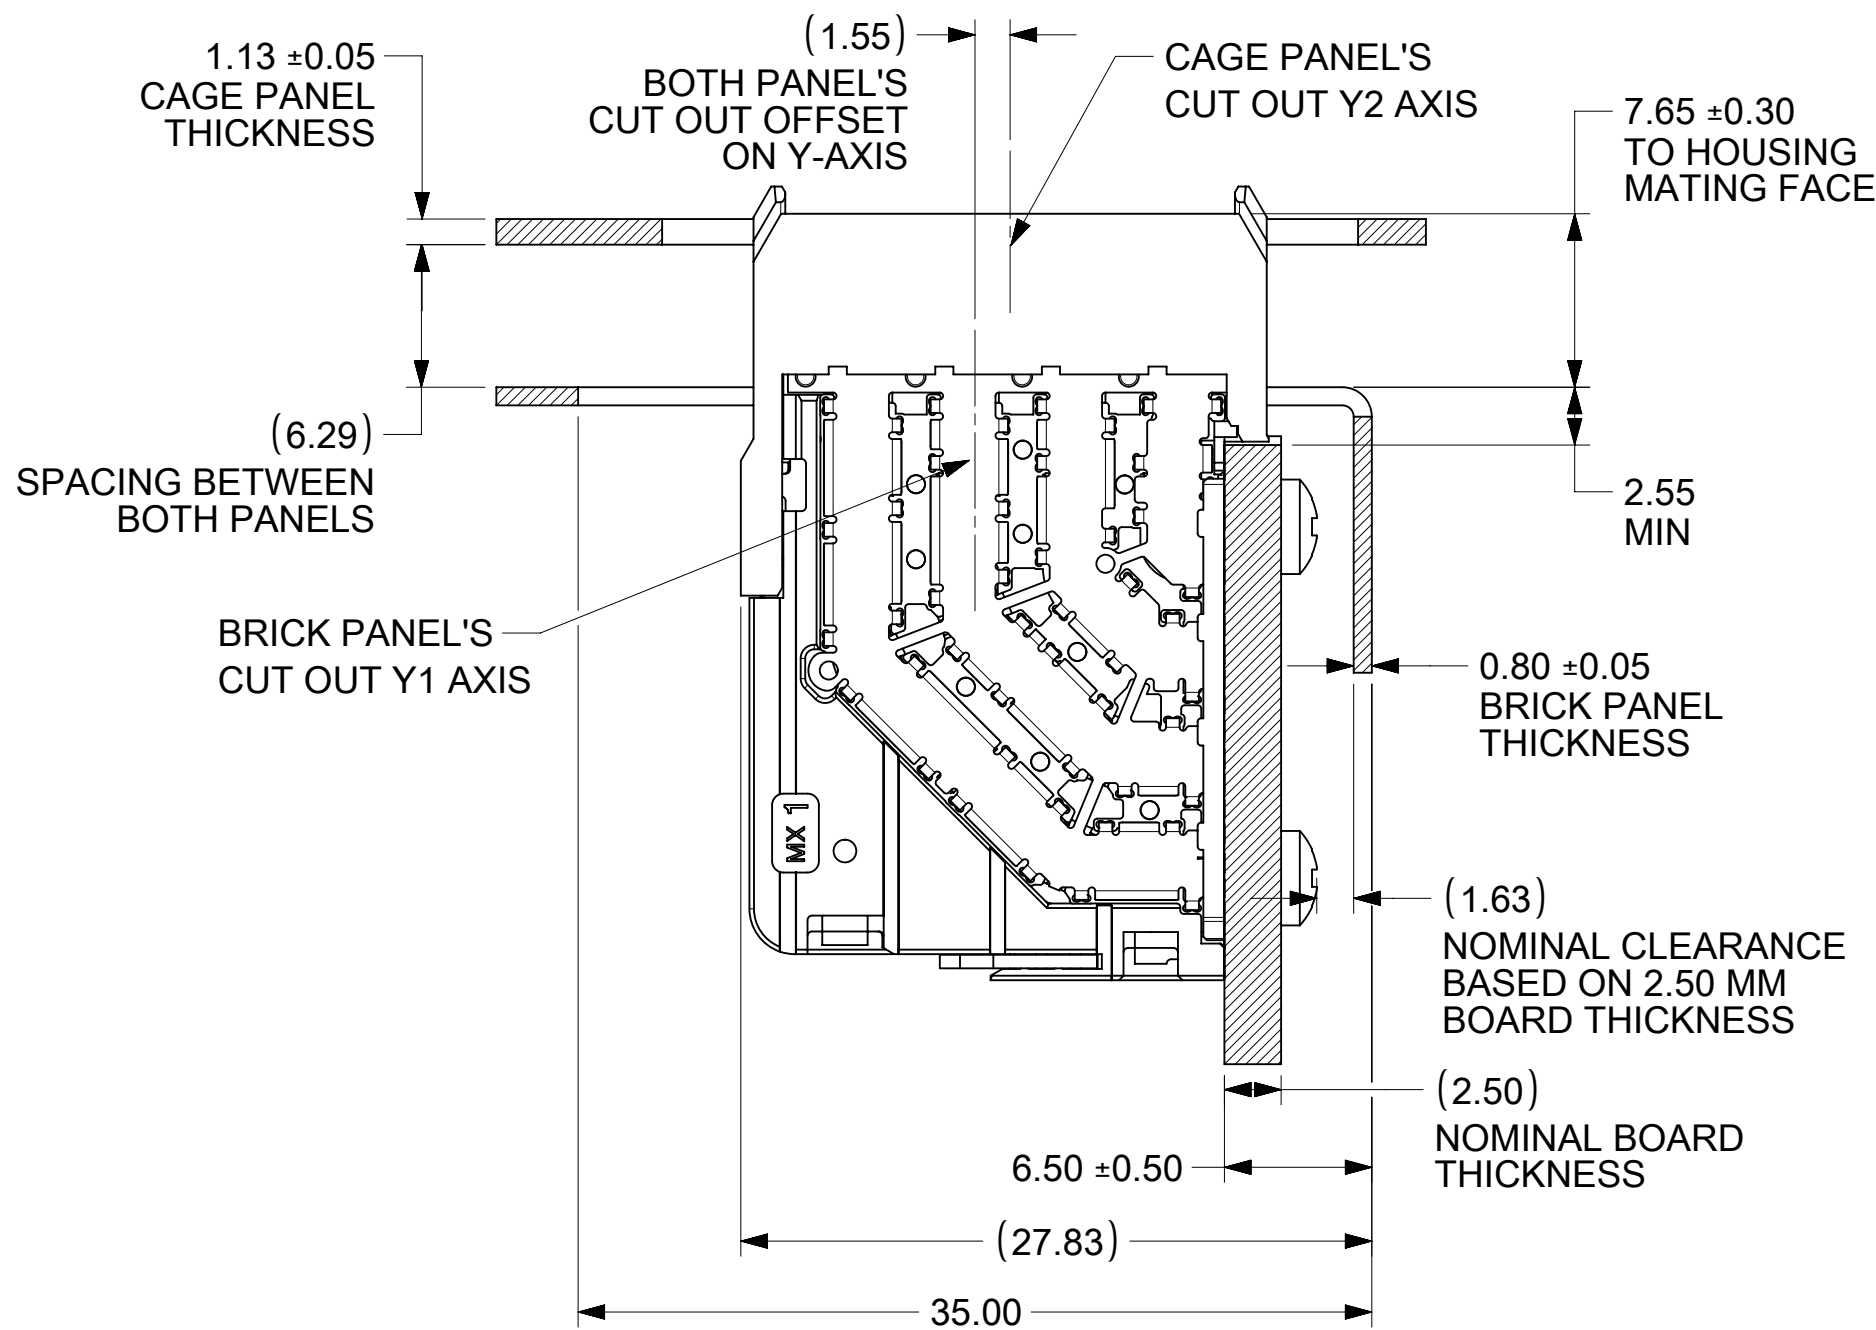

SECTION C-C
DATA CABLE IS INTENTIONALLY HIDDEN

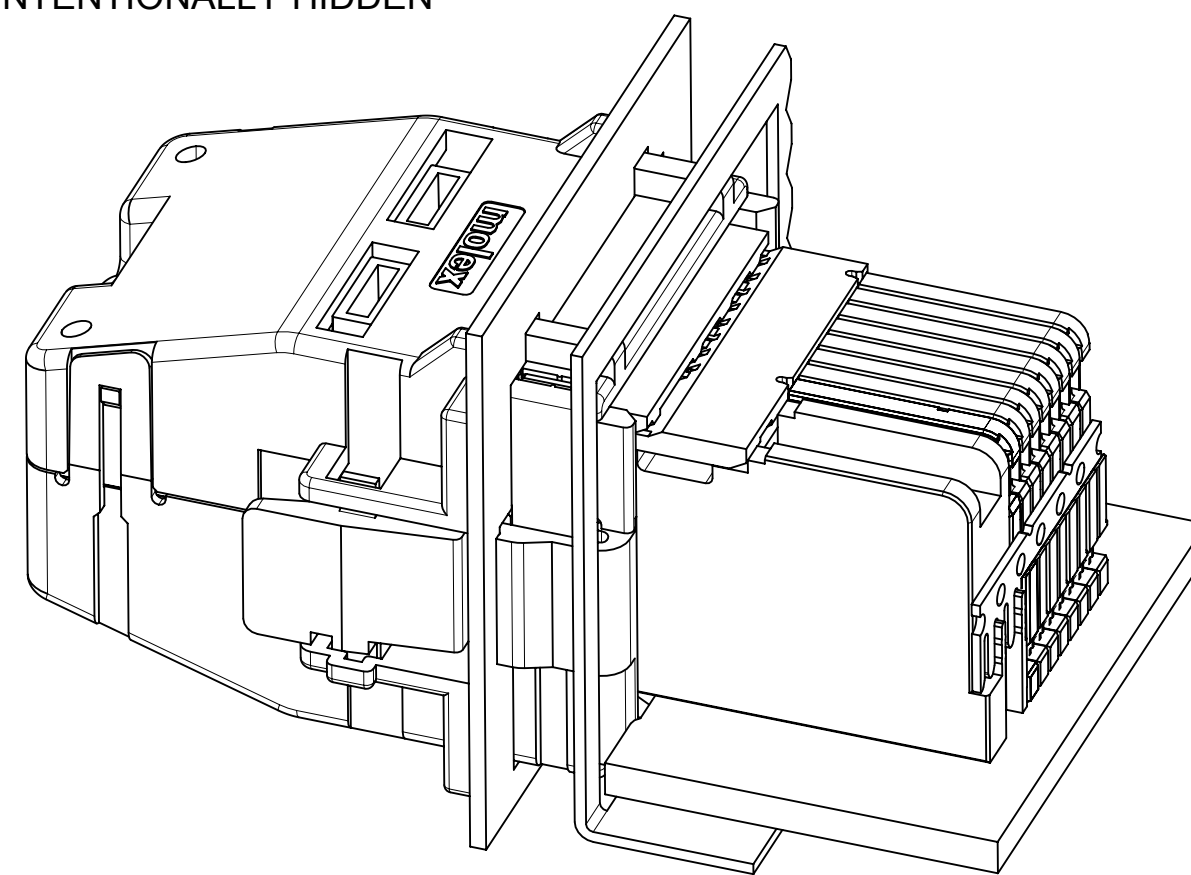

ISOMETRIC VIEW B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: 1. AMEND "QSP" TO "QSFP" ON PIN OUT TABLE, SHEET 2. 2. ADD "PCB EDGE" NOTE ON SHEET 2 C6				molex							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 714548 DRWN: JLTAN062022/07/06 CHK'D: YLLIM2022/07/18 APPR: DWLEE012022/07/18				IMPEL PLUS 4PX8C CUSTOM RIGHT GUIDED DC SPI (OPEN19 V2)							
ANGULAR TOL ± °															
4 PLACES		±													
3 PLACES		±													
2 PLACES		± 0.13													
1 PLACE		± 0.25		INITIAL REVISION: DRWN: JLTAN062022/04/12 APPR: DWLEE012022/06/27				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION			
0 PLACES		±						2040669001-SD		PSD	000	A1			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		204066		SEE TABLE		GENERAL MARKET		3 OF 3	