



Open19 Brick Mechanical Specifications

Linux Foundation Sustainable Scalable Infrastructure Alliance

Table of Contents

Open19 V2 Authors/Contributors	1
1. Change log	3
Definitions	4
2. Open19 Bricks	5
3. Brick Mechanical Specification [SHHW]	6
3.1. SHHW Brick	6
3.2. Brick Dimensions	7
3.3. Mechanical features	9
3.4. Connector Pinout	13
3.5. Liquid cooling	18
3.6. Design guidance	28
3.7. Brick performance	31
4. Brick Mechanical Specification [DHHW]	32
4.1. DHHW Brick	32
4.2. Brick Dimensions	33
4.3. Mechanical features	34
4.4. Connector Pinout	41
4.5. Liquid cooling	46
4.6. Brick performance	60
5. Brick Mechanical Specification [SHDW]	61
5.1. SHDW Brick	61
5.2. Brick Dimensions	62
5.3. Mechanical features	63
5.4. Connector Pinout	68
5.5. Liquid cooling	73
5.6. Design guidance	83
5.7. Brick performance	86
6. Brick Mechanical Specification [DHDW]	87
6.1. DHDW Brick	87
6.2. Brick Dimensions	88
6.3. Mechanical features	89
6.4. Connector Pinout	94
6.5. Liquid cooling	99
6.6. Design guidance	109
6.7. Brick performance	112
Data connector pin assignments	113

Open19 V2 Authors/Contributors

ASRock Rack: Weishi Sa

Cisco: Christopher Liljenstolpe

CoolIT: Brandon Peterson

Delta: Ralf Pieper

Equinix: Doug Asay, Suresh Pichai, My D. Truong

Inspur: John Leung, Kay Lu

Molex: Liz Hardin, Keegan McGraw, Chuck Crandley, Jeff Joniak

SE: Erin Mccann, Rob Bunger

Vertiv: Roy Grantham

ZutaCore: Shahar Belkin, Or Farjun



Alliance

The Sustainable & Scalable Infrastructure Alliance (SSIA) is a community-based organization dedicated to creating, fostering and driving adoption of open standards that increase the efficiencies of the data center and digital infrastructure supply chains. We enable digital leaders from any sized organization to adopt and deploy advanced and highly efficient rack-level datacenter technologies to increase sustainability, power next-generation workloads and reduce cost and waste, regardless of deployment size or location.

SSIA members include data center operators, private and public cloud end users, supply chain manufacturers and technology component providers, as well as thousands of individual members active in the cloud, technology, data center and edge ecosystem.

Learn more about joining the Linux Foundation SSI Alliance at <http://www.ssia.org/about-us/>.

Chapter 1. Change log

Author	Date	Version	Change Details
My Truong	November 2023	2.0	Public Spec release

Definitions

ASHRAE

American Society of Heating, Refrigerating and Air-Conditioning Engineers

ASHRAE W27

ASHRAE specification for water temperature range from 2 °C to 27 °C

OCP

Open Compute Project

SFP

SNIA SFF-8402 SFP+ 1X Pluggable Transceiver Solution

SNIA

Storage Networking Industry Association

QSFP

SNIA SFF-8679 QSFP+ 4X Pluggable Transceiver Solution

QSFP-DD

QSFP-DD MSA QSFP DOUBLE DENSITY 8X AND QSFP 4X PLUGGABLE TRANSCEIVERS

Chapter 2. Open19 Bricks

Four brick designs are the basis of Open19 V2. They are:

- SHHW: Single-High Half-Width, "Brick"
- DHHW: Double-High Half-Width
- SHDW: Single-High Double-Width, 1RU server equivalent
- DHDW: Double-High Double-Width, 2RU server equivalent

Chapter 3. Brick Mechanical Specification

[SHHW]

3.1. SHHW Brick

The SHHW brick form-factor is a half-wide 1RU commonly used as the basis of 2U 4-node designs.

3.2. Brick Dimensions

The brick is designed with the overall dimensions shown.

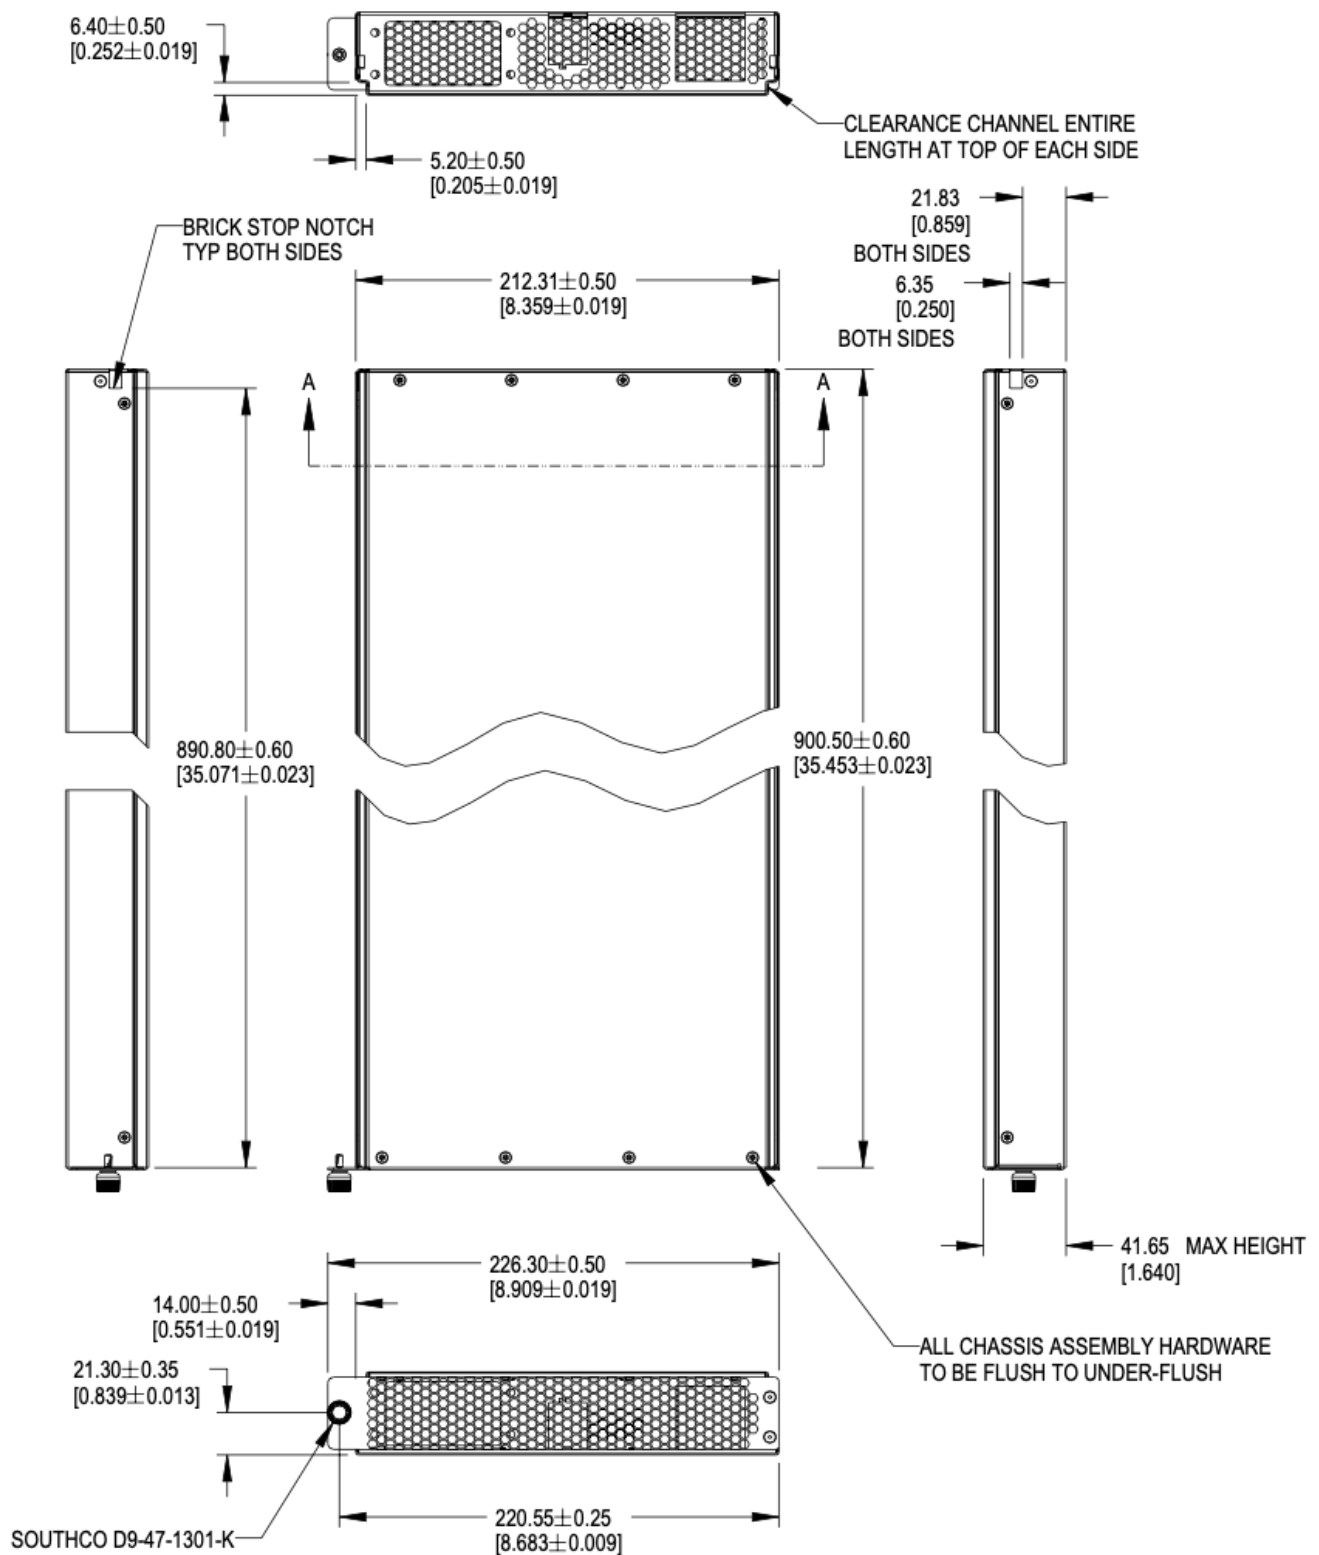


Figure 1. Brick dimensions

Please refer to the [drawings](#), and 3D files for further details.

The V1 specification for bricks defined 901.7mm as the overall length of the brick, including the thickness of the front panel.

The dimension is modified to reference to the inside of the front panel to the rear of the brick. This dimension is 900.50mm +/-0.60 from the rear face of the front panel (mating surface to the cage) to the outside of the rear panel.

For half-width designs using the OCP DC-MHS M-DNO board specification, note the tolerance guidance in order to fit boards in a half-width chassis. This requires setting the nominal width at 209.55mm or smaller.

3.3. Mechanical features

3.3.1. Brick retention

The brick is secured into the cage with a single Southco D9-47-1302-K quarter-turn fastener, located on the left side of the faceplate. This is a change from V1. The change aligns the retention screw with high force areas of the optional liquid cooling interface.

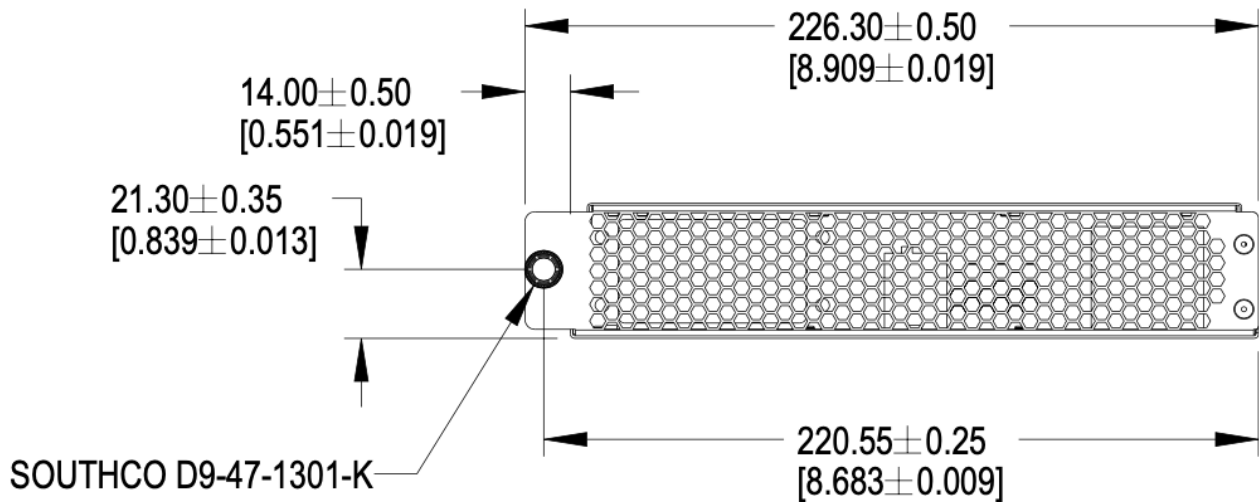


Figure 2. Brick retention

3.3.2. Brick mechanical guide

Clearance channels are required along the top edges of the brick, extending forward from the rear panel to the back of the faceplate.

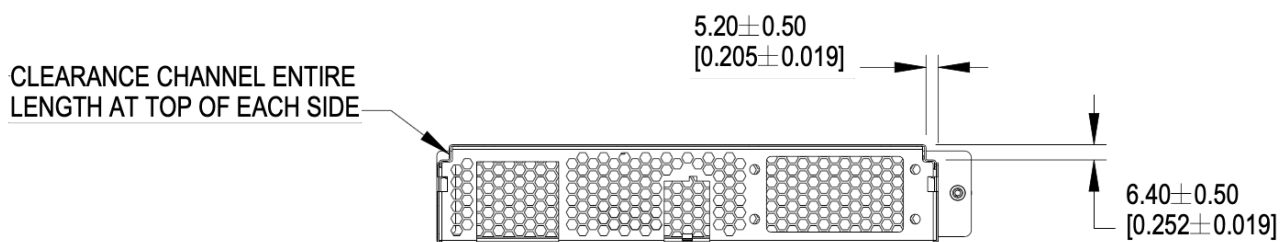


Figure 3. Mechanical guide at top edge of brick

Brick insertion and retention assistance for liquid cooling

For liquid cooling applications, two different mechanical assist for insertion and retention are available in the cage. Bricks can implement features to make use either/both features.

The features are:

- Brick retention standoff, available on both sides in the mechanical guide channel
- Slots, available on both sides of the cage wall

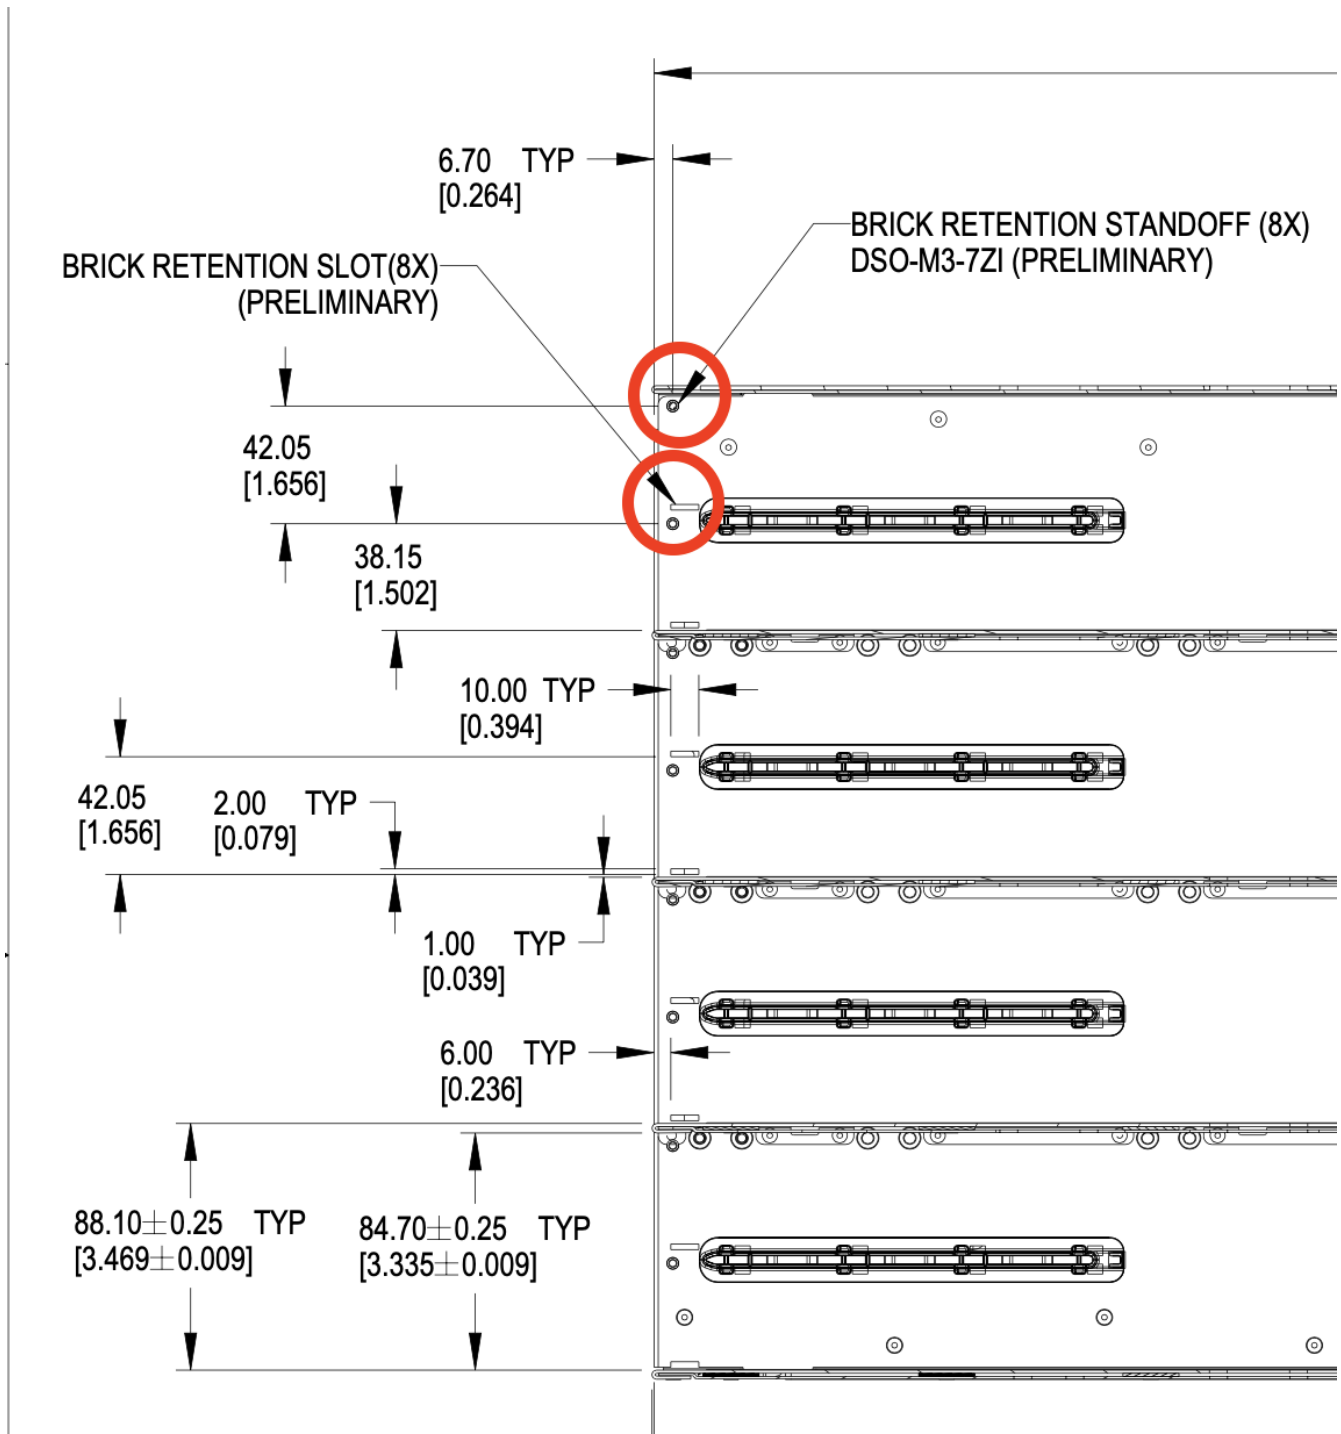


Figure 4. Brick mechanical assistance features in cage

Each feature shall support 100 lbf (445N) force or greater, using the recommended 1.3mm SGCC material.

3.3.3. Brick Mechanical Keying

Two keying notches are positioned in the left and right corners of the sheet metal enclosure as shown below. All dimensions below are critical.

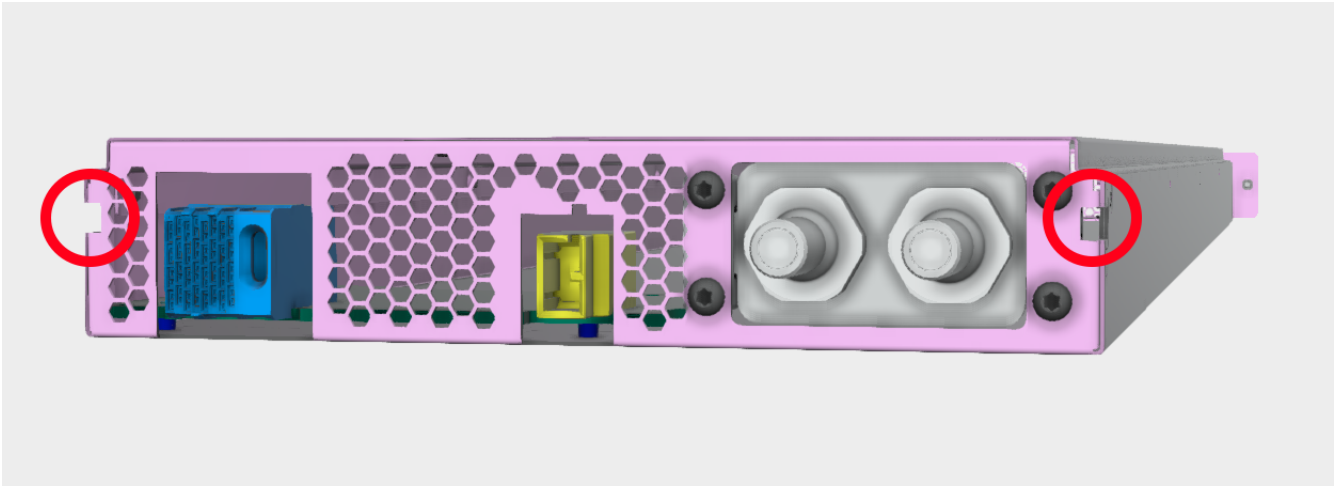


Figure 5. Brick keying

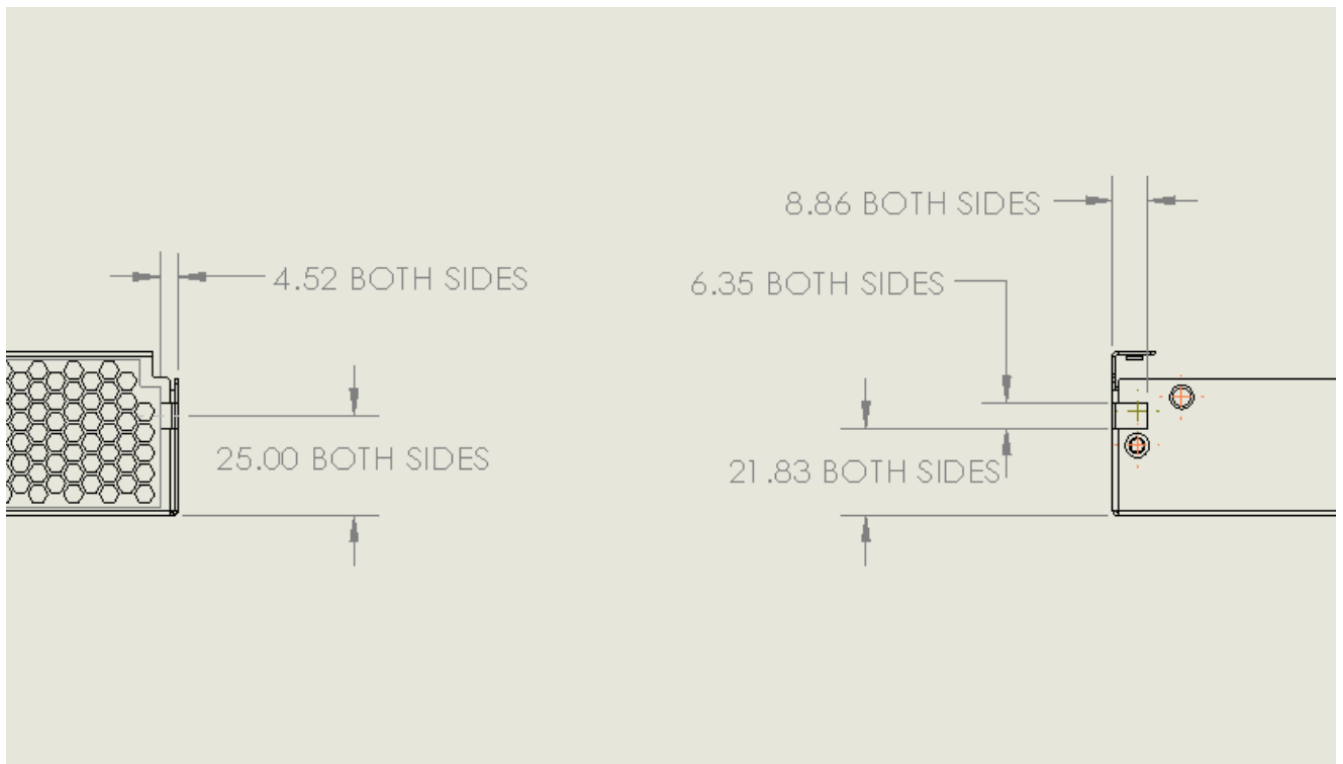


Figure 6. Brick keying dimensions

3.3.4. PCBA

The rear PCBA (Printed Circuit Board Assembly), also referenced as the interposer, provides the +48V DC input power and a data connections. The top of the PCBA is the reference surface, located 6.5mm +/- 0.6mm above the bottom surface of the sheet metal chassis.

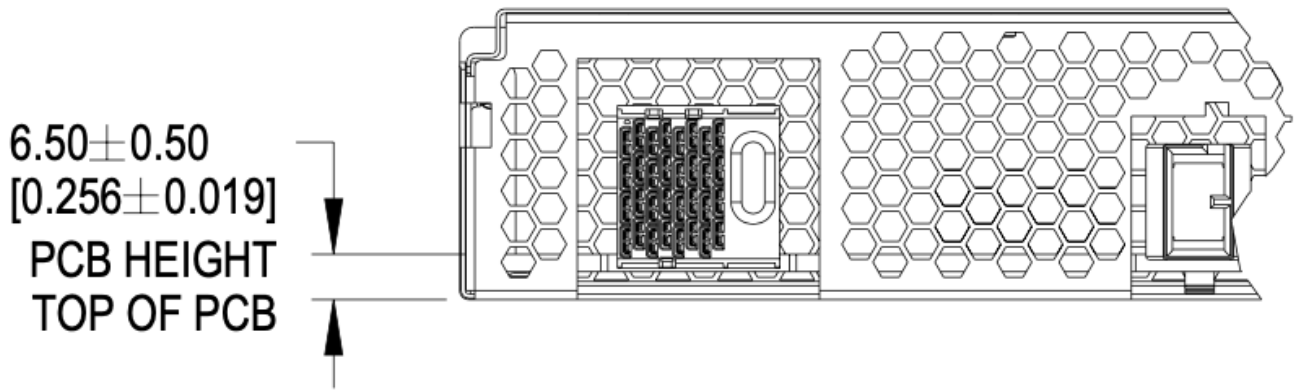


Figure 7. PCBA References

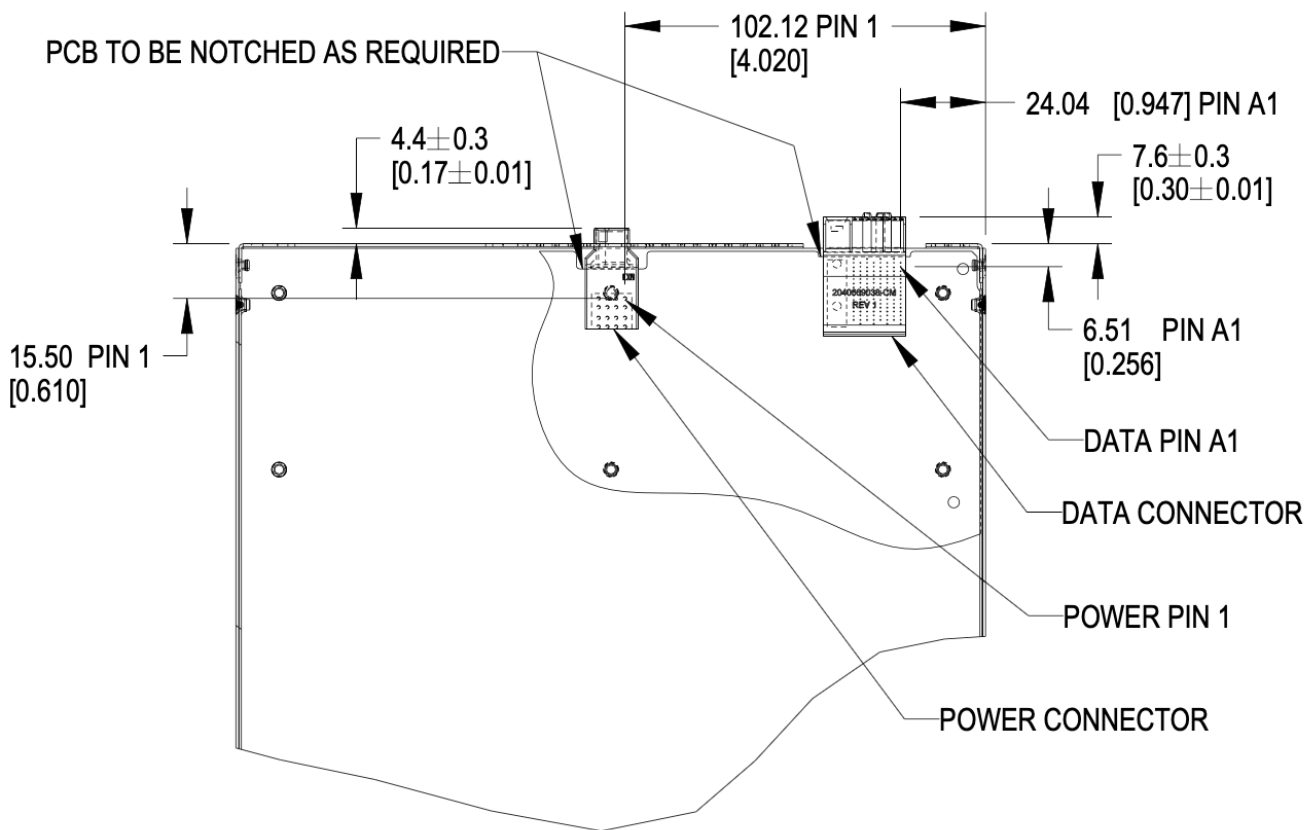


Figure 8. Brick PCB dimensions

3.3.5. Materials

The brick enclosure is constructed of sheet metal with adequate strength and rigidity. Suggested material is 0.8mm SGCC for the chassis base and 0.6mm SGCC for the top cover.

3.3.6. Blind mate interfaces

A brick is equipped with at least one set of blind mate connectors for receiving +48V DC power and transferring data with an external device, typically a network switch. Introduced in this version is

are blind mate connections to facilitate liquid cooling. The connections mate with cable and manifold projections from the rear wall of the cage.

- Power connector: Molex Ten60 PN: 220370-0001 (35A) 22037-0000 (70A), refer to Molex document [PSD-220370-0000](#)
- Data connector: Molex 4x8 Impel with guide receptacle PN: 204066-9038 (PCB thickness 2.2-4.1mm), 204066-9138 (PCB thickness 1.0-1.9mm), refer to Molex document [PSD-204066-9001](#)

The power connector has two ratings:

- Power: Not-To-Exceed (NTE) 70A at +48V DC
- Power: Not-To-Exceed (NTE) 35A at +48V DC

The ratings shall be coordinated with the power shelf. 35A bricks shall be enabled in 70A capable infrastructure. 70A bricks are keyed to prevent unsafe operation in 35A infrastructure.

3.3.7. Weight

The maximum weight of the brick, when equipped with all drives and/or accessories, is 30lbs (13.6kg). This is an increase of 5lbs from V1.

3.4. Connector Pinout

3.4.1. Brick power connector

The brick blind-mate power connector for receiving 48V DC (51V nominal) power from the power shelf. The connector mates with the power cable connector projected from the brick cage wall.

Two variations of the brick connector exist, with different Not-to-exceed (NTE) ratings:

- 35A Power Connector: Molex 2203700001 (NTE 35 AMPS) No Key
- 70A Power Connector: Molex 2203700000 (NTE 70 AMPS) Keyed

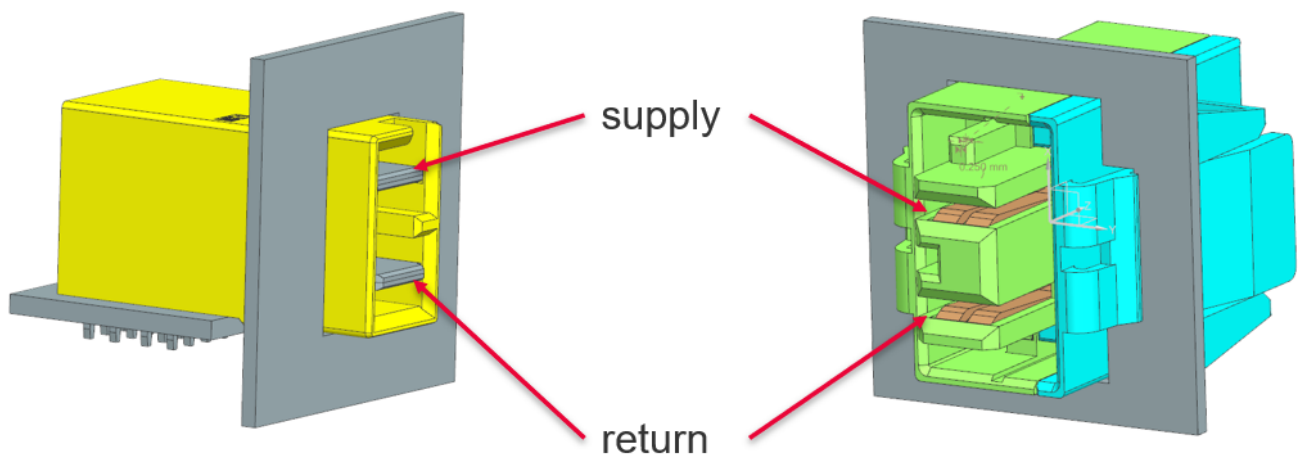


Figure 9. Power connector supply/return definition

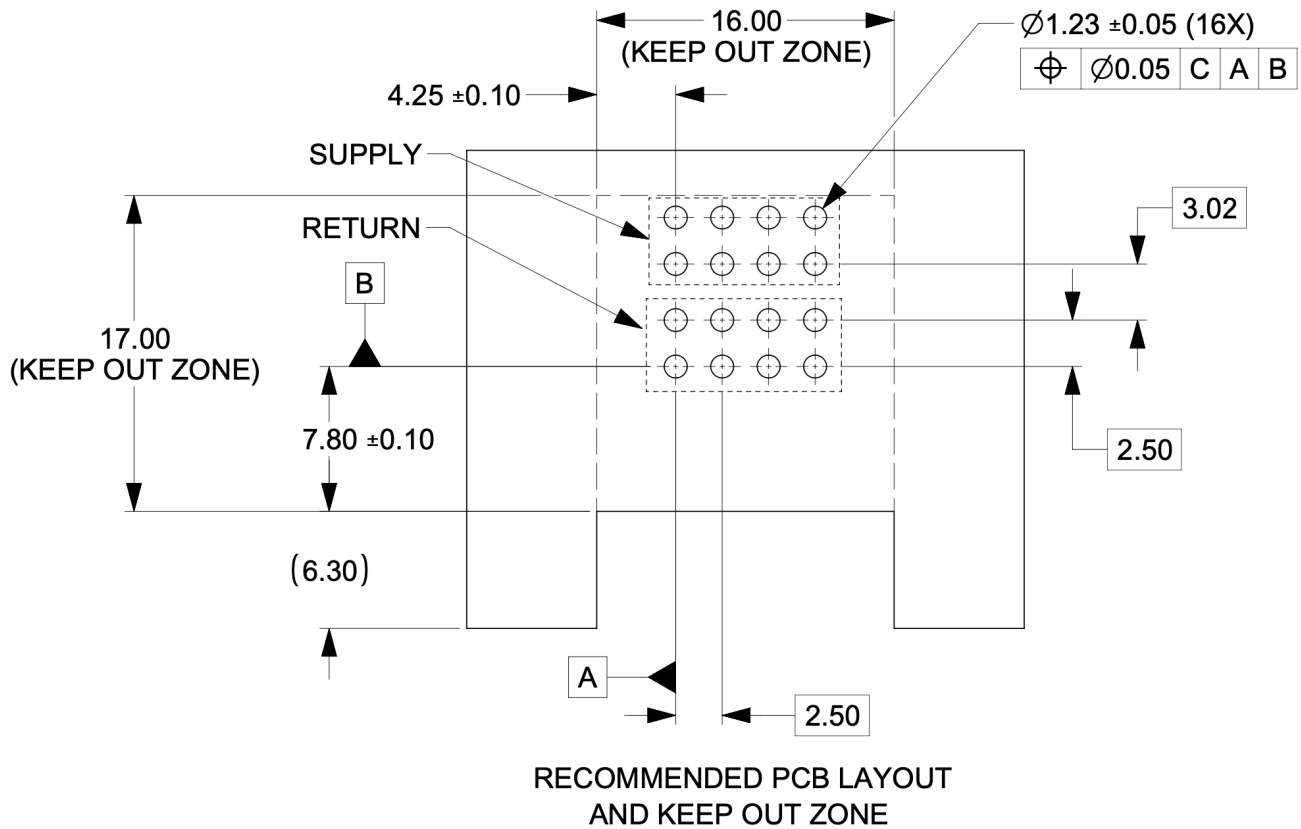


Figure 10. Power connector footprint definition

Connector drawings are available: [Molex Brick power connector](#)

3.4.2. Brick critical dimensions

The brick power connector has a critical dimension for the projection from the brick panel. Spacing between panels is 6.23mm. The power connector shall be proud of the panel 4.40mm.

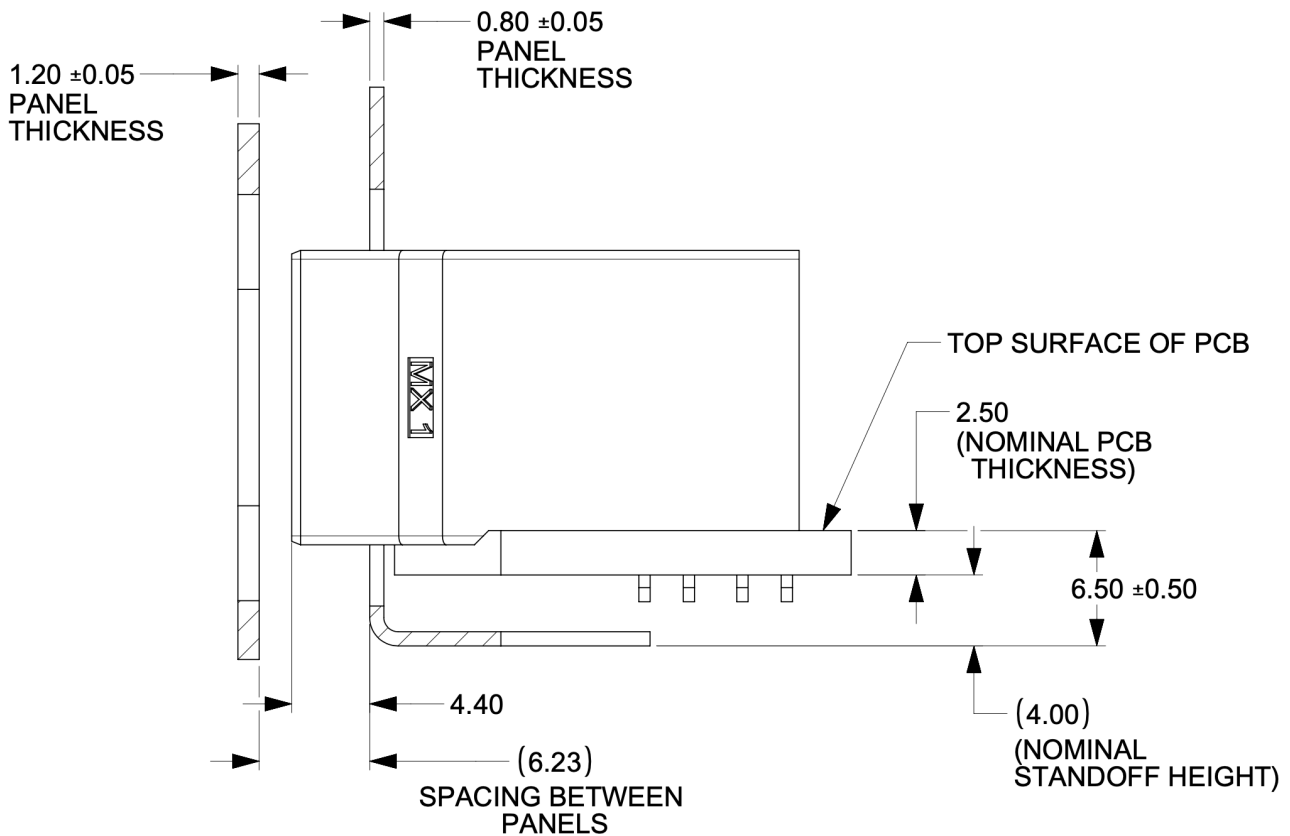


Figure 11. Power connector critical dimensions

3.4.3. Brick voltage

Open19 V2 power shares Open Compute ORV3 power characteristics. Open19 bricks shall safely operate in the DC range 48-52V and shall remain functional when exposed to 0-54V. The power rail shall not exceed 52.5V for more than 200ms. DC voltage shall never exceed 54V.

- Operating range: 48-52V
- NTE voltage: 54V
- Max voltage: $\leq 52.5V$ for $<200ms$

3.4.4. Data Connector

The data connector is rated for 56G PAM4 with an air dielectric. Variations of cables deliver different lane counts, data rates, and physical interfaces. In the reference Ethernet implementation, the data connector pinout explicitly supports a dedicated 10/100/1000Base-T management port, four 25G NRZ/50G PAM4 lanes. Optionally, a single QSFP-DD or two QSFP interfaces are supported.

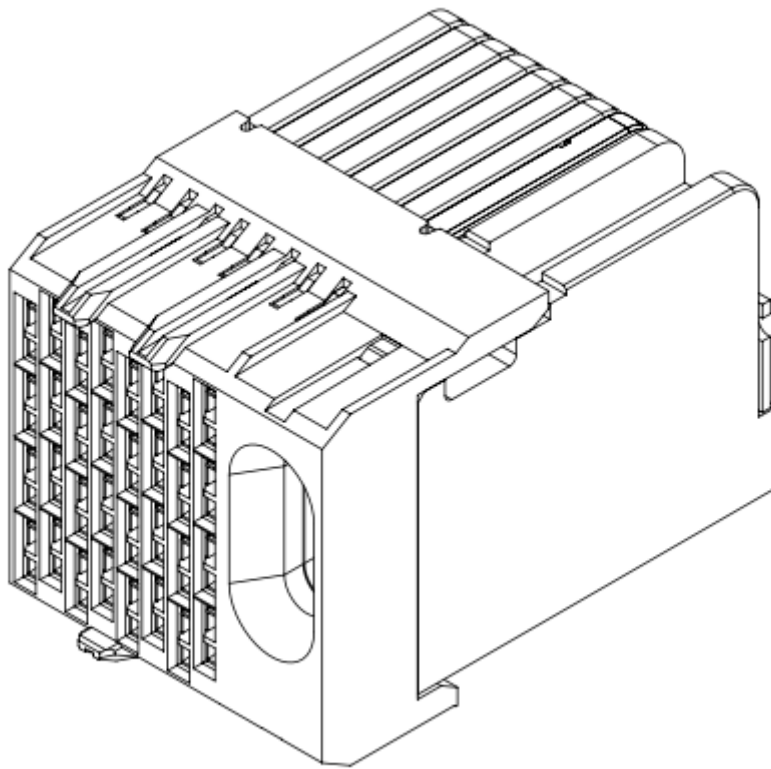


Figure 12. Impel Connector with guide feature

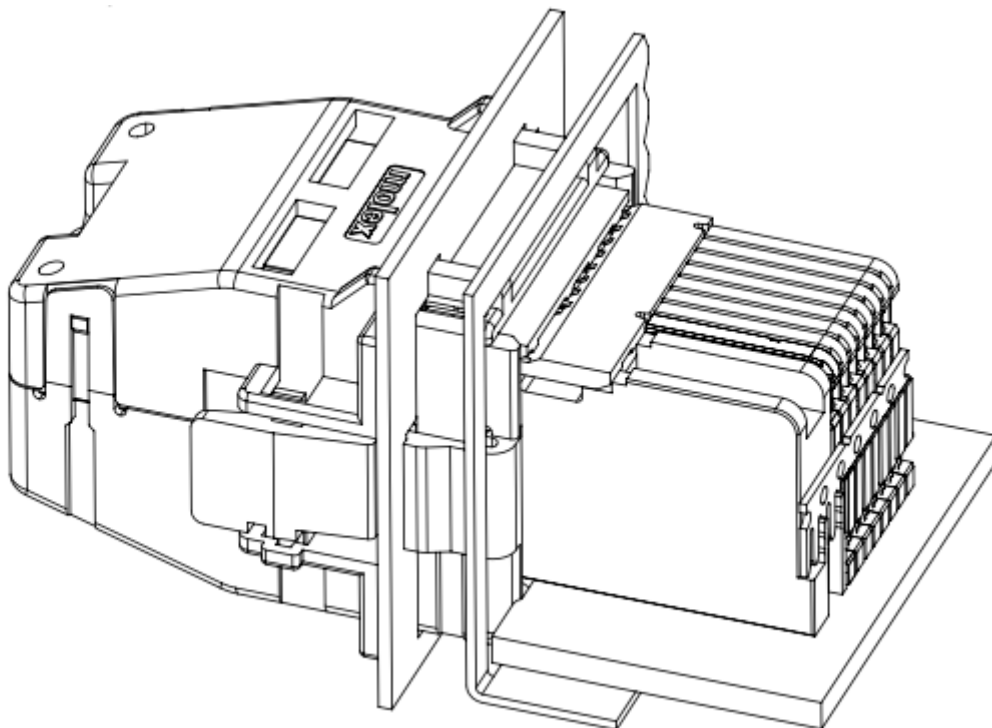


Figure 13. Impel Mated connector with cable backshell

The data connector pinout is defined in the [\[Appendix\]](#)

There is no attempt to support 50G (2x25G NRZ) nor 50G (1x50G NRZ).

3.4.5. Ethernet interface inter-operability

The inter-operability of bricks at deployment with Ethernet interfaces is critical. To support 25G NRZ, 50G PAM4, 100G (4x25G NRZ), 200G (4x50G PAM4), and 400G (8x50G PAM4), the following table:

Port Count	Data Rate	Implementation Interface and order
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1
6		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1, QSFP2 LN 1
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	100G (4x25G)	SFP1, SFP2, SFP3, SFP4, QSFP1
6	200G (4x50G PAM4)	SFP1, SFP2, SFP3, SFP4, QSFP1, QSFP2
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	400G (8x50G PAM4)	QSFP-DD (QSFP1+QSFP2)
		200G (4x50G PAM4)
QSFP (SFP1+SFP2+SFP3+SFP4)	2	QSFP, QSFP1

3.5. Liquid cooling

3.5.1. Brick liquid cooling

Brick liquid cooling is divided into two broad categories, single-phase and two phase. They are mutually incompatible and the designs are mechanically incompatible by design. All bricks inside a single cage are expected to be the same liquid cooling technology.

Unified cutout

Open19 V2 liquid cooling implements a unified liquid cooling cutout. This allows for a consistent brick design to implement both liquid cooling solutions. Implementing the unified cutout is not required, provided all the requirements of a single solution are met.

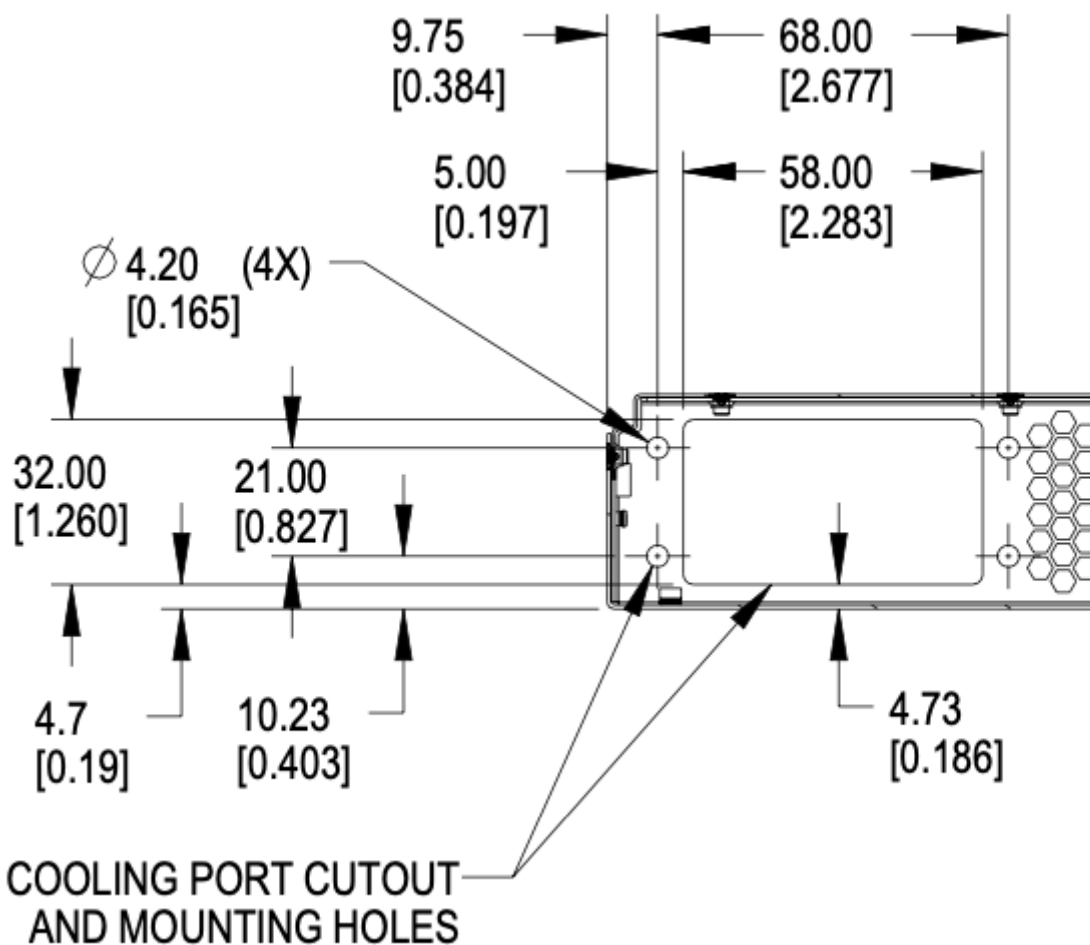


Figure 14. Brick unified cooling cutout

3.5.2. Single phase

Single-phase Connector selection

Single-phase cooling solutions shall use the [CPC BLQ4](#) family of interfaces.



Figure 15. BLQ4 body for manifold



Figure 16. BLQ4 insert for bricks

[BLQ4_SpecSheet.pdf](#)

The BLQ4 connectors are blind mate. Both sides of the connector have G 3/8" threads which thread into manifold (body) and brick (insert), respectively.

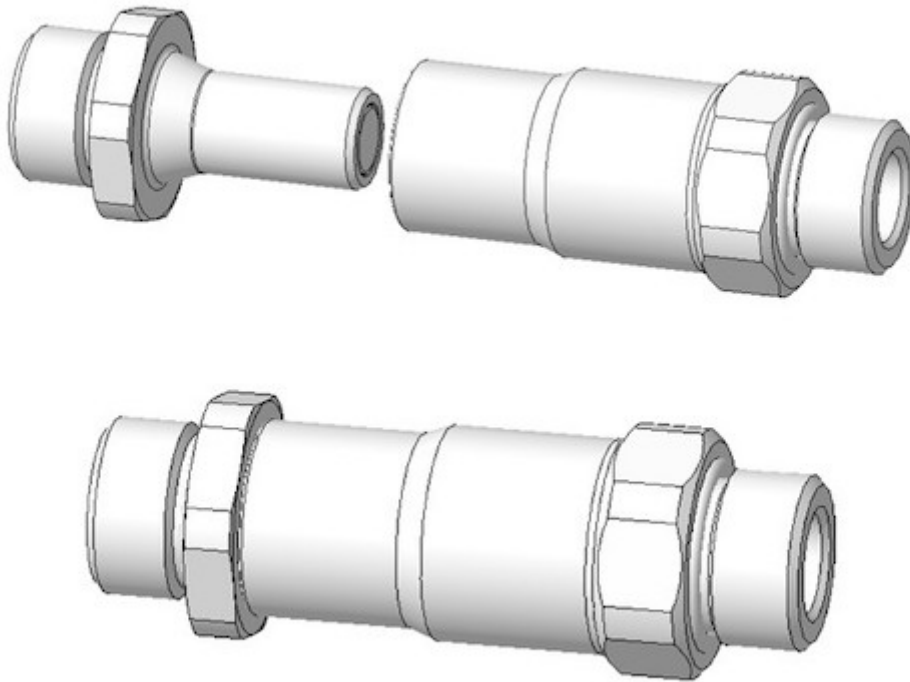


Figure 17. BLQ4 pair

Single-phase connector mounting and polarization

Bricks shall have male blind-mate connectors (inserts), BLQ4D47006 or compatible part.

When viewed from the rear of the brick, in reference to the server: Liquid return shall be located to the left. Liquid supply shall be located in the to the right.

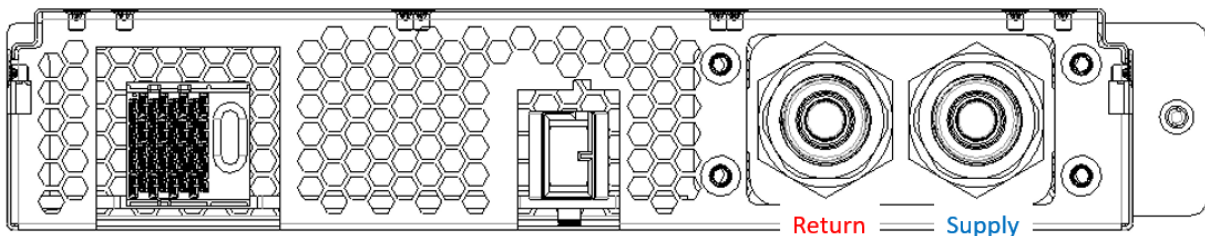


Figure 18. Brick side supply and return

Single-phase brick side connector locations

The supply connector should be 29.5mm from the outer side of the brick (opposite the thumbscrew) in the x-direction and 20.73mm from the bottom of face of the brick in the y-direction. The two

connectors should be lined up in the horizontal plane and spaced 28.5mm from each other.

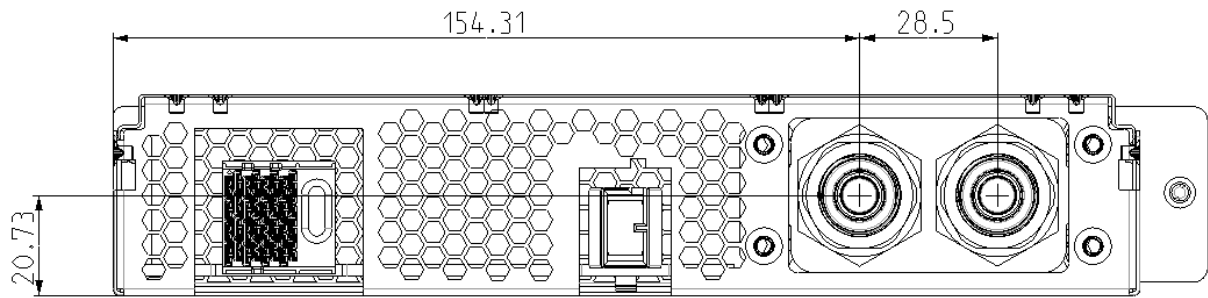


Figure 19. Brick side liquid connector locations for single-phase

Single-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

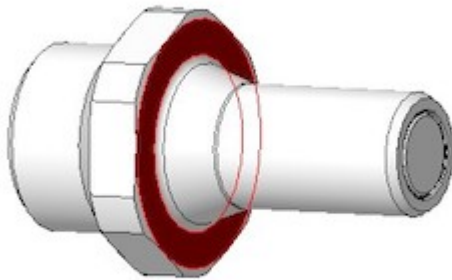


Figure 20. Mating surface BLQ4 insert

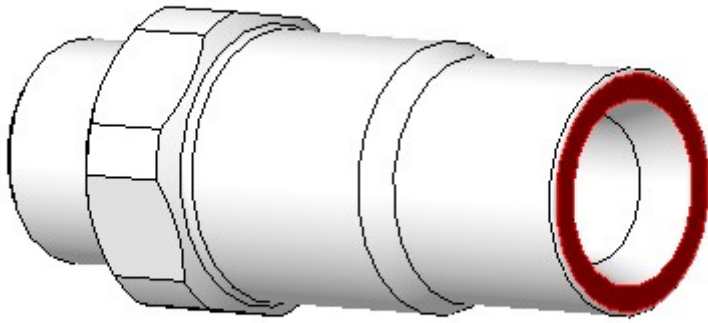


Figure 21. Mating surface BLQ4 body

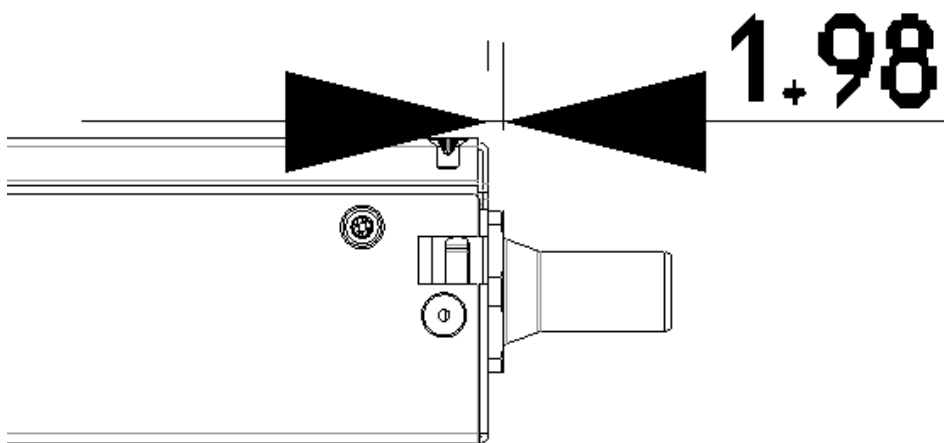


Figure 22. Offset from cage back panel to connector mating interface

The BLQ4 connectors must be within 3mm of this fully engaged state to achieve full flow.

3.5.3. Two phase

Two-phase connector selection

The two-phase cooling solution shall use the CPC BLQ family of interfaces.

On brick side



Figure 23. Liquid - CPC BLQ4 series insert P/N BLQ4D47004PROTO (chrome plated brass) or P/N 4649800PROTO (Aluminum)



Figure 24. Vapor - CPC BLQ6 series insert P/N 4650000PROTO (chrome plated brass)

On the Manifold side



Figure 25. Liquid - CPC BLQ4 series body P/N BLQ4D31004PROTO (chrome plated brass) or P/N 4649900PROTO (Aluminum)



Figure 26. Vapor - CPC BLQ6 series body P/N 4650200PROTO (chrome plated brass)

Two-phase connector mounting polarization

Cage manifolds shall have body (female) blind mate connectors. Bricks shall have insert (male) blind-mate connectors. When viewed from rear of the brick, vapor connection shall be located at the right position. Liquid connection shall be located at the left position.

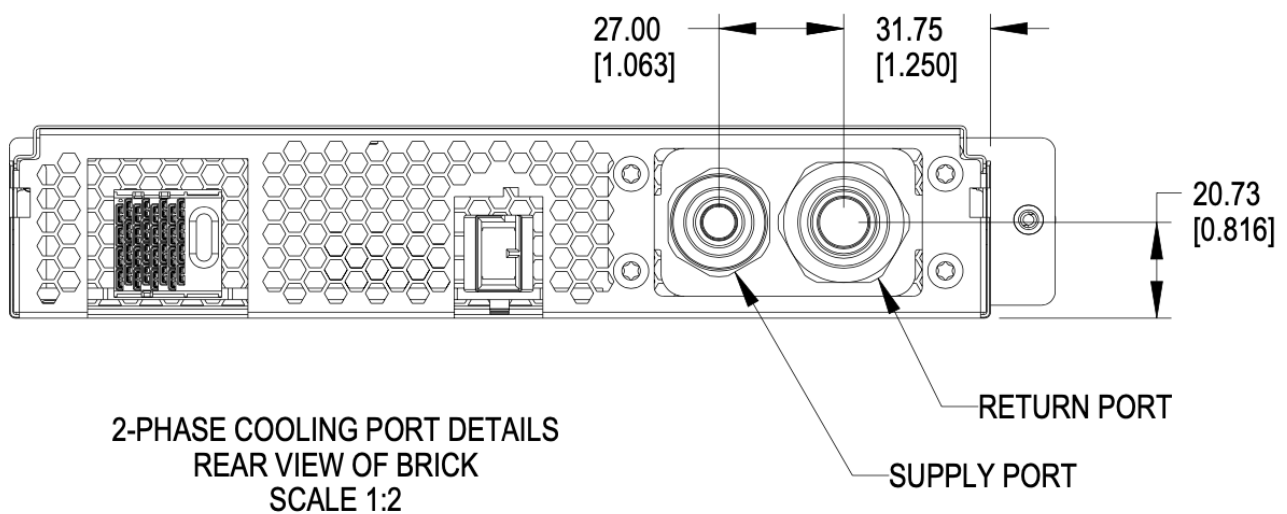


Figure 27. Brick liquid supply and Vapor return

Two-phase brick side connector locations

Using the right-side panel of the brick as a reference, the Vapor return connector on the brick should be 31.85mm in the x direction and 20.73 upwards in the y direction.

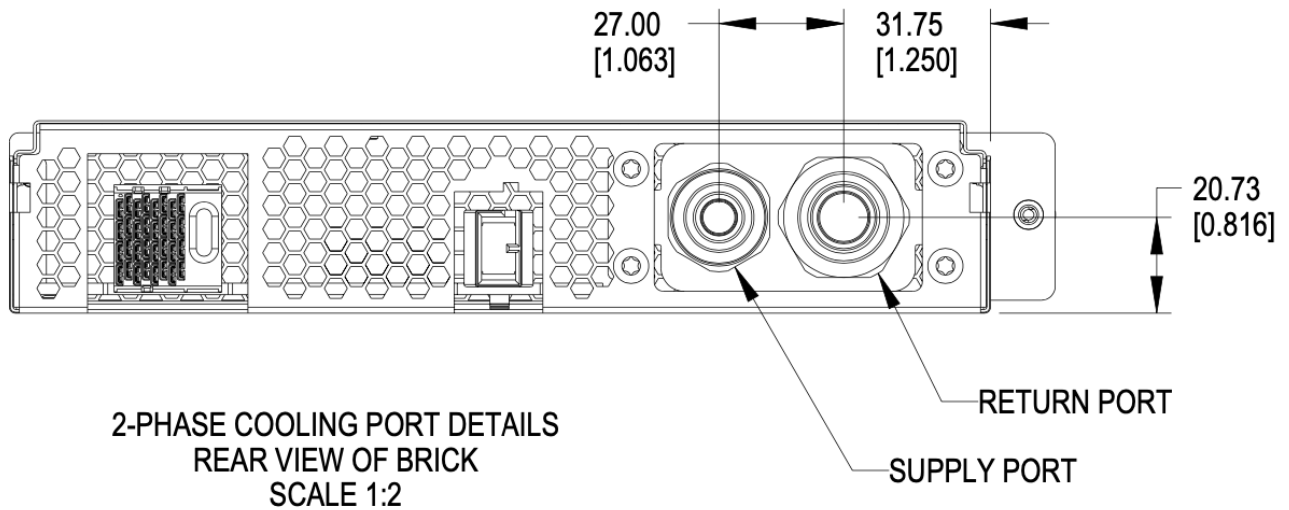


Figure 28. Brick side connectors locations

Two-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

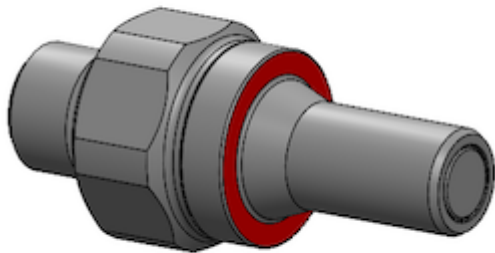


Figure 29. Mating surface BLQ4 insert

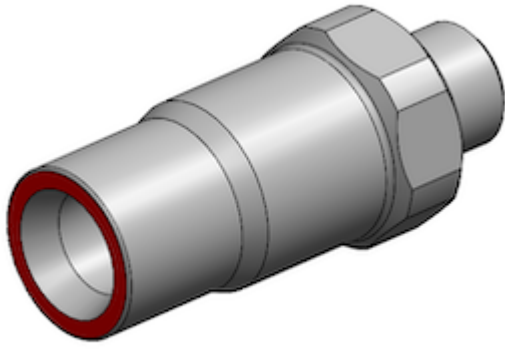


Figure 30. Mating surface BLQ4 body

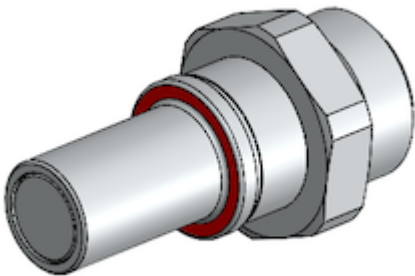


Figure 31. Mating surface BLQ6 insert

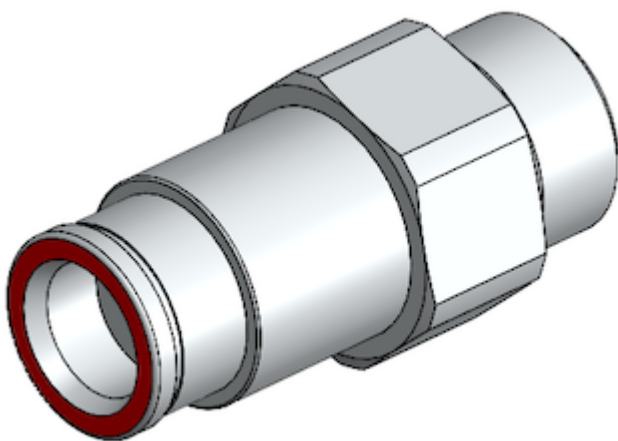


Figure 32. Mating surface BLQ6 body

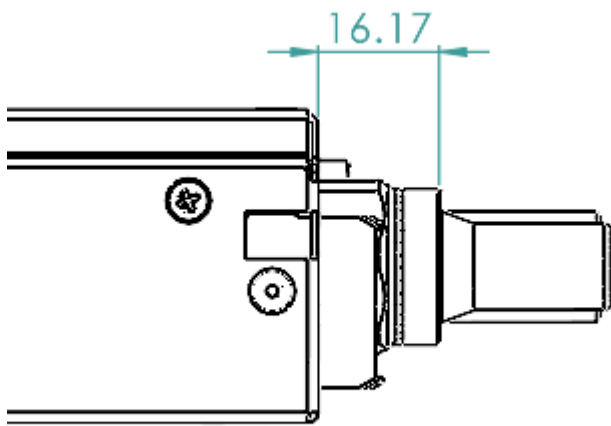


Figure 33. Offset from cage back panel to BLQ4 connector mating interface

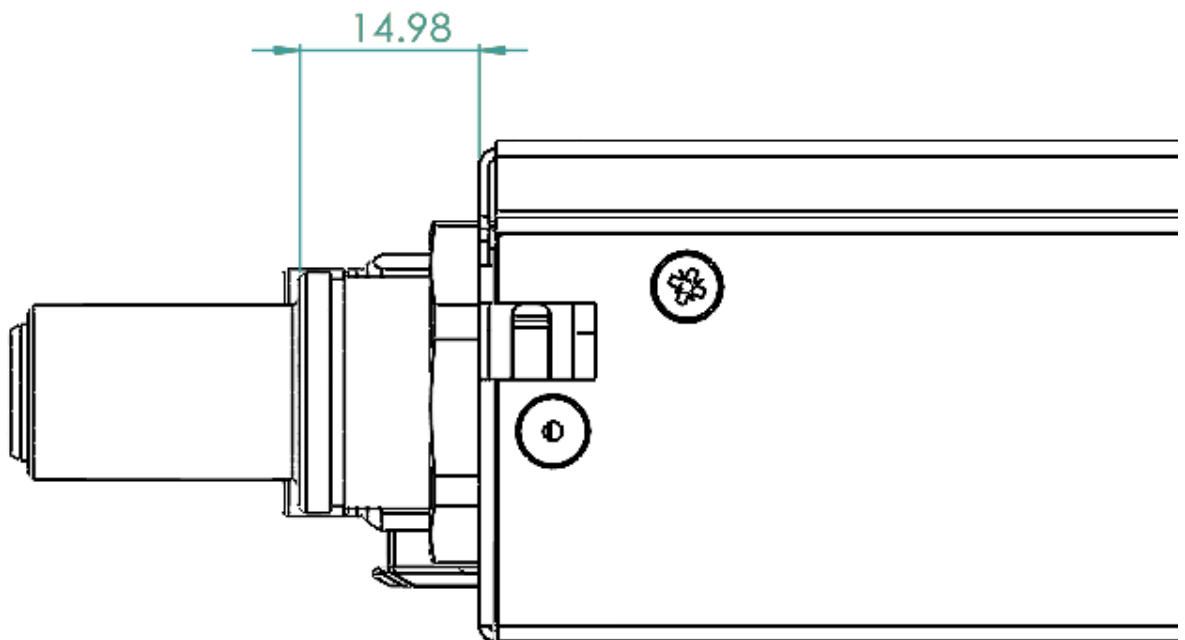


Figure 34. Offset from cage back panel to BLQ6 connector mating interface

The BLQ4 & BLQ6 connectors must be within $\pm 1.5\text{mm}$ of this engaged state to achieve full flow.

3.6. Design guidance

Design guidance is not a specification requirement. It is simple design guidance that can be implemented to simplify future needs, to meet certification requirements, or satisfy general fit & finish.

3.6.1. Brick faceplate guidance

The faceplate is notched above and below the fastener (See [Figure 2, “Brick retention”](#)). Note that the faceplate can accommodate any type of ports or drives as needed and is not required to be fully perforated.

Screws and/or rivets used to secure the top cover are flush to be under-flush. The vertical edges on the rear of the brick chassis base are coined to break sharp edges.

3.6.2. Back panel safety perforation

See below for typical dimensions of the airflow perforation. All dimensions below are critical.


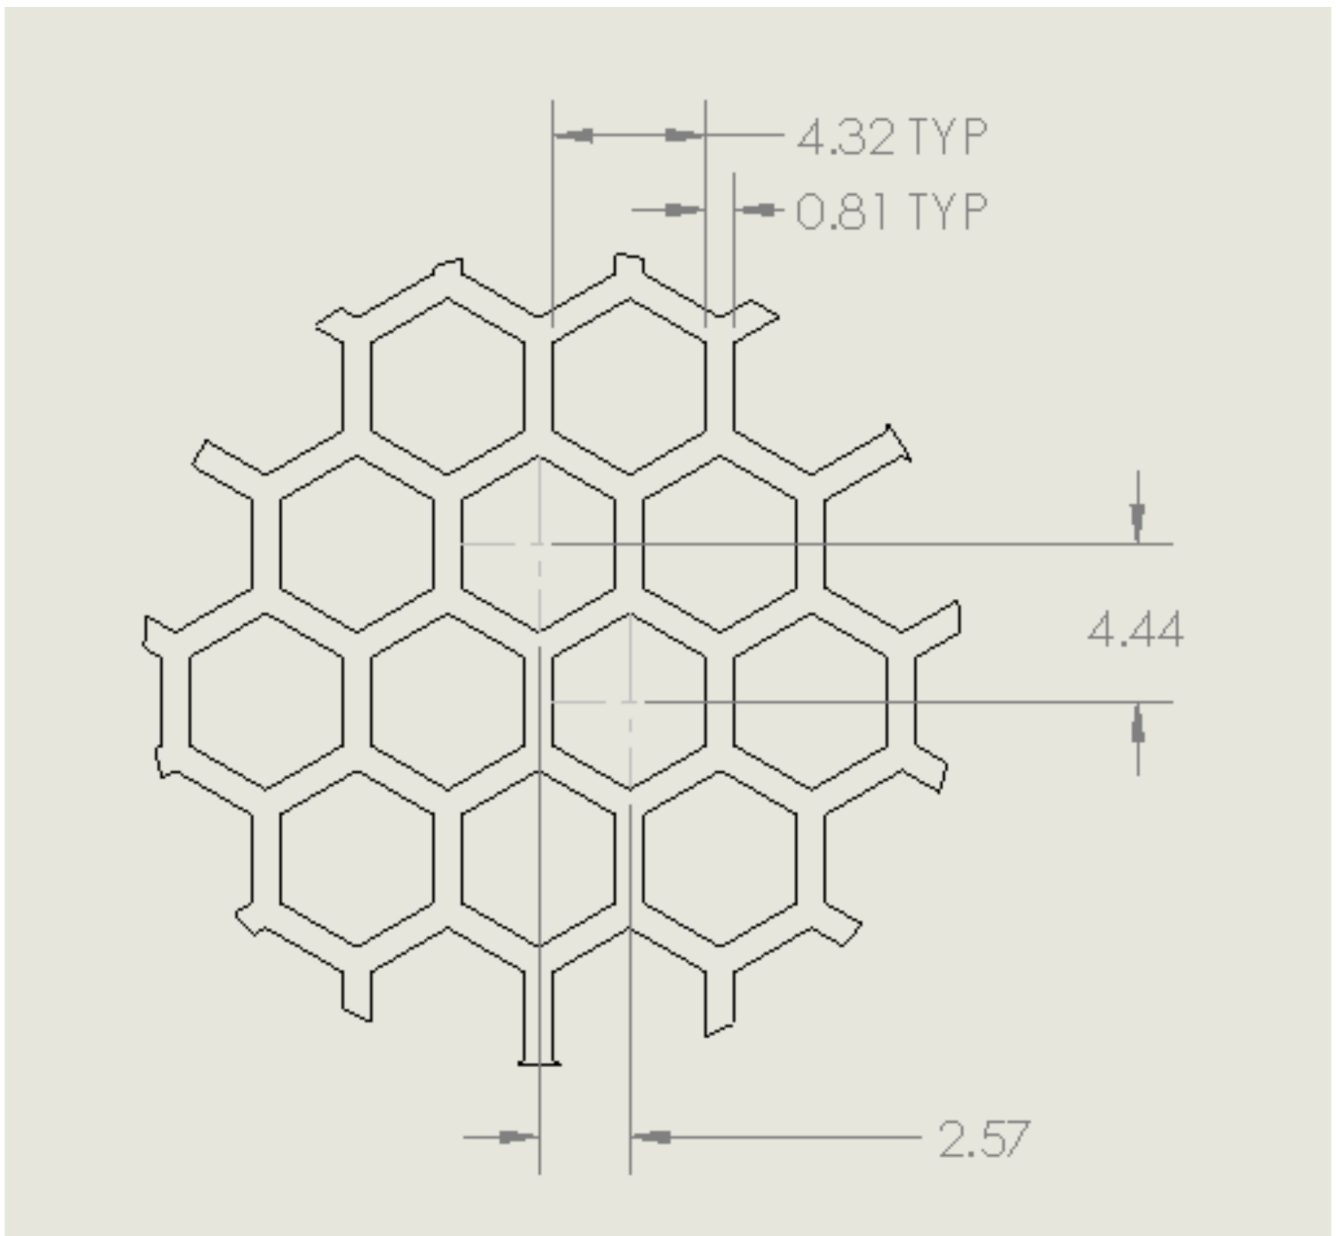


Figure 35. Brick panel perforation


Keep-out zones

Keep-out zones are defined in the brick surrounding the power connector and liquid cooling interfaces. The liquid cooling keep-out spaces "fly" above the PCB, allowing components to be populated below the connections.

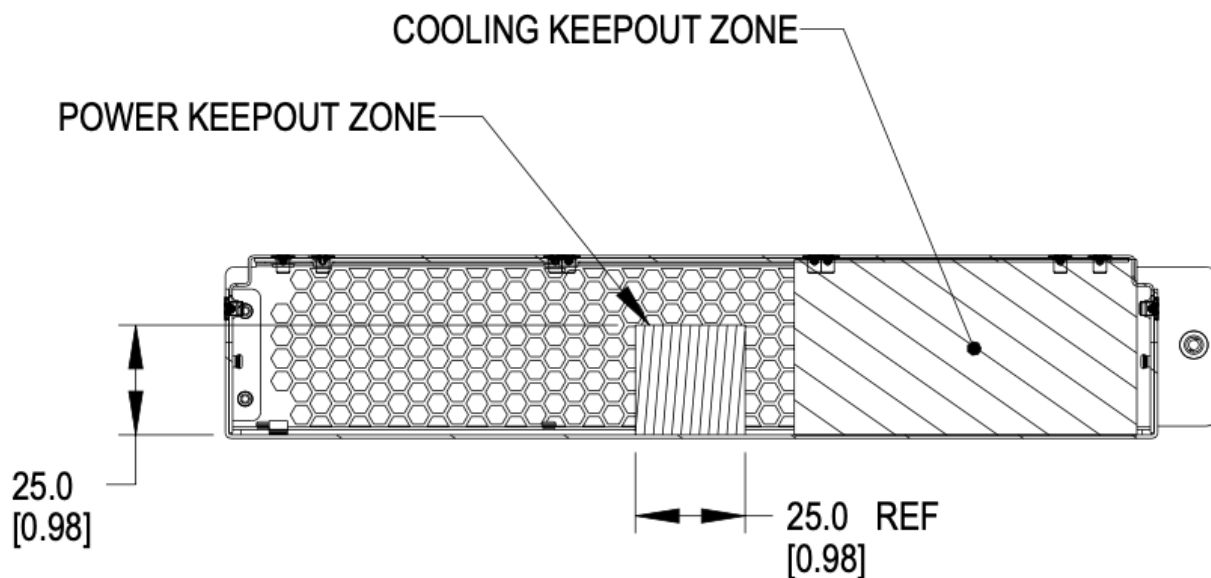

REAR SECTION
KEEPOUT ZONE DETAILS

Figure 36. Brick keep-out zone

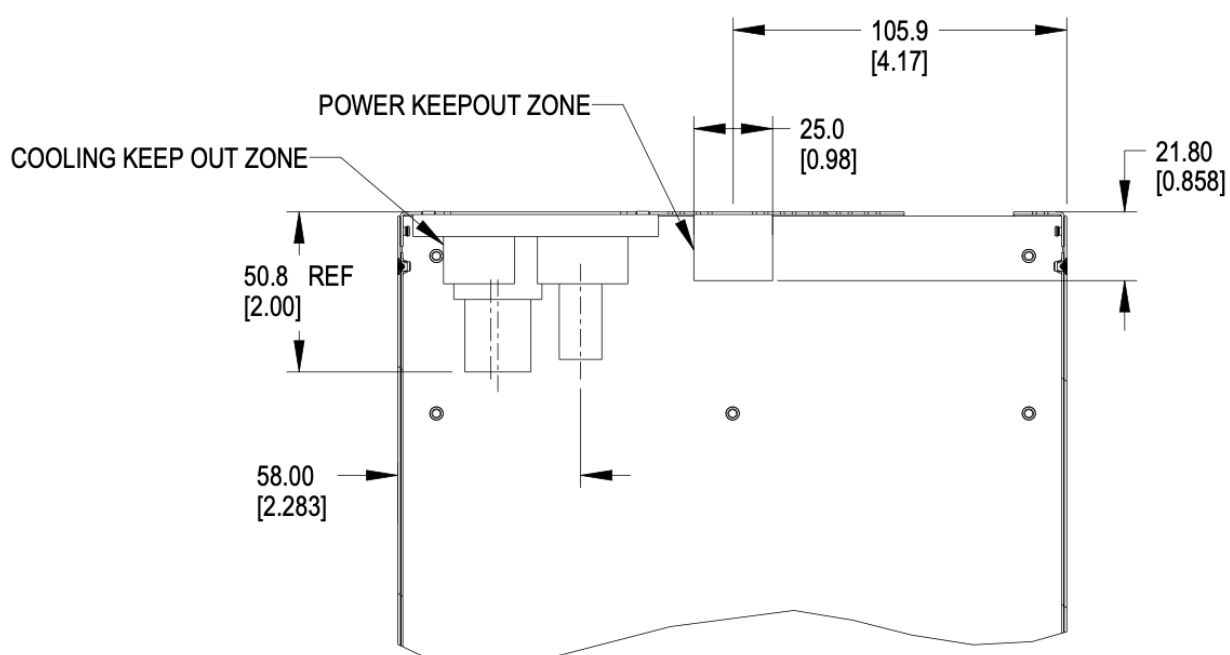

TOP SECTION
KEEPOUT ZONE DETAILS

Figure 37. Brick keep-out zone top view

3.7. Brick performance

3.7.1. Brick electrical startup behavior

In order to safely operate the power shelf, we define the following characteristics for brick startup behavior.

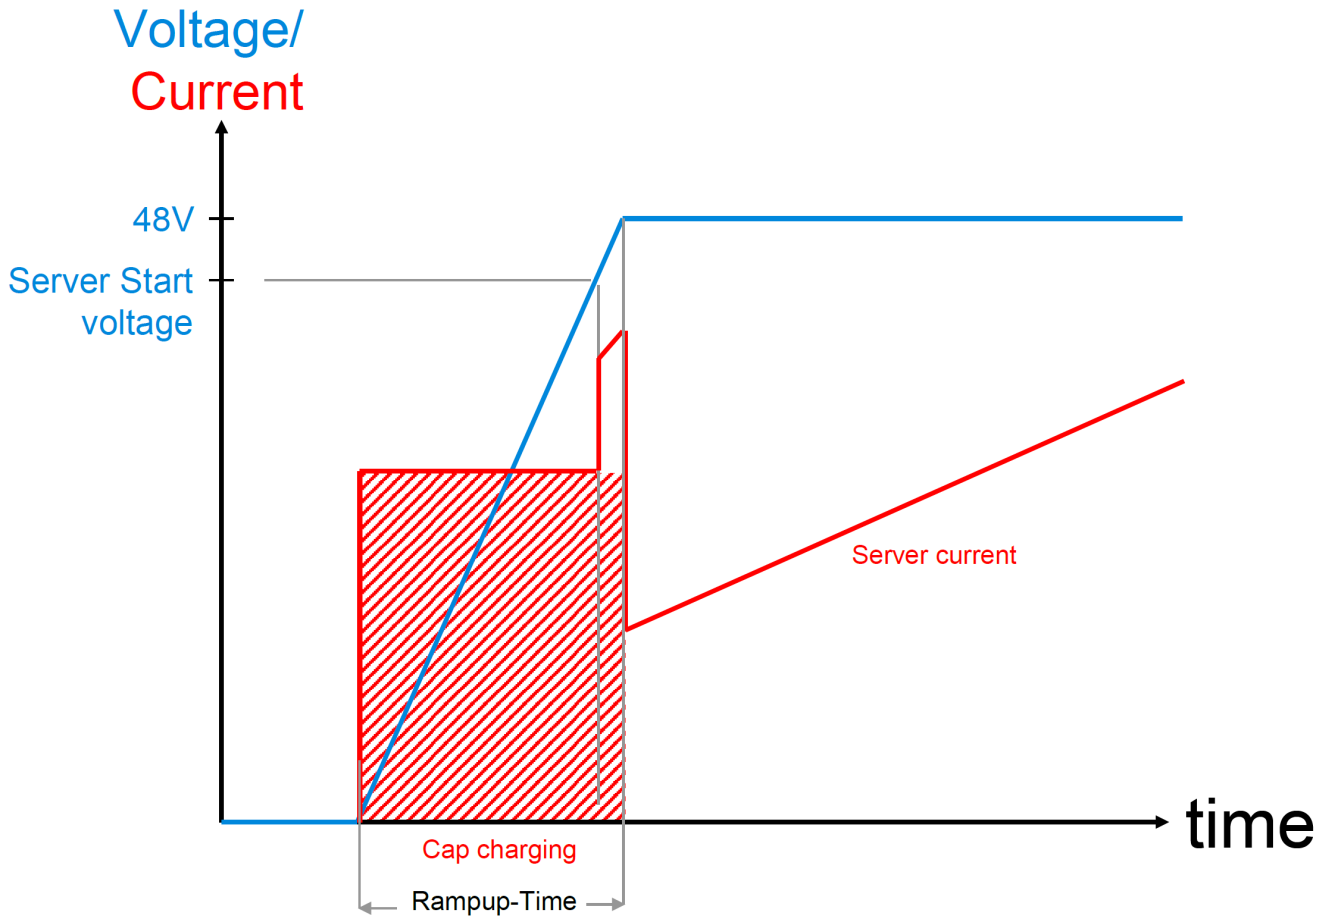


Figure 38. Server startup electrical characteristics

These values are per connector feed from a power shelf.

- Min start-up voltage: +44V DC
- Max input capacitance per brick feed: $\leq 1000\mu\text{F}$
- Max server current at start-up voltage: 70A
- Ramp time: Follow Intel CRPS spec: ramp time 10-70msec, slew rate 0.5V/msec

<https://www.intel.com/content/dam/www/public/us/en/documents/guides/power-supply-design-guide-june.pdf>

Chapter 4. Brick Mechanical Specification

[DHHW]

4.1. DHHW Brick

The DHHW brick is commonly used as a 2U 2N server form-factor.

4.2. Brick Dimensions

The brick is designed with the overall dimensions shown.

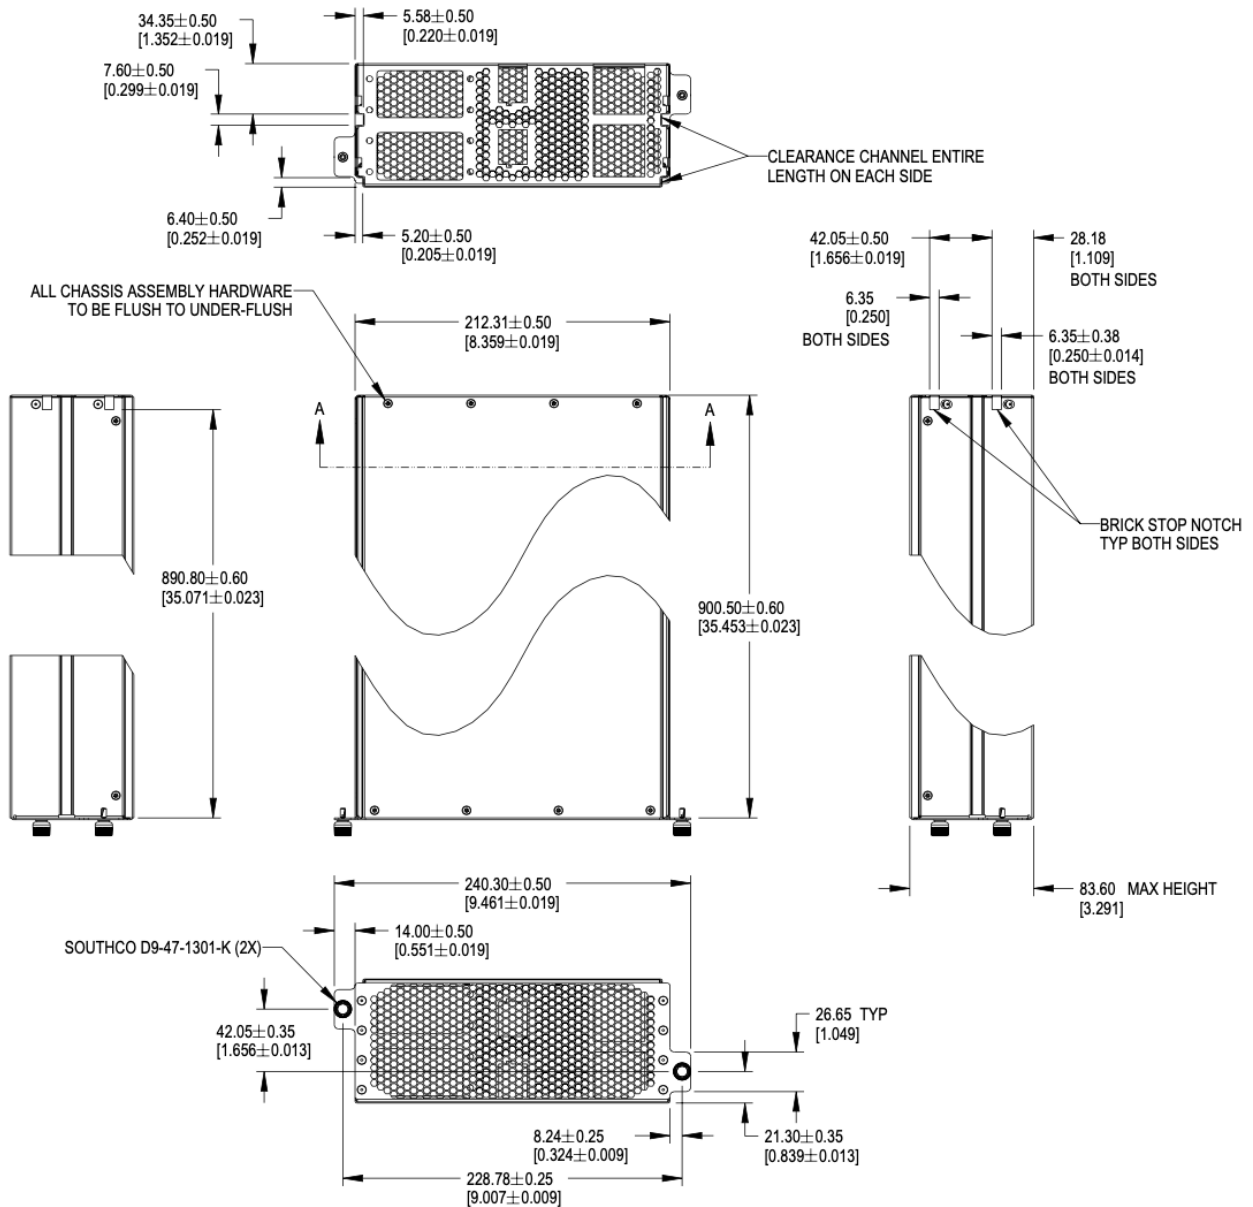


Figure 39. Brick dimensions

Please refer to the [drawings](#), and 3D files for further details.

The V1 specification for bricks defined 901.7mm as the overall length of the brick, including the thickness of the front panel.

The dimension is modified to reference to the inside of the front panel to the rear of the brick. This dimension is 900.50mm +/-0.60 from the rear face of the front panel (mating surface to the cage) to the outside of the rear panel.

For half-width designs using the OCP DC-MHS M-DNO board specification, note the tolerance guidance in order to fit boards in a half-width chassis. This requires setting the nominal width at 209.55mm or smaller.

4.3. Mechanical features

4.3.1. Brick retention

Brick are secured into the cage with Southco D9-47-1302-K quarter-turn fasteners.

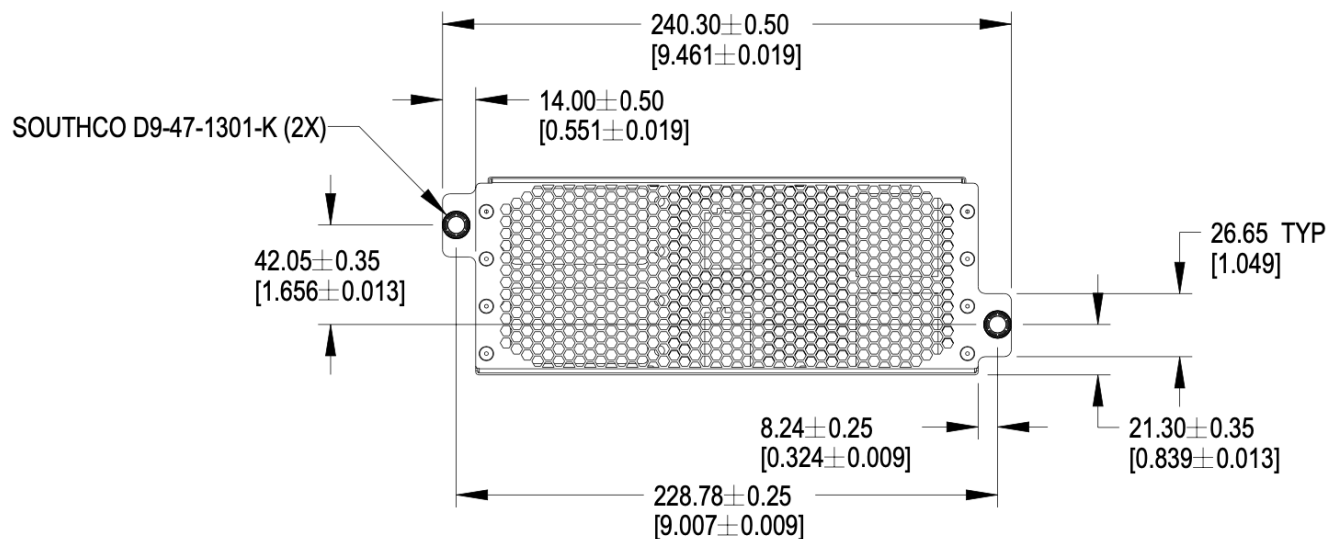


Figure 40. Brick retention

4.3.2. Brick mechanical guide

Clearance channels are required along the top edges of the brick and the sidewalls, extending forward from the rear panel to the back of the faceplate.

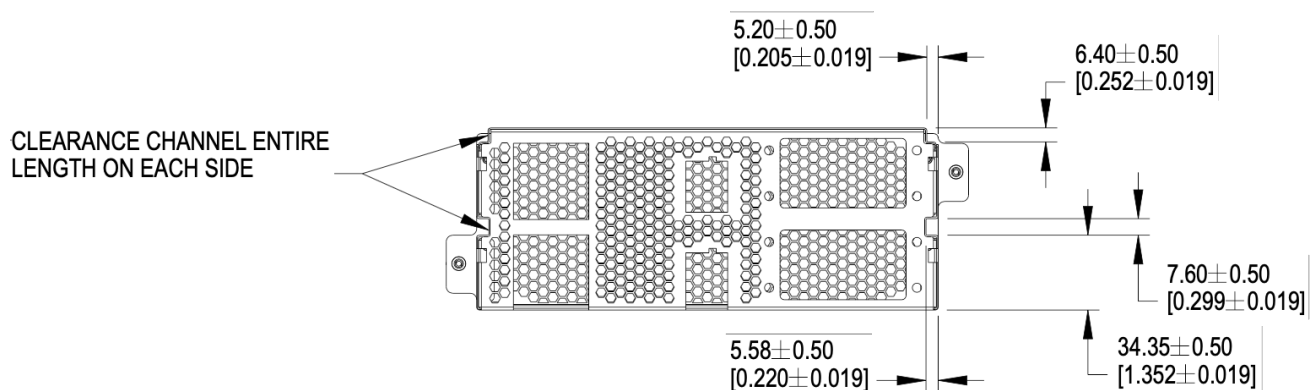


Figure 41. Mechanical guide at top edge and side walls of brick

Brick insertion and retention assistance for liquid cooling

For liquid cooling applications, two different mechanical assist for insertion and retention are available in the cage. Bricks can implement features to make use either/both features.

The features are:

- Brick retention standoff, available on both sides in the mechanical guide channel
- Slots, available on both sides of the cage wall

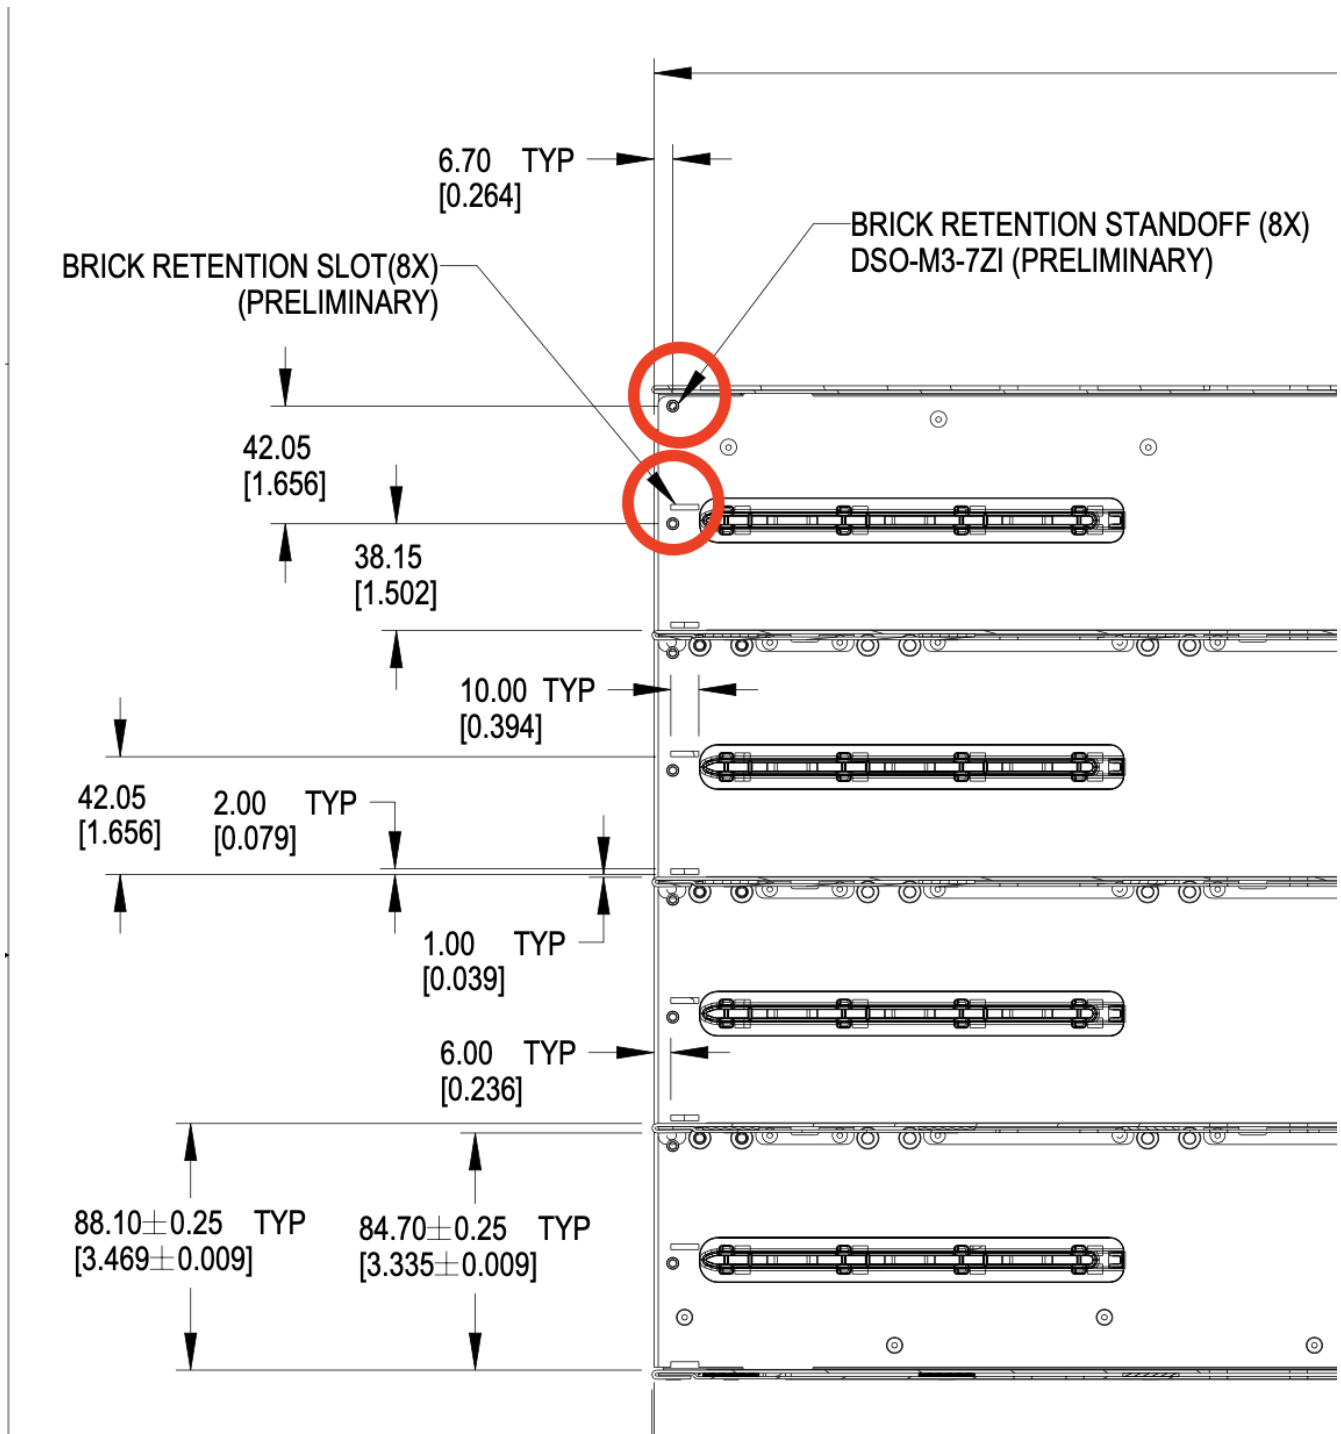


Figure 42. Brick mechanical assistance features in cage

Each feature shall support 100 lbf (445N) force or greater, using the recommended 1.3mm SGCC material.

4.3.3. Brick Mechanical Keying

Two keying notches are positioned in the left and right corners of the sheet metal enclosure as shown below. All dimensions below are critical.

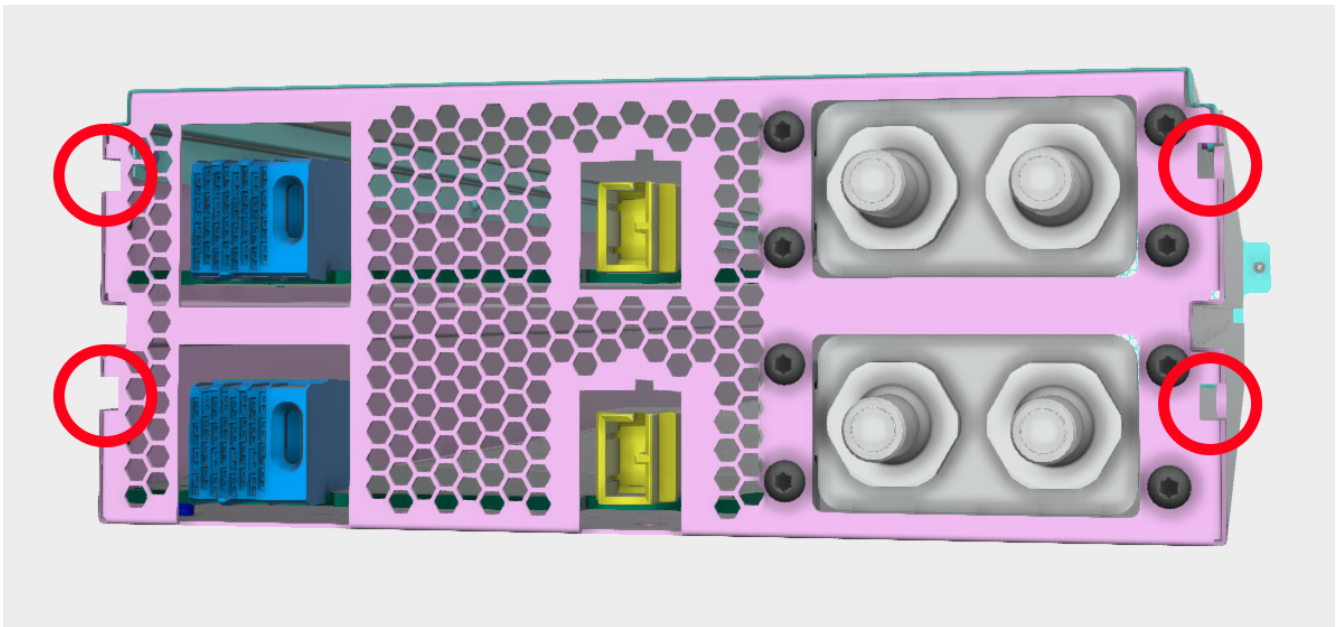


Figure 43. Brick keying

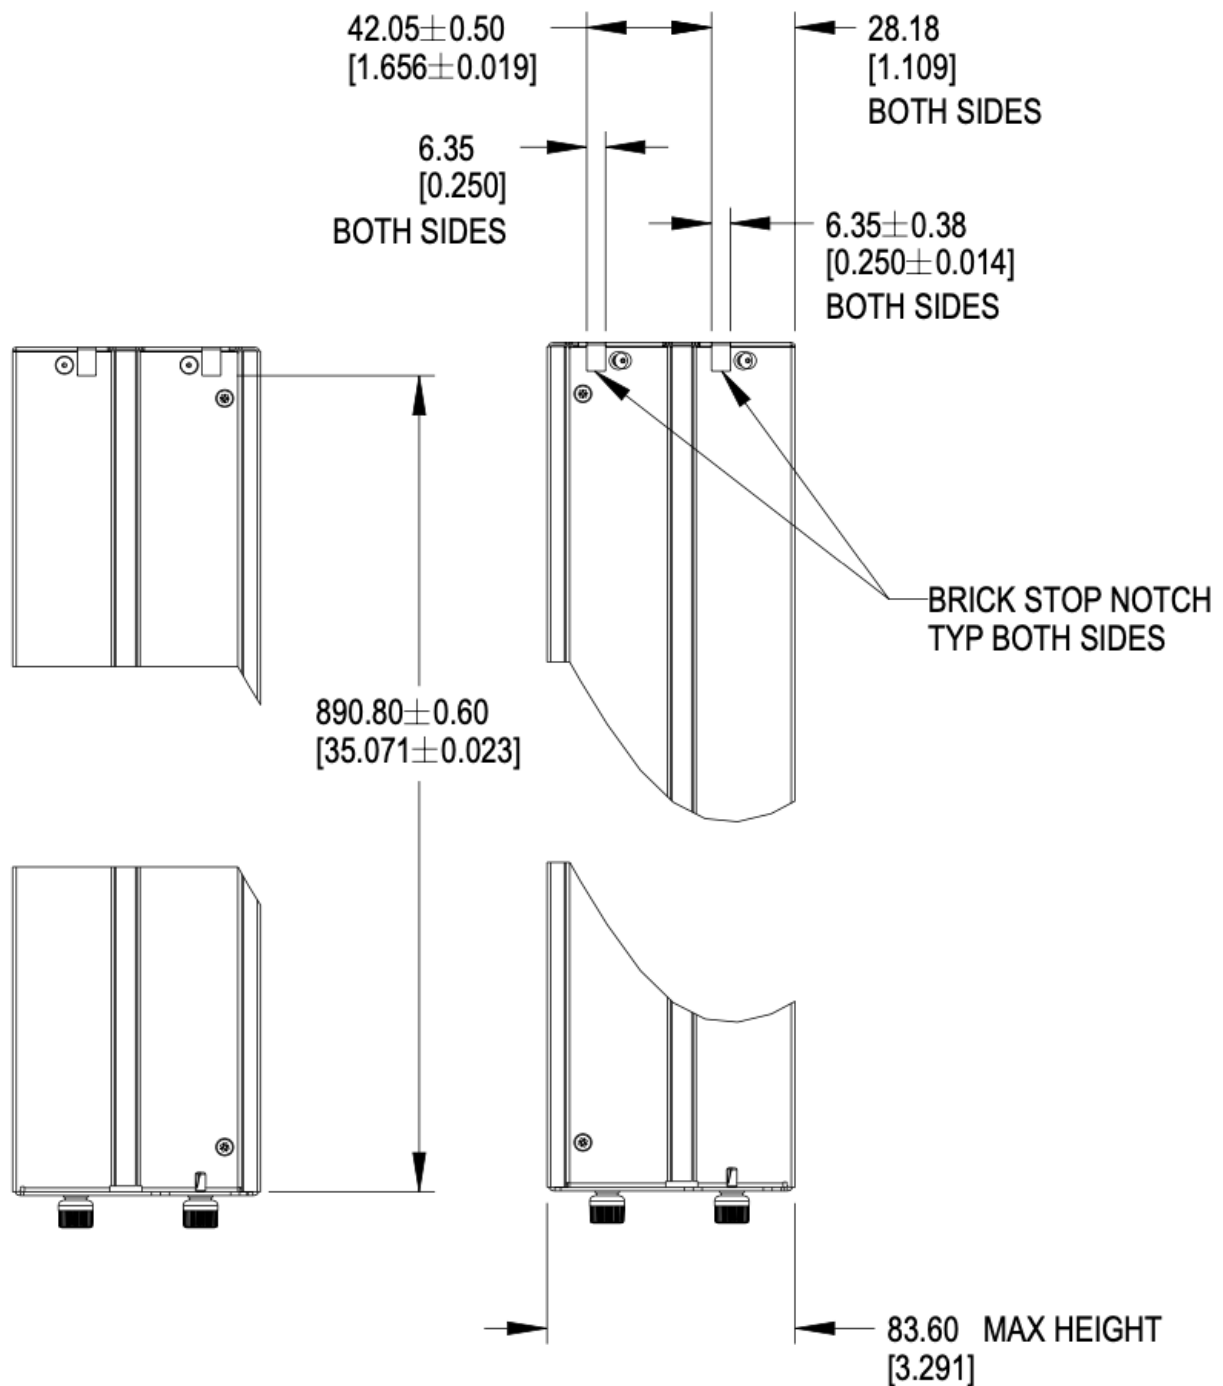


Figure 44. Brick keying dimensions

4.3.4. PCBA

The rear PCBA (Printed Circuit Board Assembly), also referenced as the interposer, provides the +48V DC input power and a data connections. The top of the PCBA is the reference surface, located 6.5mm +/- 0.6mm above the bottom surface of the sheet metal chassis.

A second PCBA may be installed at 48.55mm +/- 0.5mm above the bottom surface of the chassis.

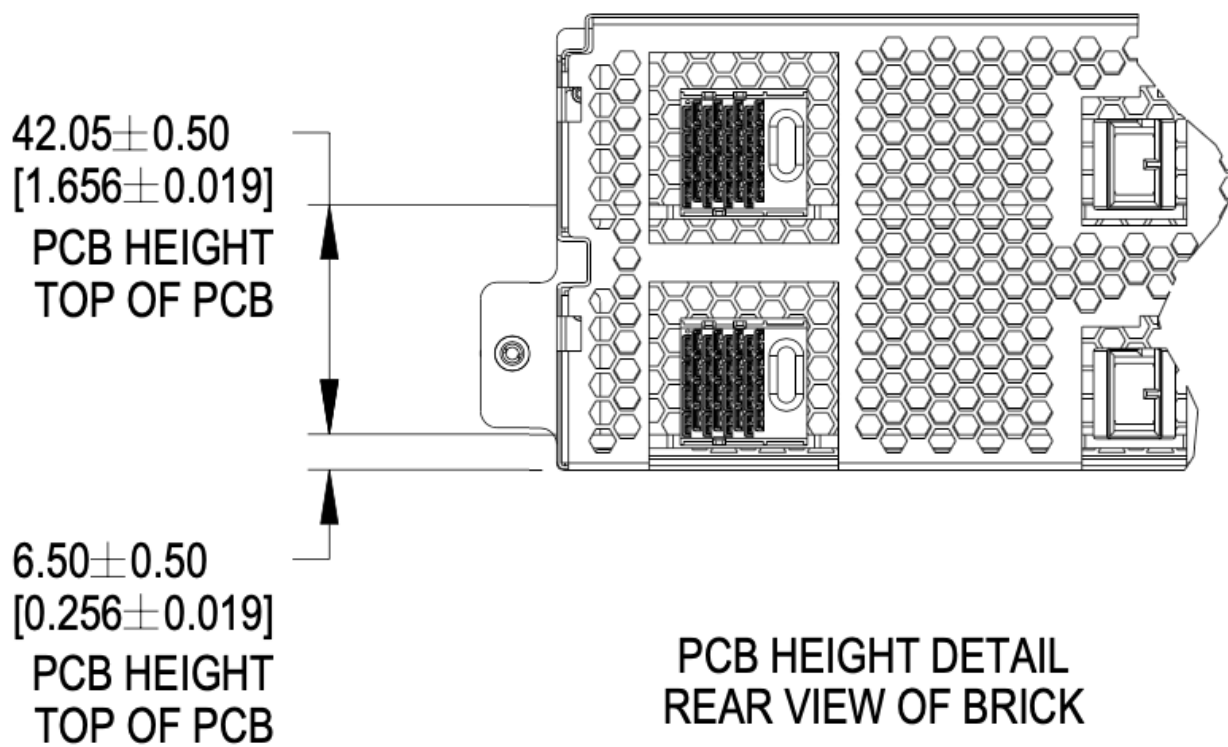


Figure 45. PCBA References

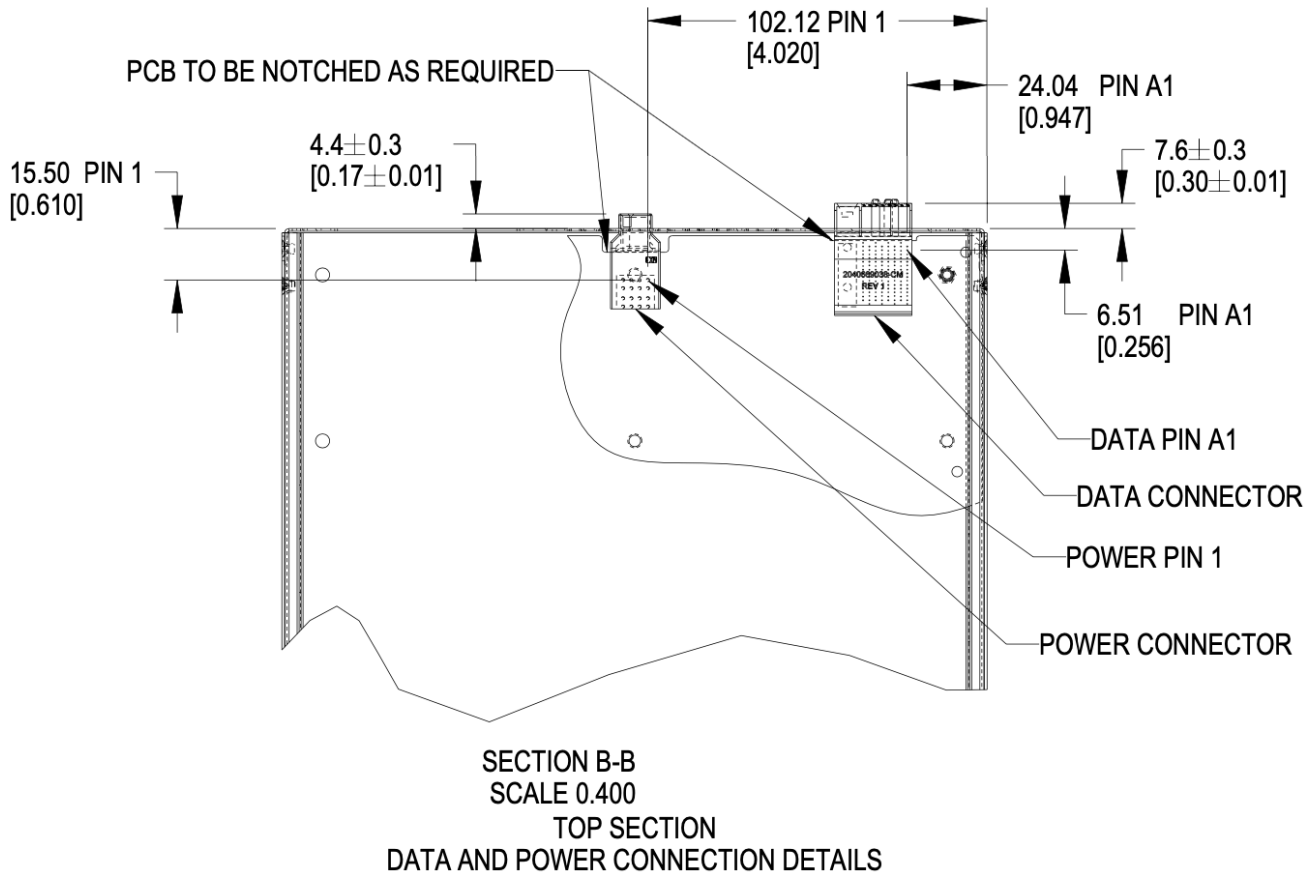


Figure 46. Brick PCB dimensions

One set of connectors are shown in the image. Two sets are available in a brick.

4.3.5. Materials

The brick enclosure is constructed of sheet metal with adequate strength and rigidity. Suggested material is 0.8mm SGCC for the chassis base and 0.6mm SGCC for the top cover.

4.3.6. Blind mate interfaces

A brick is equipped with at least one set of blind mate connectors for receiving +48V DC power and transferring data with an external device, typically a network switch. Introduced in this version is are blind mate connections to facilitate liquid cooling. The connections mate with cable and manifold projections from the rear wall of the cage.

- Power connector: Molex Ten60 PN: 220370-0001 (35A) 22037-0000 (70A), refer to Molex document [PSD-220370-0000](#)
- Data connector: Molex 4x8 Impel with guide receptacle PN: 204066-9038 (PCB thickness 2.2-4.1mm), 204066-9138 (PCB thickness 1.0-1.9mm), refer to Molex document [PSD-204066-9001](#)

The power connector has two ratings:

- Power: Not-To-Exceed (NTE) 70A at +48V DC
- Power: Not-To-Exceed (NTE) 35A at +48V DC

The ratings shall be coordinated with the power shelf. 35A bricks shall be enabled in 70A capable infrastructure. 70A bricks are keyed to prevent unsafe operation in 35A infrastructure.

The brick may populate a second set of connectors, as required.

4.4. Connector Pinout

4.4.1. Brick power connector

The brick blind-mate power connector for receiving 48V DC (51V nominal) power from the power shelf. The connector mates with the power cable connector projected from the brick cage wall.

Two variations of the brick connector exist, with different Not-to-exceed (NTE) ratings:

- 35A Power Connector: Molex 2203700001 (NTE 35 AMPS) No Key
- 70A Power Connector: Molex 2203700000 (NTE 70 AMPS) Keyed

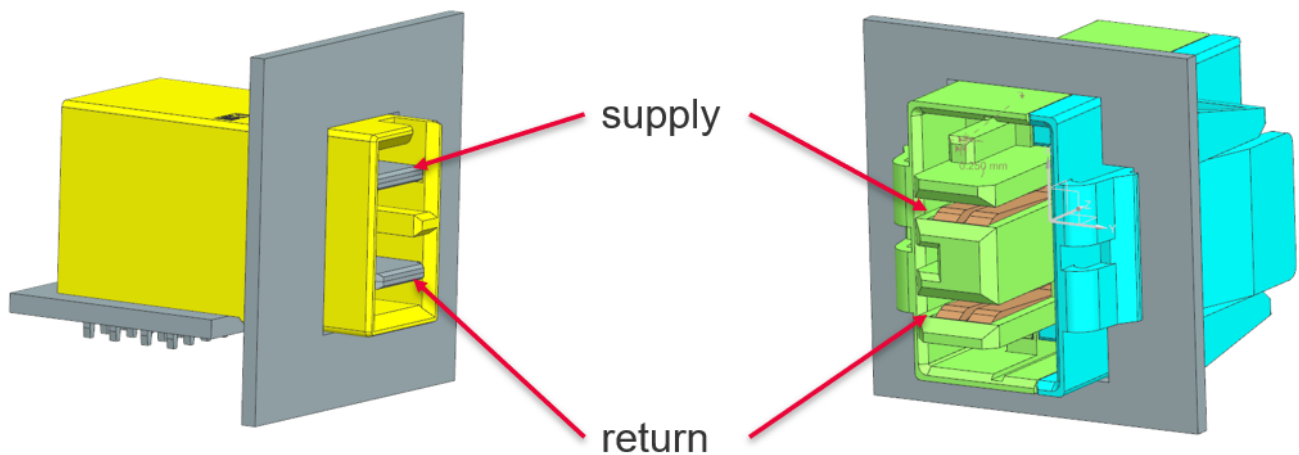


Figure 47. Power connector supply/return definition

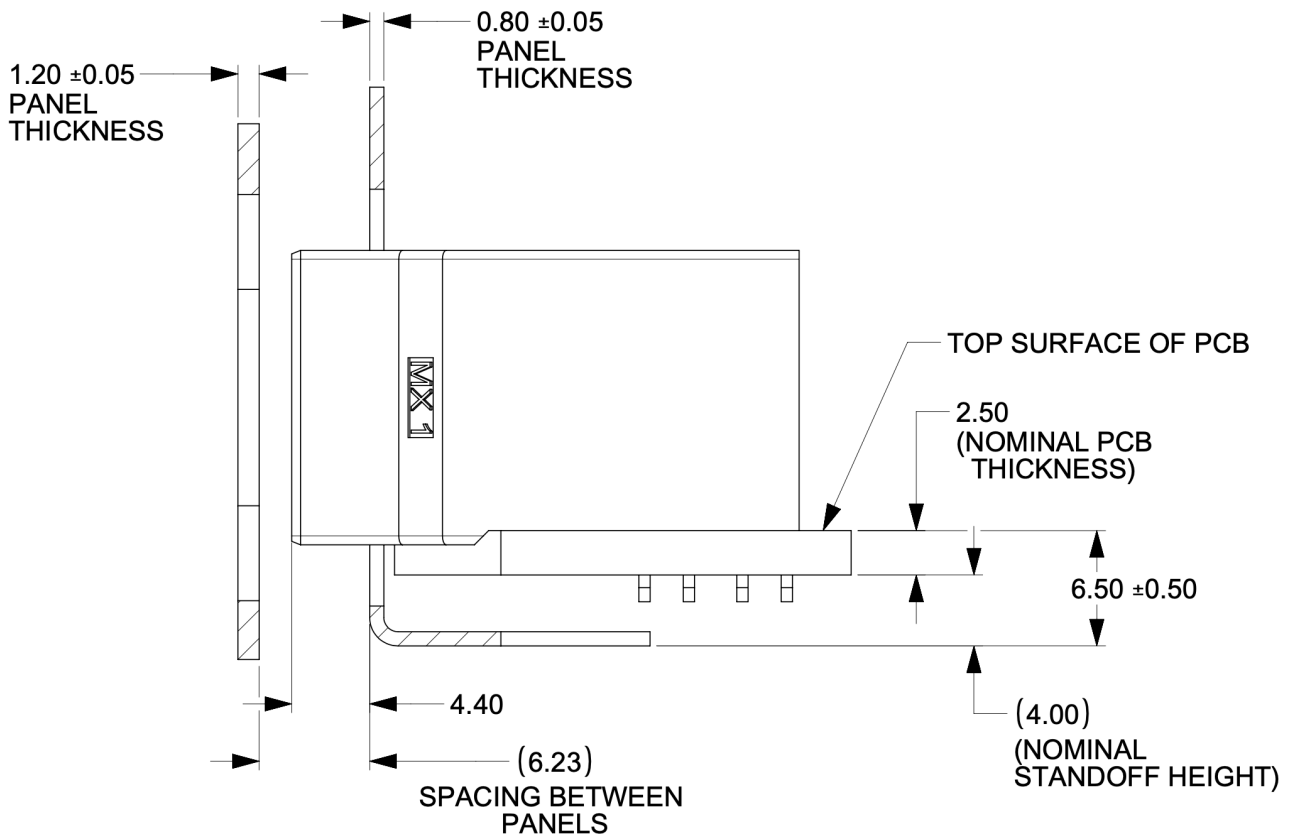


Figure 49. Power connector critical dimensions

4.4.3. Brick voltage

Open19 V2 power shares Open Compute ORV3 power characteristics. Open19 bricks shall safely operate in the DC range 48-52V and shall remain functional when exposed to 0-54V. The power rail shall not exceed 52.5V for more than 200ms. DC voltage shall never exceed 54V.

- Operating range: 48-52V
- NTE voltage: 54V
- Max voltage: $\leq 52.5V$ for $<200ms$

4.4.4. Data Connector

The data connector is rated for 56G PAM4 with an air dielectric. Variations of cables deliver different lane counts, data rates, and physical interfaces. In the reference Ethernet implementation, the data connector pinout explicitly supports a dedicated 10/100/1000Base-T management port, four 25G NRZ/50G PAM4 lanes. Optionally, a single QSFP-DD or two QSFP interfaces are supported.

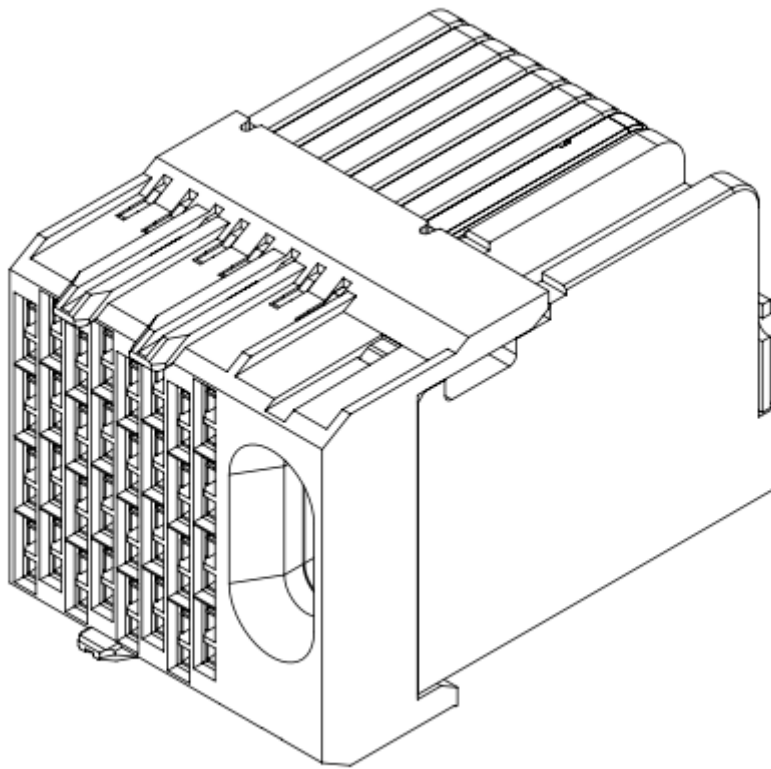


Figure 50. Impel Connector with guide feature

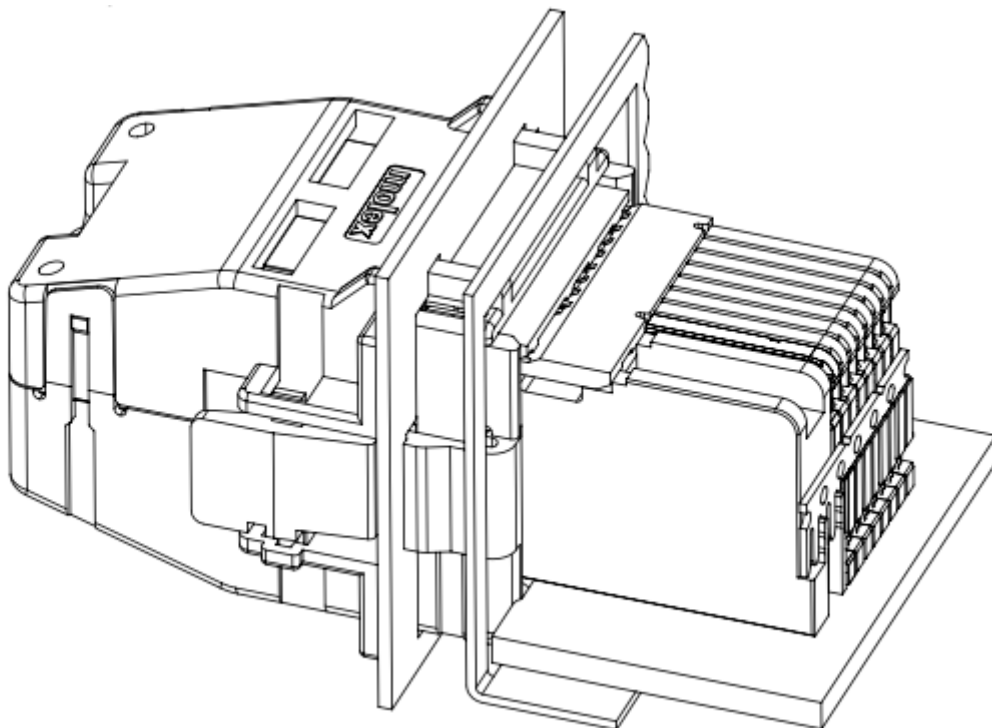


Figure 51. Impel Mated connector with cable backshell

The data connector pinout is defined in the [\[Appendix\]](#)

There is no attempt to support 50G (2x25G NRZ) nor 50G (1x50G NRZ).

4.4.5. Ethernet interface inter-operability

The inter-operability of bricks at deployment with Ethernet interfaces is critical. To support 25G NRZ, 50G PAM4, 100G (4x25G NRZ), 200G (4x50G PAM4), and 400G (8x50G PAM4), the following table:

Port Count	Data Rate	Implementation Interface and order
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1
6		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1, QSFP2 LN 1
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	100G (4x25G)	SFP1, SFP2, SFP3, SFP4, QSFP1
6	200G (4x50G PAM4)	SFP1, SFP2, SFP3, SFP4, QSFP1, QSFP2
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	400G (8x50G PAM4)	QSFP-DD (QSFP1+QSFP2)
		200G (4x50G PAM4)
QSFP (SFP1+SFP2+SFP3+SFP4)	2	QSFP, QSFP1

4.5. Liquid cooling

4.5.1. Brick liquid cooling

Brick liquid cooling is divided into two broad categories, single-phase and two phase. They are mutually incompatible and the designs are mechanically incompatible by design. All bricks inside a single cage are expected to be the same liquid cooling technology.

Unified cutout

Open19 V2 liquid cooling implements a unified liquid cooling cutout. This allows for a consistent brick design to implement both liquid cooling solutions. Implementing the unified cutout is not required, provided all the requirements of a single solution are met.

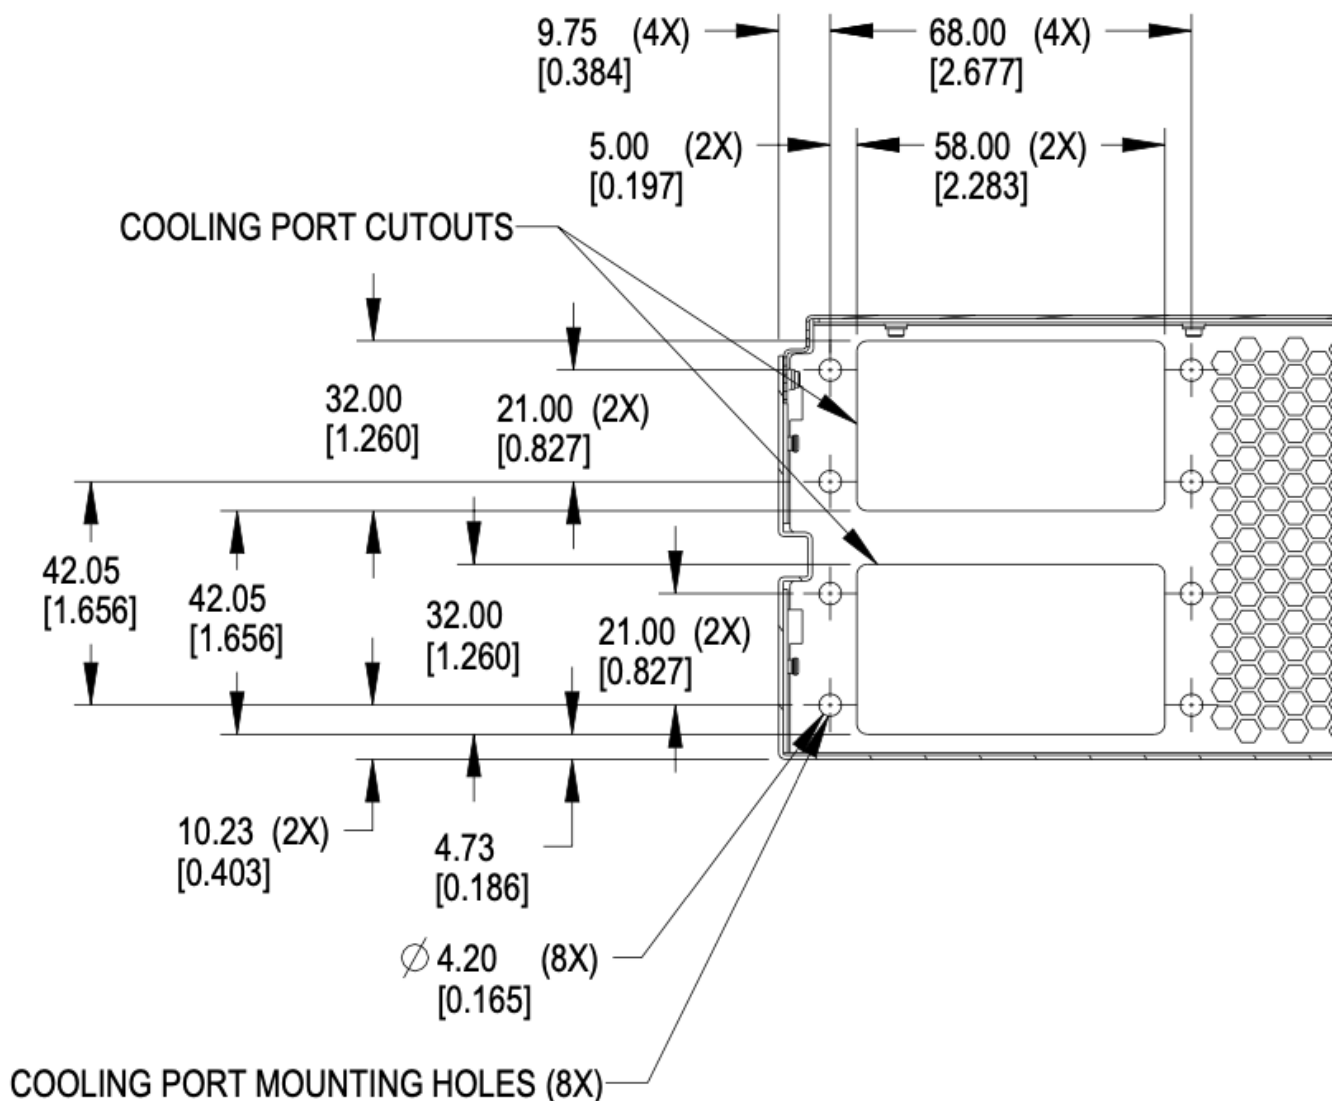


Figure 52. Brick unified cooling cutout

4.5.2. Single phase

Single-phase Connector selection

Single-phase cooling solutions shall use the [CPC BLQ4](#) family of interfaces.



Figure 53. BLQ4 body for manifold



Figure 54. BLQ4 insert for bricks

[BLQ4_SpecSheet.pdf](#)

The BLQ4 connectors are blind mate. Both sides of the connector have G 3/8" threads which thread into manifold (body) and brick (insert), respectively.

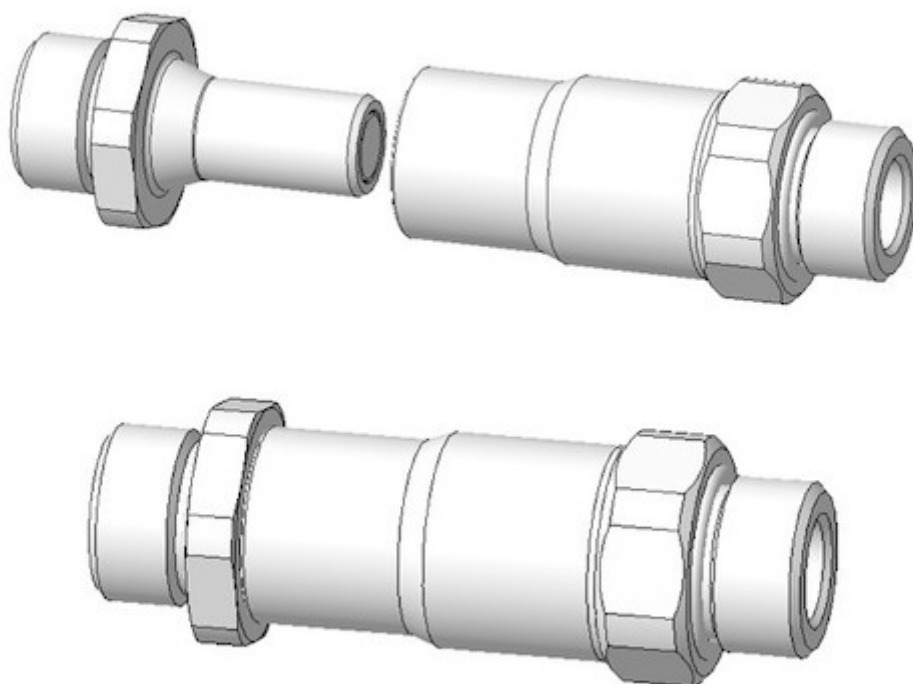


Figure 55. BLQ4 pair

Single-phase connector mounting and polarization

Bricks shall have male blind-mate connectors (inserts), BLQ4D47006 or compatible part.

When viewed from the rear of the brick, in reference to the server: Liquid return shall be located to the left. Liquid supply shall be located in the to the right.

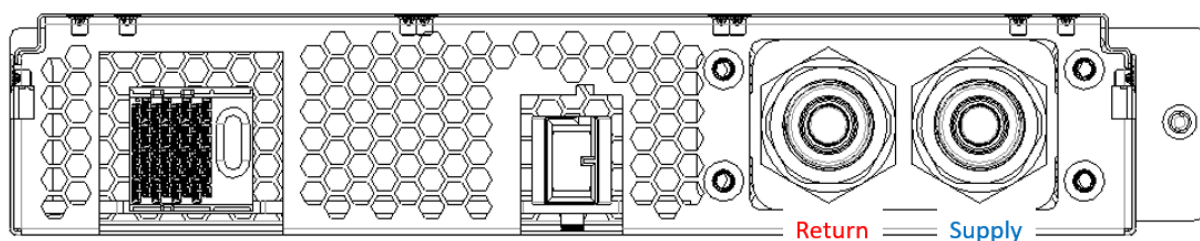


Figure 56. Brick side supply and return

Single-phase brick side connector locations

The supply connector should be 29.5mm from the outer side of the brick (opposite the thumbscrew) in the x-direction and 20.73mm from the bottom of face of the brick in the y-direction. The two

connectors should be lined up in the horizontal plane and spaced 28.5mm from each other.

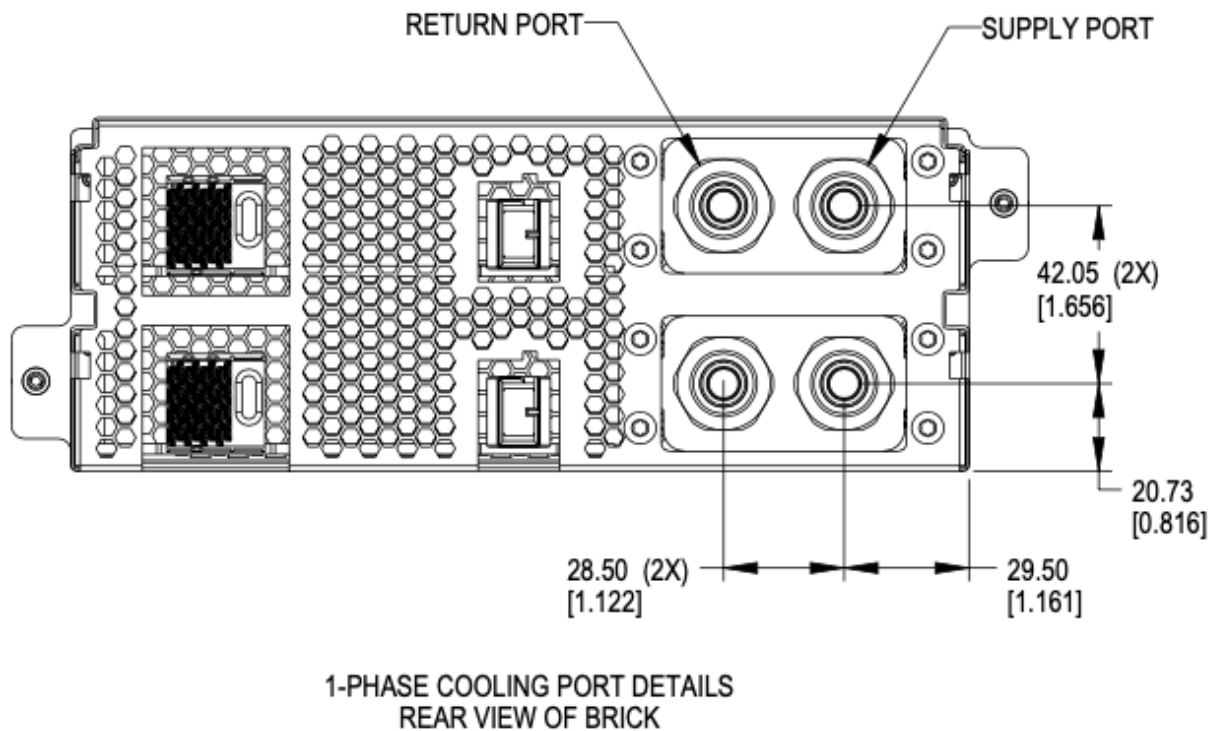


Figure 57. Brick side liquid connector locations for single-phase

Single-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

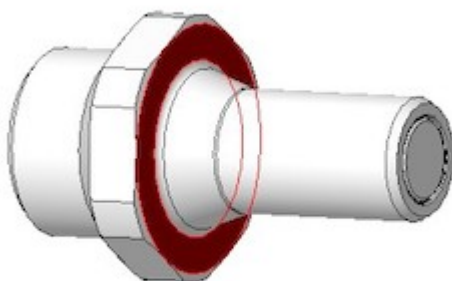


Figure 58. Mating surface BLQ4 insert

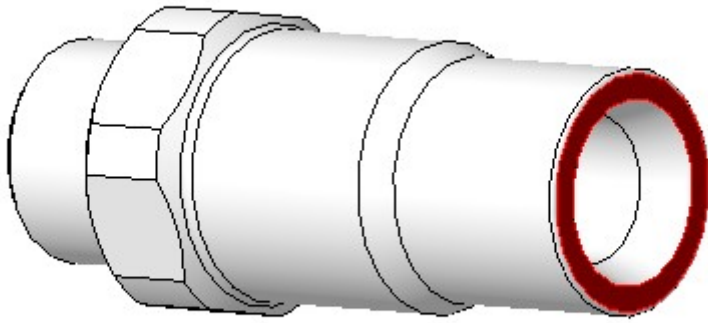


Figure 59. Mating surface BLQ4 body

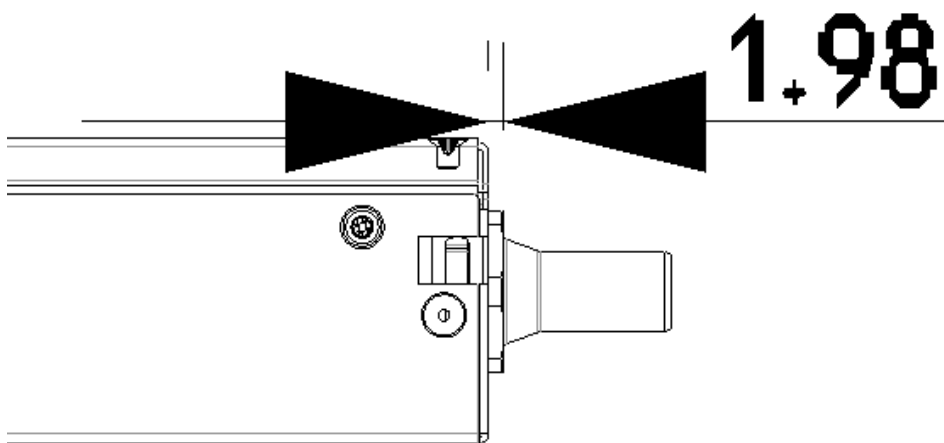


Figure 60. Offset from cage back panel to connector mating interface

The BLQ4 connectors must be within 3mm of this fully engaged state to achieve full flow.

4.5.3. Two phase

Two-phase connector selection

The two-phase cooling solution shall use the CPC BLQ family of interfaces.

On brick side



Figure 61. Liquid - CPC BLQ4 series insert P/N BLQ4D47004PROTO (chrome plated brass) or P/N 4649800PROTO (Aluminum)



Figure 62. Vapor - CPC BLQ6 series insert P/N 4650000PROTO (chrome plated brass)

On the Manifold side



Figure 63. Liquid - CPC BLQ4 series body P/N BLQ4D31004PROTO (chrome plated brass) or P/N 4649900PROTO (Aluminum)



Figure 64. Vapor - CPC BLQ6 series body P/N 4650200PROTO (chrome plated brass)

Two-phase connector mounting polarization

Cage manifolds shall have body (female) blind mate connectors. Bricks shall have insert (male) blind-mate connectors. When viewed from rear of the brick, vapor connection shall be located at the right position. Liquid connection shall be located at the left position.

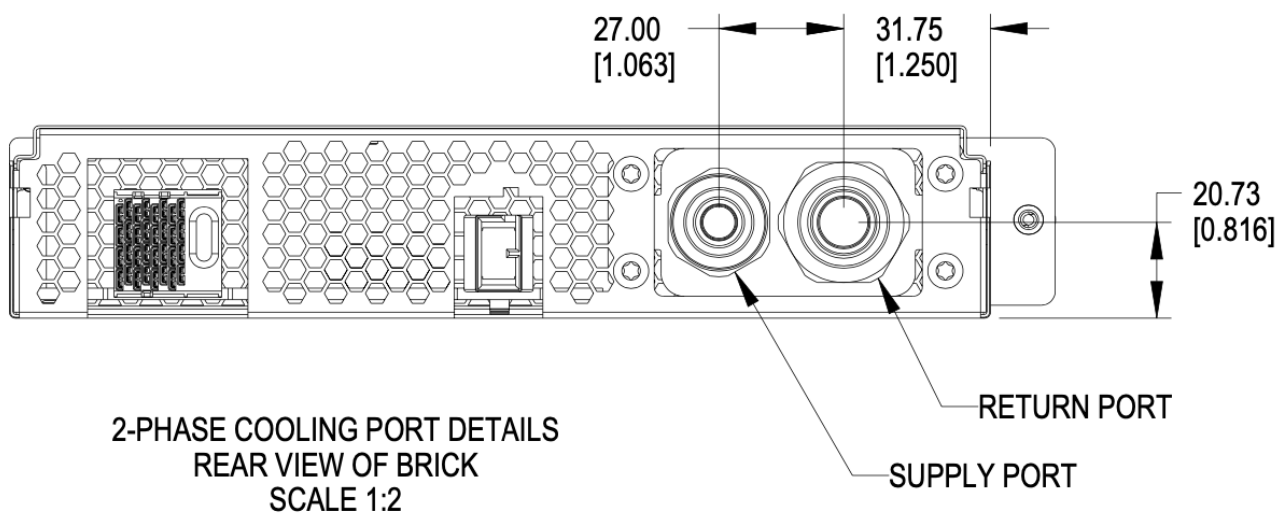


Figure 65. Brick liquid supply and Vapor return

Two-phase brick side connector locations

Using the right-side panel of the brick as a reference, the Vapor return connector on the brick should be 31.85mm in the x direction and 20.73 upwards in the y direction.

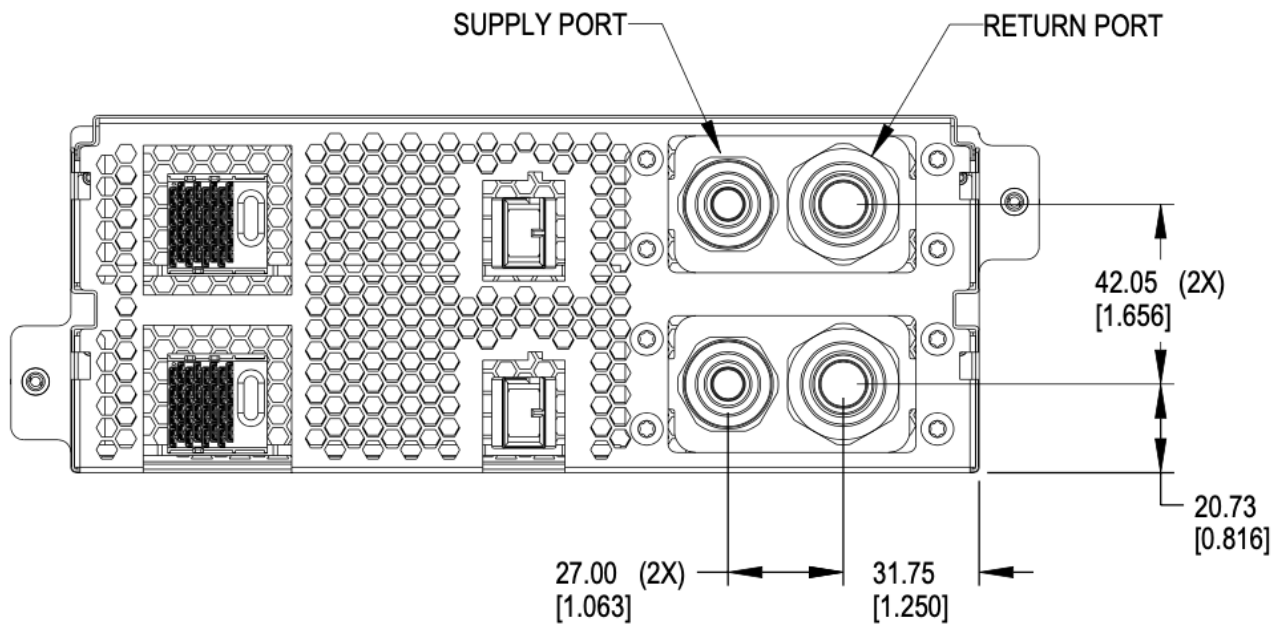


Figure 66. Brick side connectors locations

Two-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

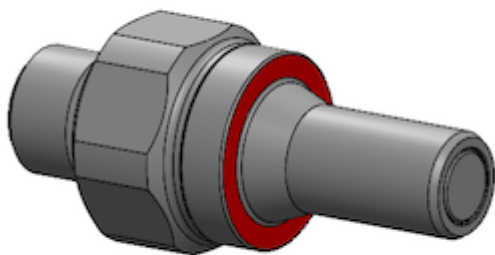


Figure 67. Mating surface BLQ4 insert

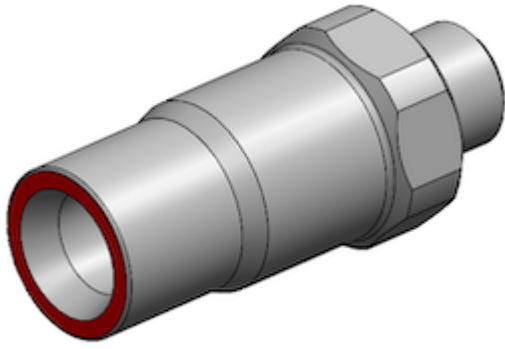


Figure 68. Mating surface BLQ4 body

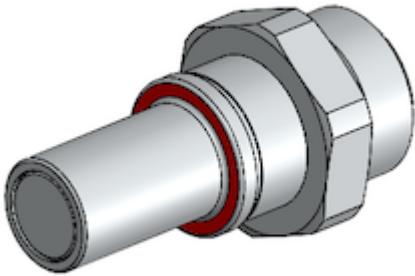


Figure 69. Mating surface BLQ6 insert

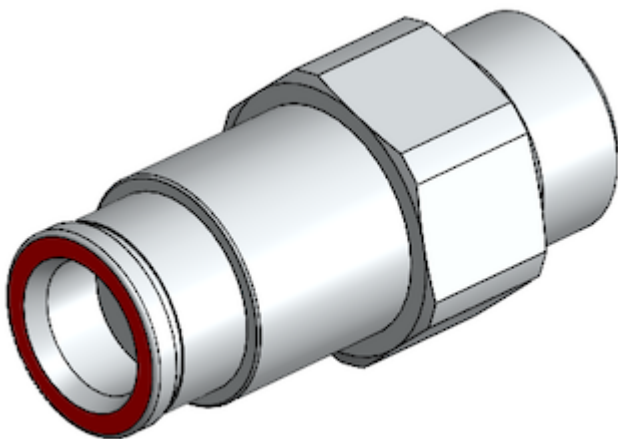


Figure 70. Mating surface BLQ6 body

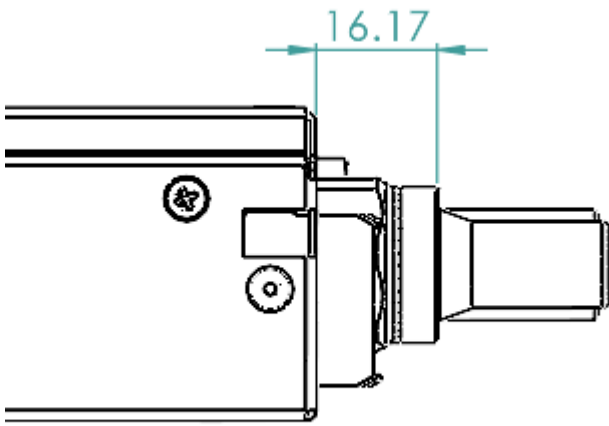


Figure 71. Offset from cage back panel to BLQ4 connector mating interface

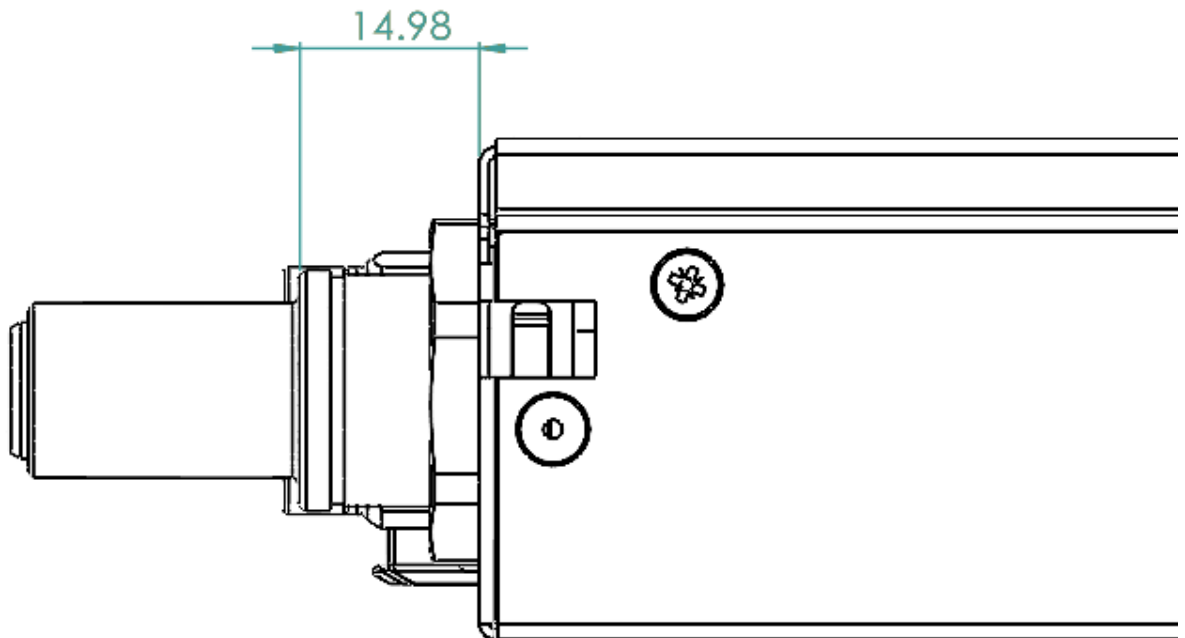


Figure 72. Offset from cage back panel to BLQ6 connector mating interface

The BLQ4 & BLQ6 connectors must be within $\pm 1.5\text{mm}$ of this engaged state to achieve full flow.

4.5.4. Weight

The maximum weight of the brick, when equipped with all drives and/or accessories, is 60lbs (13.6kg). This is an increase of 10lbs from V1.

4.5.5. Design guidance

Design guidance is not a specification requirement. It is simple design guidance that can be implemented to simplify future needs, to meet certification requirements, or satisfy general fit & finish.

4.5.6. Brick faceplate guidance

The faceplate is notched above and below the fastener (See [Figure 40, “Brick retention”](#)). Note that the faceplate can accommodate any type of ports or drives as needed and is not required to be fully perforated.

Screws and/or rivets used to secure the top cover are flush to be under-flush. The vertical edges on the rear of the brick chassis base are coined to break sharp edges.

4.5.7. Back panel safety perforation

See below for typical dimensions of the airflow perforation. All dimensions below are critical.

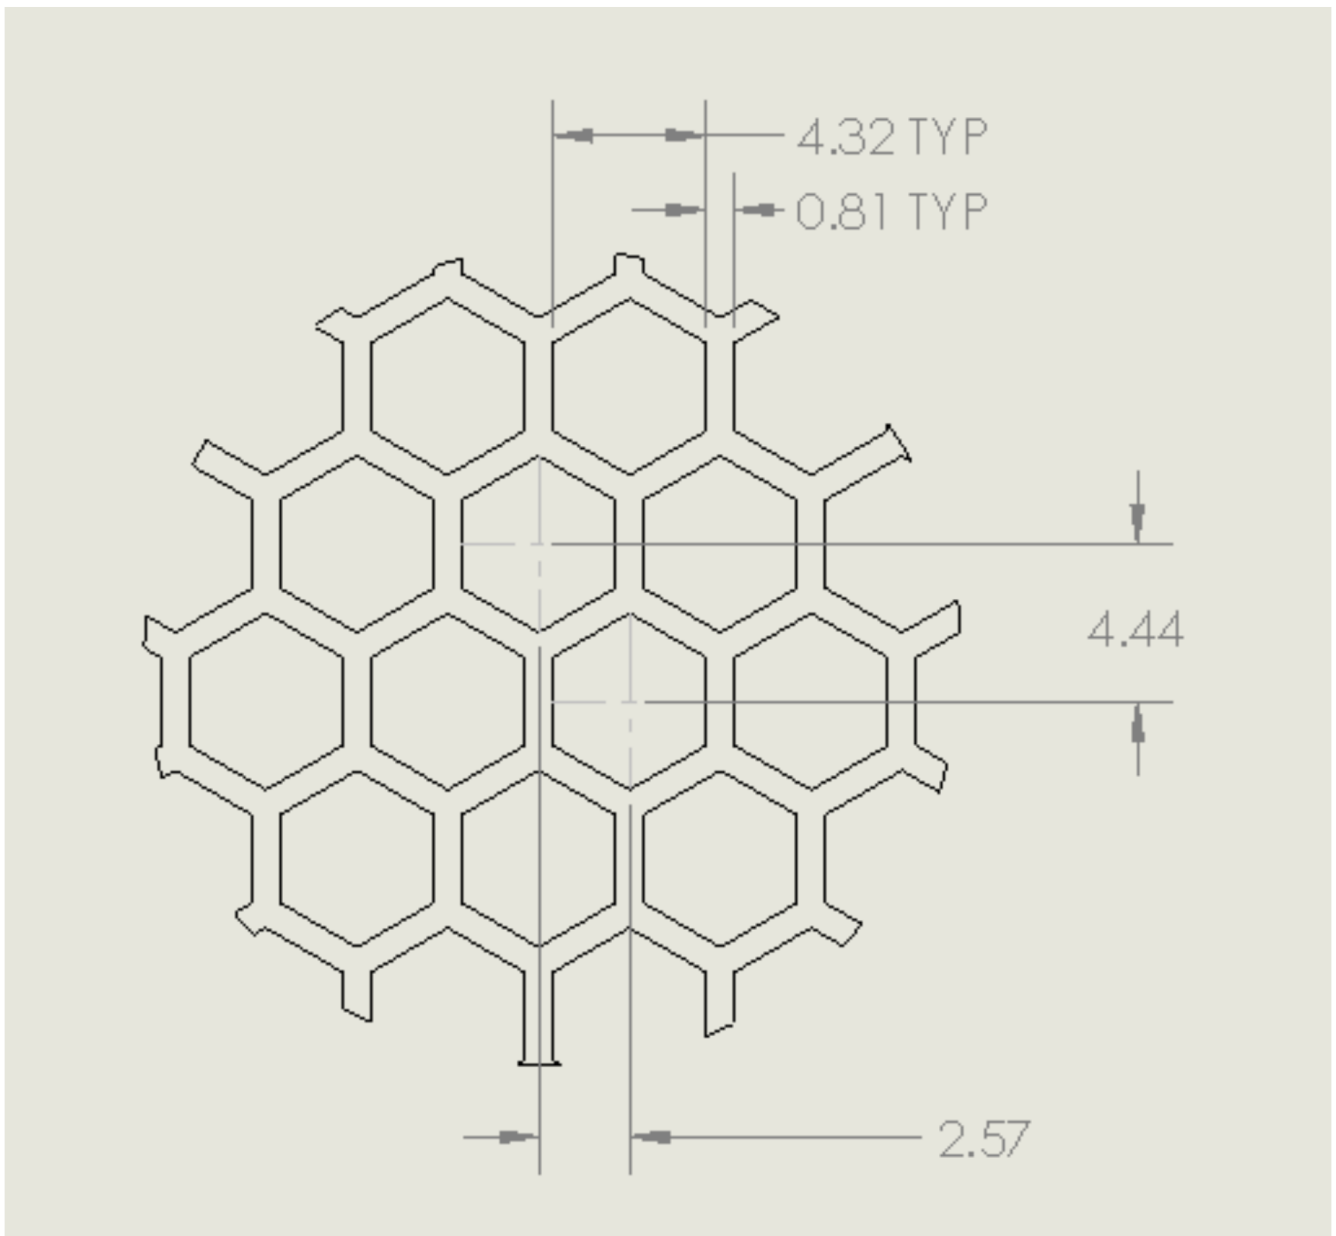


Figure 73. Brick panel perforation

Keep-out zones

Keep-out zones are defined in the brick surrounding the power connector and liquid cooling interfaces. The liquid cooling keep-out spaces "fly" above the PCB, allowing components to be populated below the connections.

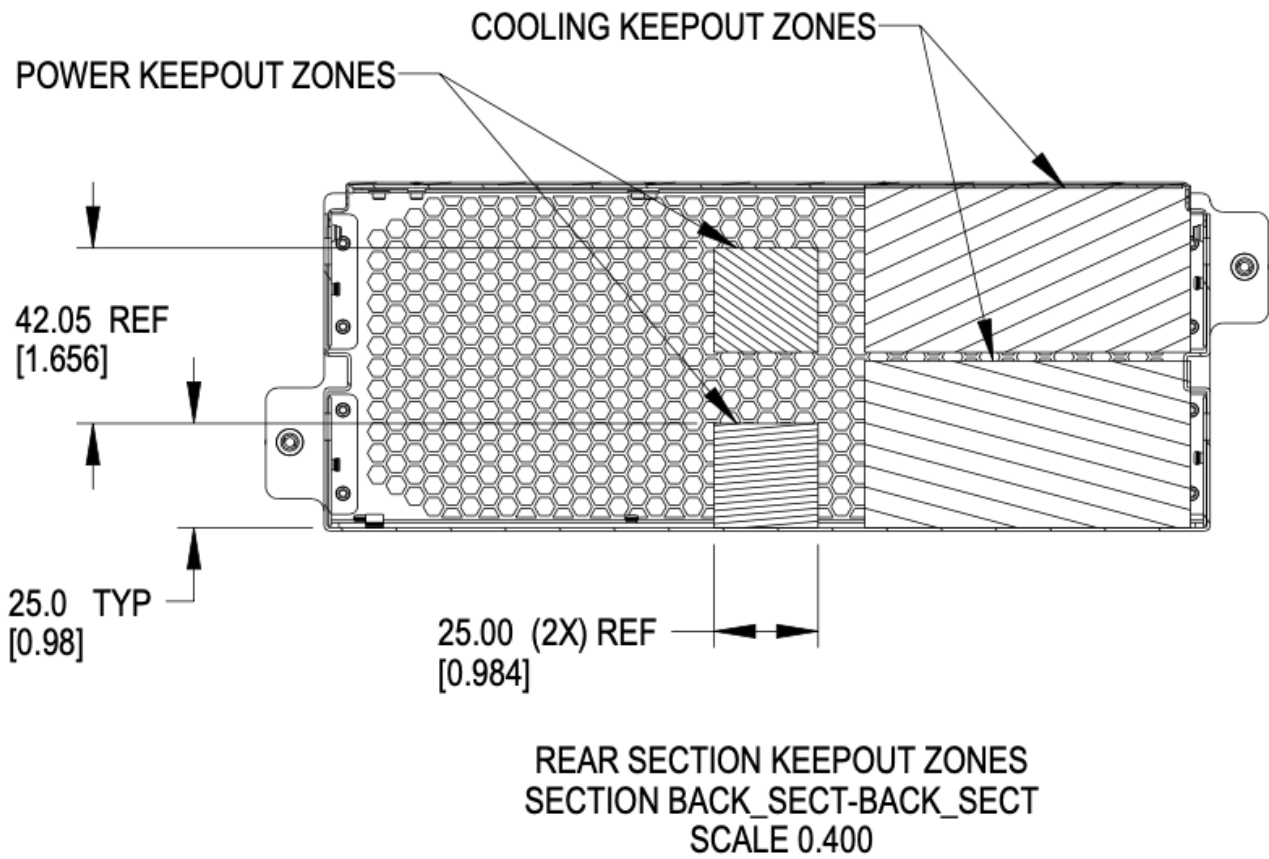


Figure 74. Brick keep-out zone

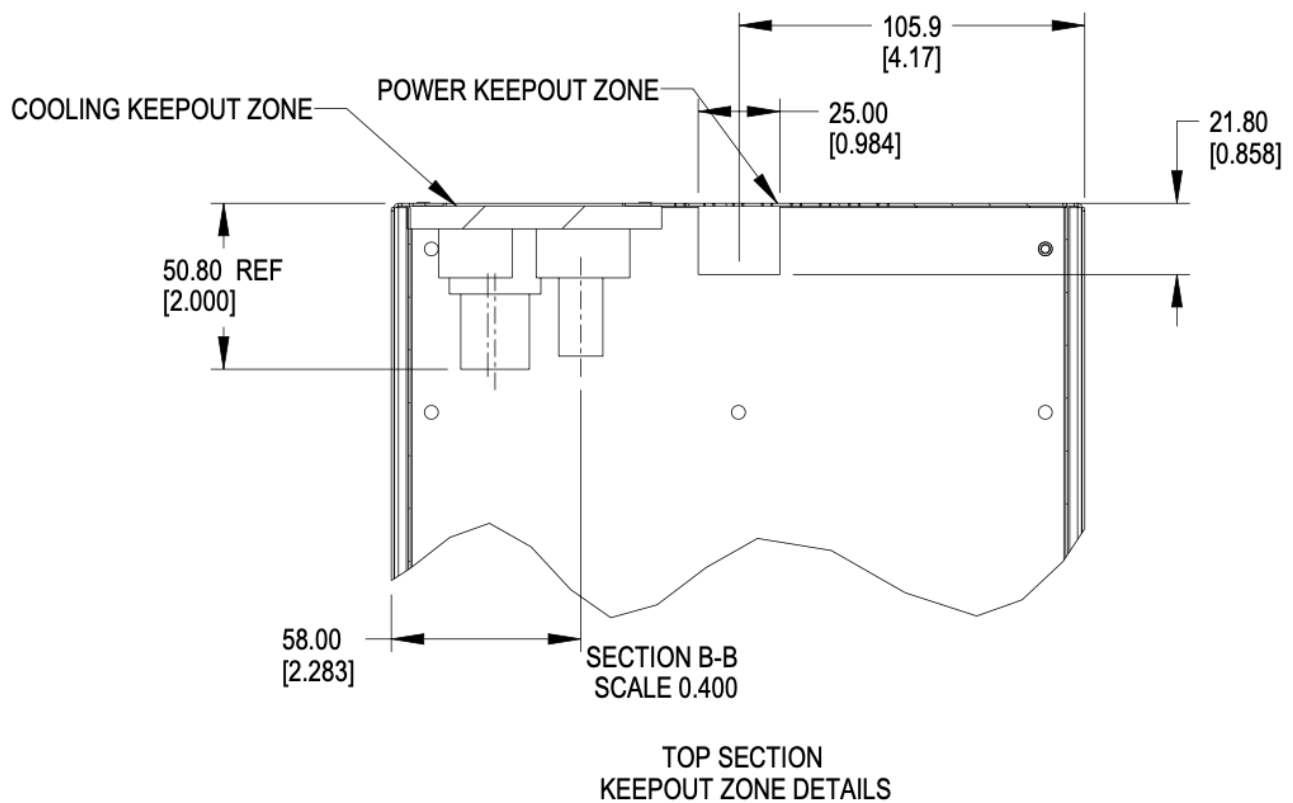


Figure 75. Brick keep-out zone top view

4.6. Brick performance

4.6.1. Brick electrical startup behavior

In order to safely operate the power shelf, we define the following characteristics for brick startup behavior.

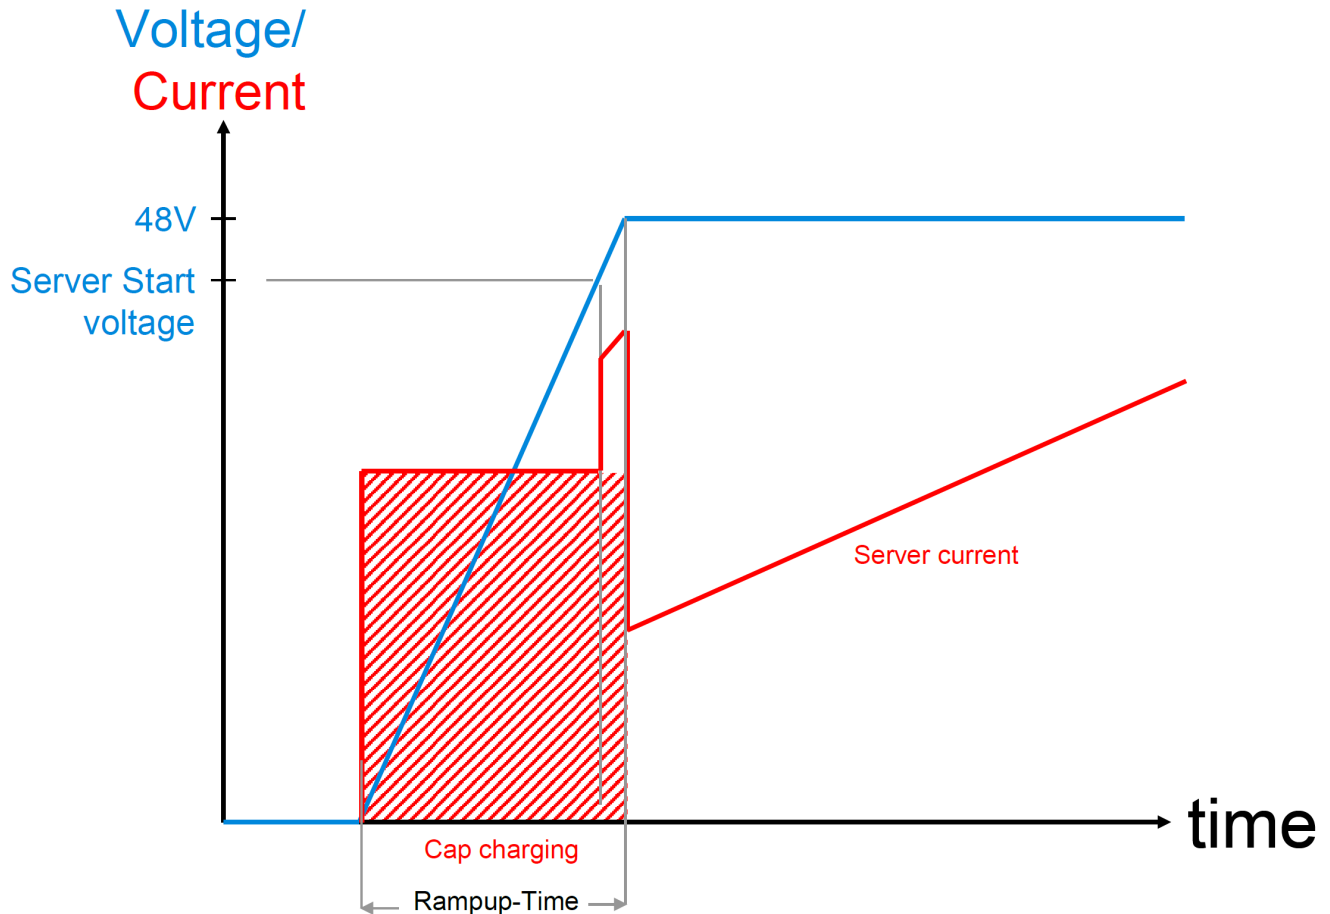


Figure 76. Server startup electrical characteristics

These values are per connector feed from a power shelf.

Two power connectors are available for use.

- Min start-up voltage: +44V DC
- Max input capacitance per brick feed: $\leq 1000\mu\text{F}$
- Max server current at start-up voltage: 70A
- Ramp time: Follow Intel CRPS spec: ramp time 10-70msec, slew rate 0.5V/msec

<https://www.intel.com/content/dam/www/public/us/en/documents/guides/power-supply-design-guide-june.pdf>

Chapter 5. Brick Mechanical Specification

[SHDW]

5.1. SHDW Brick

The SHDW brick is commonly used as a 1RU server form-factor.

5.2. Brick Dimensions

The brick is designed with the overall dimensions shown.

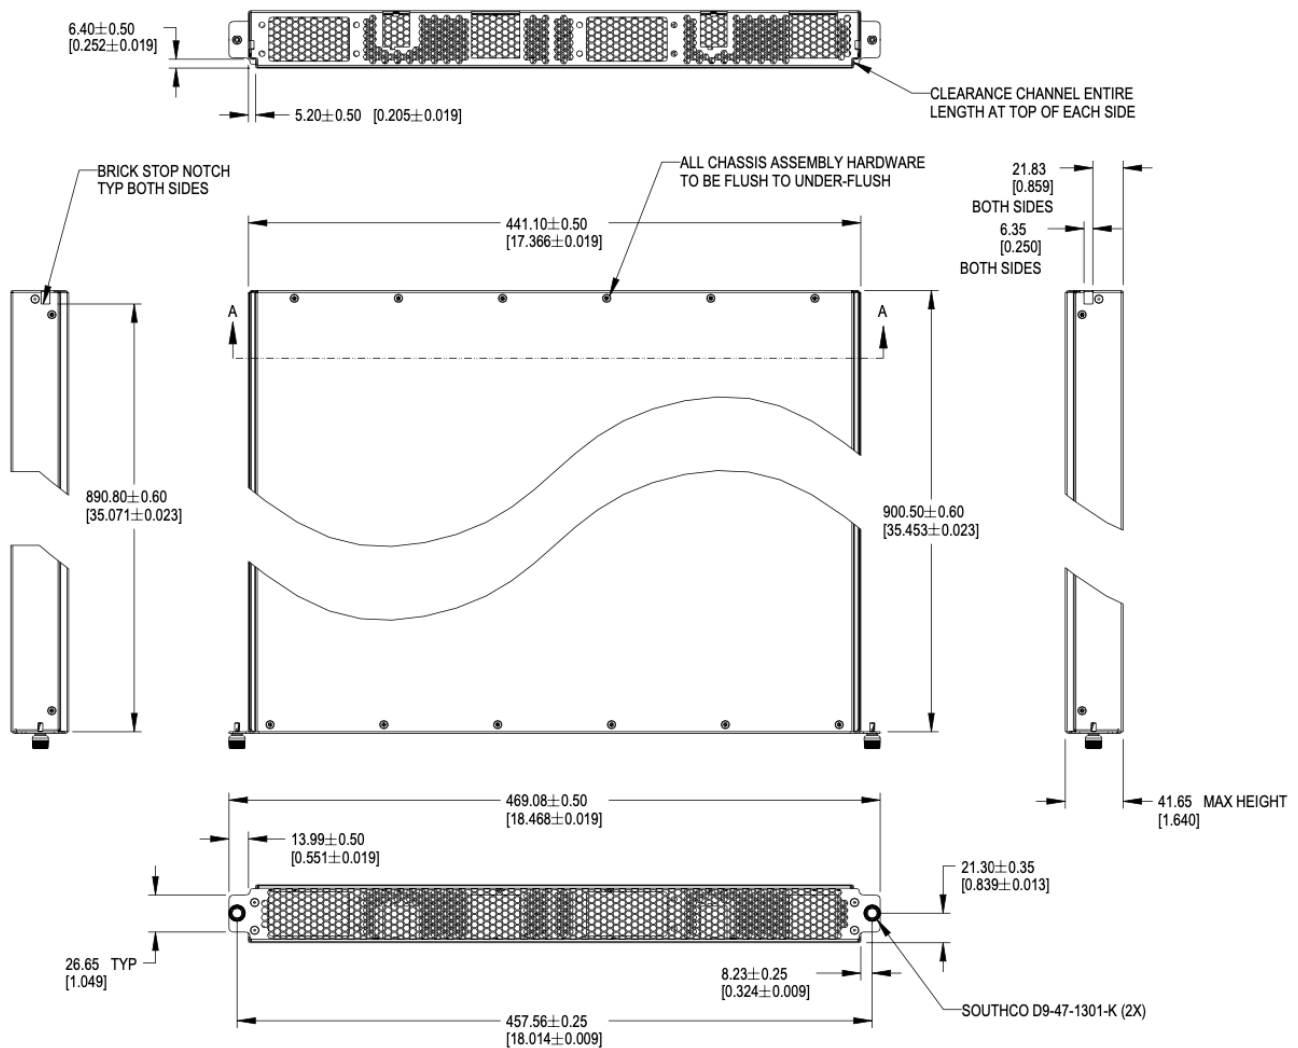


Figure 77. Brick dimensions

Please refer to the [drawings](#), and 3D files for further details.

The V1 specification for bricks defined 901.7mm as the overall length of the brick, including the thickness of the front panel.

The dimension is modified to reference to the inside of the front panel to the rear of the brick. This dimension is 900.50mm +/-0.60 from the rear face of the front panel (mating surface to the cage) to the outside of the rear panel.

5.3. Mechanical features

5.3.1. Brick retention

The brick is secured into the cage with two Southco D9-47-1302-K quarter-turn fastener, located on the left and right side of the faceplate.

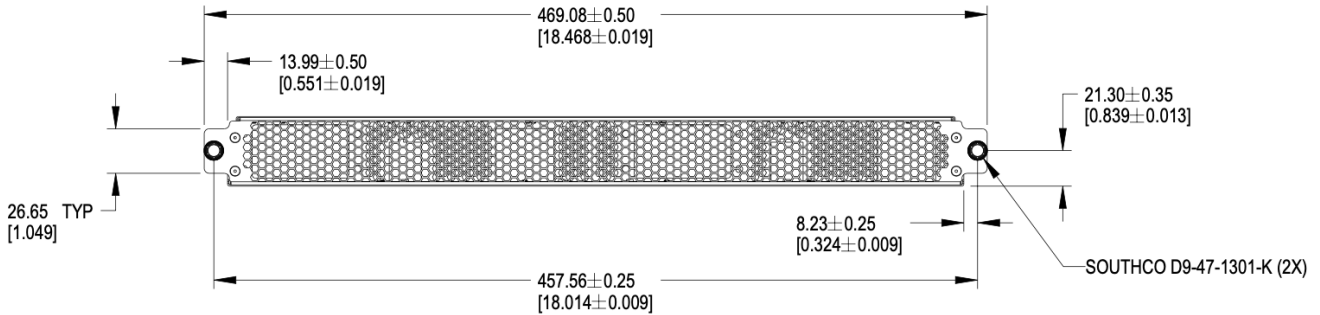


Figure 78. Brick retention

5.3.2. Brick mechanical guide

Clearance channels are required along the top edges of the brick, extending forward from the rear panel to the back of the faceplate.

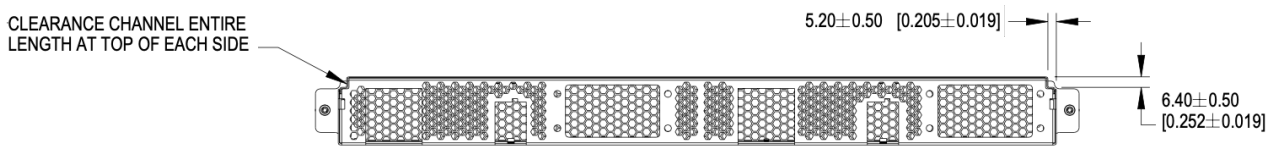


Figure 79. Mechanical guide at top edge of brick

Brick insertion and retention assistance for liquid cooling

For liquid cooling applications, two different mechanical assist for insertion and retention are available in the cage. Bricks can implement features to make use either/both features.

The features are:

- Brick retention standoff, available on both sides in the mechanical guide channel
- Slots, available on both sides of the cage wall

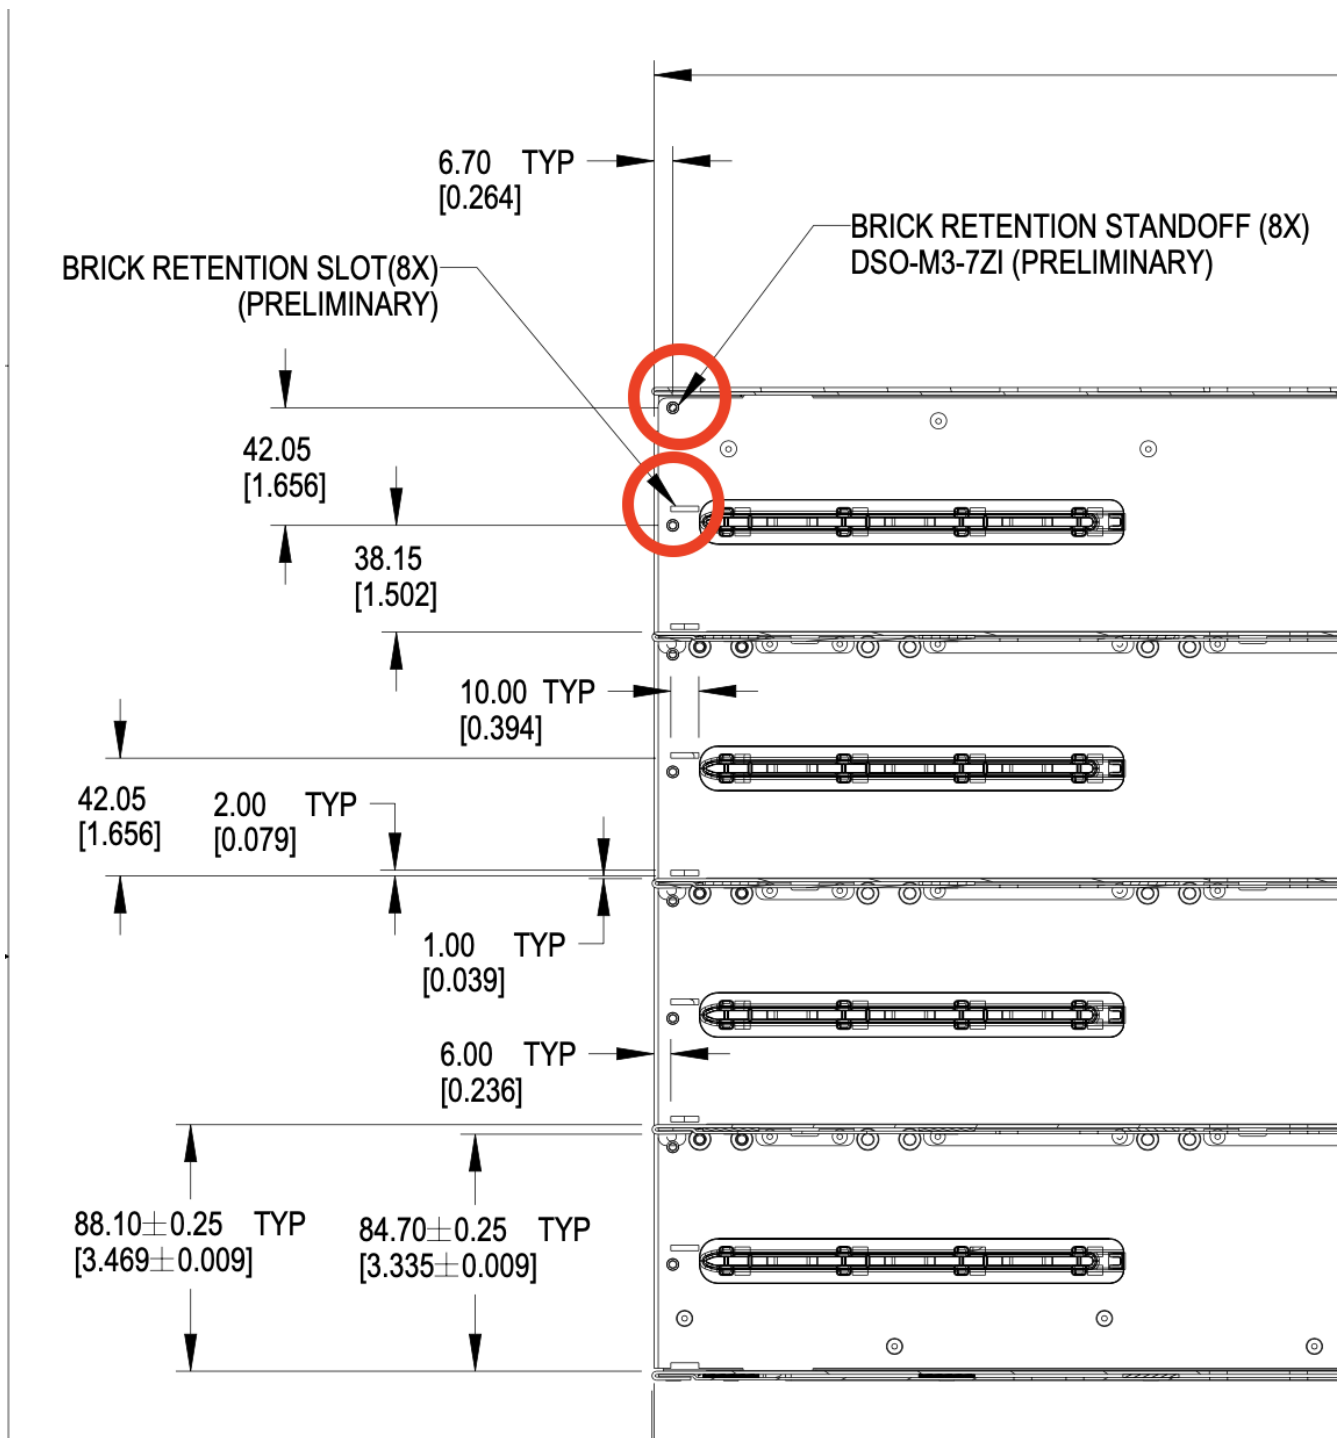


Figure 80. Brick mechanical assistance features in cage

Each feature shall support 100 lbf (445N) force or greater, using the recommended 1.3mm SGCC material.

5.3.3. Brick Mechanical Keying

Two keying notches are positioned in the left and right corners of the sheet metal enclosure as shown below. All dimensions below are critical.

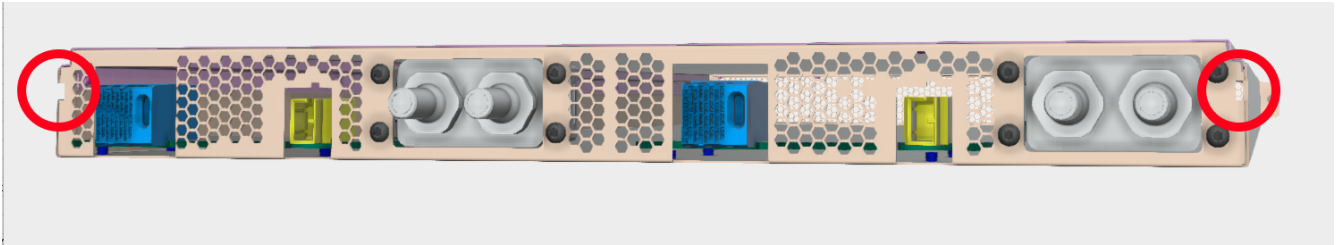


Figure 81. Brick keying

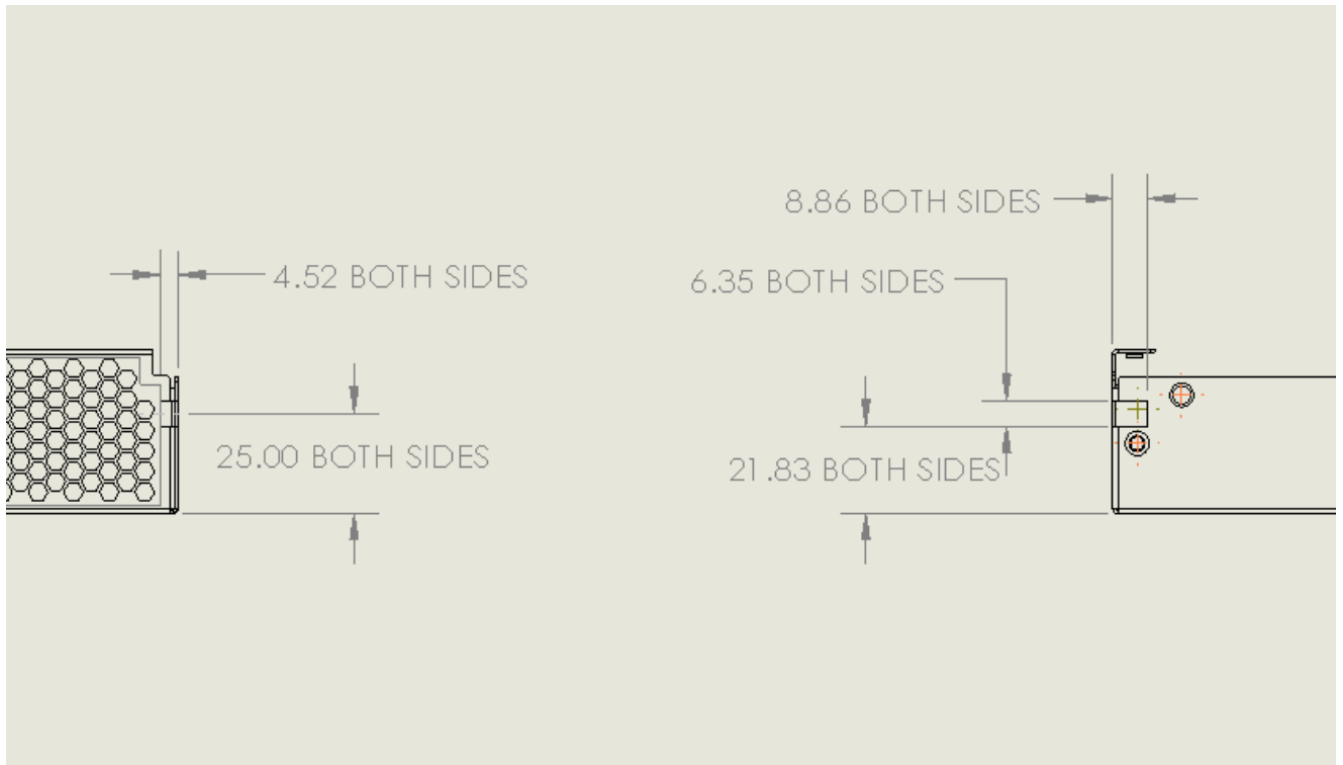


Figure 82. Brick keying dimensions

5.3.4. PCBA

The rear PCBA (Printed Circuit Board Assembly), also referenced as the interposer, provides the +48V DC input power and a data connections. The top of the PCBA is the reference surface, located 6.5mm +/- 0.6mm above the bottom surface of the sheet metal chassis.

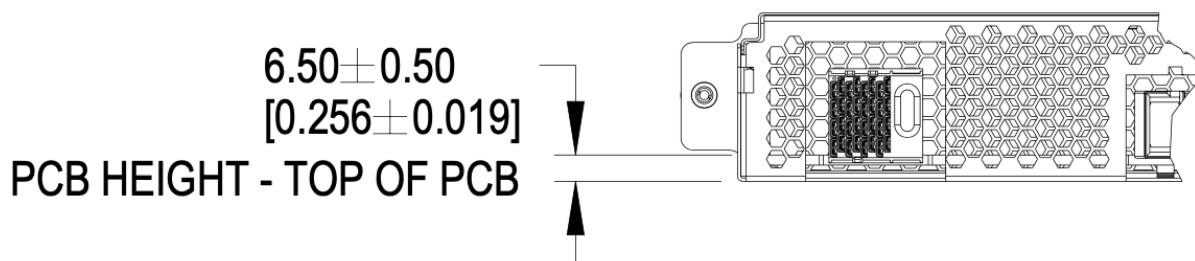


Figure 83. PCBA References

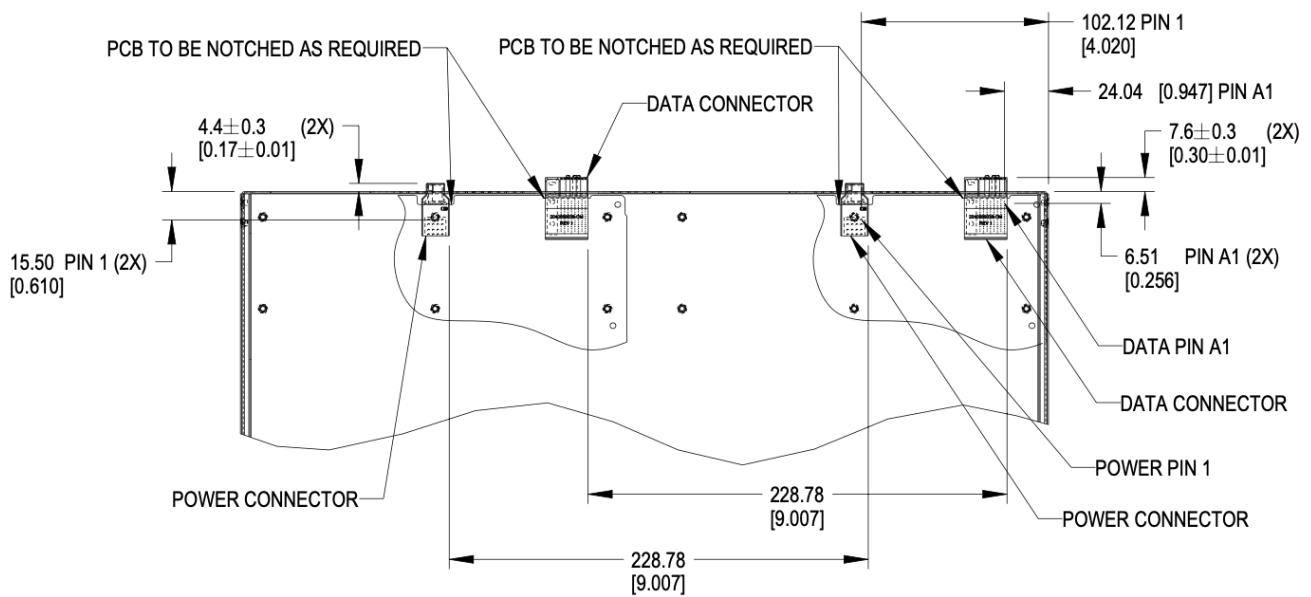


Figure 84. Brick PCB dimensions

5.3.5. Materials

The brick enclosure is constructed of sheet metal with adequate strength and rigidity. Suggested material is 0.8mm SGCC for the chassis base and 0.6mm SGCC for the top cover.

5.3.6. Blind mate interfaces

A brick is equipped with at least one set of blind mate connectors for receiving +48V DC power and transferring data with an external device, typically a network switch. Introduced in this version is are blind mate connections to facilitate liquid cooling. The connections mate with cable and manifold projections from the rear wall of the cage.

- Power connector: Molex Ten60 PN: 220370-0001 (35A) 22037-0000 (70A), refer to Molex document [PSD-220370-0000](#)
- Data connector: Molex 4x8 Impel with guide receptacle PN: 204066-9038 (PCB thickness 2.2-4.1mm), 204066-9138 (PCB thickness 1.0-1.9mm), refer to Molex document [PSD-204066-9001](#)

The power connector has two ratings:

- Power: Not-To-Exceed (NTE) 70A at +48V DC
- Power: Not-To-Exceed (NTE) 35A at +48V DC

The ratings shall be coordinated with the power shelf. 35A bricks shall be enabled in 70A capable infrastructure. 70A bricks are keyed to prevent unsafe operation in 35A infrastructure.

The brick may populate a second set of connectors, as required.

5.3.7. Weight

The maximum weight of the brick, when equipped with all drives and/or accessories, is 60lbs (13.6kg). This is an increase of 10lbs from V1.

5.4. Connector Pinout

5.4.1. Brick power connector

The brick blind-mate power connector for receiving 48V DC (51V nominal) power from the power shelf. The connector mates with the power cable connector projected from the brick cage wall.

Two variations of the brick connector exist, with different Not-to-exceed (NTE) ratings:

- 35A Power Connector: Molex 2203700001 (NTE 35 AMPS) No Key
- 70A Power Connector: Molex 2203700000 (NTE 70 AMPS) Keyed

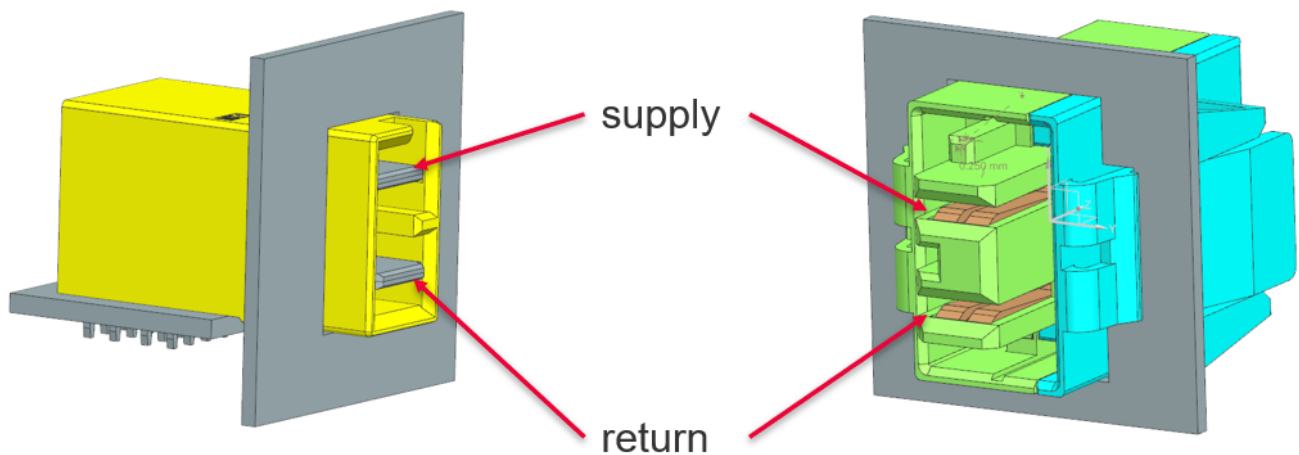


Figure 85. Power connector supply/return definition

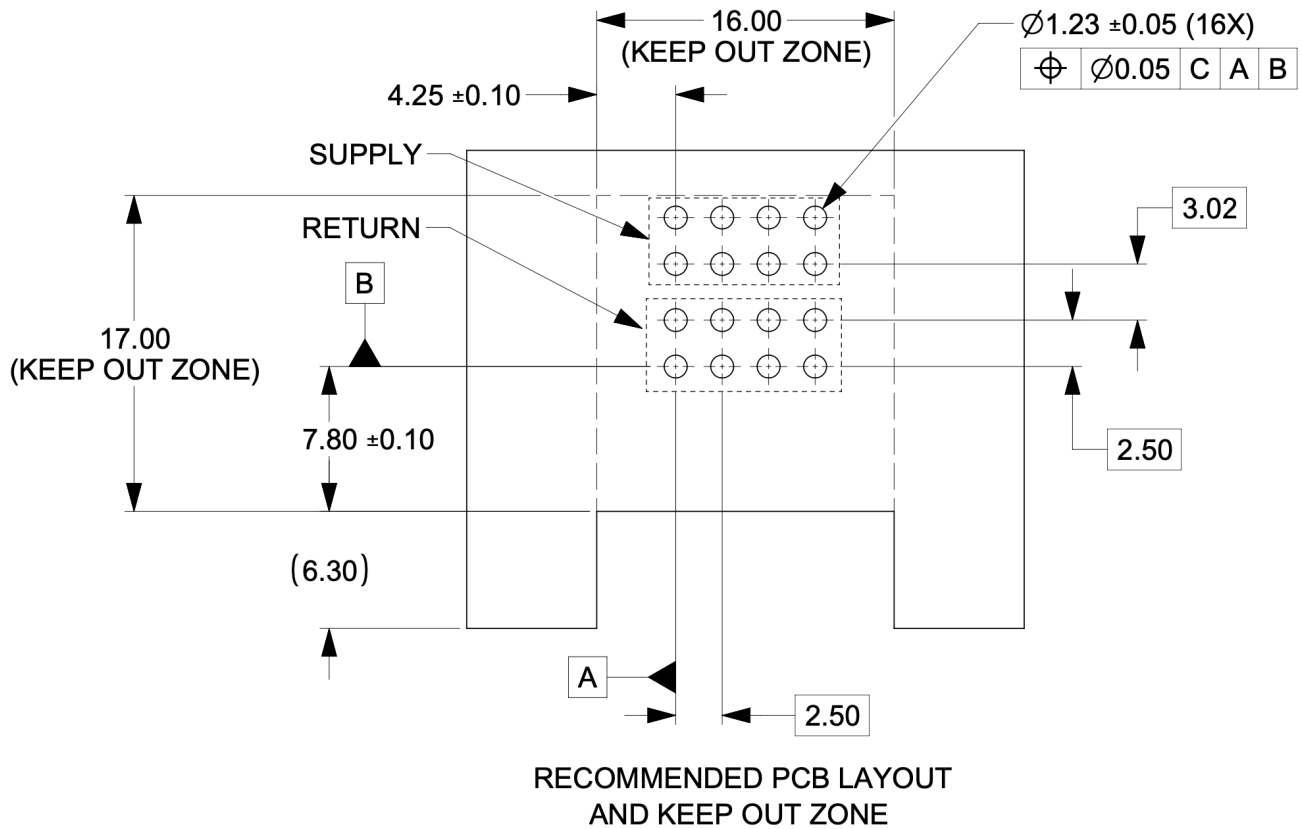


Figure 86. Power connector footprint definition

Connector drawings are available: [Molex Brick power connector](#)

5.4.2. Brick critical dimensions

The brick power connector has a critical dimension for the projection from the brick panel. Spacing between panels is 6.23mm. The power connector shall be proud of the panel 4.40mm.

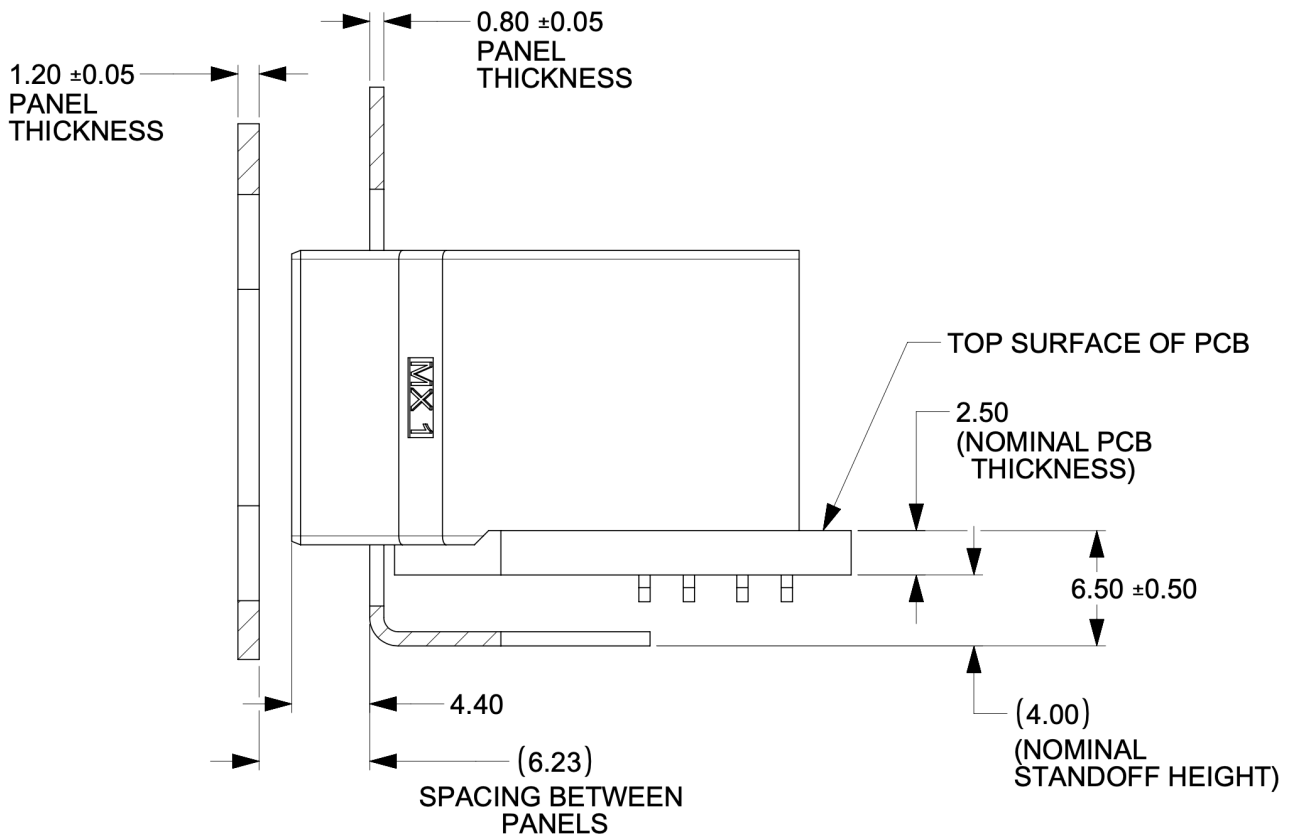


Figure 87. Power connector critical dimensions

5.4.3. Brick voltage

Open19 V2 power shares Open Compute ORV3 power characteristics. Open19 bricks shall safely operate in the DC range 48-52V and shall remain functional when exposed to 0-54V. The power rail shall not exceed 52.5V for more than 200ms. DC voltage shall never exceed 54V.

- Operating range: 48-52V
- NTE voltage: 54V
- Max voltage: $\leq 52.5V$ for $<200ms$

5.4.4. Data Connector

The data connector is rated for 56G PAM4 with an air dielectric. Variations of cables deliver different lane counts, data rates, and physical interfaces. In the reference Ethernet implementation, the data connector pinout explicitly supports a dedicated 10/100/1000Base-T management port, four 25G NRZ/50G PAM4 lanes. Optionally, a single QSFP-DD or two QSFP interfaces are supported.

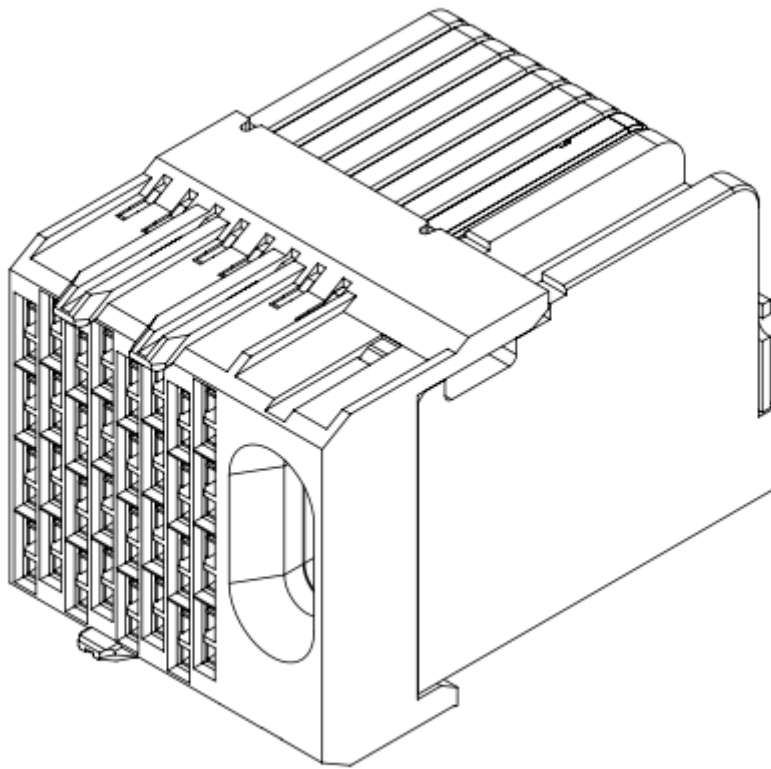


Figure 88. Impel Connector with guide feature

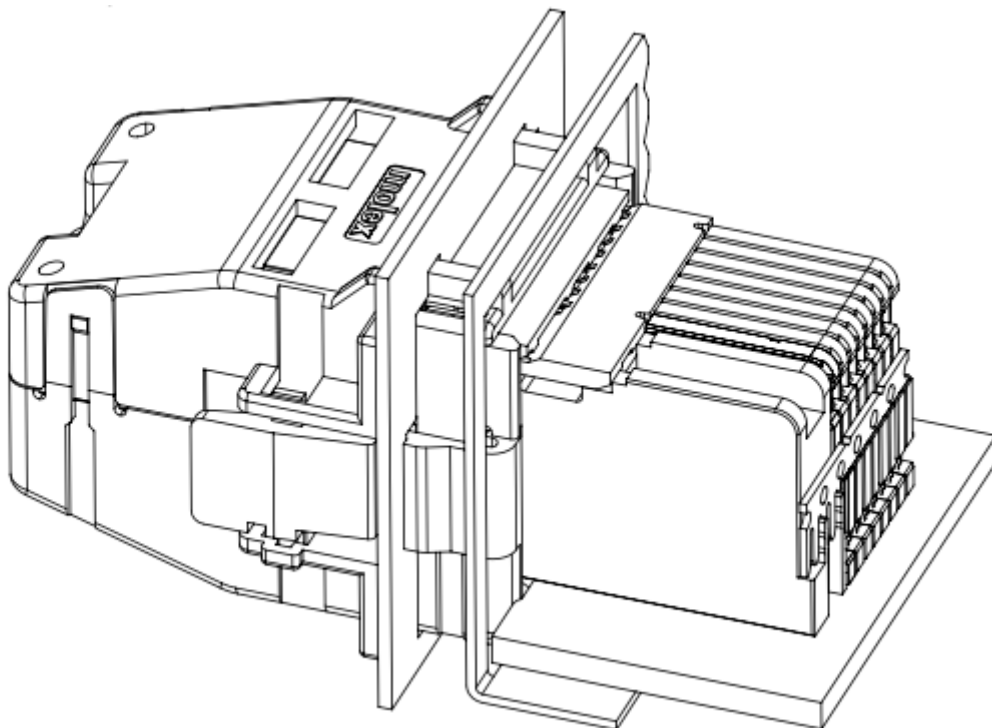


Figure 89. Impel Mated connector with cable backshell

The data connector pinout is defined in the [\[Appendix\]](#)

There is no attempt to support 50G (2x25G NRZ) nor 50G (1x50G NRZ).

5.4.5. Ethernet interface inter-operability

The inter-operability of bricks at deployment with Ethernet interfaces is critical. To support 25G NRZ, 50G PAM4, 100G (4x25G NRZ), 200G (4x50G PAM4), and 400G (8x50G PAM4), the following table:

Port Count	Data Rate	Implementation Interface and order
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1
6		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1, QSFP2 LN 1
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	100G (4x25G)	SFP1, SFP2, SFP3, SFP4, QSFP1
6	200G (4x50G PAM4)	SFP1, SFP2, SFP3, SFP4, QSFP1, QSFP2
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	400G (8x50G PAM4)	QSFP-DD (QSFP1+QSFP2)
		200G (4x50G PAM4)
QSFP (SFP1+SFP2+SFP3+SFP4)	2	QSFP, QSFP1

5.5. Liquid cooling

5.5.1. Brick liquid cooling

Brick liquid cooling is divided into two broad categories, single-phase and two phase. They are mutually incompatible and the designs are mechanically incompatible by design. All bricks inside a single cage are expected to be the same liquid cooling technology.

Unified cutout

Open19 V2 liquid cooling implements a unified liquid cooling cutout. This allows for a consistent brick design to implement both liquid cooling solutions. Implementing the unified cutout is not required, provided all the requirements of a single solution are met.

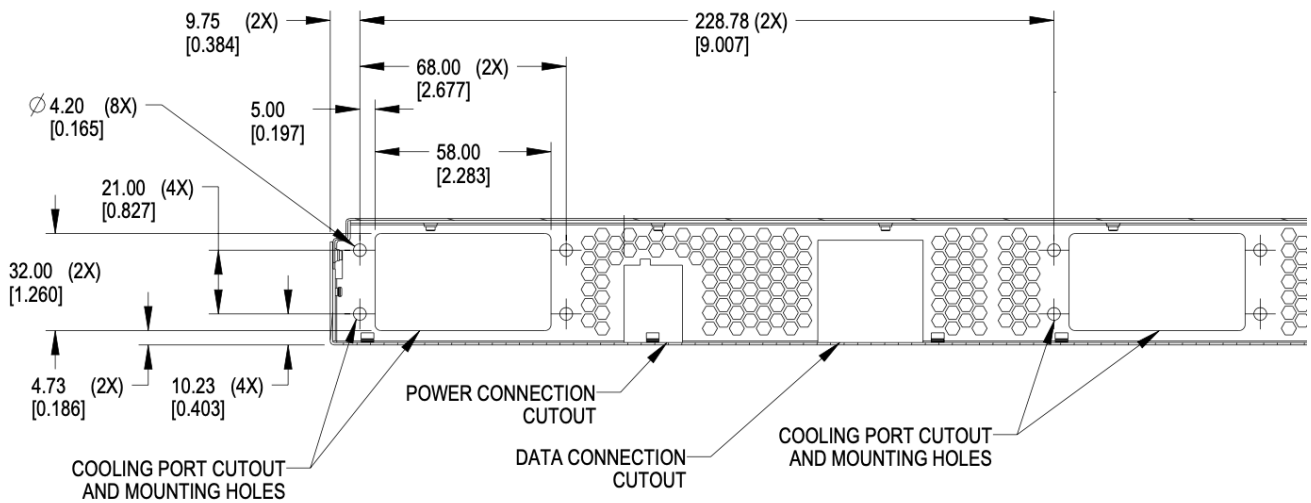


Figure 90. Brick unified cooling cutout

5.5.2. Single phase

Single-phase Connector selection

Single-phase cooling solutions shall use the [CPC BLQ4](#) family of interfaces.



Figure 91. BLQ4 body for manifold



Figure 92. BLQ4 insert for bricks

[BLQ4_SpecSheet.pdf](#)

The BLQ4 connectors are blind mate. Both sides of the connector have G 3/8" threads which thread into manifold (body) and brick (insert), respectively.

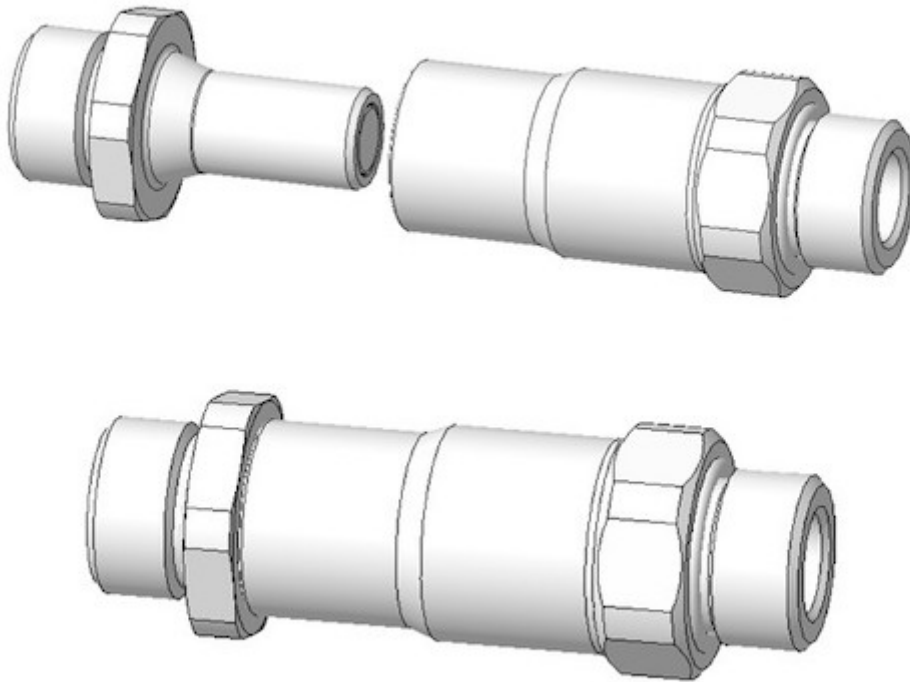


Figure 93. BLQ4 pair

Single-phase connector mounting and polarization

Bricks shall have male blind-mate connectors (inserts), BLQ4D47006 or compatible part.

When viewed from the rear of the brick, in reference to the server: Liquid return shall be located to the left. Liquid supply shall be located in the to the right.

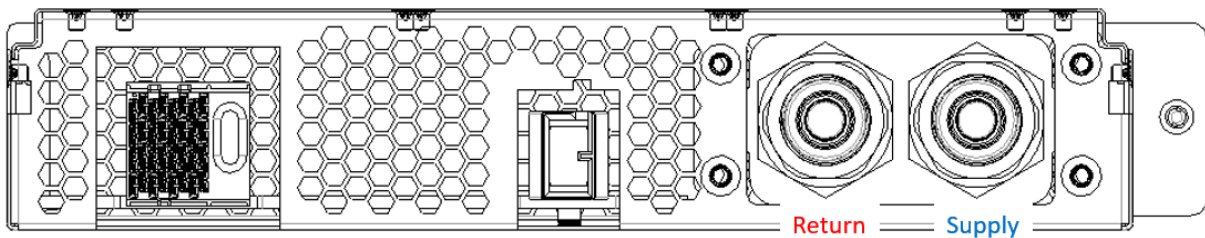


Figure 94. Brick side supply and return

Single-phase brick side connector locations

The supply connector should be 29.5mm from the outer side of the brick (opposite the thumbscrew) in the x-direction and 20.7mm from the bottom of face of the brick in the y-direction. The two

connectors should be lined up in the horizontal plane and spaced 28.5mm from each other.

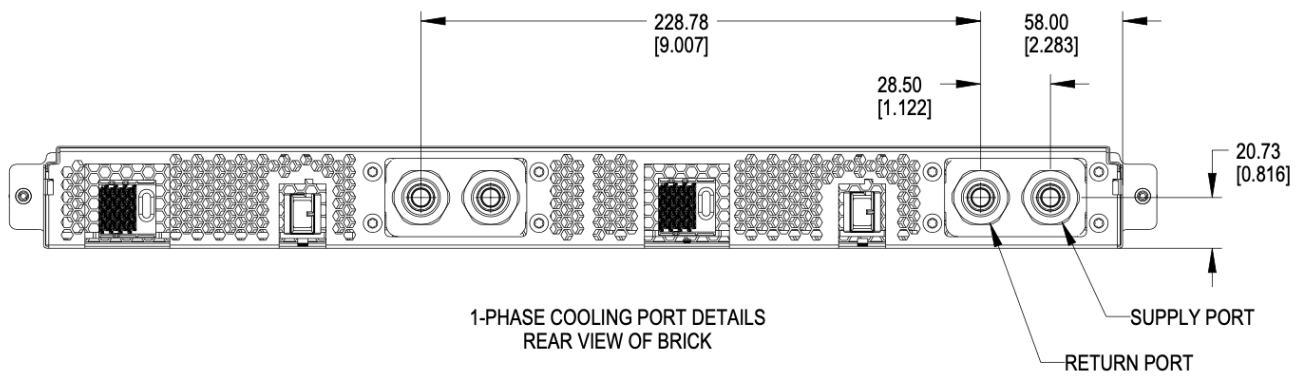


Figure 95. Brick side liquid connector locations for single-phase

Single-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

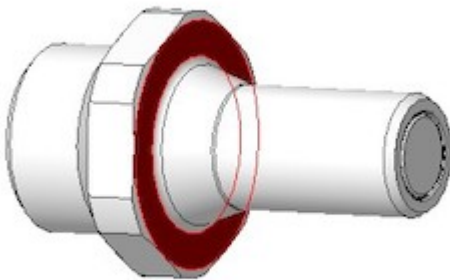


Figure 96. Mating surface BLQ4 insert

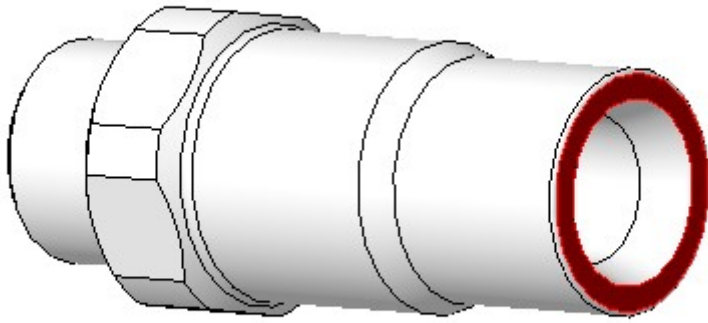


Figure 97. Mating surface BLQ4 body

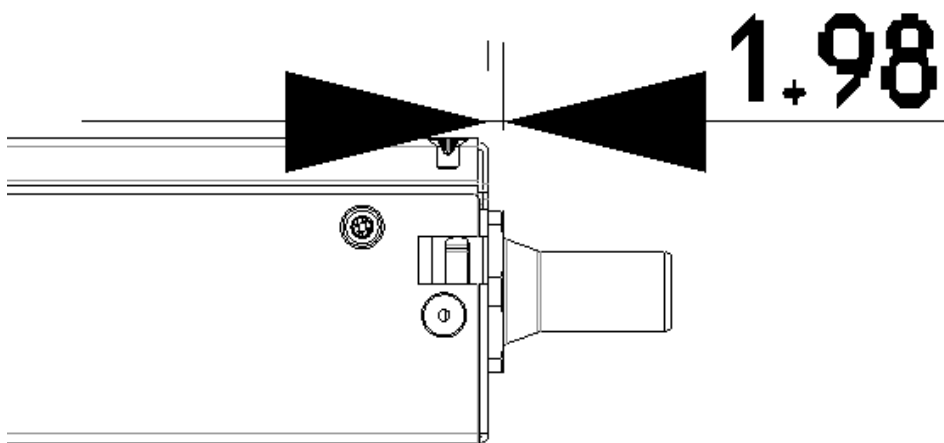


Figure 98. Offset from cage back panel to connector mating interface

The BLQ4 connectors must be within 3mm of this fully engaged state to achieve full flow.

5.5.3. Two phase

Two-phase connector selection

The two-phase cooling solution shall use the CPC BLQ family of interfaces.

On brick side



Figure 99. Liquid - CPC BLQ4 series insert P/N BLQ4D47004PROTO (chrome plated brass) or P/N 4649800PROTO (Aluminum)



Figure 100. Vapor - CPC BLQ6 series insert P/N 4650000PROTO (chrome plated brass)

On the Manifold side



Figure 101. Liquid - CPC BLQ4 series body P/N BLQ4D31004PROTO (chrome plated brass) or P/N 4649900PROTO (Aluminum)



Figure 102. Vapor - CPC BLQ6 series body P/N 4650200PROTO (chrome plated brass)

Two-phase connector mounting polarization

Cage manifolds shall have body (female) blind mate connectors. Bricks shall have insert (male) blind-mate connectors. When viewed from rear of the brick, vapor connection shall be located at the right position. Liquid connection shall be located at the left position.

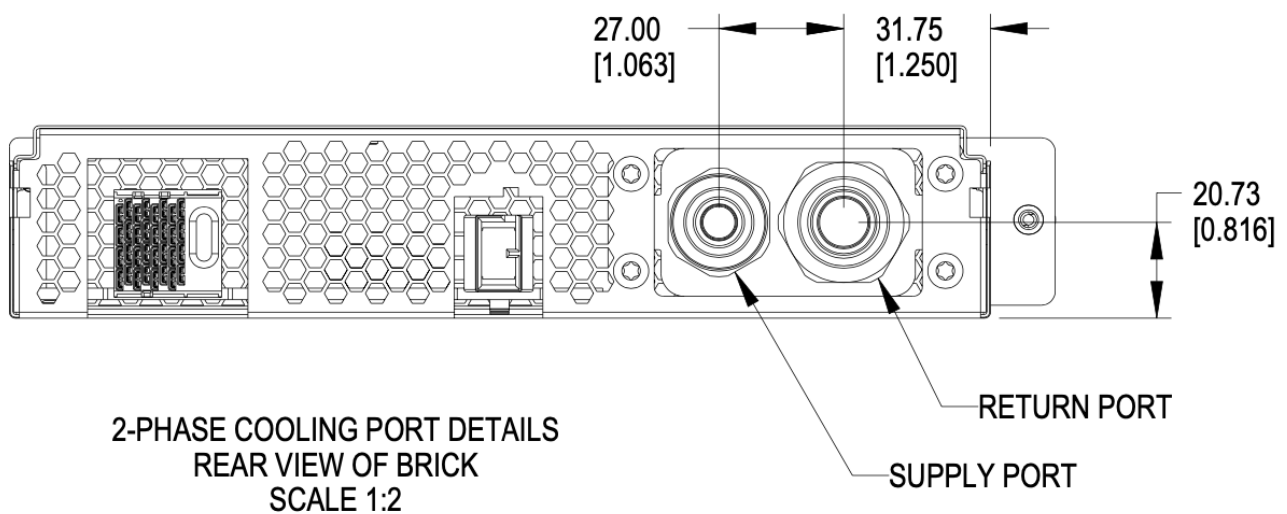


Figure 103. Brick liquid supply and Vapor return

Two-phase brick side connector locations

Using the right-side panel of the brick as a reference, the Vapor return connector on the brick should be 31.85mm in the x direction and 20.73 upwards in the y direction.

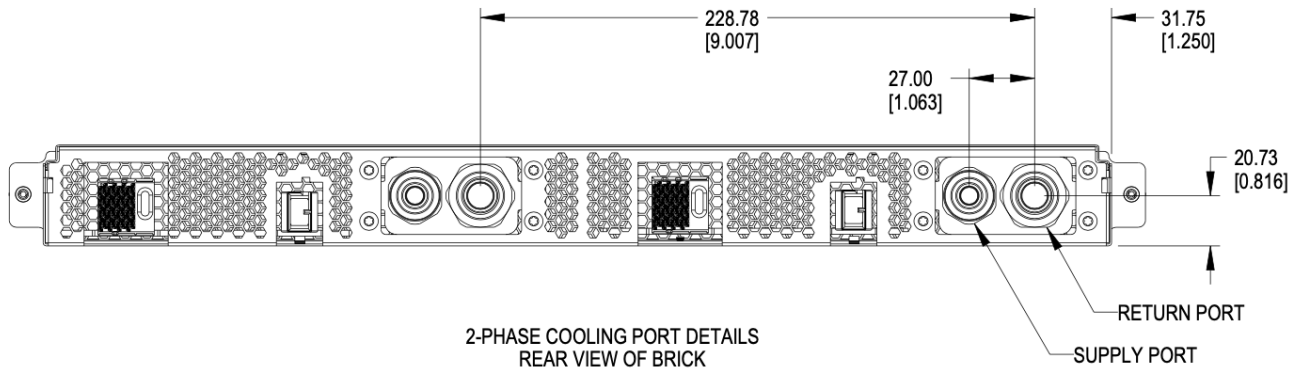


Figure 104. Brick side connectors locations

Two-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

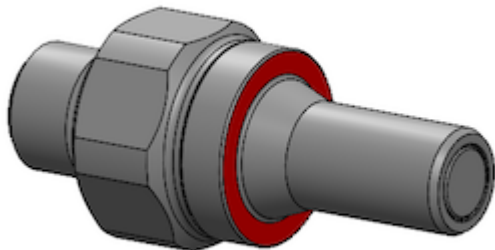


Figure 105. Mating surface BLQ4 insert

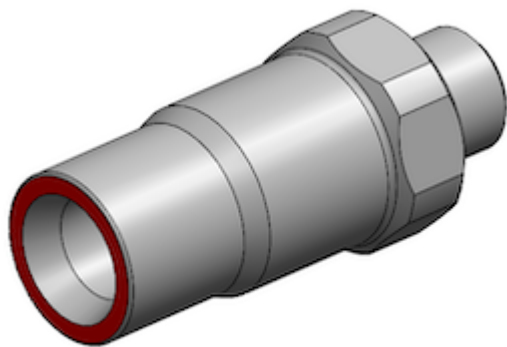


Figure 106. Mating surface BLQ4 body

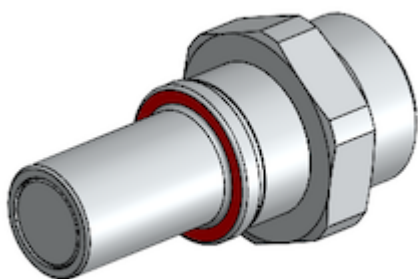


Figure 107. Mating surface BLQ6 insert

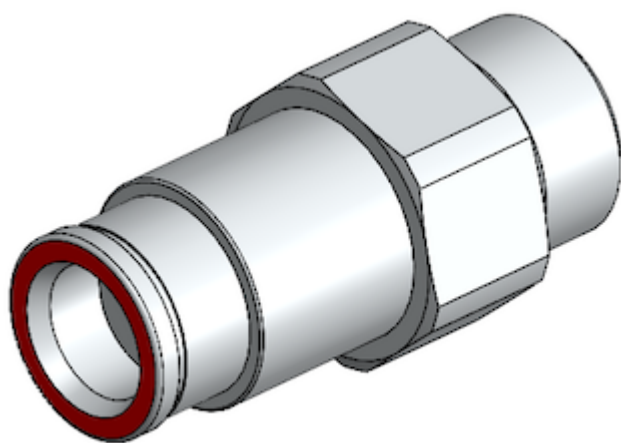


Figure 108. Mating surface BLQ6 body

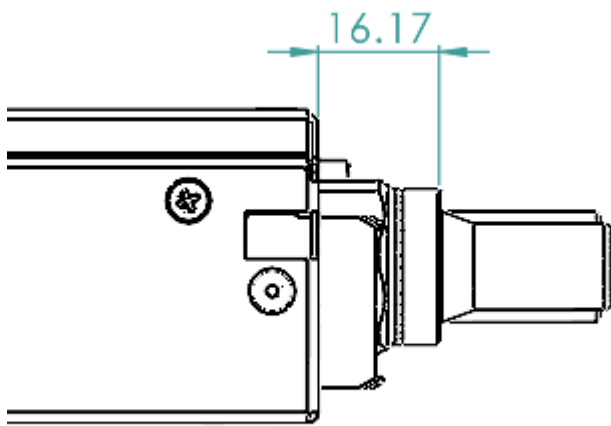


Figure 109. Offset from cage back panel to BLQ4 connector mating interface

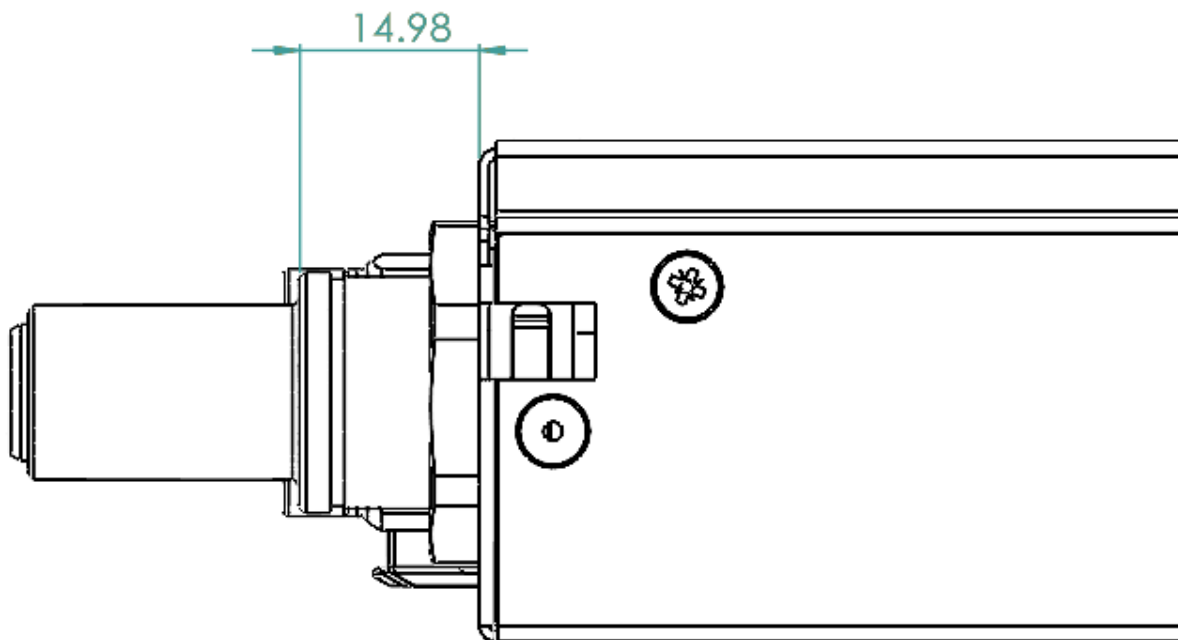


Figure 110. Offset from cage back panel to BLQ6 connector mating interface

The BLQ4 & BLQ6 connectors must be within $\pm 1.5\text{mm}$ of this engaged state to achieve full flow.

5.6. Design guidance

Design guidance is not a specification requirement. It is simple design guidance that can be implemented to simplify future needs, to meet certification requirements, or satisfy general fit & finish.

5.6.1. Brick faceplate guidance

The faceplate is notched above and below the fastener (See [Figure 78, “Brick retention”](#)). Note that the faceplate can accommodate any type of ports or drives as needed and is not required to be fully perforated.

Screws and/or rivets used to secure the top cover are flush to be under-flush. The vertical edges on the rear of the brick chassis base are coined to break sharp edges.

5.6.2. Back panel safety perforation

See below for typical dimensions of the airflow perforation. All dimensions below are critical.

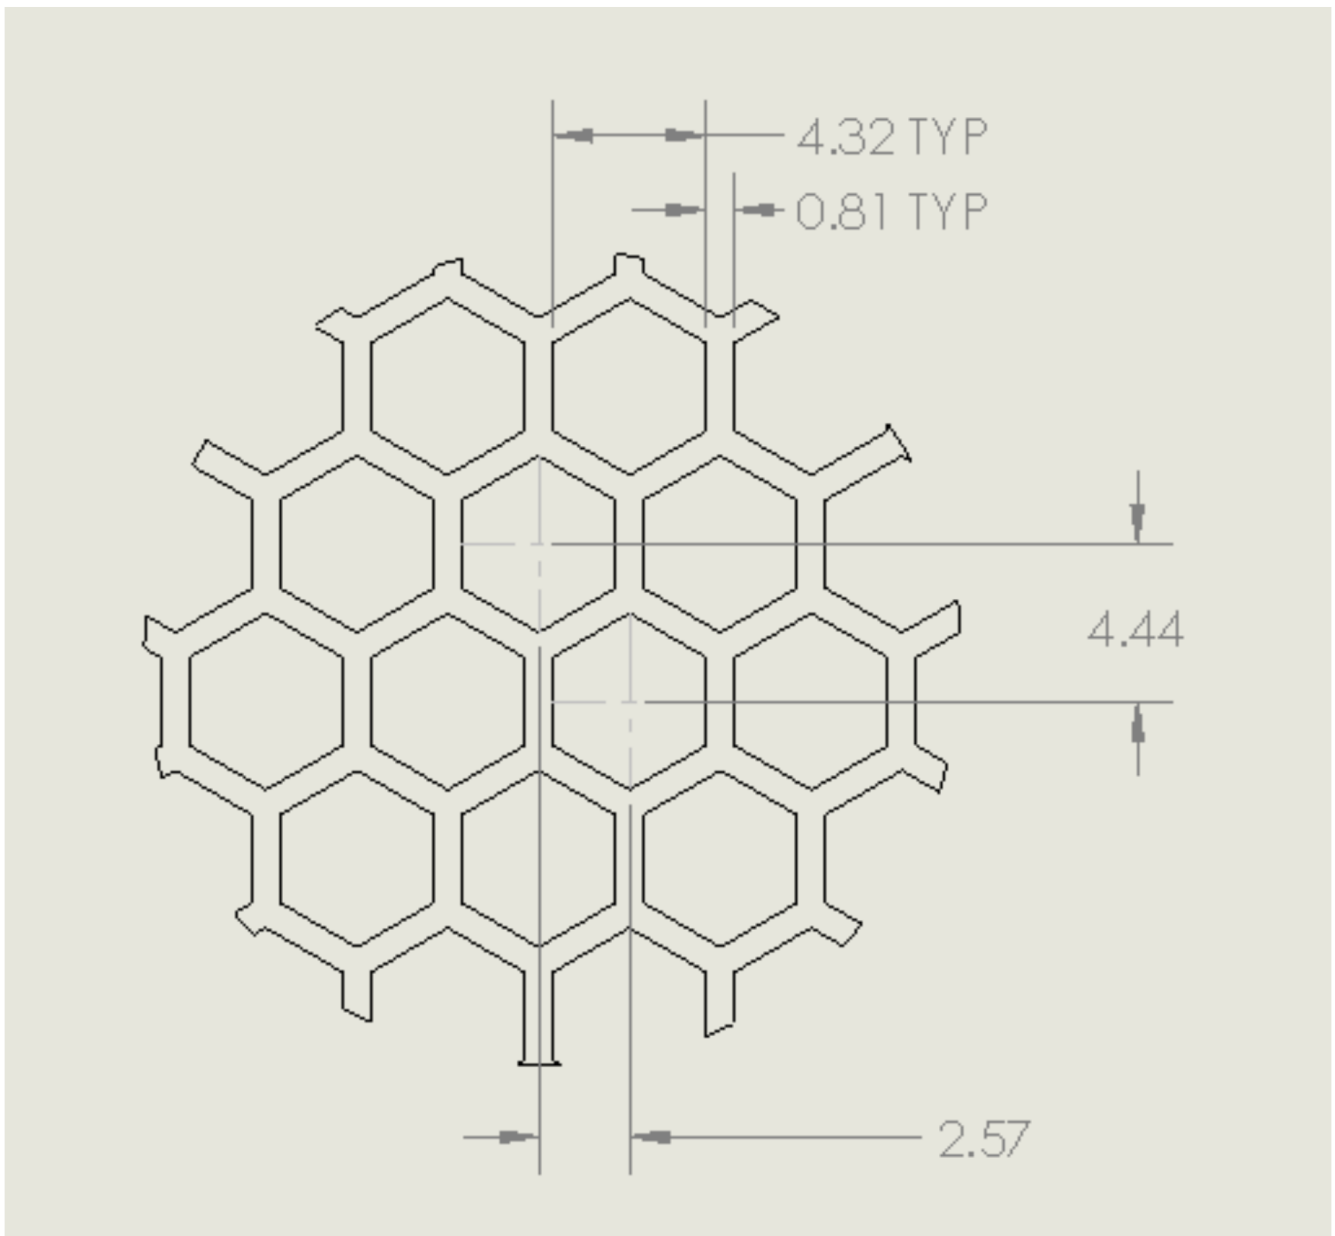


Figure 111. Brick panel perforation

Keep-out zones

Keep-out zones are defined in the brick surrounding the power connector and liquid cooling interfaces. The liquid cooling keep-out spaces "fly" above the PCB, allowing components to be populated below the connections.

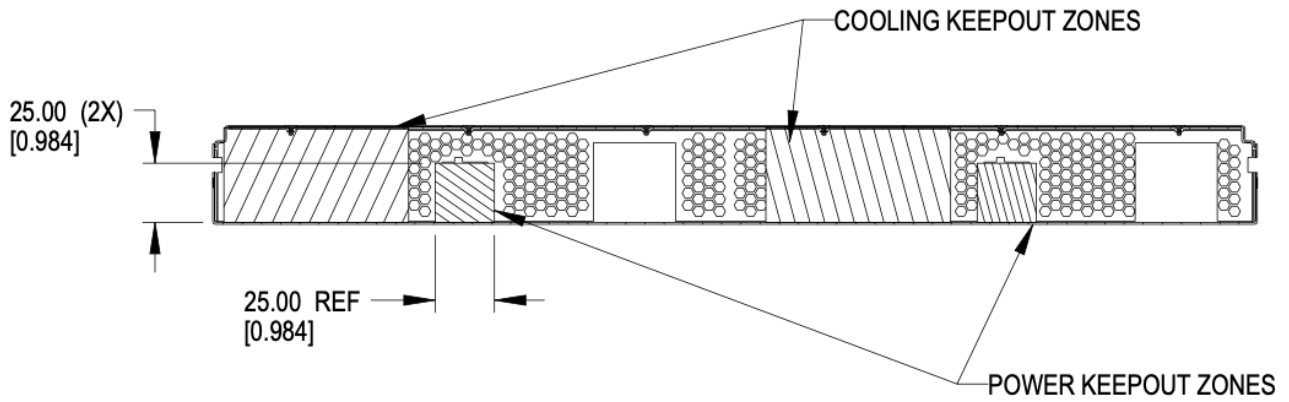


Figure 112. Brick keep-out zone

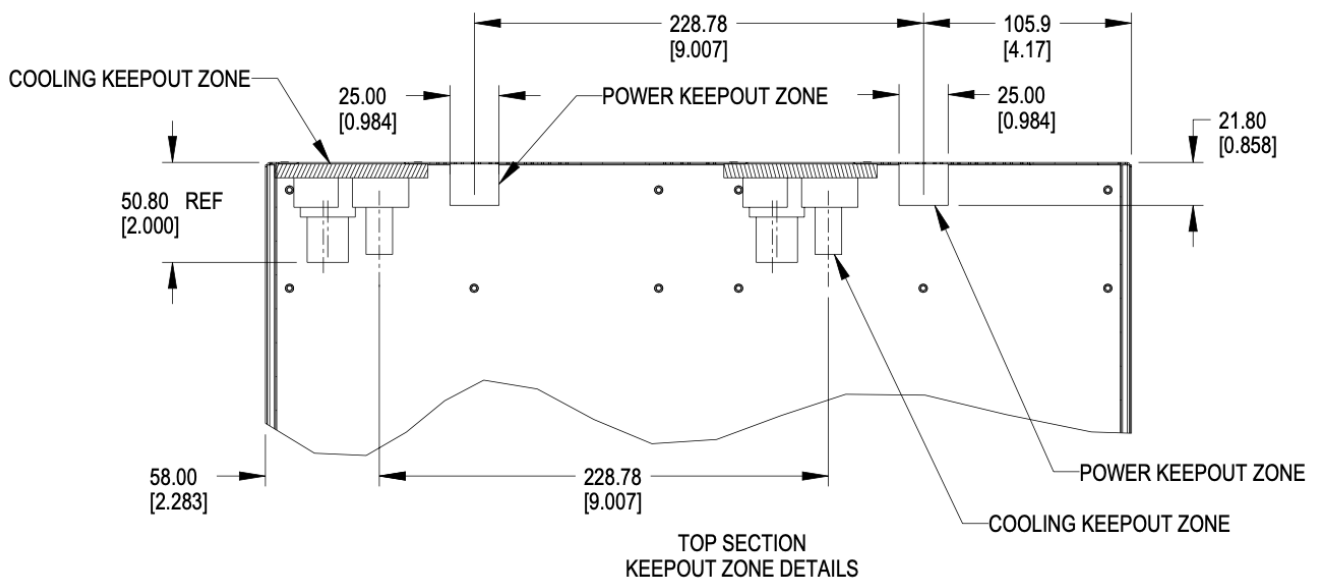


Figure 113. Brick keep-out zone top view

5.7. Brick performance

5.7.1. Brick electrical startup behavior

In order to safely operate the power shelf, we define the following characteristics for brick startup behavior.

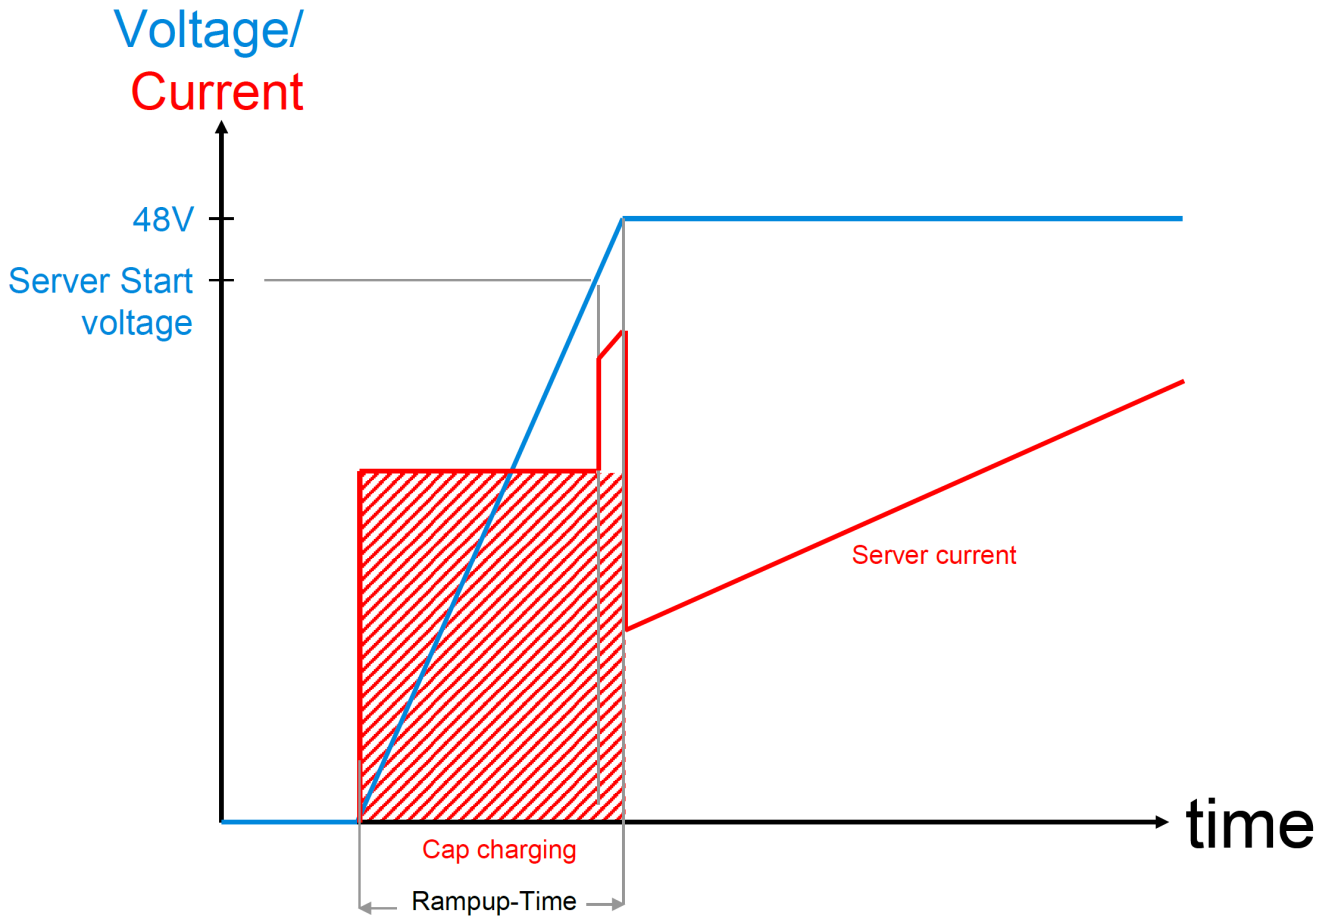


Figure 114. Server startup electrical characteristics

These values are per connector feed from a power shelf.

Two power connectors are available for use.

- Min start-up voltage: +44V DC
- Max input capacitance per brick feed: $\leq 1000\mu\text{F}$
- Max server current at start-up voltage: 70A
- Ramp time: Follow Intel CRPS spec: ramp time 10-70msec, slew rate 0.5V/msec

<https://www.intel.com/content/dam/www/public/us/en/documents/guides/power-supply-design-guide-june.pdf>

Chapter 6. Brick Mechanical Specification

[DHDW]

6.1. DHDW Brick

The DHDW brick is commonly used as a 2U server form-factor.

6.2. Brick Dimensions

The brick is designed with the overall dimensions shown.

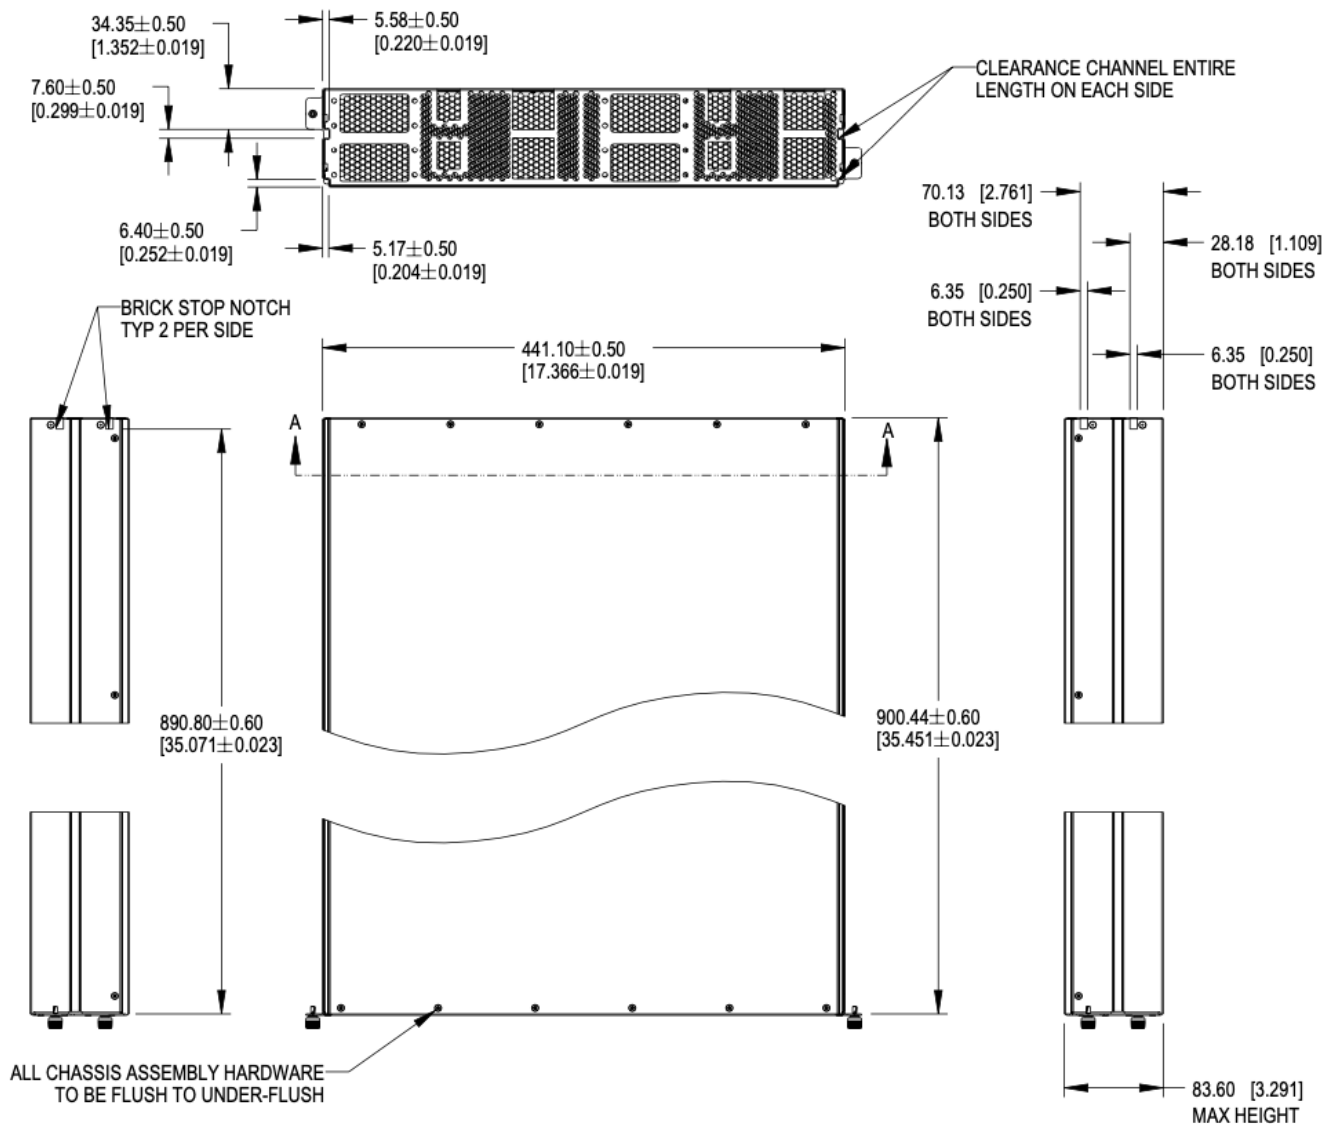


Figure 115. Brick dimensions

Please refer to the [drawings](#), and 3D files for further details.

The V1 specification for bricks defined 901.7mm as the overall length of the brick, including the thickness of the front panel.

The dimension is modified to reference to the inside of the front panel to the rear of the brick. This dimension is 900.50mm $\pm$ 0.60 from the rear face of the front panel (mating surface to the cage) to the outside of the rear panel.

6.3. Mechanical features

6.3.1. Brick retention

The brick is secured into the cage with up to four Southco D9-47-1302-K quarter-turn fasteners, located on the left and right side of the faceplate.

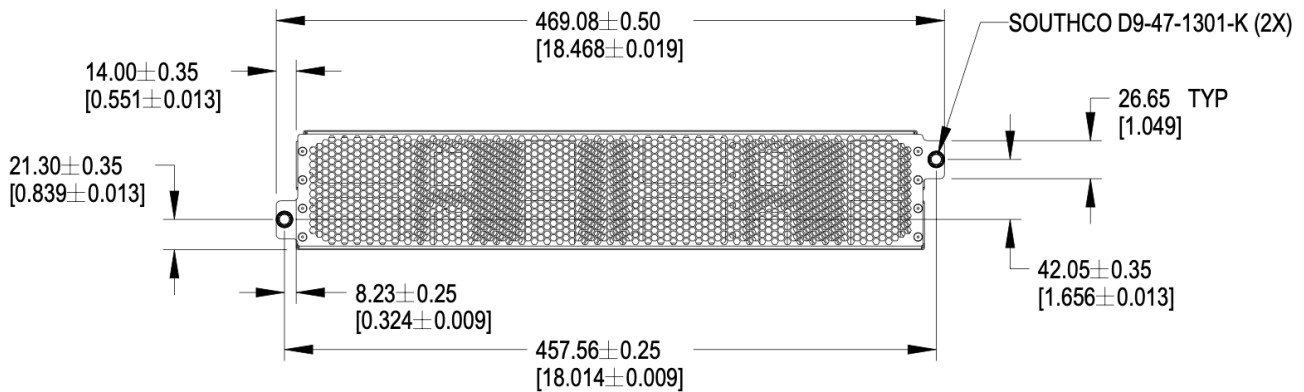


Figure 116. Brick retention

6.3.2. Brick mechanical guide

Clearance channels are required along the top edges of the brick and the sidewalls, extending forward from the rear panel to the back of the faceplate.

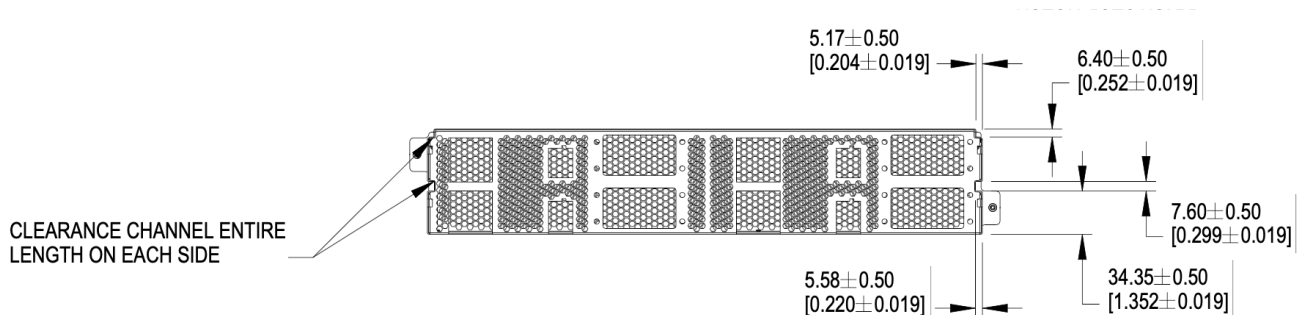


Figure 117. Mechanical guide at top edge and side walls of brick

Brick insertion and retention assistance for liquid cooling

For liquid cooling applications, two different mechanical assist for insertion and retention are available in the cage. Bricks can implement features to make use either/both features.

The features are:

- Brick retention standoff, available on both sides in the mechanical guide channel
- Slots, available on both sides of the cage wall

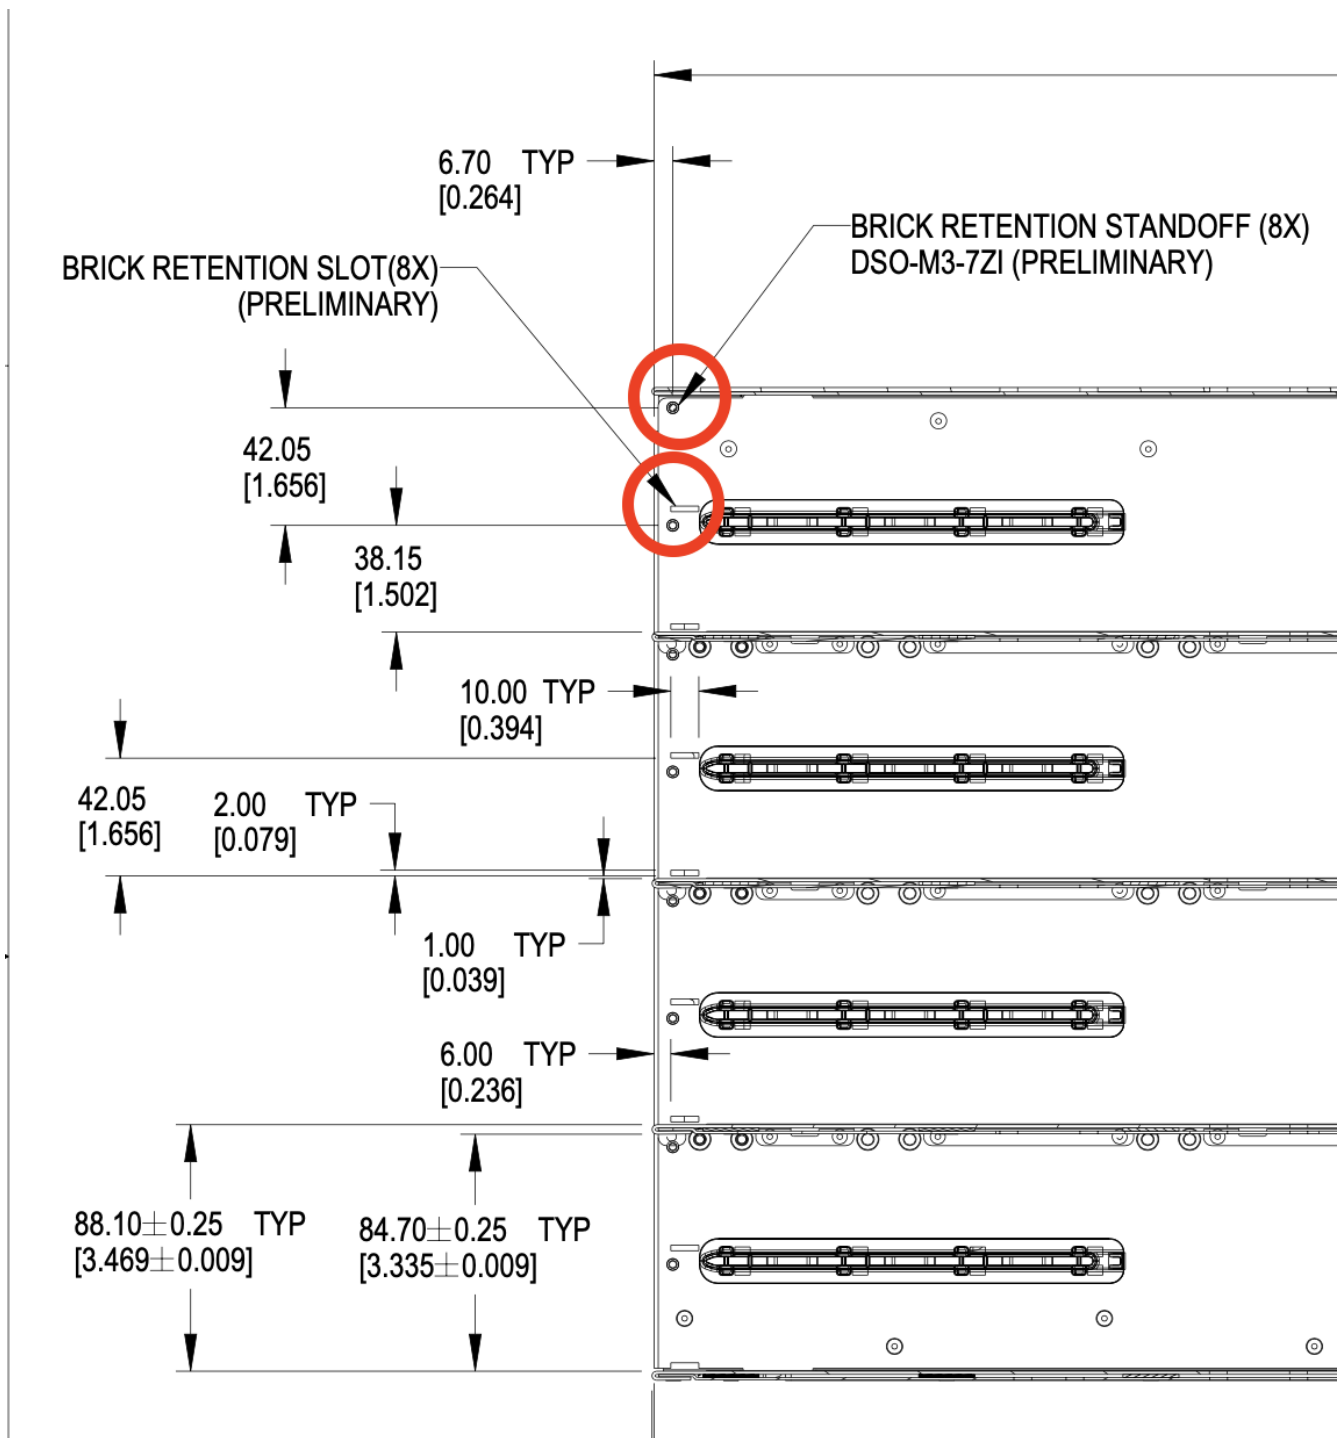


Figure 118. Brick mechanical assistance features in cage

Each feature shall support 100 lbf (445N) force or greater, using the recommended 1.3mm SGCC material.

6.3.3. Brick Mechanical Keying

Two keying notches are positioned in the left and right corners of the sheet metal enclosure as shown below. All dimensions below are critical.

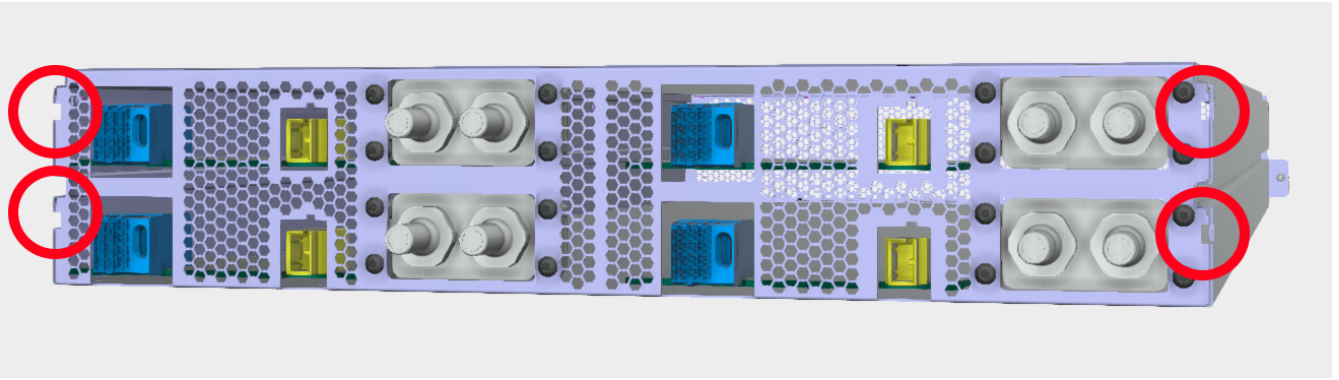


Figure 119. Brick keying

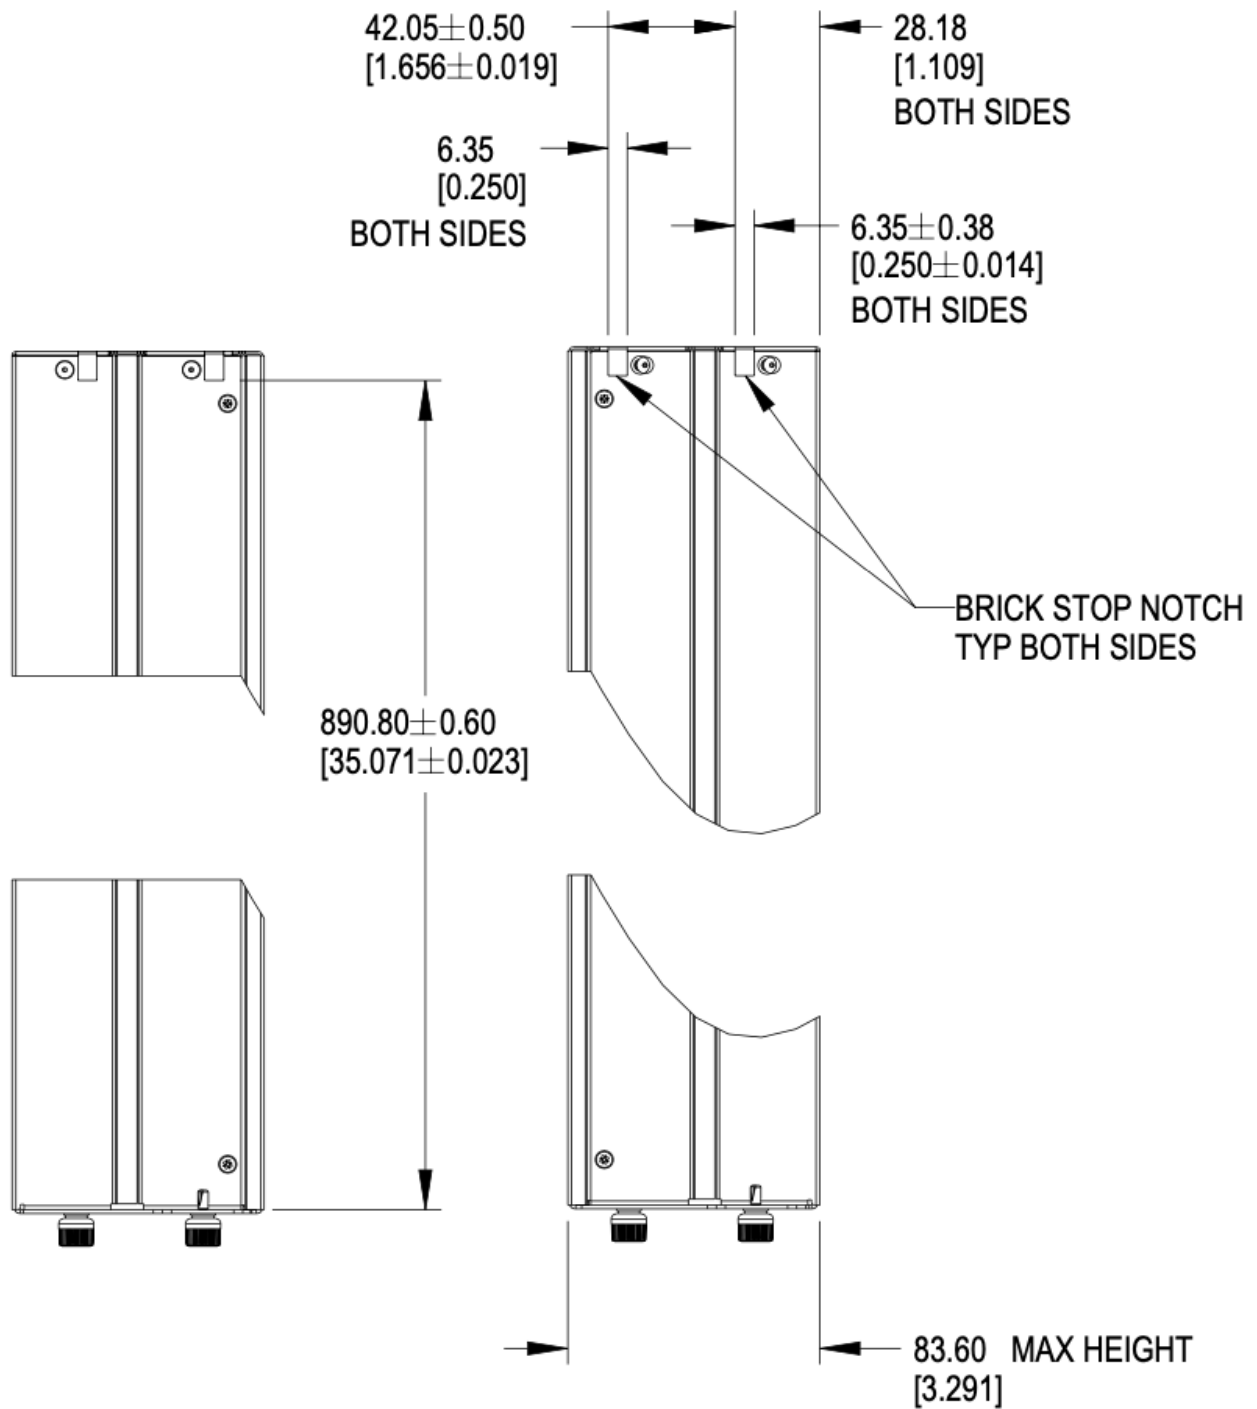


Figure 120. Brick keying dimensions

6.3.4. PCBA

The rear PCBA (Printed Circuit Board Assembly), also referenced as the interposer, provides the +48V DC input power and a data connections. The top of the PCBA is the reference surface, located 6.5mm +/- 0.6mm above the bottom surface of the sheet metal chassis.

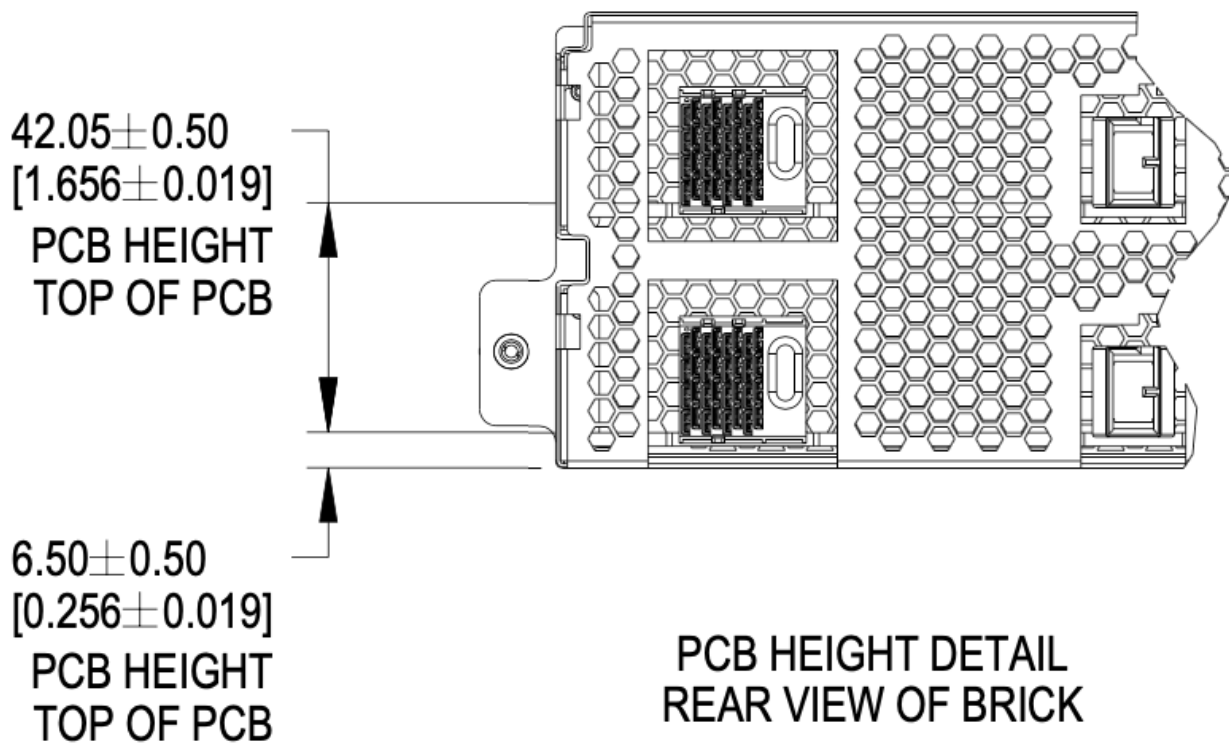


Figure 121. PCBA References

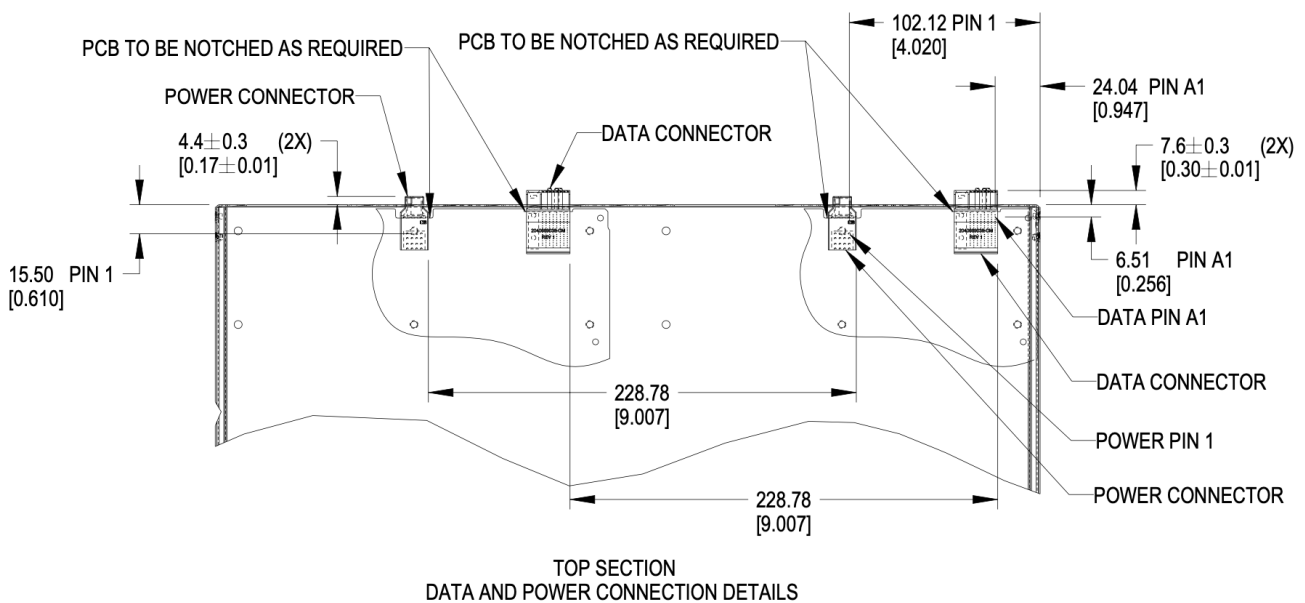


Figure 122. Brick PCB dimensions

6.3.5. Materials

The brick enclosure is constructed of sheet metal with adequate strength and rigidity. Suggested material is 0.8mm SGCC for the chassis base and 0.6mm SGCC for the top cover.

6.3.6. Blind mate interfaces

A brick is equipped with at least one set of blind mate connectors for receiving +48V DC power and transferring data with an external device, typically a network switch. Introduced in this version is are blind mate connections to facilitate liquid cooling. The connections mate with cable and manifold projections from the rear wall of the cage.

- Power connector: Molex Ten60 PN: 220370-0001 (35A) 22037-0000 (70A), refer to Molex document [PSD-220370-0000](#)
- Data connector: Molex 4x8 Impel with guide receptacle PN: 204066-9038 (PCB thickness 2.2-4.1mm), 204066-9138 (PCB thickness 1.0-1.9mm), refer to Molex document [PSD-204066-9001](#)

The power connector has two ratings:

- Power: Not-To-Exceed (NTE) 70A at +48V DC
- Power: Not-To-Exceed (NTE) 35A at +48V DC

The ratings shall be coordinated with the power shelf. 35A bricks shall be enabled in 70A capable infrastructure. 70A bricks are keyed to prevent unsafe operation in 35A infrastructure.

The brick may populate up to four sets of connectors, as required.

6.3.7. Weight

The maximum weight of the brick, when equipped with all drives and/or accessories, is 120lbs (54.43kg). This is an increase of 20lbs from V1.

6.4. Connector Pinout

6.4.1. Brick power connector

The brick blind-mate power connector for receiving 48V DC (51V nominal) power from the power shelf. The connector mates with the power cable connector projected from the brick cage wall.

Two variations of the brick connector exist, with different Not-to-exceed (NTE) ratings:

- 35A Power Connector: Molex 2203700001 (NTE 35 AMPS) No Key
- 70A Power Connector: Molex 2203700000 (NTE 70 AMPS) Keyed

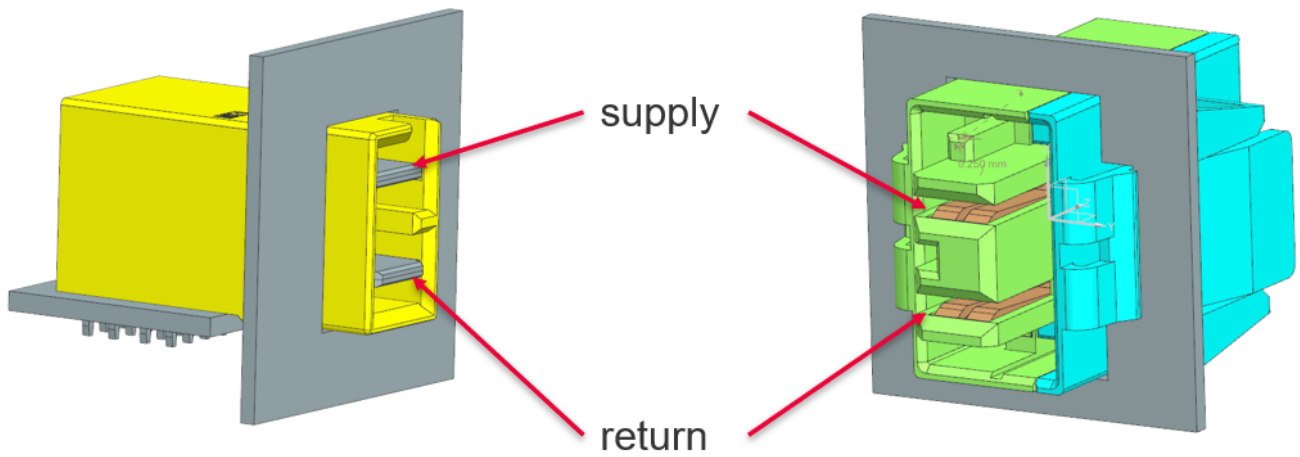


Figure 123. Power connector supply/return definition

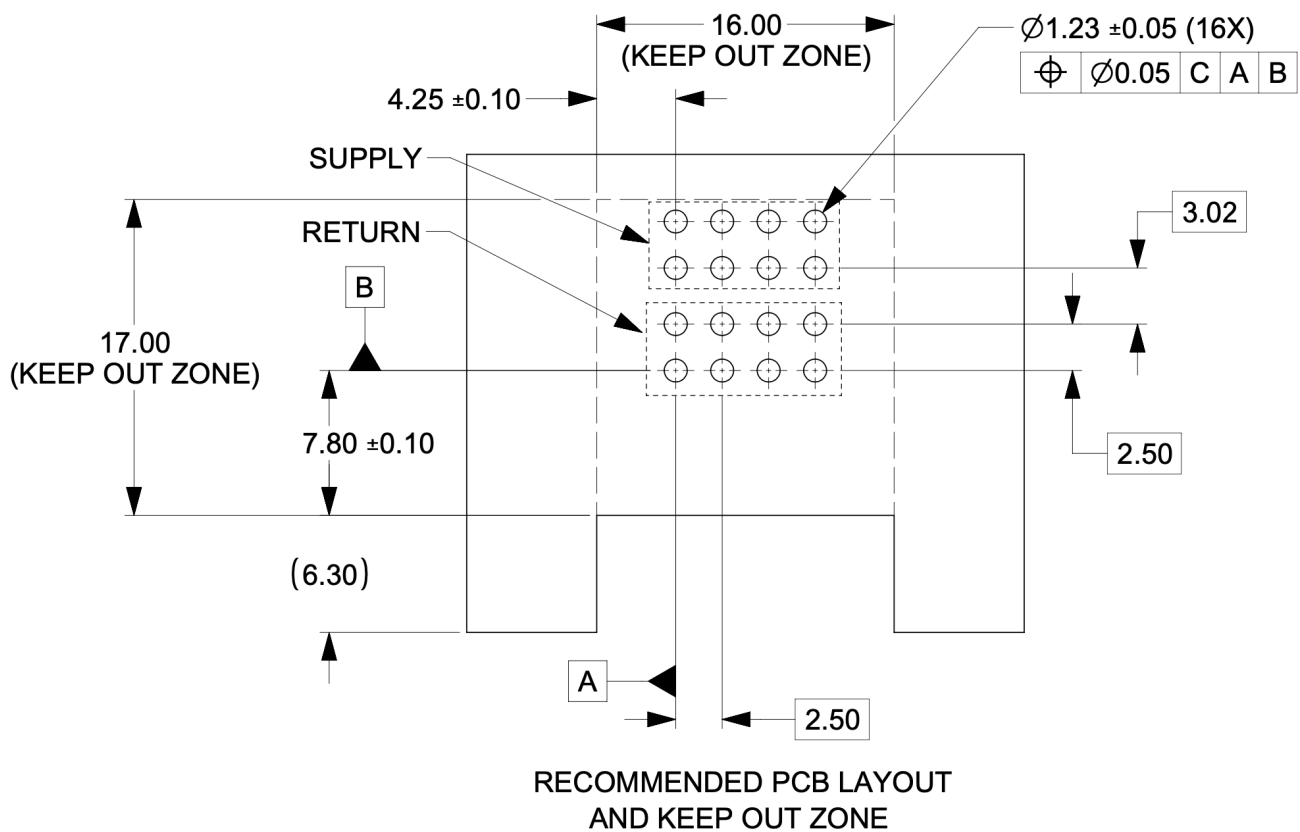


Figure 124. Power connector footprint definition

Connector drawings are available: [Molex Brick power connector](#)

6.4.2. Brick critical dimensions

The brick power connector has a critical dimension for the projection from the brick panel. Spacing between panels is 6.23mm. The power connector shall be proud of the panel 4.40mm.

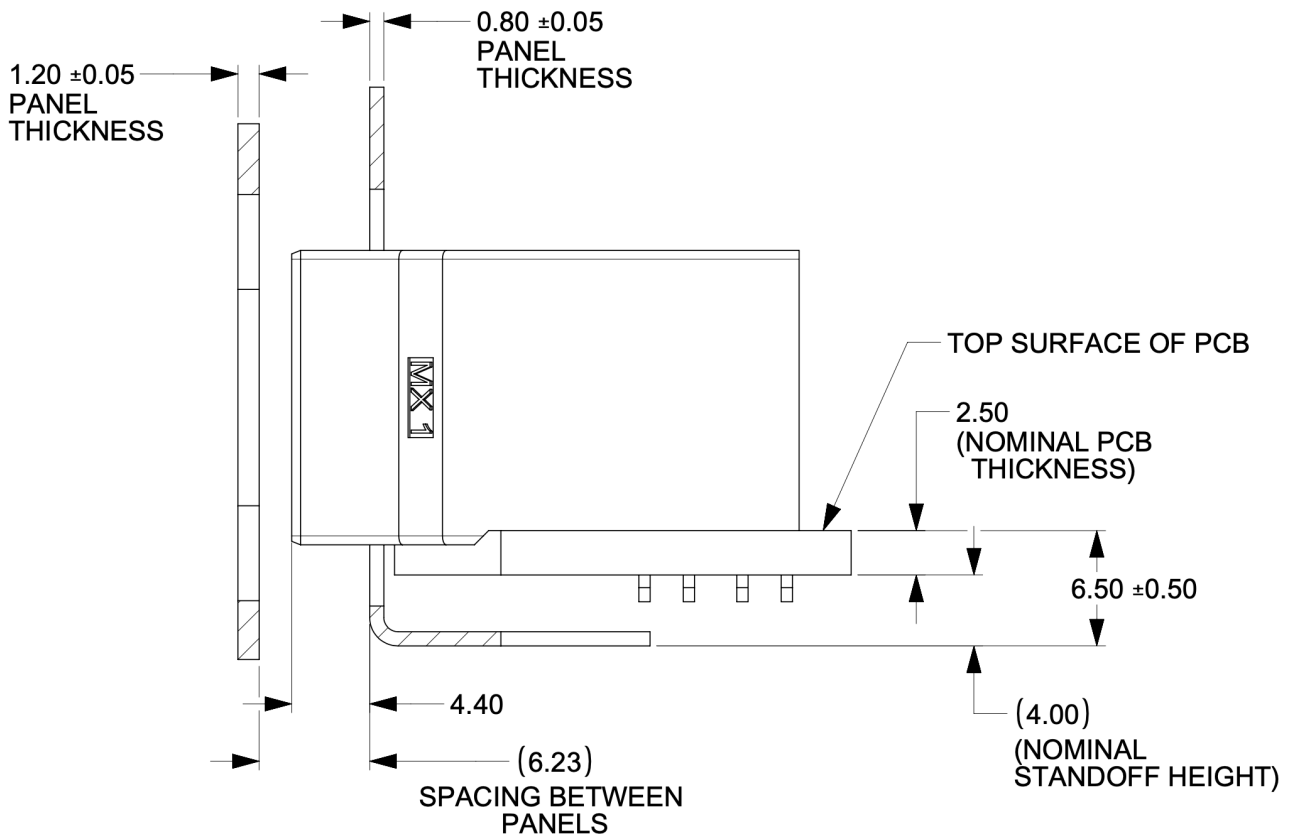


Figure 125. Power connector critical dimensions

6.4.3. Brick voltage

Open19 V2 power shares Open Compute ORV3 power characteristics. Open19 bricks shall safely operate in the DC range 48-52V and shall remain functional when exposed to 0-54V. The power rail shall not exceed 52.5V for more than 200ms. DC voltage shall never exceed 54V.

- Operating range: 48-52V
- NTE voltage: 54V
- Max voltage: $\leq 52.5V$ for $<200ms$

6.4.4. Data Connector

The data connector is rated for 56G PAM4 with an air dielectric. Variations of cables deliver different lane counts, data rates, and physical interfaces. In the reference Ethernet implementation, the data connector pinout explicitly supports a dedicated 10/100/1000Base-T management port, four 25G NRZ/50G PAM4 lanes. Optionally, a single QSFP-DD or two QSFP interfaces are supported.

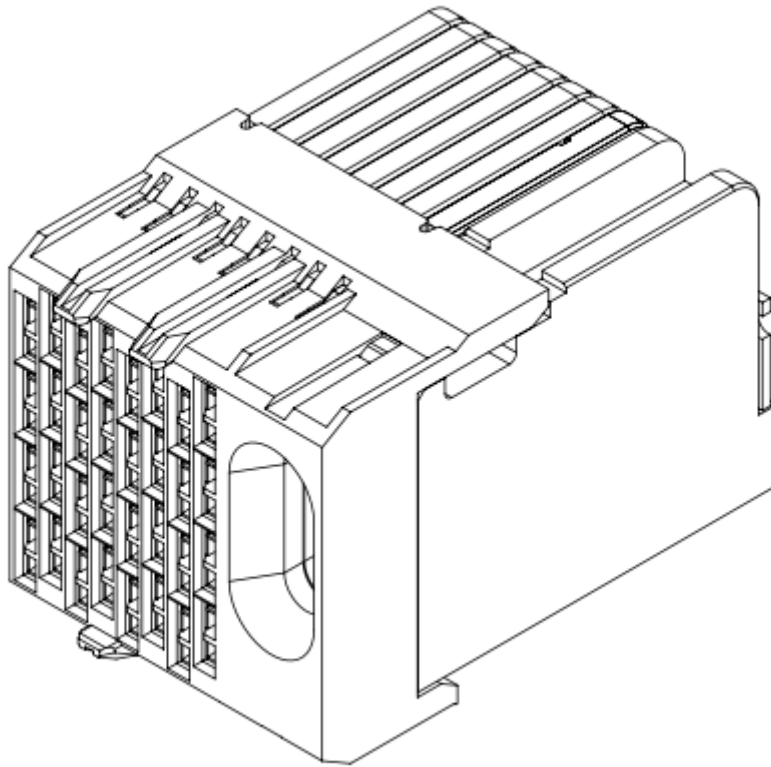


Figure 126. Impel Connector with guide feature

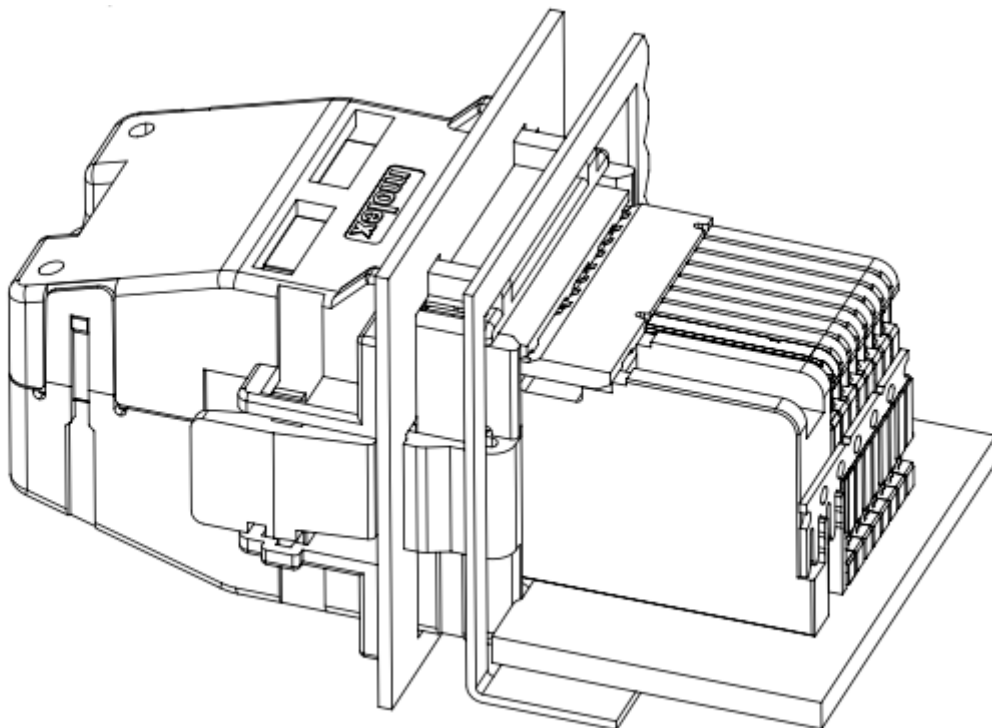


Figure 127. Impel Mated connector with cable backshell

The data connector pinout is defined in the [\[Appendix\]](#)

There is no attempt to support 50G (2x25G NRZ) nor 50G (1x50G NRZ).

6.4.5. Ethernet interface inter-operability

The inter-operability of bricks at deployment with Ethernet interfaces is critical. To support 25G NRZ, 50G PAM4, 100G (4x25G NRZ), 200G (4x50G PAM4), and 400G (8x50G PAM4), the following table:

Port Count	Data Rate	Implementation Interface and order
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1
6		SFP1, SFP2, SFP3, SFP4, QSFP1 LN 1, QSFP2 LN 1
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	100G (4x25G)	SFP1, SFP2, SFP3, SFP4, QSFP1
6	200G (4x50G PAM4)	SFP1, SFP2, SFP3, SFP4, QSFP1, QSFP2
1	25G NRZ 50G PAM4	SFP1
2		SFP1, SFP2
3		SFP1, SFP2, SFP3
4		SFP1, SFP2, SFP3, SFP4
5	400G (8x50G PAM4)	QSFP-DD (QSFP1+QSFP2)
		200G (4x50G PAM4)
QSFP (SFP1+SFP2+SFP3+SFP4)	2	QSFP, QSFP1



Figure 129. BLQ4 body for manifold



Figure 130. BLQ4 insert for bricks

[BLQ4_SpecSheet.pdf](#)

The BLQ4 connectors are blind mate. Both sides of the connector have G 3/8" threads which thread into manifold (body) and brick (insert), respectively.

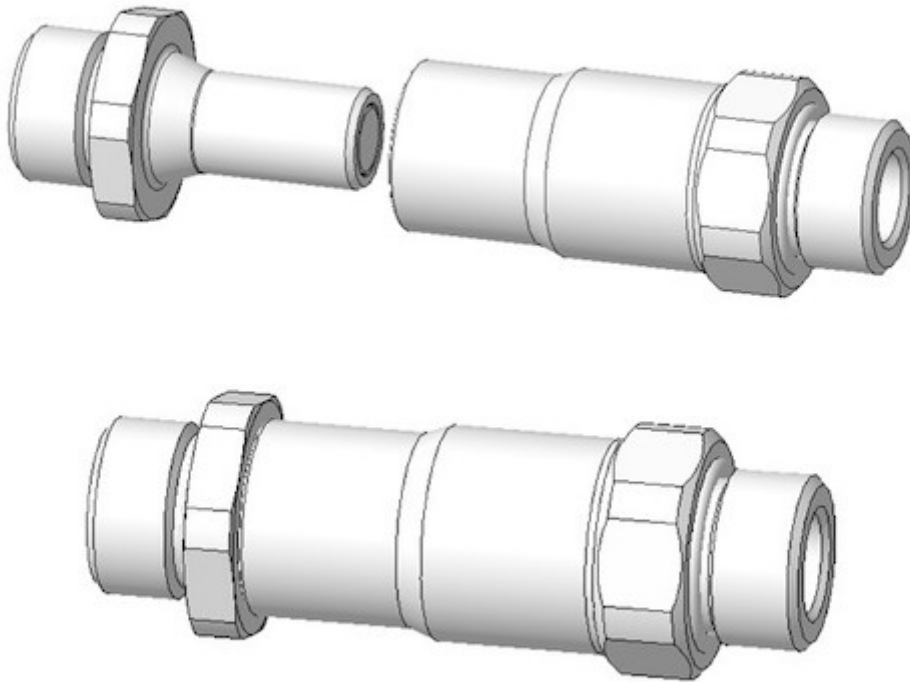


Figure 131. BLQ4 pair

Single-phase connector mounting and polarization

Bricks shall have male blind-mate connectors (inserts), BLQ4D47006 or compatible part.

When viewed from the rear of the brick, in reference to the server: Liquid return shall be located to the left. Liquid supply shall be located in the to the right.

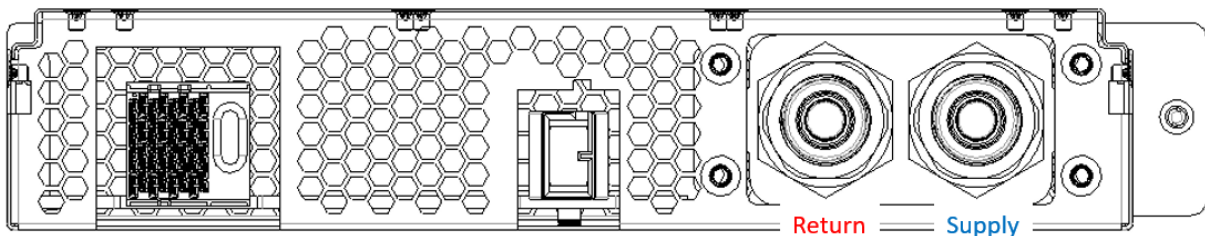


Figure 132. Brick side supply and return

Single-phase brick side connector locations

The supply connector should be 29.5mm from the outer side of the brick (opposite the thumbscrew) in the x-direction and 20.73mm from the bottom of face of the brick in the y-direction. The two

connectors should be lined up in the horizontal plane and spaced 28.5mm from each other.

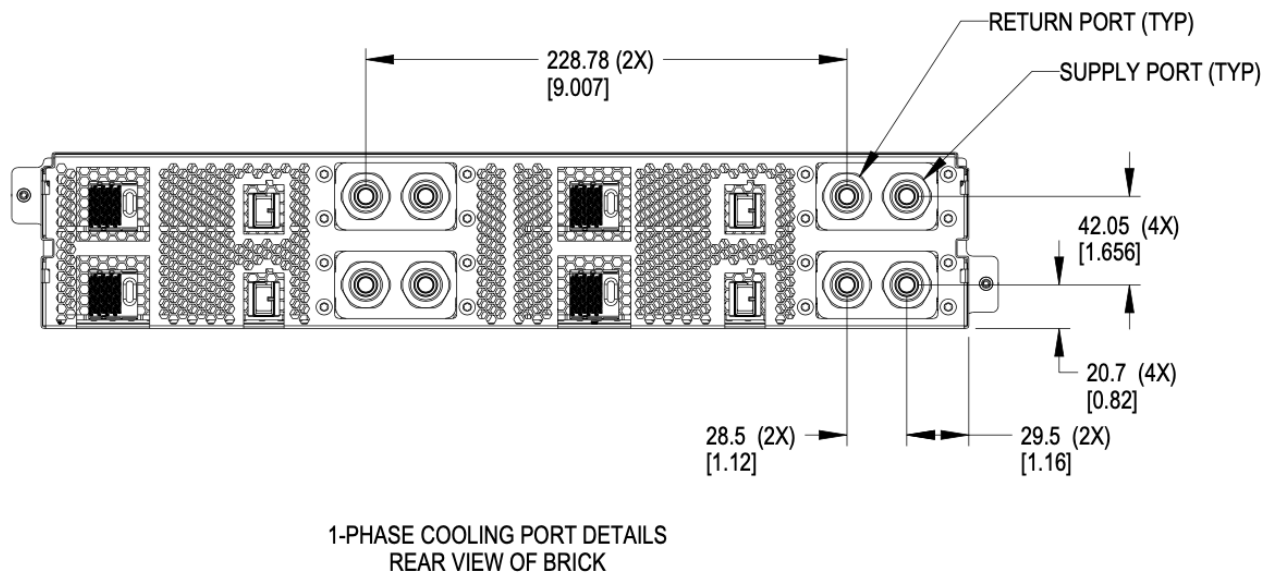


Figure 133. Brick side liquid connector locations for single-phase

Single-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

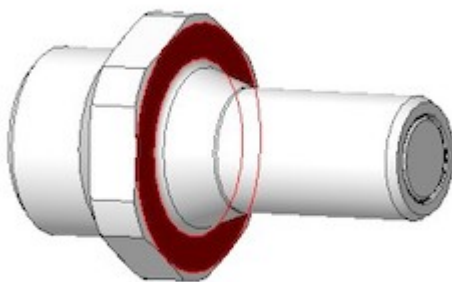


Figure 134. Mating surface BLQ4 insert

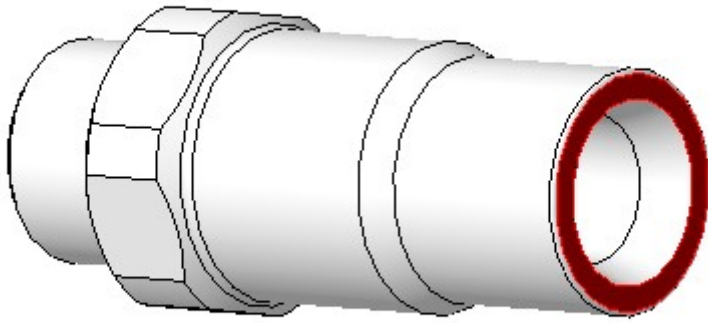


Figure 135. Mating surface BLQ4 body

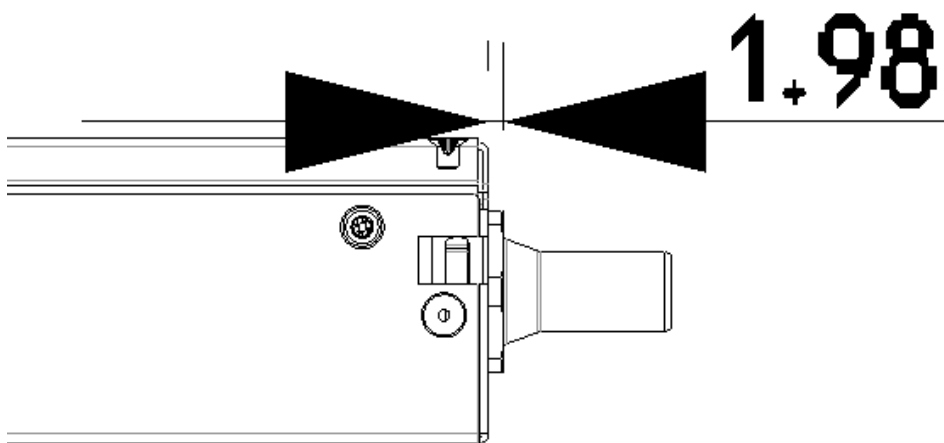


Figure 136. Offset from cage back panel to connector mating interface

The BLQ4 connectors must be within 3mm of this fully engaged state to achieve full flow.

6.5.3. Two phase

Two-phase connector selection

The two-phase cooling solution shall use the CPC BLQ family of interfaces.

On brick side



Figure 137. Liquid - CPC BLQ4 series insert P/N BLQ4D47004PROTO (chrome plated brass) or P/N 4649800PROTO (Aluminum)



Figure 138. Vapor - CPC BLQ6 series insert P/N 4650000PROTO (chrome plated brass)

On the Manifold side



Figure 139. Liquid - CPC BLQ4 series body P/N BLQ4D31004PROTO (chrome plated brass) or P/N 4649900PROTO (Aluminum)



Figure 140. Vapor - CPC BLQ6 series body P/N 4650200PROTO (chrome plated brass)

Two-phase connector mounting polarization

Cage manifolds shall have body (female) blind mate connectors. Bricks shall have insert (male) blind-mate connectors. When viewed from rear of the brick, vapor connection shall be located at the right position. Liquid connection shall be located at the left position.

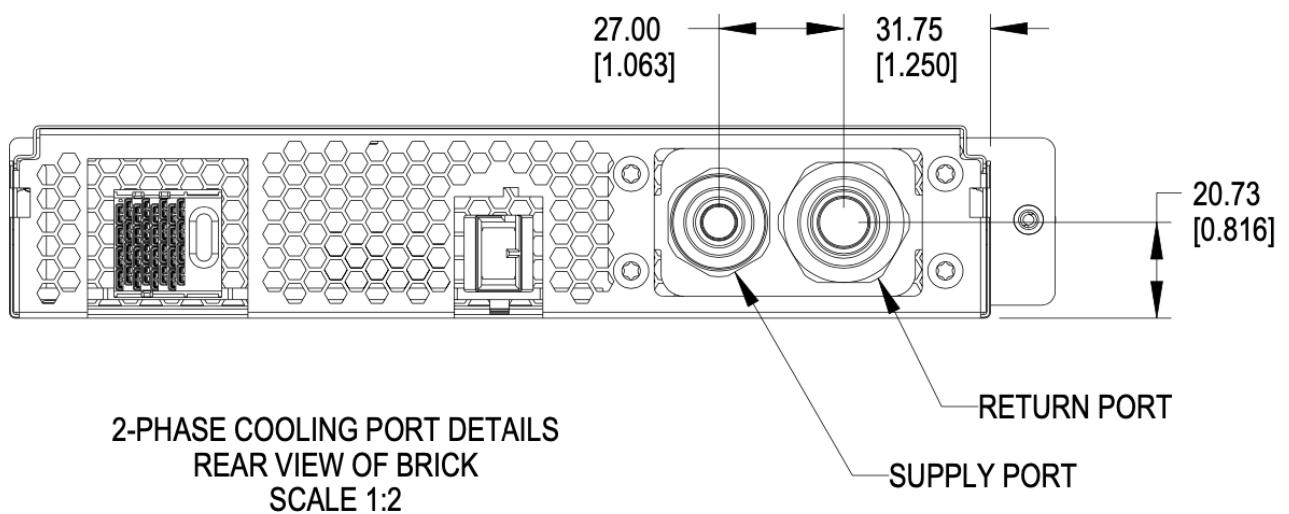


Figure 141. Brick liquid supply and Vapor return

Two-phase brick side connector locations

Using the right-side panel of the brick as a reference, the Vapor return connector on the brick should be 31.85mm in the x direction and 20.73 upwards in the y direction.

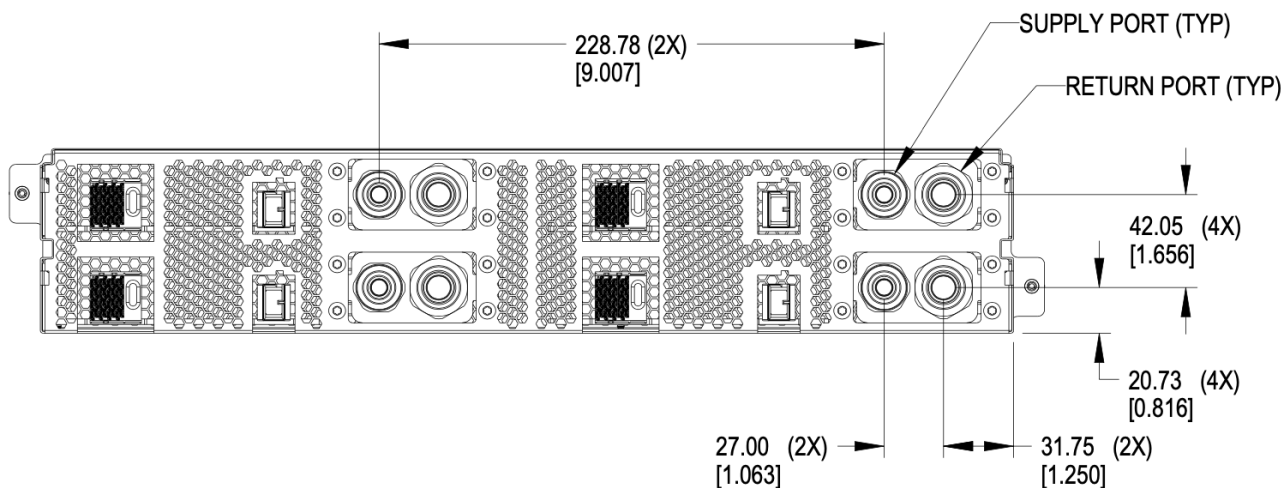


Figure 142. Brick side connectors locations

Two-phase offset depth

The mating surface of the brick side connector sits xx mm behind (outside) the outer edge of the back plane of the brick. Specifying this dimension ensures the server manufacturer and manifold/cage side implementor have a consistent location where the connectors must meet to ensure full mating and thereby full flow.

The reference mating surfaces of each connector are highlighted below along with a drawing showing the specified dimension.

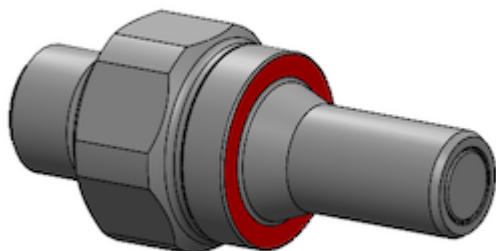


Figure 143. Mating surface BLQ4 insert

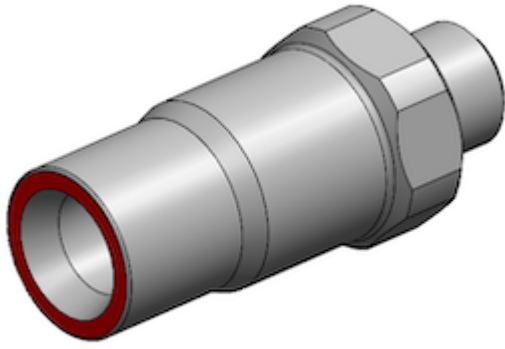


Figure 144. Mating surface BLQ4 body

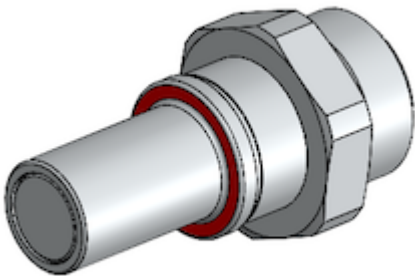


Figure 145. Mating surface BLQ6 insert

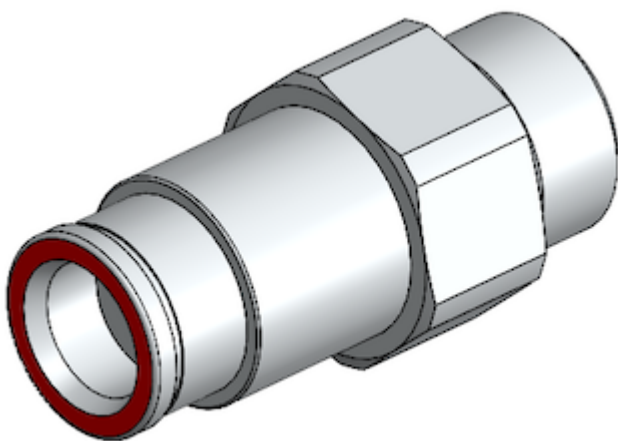


Figure 146. Mating surface BLQ6 body

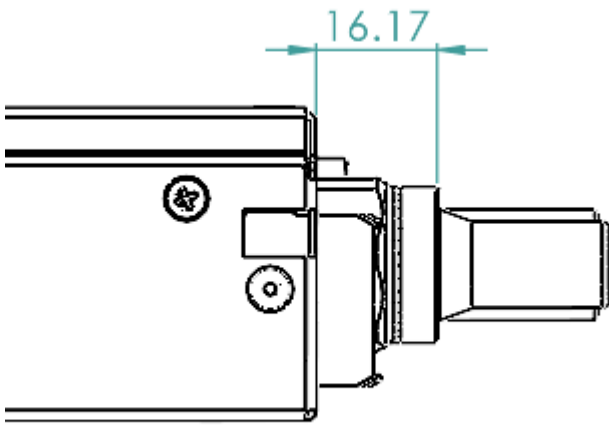


Figure 147. Offset from cage back panel to BLQ4 connector mating interface

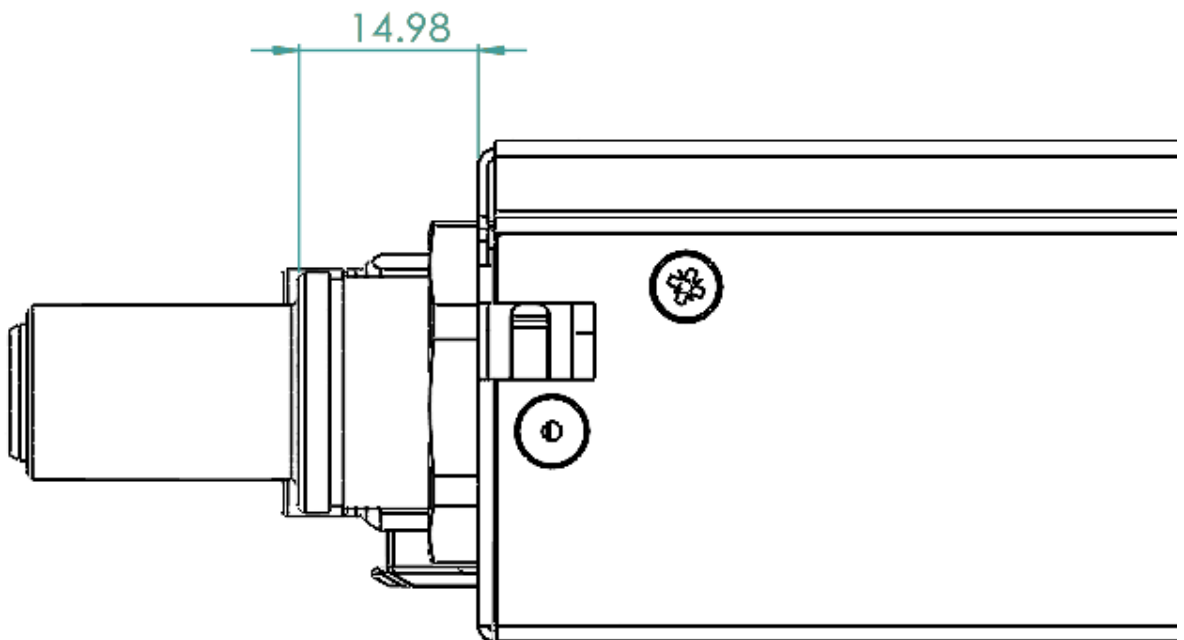


Figure 148. Offset from cage back panel to BLQ6 connector mating interface

The BLQ4 & BLQ6 connectors must be within $\pm 1.5\text{mm}$ of this engaged state to achieve full flow.

6.6. Design guidance

Design guidance is not a specification requirement. It is simple design guidance that can be implemented to simplify future needs, to meet certification requirements, or satisfy general fit & finish.

6.6.1. Brick faceplate guidance

The faceplate is notched above and below the fastener (See [Figure 116, “Brick retention”](#)). Note that the faceplate can accommodate any type of ports or drives as needed and is not required to be fully perforated.

Screws and/or rivets used to secure the top cover are flush to be under-flush. The vertical edges on the rear of the brick chassis base are coined to break sharp edges.

6.6.2. Back panel safety perforation

See below for typical dimensions of the airflow perforation. All dimensions below are critical.

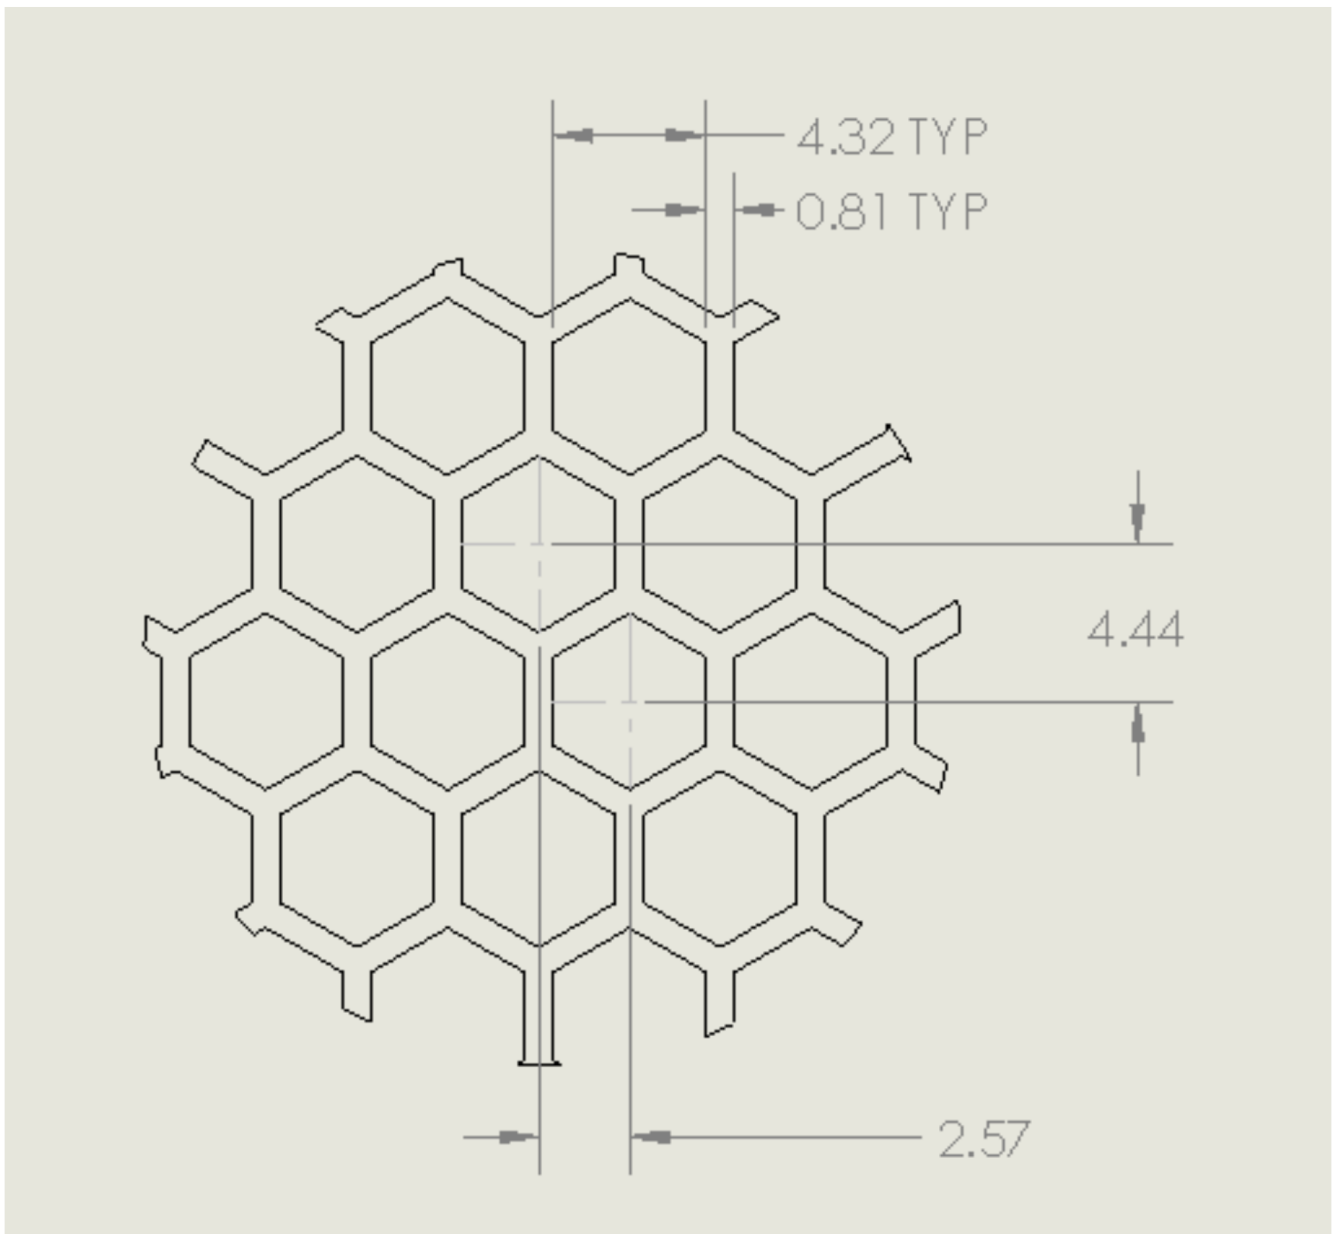


Figure 149. Brick panel perforation

Keep-out zones

Keep-out zones are defined in the brick surrounding the power connector and liquid cooling interfaces. The liquid cooling keep-out spaces "fly" above the PCB, allowing components to be populated below the connections.

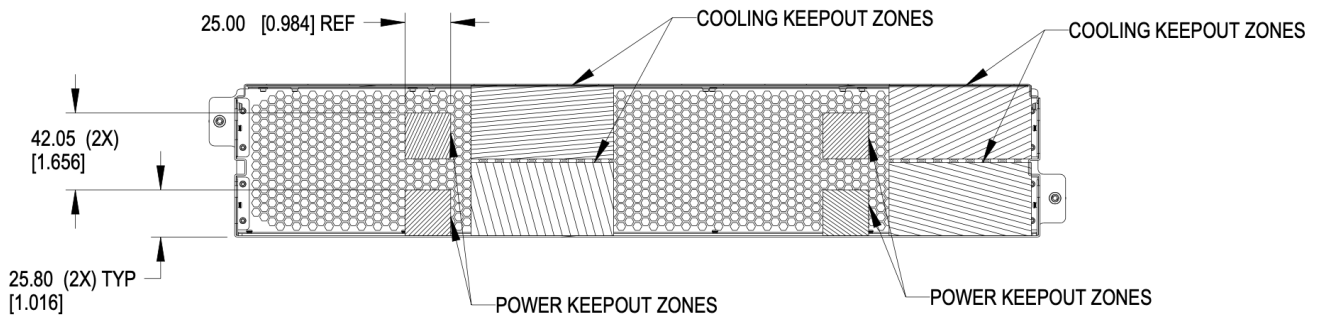


Figure 150. Brick keep-out zone

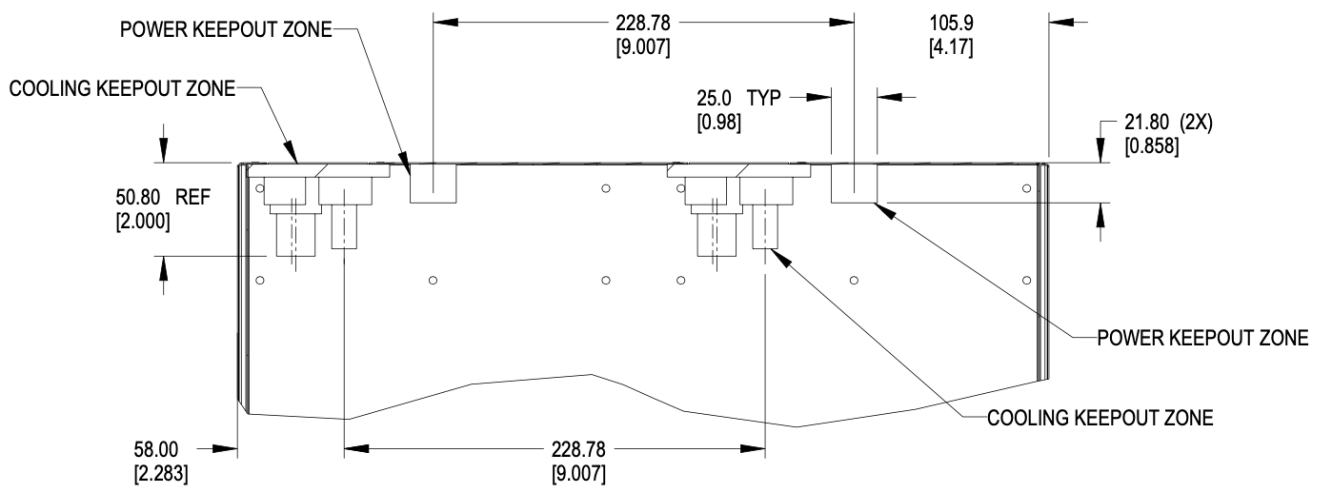


Figure 151. Brick keep-out zone top view

6.7. Brick performance

6.7.1. Brick electrical startup behavior

In order to safely operate the power shelf, we define the following characteristics for brick startup behavior.

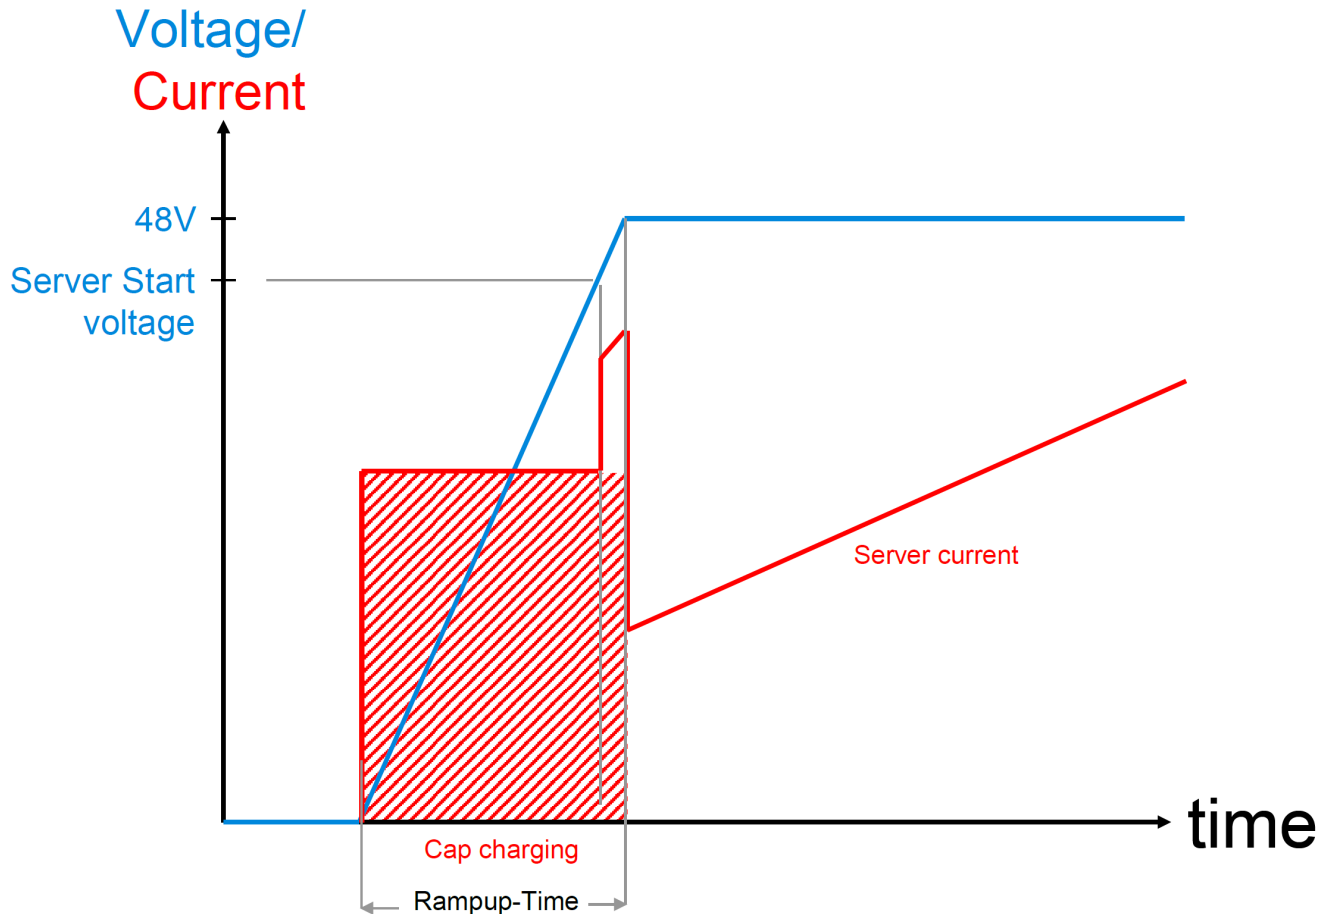


Figure 152. Server startup electrical characteristics

These values are per connector feed from a power shelf.

Four power connectors are available for use.

- Min start-up voltage: +44V DC
- Max input capacitance per brick feed: $\leq 1000\mu\text{F}$
- Max server current at start-up voltage: 70A
- Ramp time: Follow Intel CRPS spec: ramp time 10-70msec, slew rate 0.5V/msec

<https://www.intel.com/content/dam/www/public/us/en/documents/guides/power-supply-design-guide-june.pdf>

Data connector pin assignments

WHEN VIEWED FROM PCB DAUGHTER CARD CONNECTOR REAR BRICK PANEL
DIRECTLY FACING CONNECTOR. PIN AC1 is BOTTOM LEFT CORNER

2022 December 4

	C1	C2	C3	C4	C5	C6	C7	C8	
H	DP4-	DP8-	DP12-	DP16-	DP20-	DP24-	DP28-	DP32-	Key
G	DP4+	DP8+	DP12+	DP16+	DP20+	DP24+	DP28+	DP32+	
F	DP3-	DP7-	DP11-	DP15-	DP19-	DP23-	DP27-	DP31-	
E	DP3+	DP7+	DP11+	DP15+	DP19+	DP23+	DP27+	DP31+	
D	DP2-	DP6-	DP10-	DP14-	DP18-	DP22-	DP26-	DP30-	
C	DP2+	DP6+	DP10+	DP14+	DP18+	DP22+	DP26+	DP30+	
B	DP1-	DP5-	DP9-	DP13-	DP17-	DP21-	DP25-	DP29-	Key
A	DP1+	DP5+	DP9+	DP13+	DP17+	DP21+	DP25+	DP29+	



GROUND SHIELD TO GROUND

	C1	C2	C3	C4	C5	C6	C7	C8
H	RJ45	RJ45	SFP	SFP	QSFP	QSFP	QSFP	Key
G								
F								
E								
D								
C			SFP	SFP				
B								
A								

	C1	C2	C3	C4	C5	C6	C7	C8	
H	RJ45 PIN8	RJ45 PIN8	SFP2	SFP4	QSFP1	QSFP1	QSFP2	QSFP2	Key
G	RJ45 PIN7	RJ45 PIN7	LN1 RX	LN1 RX	LN2 RX	LN1 RX	LN2 RX	LN1 RX	
F	RJ45 PIN5	RJ45 PIN5	SFP1	SFP3	QSFP1	QSFP1	QSFP2	QSFP2	
E	RJ45 PIN4	RJ45 PIN4	LN1 RX	LN1 RX	LN4 RX	LN3 RX	LN4 RX	LN3 RX	
D	RJ45 PIN6	RJ45 PIN6	SFP2	SFP4	QSFP1	QSFP1	QSFP2	QSFP2	
C	RJ45 PIN3	RJ45 PIN3	LN1 TX	LN1 TX	LN3 TX	LN4 TX	LN3 TX	LN4 TX	
B	RJ45 PIN2	RJ45 PIN2	SFP1	SFP3	QSFP1	QSFP1	QSFP2	QSFP2	Key
A	RJ45 PIN1	RJ45 PIN1	LN1 TX	LN1 TX	LN1 TX	LN2 TX	LN1 TX	LN2 TX	

GROUND SHIELD TO GROUND

AB = CD = Tx FOR SFP & QSFP
EF = GH = Rx FOR SFP & QSFP

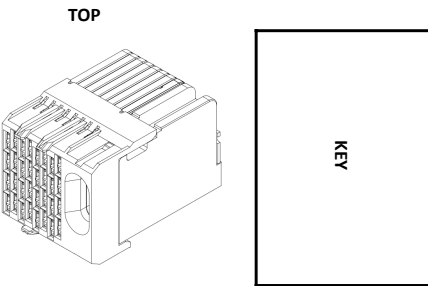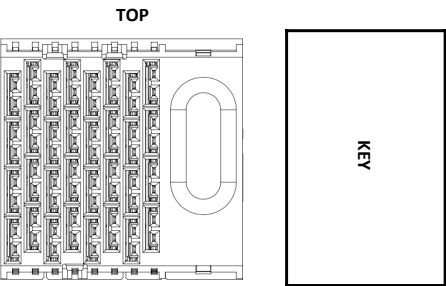

	C1	C2	C3	C4	C5	C6	C7	C8	
H	RJ45_1	RJ45_2	SFP2 RX	SFP4 RX	QSFP1	QSFP1	QSFP2	QSFP2	Key
G			SFP1 RX	SFP3 RX					
F			SFP2 TX	SFP4 TX					
E			SFP1 TX	SFP3 TX					
D	RJ45_1	RJ45_2	SFP2 RX	SFP4 RX	QSFP1	QSFP1	QSFP2	QSFP2	Key
C			SFP1 RX	SFP3 RX					
B			SFP2 TX	SFP4 TX					
A			SFP1 TX	SFP3 TX					

	C1	C2	C3	C4	C5	C6	C7	C8	
H	RJ45_1_BI_DD-	RJ45_2_BI_DD-	SFP2_LN1_RX_N	SFP4_LN1_RX_N	QSFP1_LN2_RX_N	QSFP1_LN1_RX_N	QSFP2_LN2_RX_N	QSFP2_LN1_RX_N	Key
G	RJ45_1_BI_DD+	RJ45_2_BI_DD+	SFP2_LN1_RX_P	SFP4_LN1_RX_P	QSFP1_LN2_RX_P	QSFP1_LN1_RX_P	QSFP2_LN2_RX_P	QSFP2_LN1_RX_P	
F	RJ45_1_BI_DC-	RJ45_2_BI_DC-	SFP1_LN1_RX_N	SFP3_LN1_RX_N	QSFP1_LN4_RX_N	QSFP1_LN3_RX_N	QSFP2_LN4_RX_N	QSFP2_LN3_RX_N	
E	RJ45_1_BI_DC+	RJ45_2_BI_DC+	SFP1_LN1_RX_P	SFP3_LN1_RX_P	QSFP1_LN4_RX_P	QSFP1_LN3_RX_P	QSFP2_LN4_RX_P	QSFP2_LN3_RX_P	
D	RJ45_1_BI_DB-	RJ45_2_BI_DB-	SFP2_LN1_TX_N	SFP4_LN1_TX_N	QSFP1_LN3_TX_N	QSFP1_LN4_TX_N	QSFP2_LN3_TX_N	QSFP2_LN4_TX_N	
C	RJ45_1_BI_DB+	RJ45_2_BI_DB+	SFP2_LN1_TX_P	SFP4_LN1_TX_P	QSFP1_LN3_TX_P	QSFP1_LN4_TX_P	QSFP2_LN3_TX_P	QSFP2_LN4_TX_P	
B	RJ45_1_BI_DA-	RJ45_2_BI_DA-	SFP1_LN1_TX_N	SFP3_LN1_TX_N	QSFP1_LN1_TX_N	QSFP1_LN2_TX_N	QSFP2_LN1_TX_N	QSFP2_LN2_TX_N	Key
A	RJ45_1_BI_DA+	RJ45_2_BI_DA+	SFP1_LN1_TX_P	SFP3_LN1_TX_P	QSFP1_LN1_TX_P	QSFP1_LN2_TX_P	QSFP2_LN1_TX_P	QSFP2_LN2_TX_P	

GROUND SHIELD TO GROUND

AB = CD = Tx FOR SFP & QSFP
EF = GH = Rx FOR SFP & QSFP