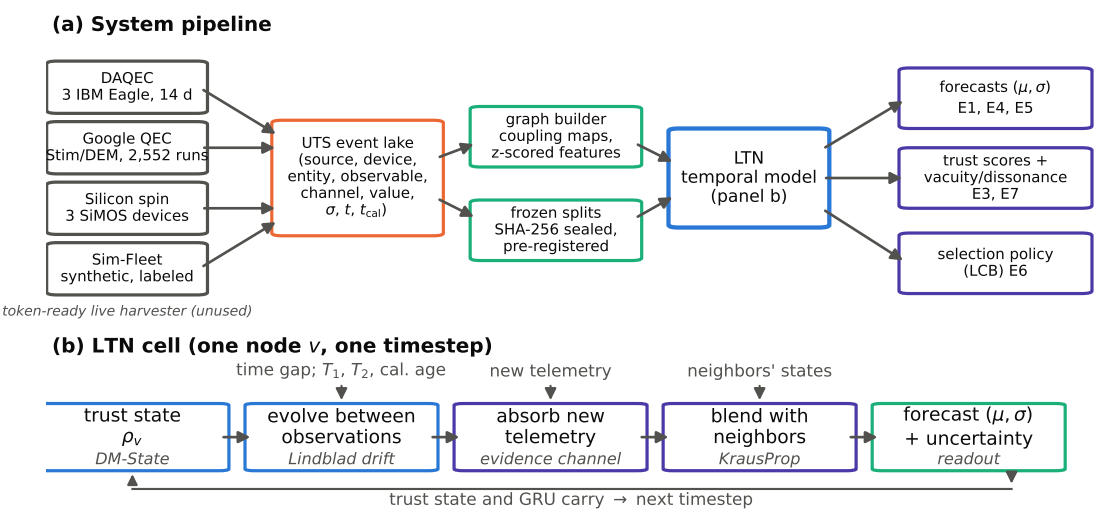
(a) System pipeline
DAQEC
3 IBM Eagle, 14 d
Google QEC
Stim/DEM, 2,552 runs
Silicon spin
3 SiMOS devices
Sim-Fleet
synthetic, labeled
token-ready live harvester (unused)
UTS event lake
(source, device,
entity, observable,
channel, value,
σ, t, t_cal)
graph builder
coupling maps,
z-scored features
frozen splits
SHA-256 sealed,
pre-registered
LTN
temporal model
(panel b)
forecasts (μ, σ)
E1, E4, E5
trust scores +
vacuity/dissonance
E3, E7
selection policy
(LCB) E6
(b) LTN cell (one node v, one timestep)
time gap; T1, T2, cal. age
new telemetry
neighbors' states
trust state
ρv
DM-State
evolve between
observations
Lindblad drift
absorb new
telemetry
evidence channel
blend with
neighbors
KrausProp
forecast (μ, σ)
+ uncertainty
readout
trust state and GRU carry → next timestep