


UHF

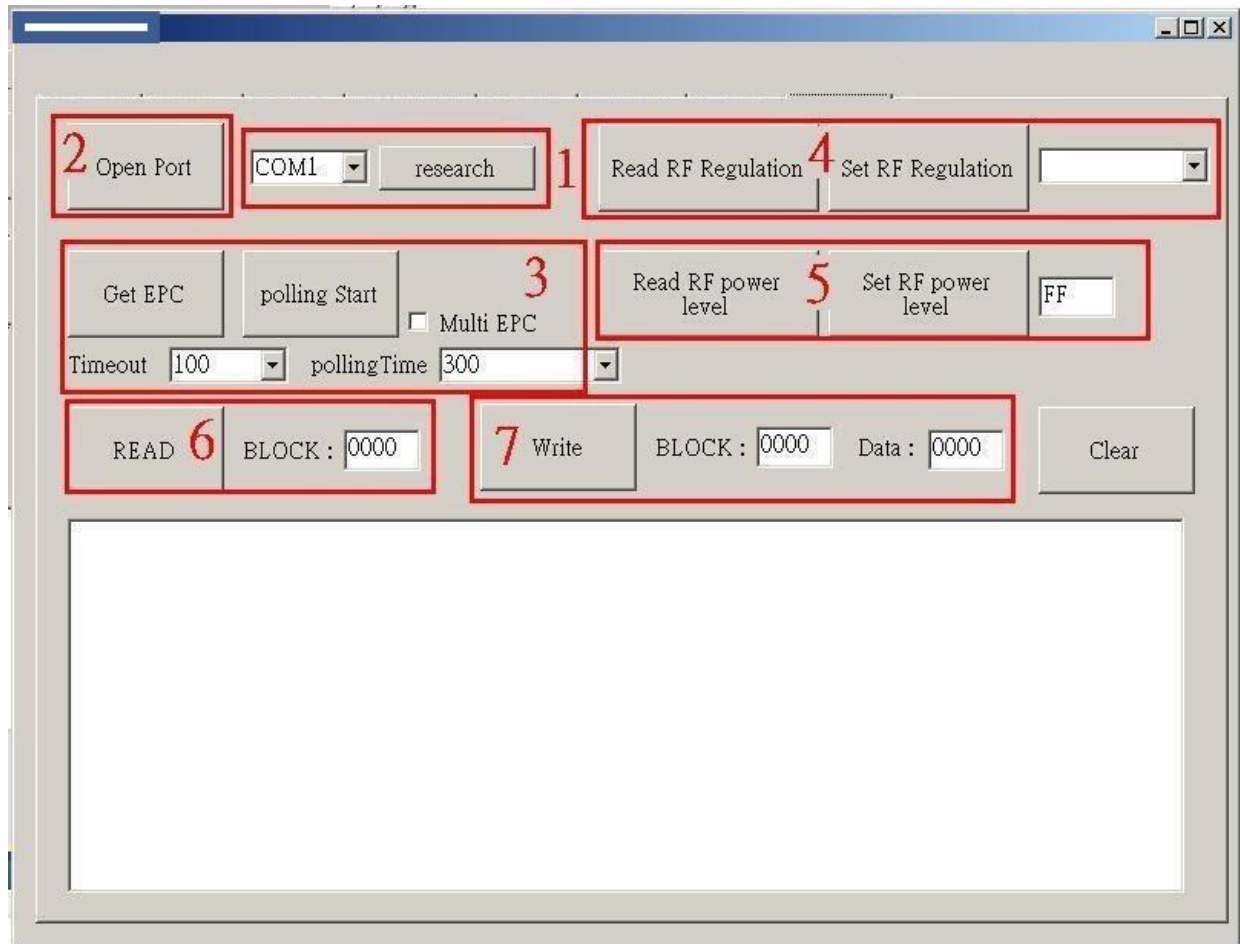

Choose READER COM PORT and open

1. Research : Searching can use COM PORT
2. Open Port : Connect with Reader
3. Get EPC , Polling Start : read Tag UID
4. Read or Set Regulation
5. Read or Set UHF POWER level
6. READ : Read Tag block memory
7. Write : Write Tag block memory