


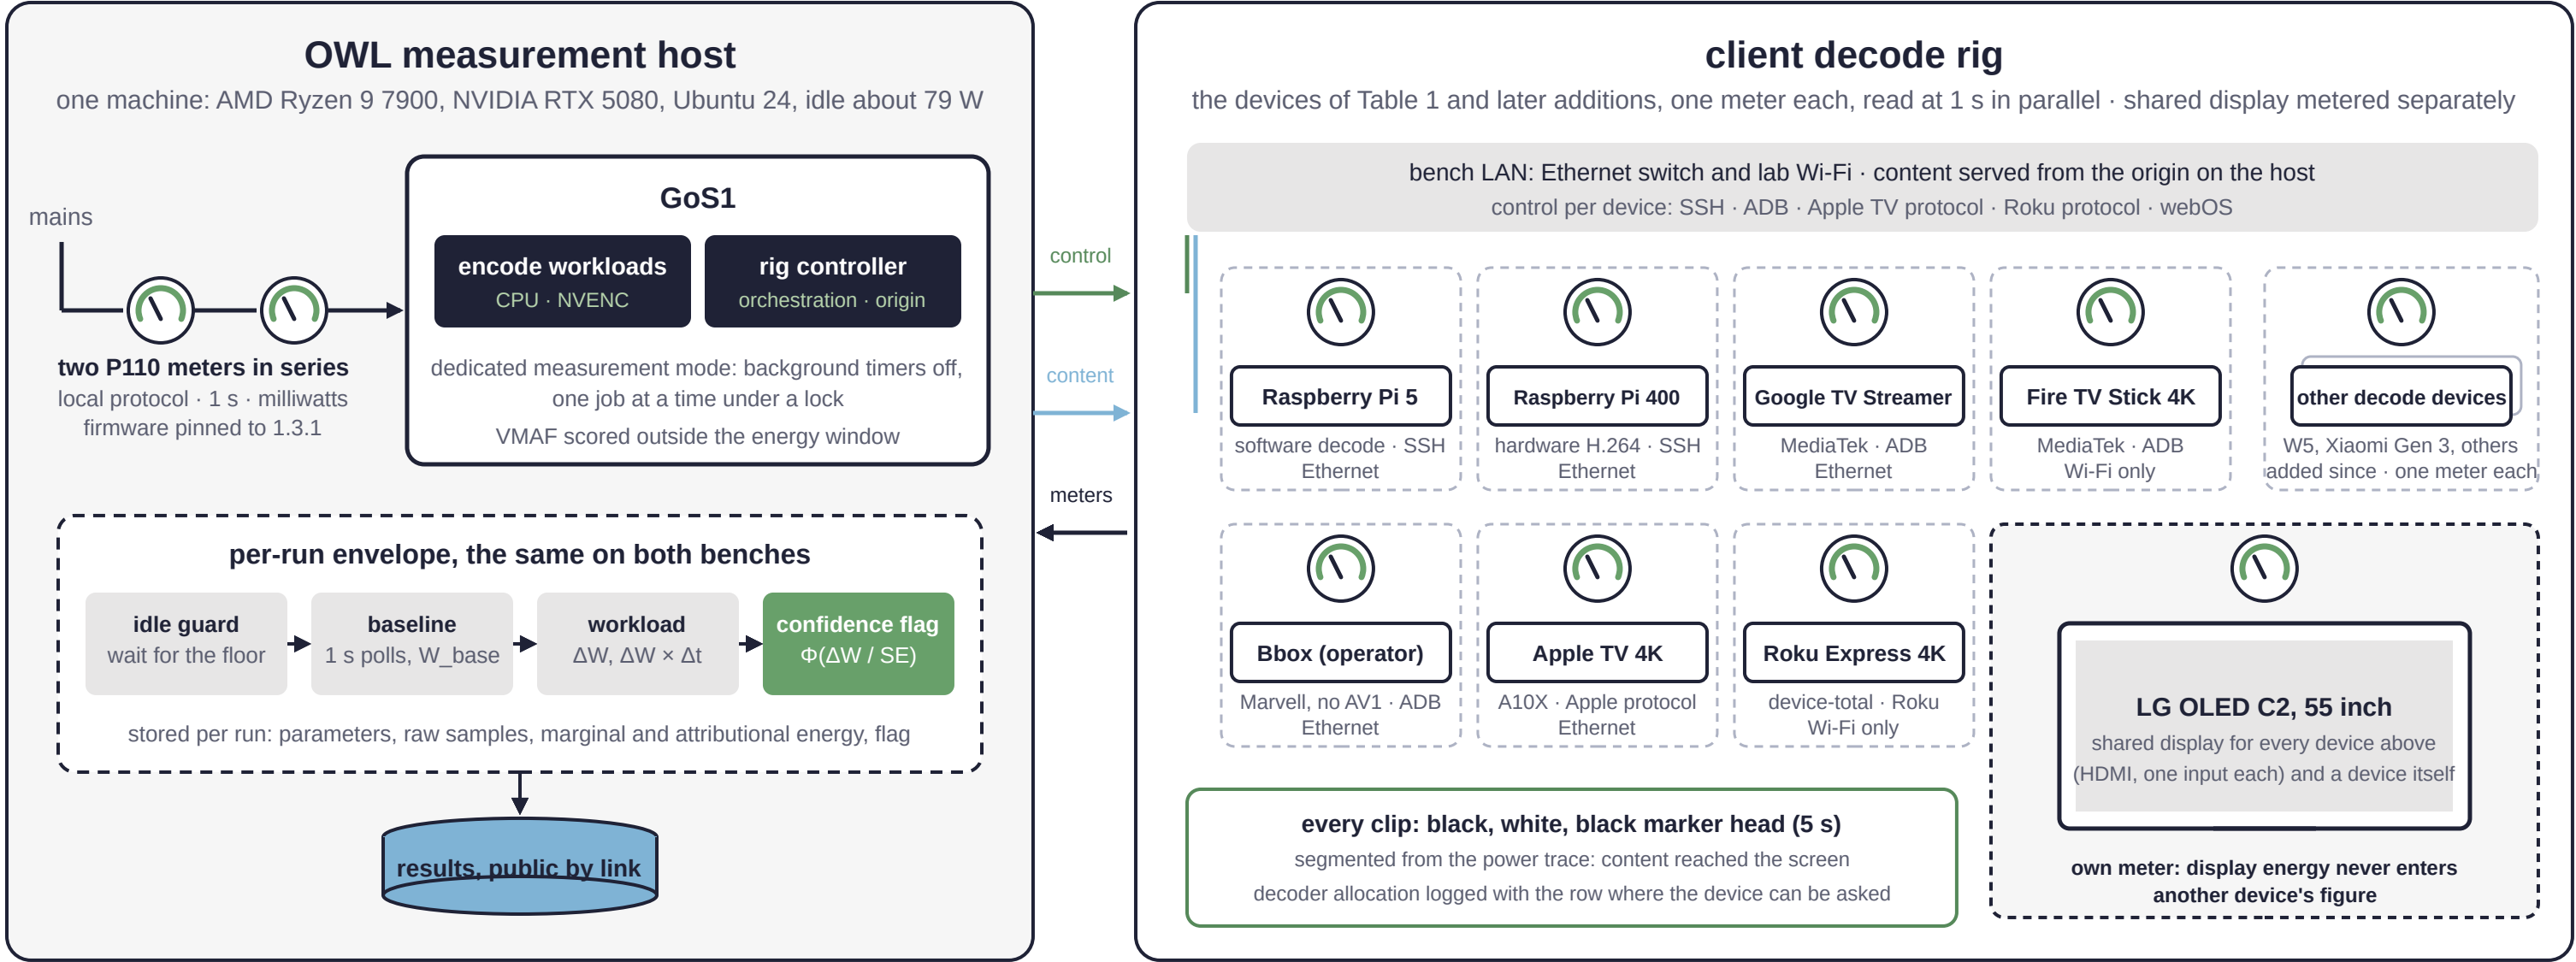

Metering boundary: each dashed slot is one wall meter. The display sits in its own slot, so a device figure is decode plus its own output path, never the display.

Scope: device layer on a lab bench. Network, CDN and data centre are outside every OWL number; content reaches the rig from the origin on the host over the bench LAN.

The rig's meters are the same plug and protocol as REM's LAN path (Figure 1); the two readers agree within 0.2% at 1 s [C8].

control content over LAN meter readings to the host one metering boundary (one wall meter)