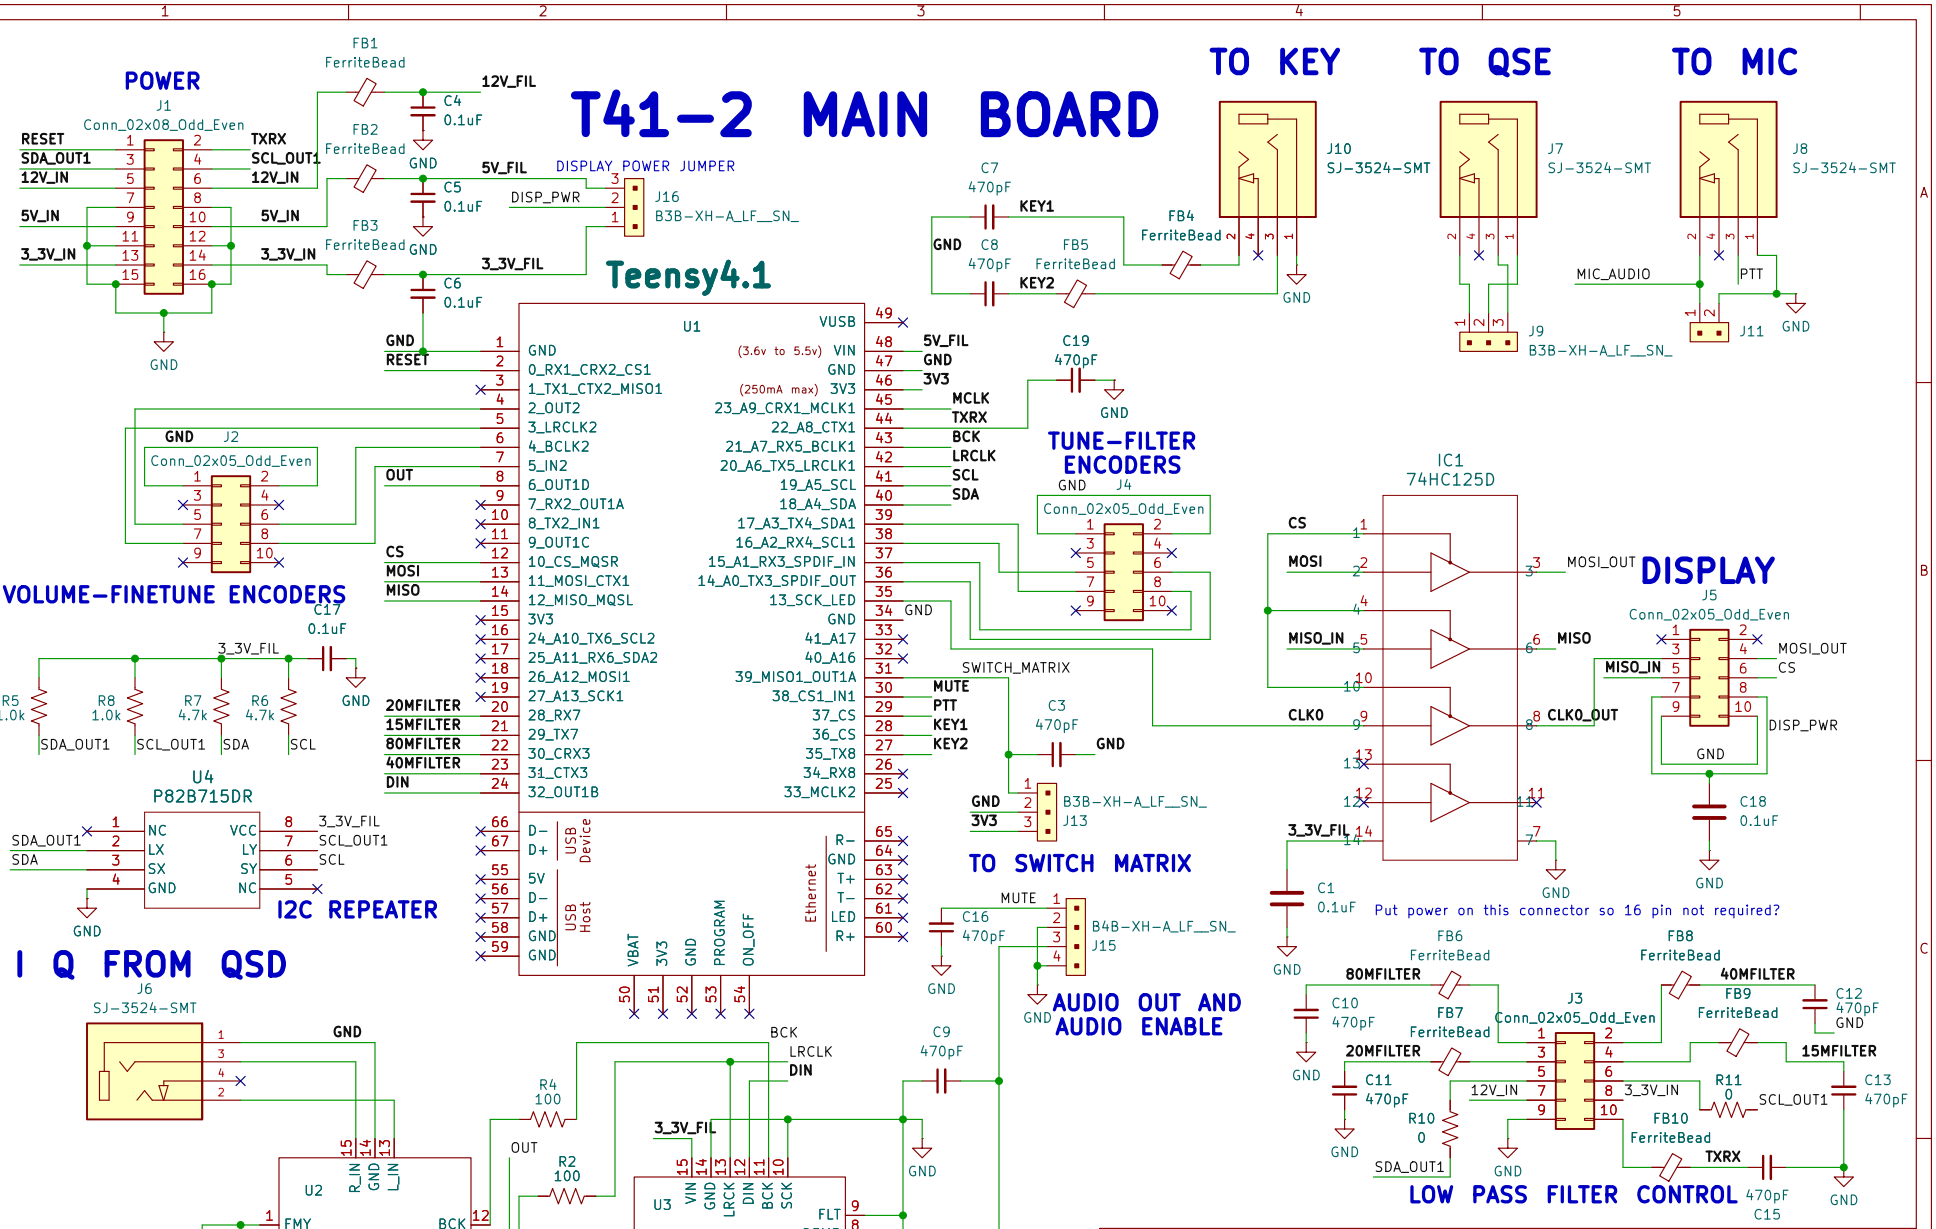

T41-2 MAIN BOARD
POWER
J1
Conn_02x08_Odd_Even
RESET
SDA_OUT1
12V_IN
5V_IN
3_3V_IN
TXRX
SCL_OUT1
FB1
FB2
FB3
FerriteBead
C4
C5
C6
0.1uF
12V_FIL
5V_FIL
3_3V_FIL
GND
DISPLAY_POWER JUMPER
DISP_PWR
J16
B3B-XH-A_LF__SN_
Teensy4.1
U1
TO KEY
TO QSE
TO MIC
J10
SJ-3524-SMT
J7
J8
J9
J11
C7
C8
470pF
KEY1
KEY2
FB4
FB5
MIC_AUDIO
PTT
VOLUME-FINETUNE ENCODERS
J2
Conn_02x05_Odd_Even
OUT
CS
MOSI
MISO
TUNE-FILTER ENCODERS
J4
C19
C17
R5
R8
R7
R6
1.0k
4.7k
SDA_OUT1
SCL_OUT1
SDA
SCL
U4
P82B715DR
I2C REPEATER
20MFILTER
15MFILTER
80MFILTER
40MFILTER
DIN
SWITCH_MATRIX
MUTE
PTT
KEY1
KEY2
C3
J13
TO SWITCH MATRIX
IC1
74HC125D
DISPLAY
J5
MOSI_OUT
MISO_IN
CLK0
CLK0_OUT
DISP_PWR
C18
C1
Put power on this connector so 16 pin not required?
I Q FROM QSD
J6
SJ-3524-SMT
AUDIO OUT AND AUDIO ENABLE
C16
J15
B4B-XH-A_LF__SN_
FB6
FB7
FB8
FB9
C10
C11
C12
C13
R10
R11
FB10
TXRX
C15
LOW PASS FILTER CONTROL
R4
R2
R3
100
BCK
LRCLK
DIN
MCLK
C9
C2
10uF
C14
2.2nF
R1
470
U2
PCM1808
RECEIVER IQ ADC
U3
PCM5102
AUDIO DAC
T41-2 MAIN BOARD
Sheet: /
File: t41_2_main_board.kicad_sch
Title: T41-2 Main Board
Size: USLetter
Date: 2024-09-19
Rev: 1.2
KiCad E.D.A. 10.0.1
Id: 1/1