

Chip Monolithic Ceramic Capacitors for Automotive



Explanation of Symbols in This Catalog



LxW dimension: products of 0.6x0.3 mm or less



AEC-Q200 compliant product



Product suitable for acoustic noise reduction and low distortion This product suppresses acoustic noise, which occurs when a ceramic capacitor is used, by devising the materials and configuration.



Fail safe product

This capacitor is designed to prevent failures as much as possible by short mode.



Product resistant to deflection cracking

This capacitor is designed to prevent failures as much as possible by short mode caused by cracking when there is board deflection.



Product with solder cracking suppression

This capacitor is configured with metal terminals or lead wires connected to the chip.

The metal terminals or lead wires relieve the stress from expansion and contraction of the solder, to suppress solder cracking.

Also, including capacitor which can be mounted with a conductive adhesive, instead of soldering.

EU RoHS Compliant

- \cdot All the products in this catalog comply with EU RoHS.
- EU RoHS is "the European Directive 2011/65/EU on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment."
- · For more details, please refer to our website 'Murata's Approach for EU RoHS' (http://www.murata.com/info/rohs.html).



Contents

Product specifications are as of March 2014.

	Part Numbering Selection Guide		p2 p4	
	Capacitance Table ·····		p5	
	Capacitatico Tablo		ро	Cap. Table
G G	eneral Purpose Produ CM Series ······	ct	p16	
	pecially Designed Prod Reduce Shorts GCD		p23	p10
S	pecially Designed Proc horts & Resin Electrod CE Series	le Product	p25	p10
C G	onductivity Adhesive (CG Series ············	Compatible Type	p27	p11
	esin External Electrod CJ Series ······		p32	p12
&	igh Effective Capacital High Allowable Ripple C3 Series ···········	Current	p38	p14
M	etal Terminal Type KC	CM Series·······	p40	p14
С	etal Terminal Type/Hiç apacitance & High Allo urrent KC3 Series ·····	owable Ripple	p43	p14
	Introduction of Website	SimSurfing ··········· EMICON-FUN! ······	p46 p66 p67 p68	

Please check the MURATA home page (http://www.murata.com/) if you cannot find the part number in the catalog.

Part Numbering

Chip Monolithic Ceramic Capacitors for Automotive

GC M 18 8 R7 1H 102 K A37 D (Part Number)

Product ID

2Series

Product ID	Code	Series					
	3	High effective capacitance & High allowable ripple current					
	D	Specially designed product to reduce shorts					
GC	E	Specially designed product to reduce shorts & resin electrode product					
	G	Conductivity adhesive compatible type					
	J	Resin external electrode product					
	M	For automotive					
КС	3	Metal terminal type/High effective capacitance & High allowable ripple current					
	M	Metal terminal type					

③Chip Dimension (L×W)

Code	Dimension (L×W)	EIA		
03	0.6×0.3mm	0201		
15	1.0×0.5mm	0402		
18	1.6×0.8mm	0603		
21	2.0×1.25mm	0805		
31	3.2×1.6mm	1206		
32	3.2×2.5mm	1210		
43	4.5×3.2mm	1812		
55	5.7×5.0mm	2220		

4 Height Dimension (T) (Except KC□)

Code	Dimension (T)					
3	0.3mm					
5	0.5mm					
6	0.6mm					
8	0.8mm					
9	0.85mm					
Α	1.0mm					
В	1.25mm					
С	1.6mm					
D	2.0mm					
E	2.5mm					
М	1.15mm					
Q	1.5mm					
Х	Depends on individual standards.					

4 Height Dimension (T) (KC□ Only)

Code	Dimension (T)			
L	2.8mm			
Q	3.7mm			
Т	4.8mm			
W	6.4mm			


5Temperature Characteristics

Temperature Characteristic Codes			Temperature Characteristics			Operating	Capacitance Change Each Temperature (%)							
Code	Public STD Code		Reference	Temperature Capacitance Change or Temperature		Temperature Range	–55°C		*3		-10°C			
Code			Temperature	Range	Coefficient		Max.	Min.	Max.	Min.	Max.	Min.		
5C	C0G EIA		25°C	25 to 125°C	0±30ppm/°C	–55 to 125°C	0.58	-0.24	0.4	-0.17	0.25	-0.11		
5G	G X8G *1		25°C	25 to 150°C	0±30ppm/°C	–55 to 150°C	0.58	-0.24	0.4	-0.17	0.25	-0.11		
7U	U2J	EIA	25°C	25 to 125°C *2	-750±120ppm/°C	–55 to 125°C	8.78	5.04	6.04	3.47	3.84	2.21		
9E	ZLM	И *1	*4	*4	20°C	−25 to 20°C	-4700+1000/-2500ppm/°C	FF to 105°C	-	-	-	-	-	-
9E			20°C	20 to 85°C	-4700+500/-1000ppm/°C	–55 to 125°C	-	-	-	-	-	-		
C7	X7S	EIA	25°C	−55 to 125°C	±22%	–55 to 125°C	-	-	-	-	-	-		
D7	X7T	EIA	25°C	−55 to 125°C	+22%, -33%	–55 to 125°C	-	-	-	-	-	-		
L8	X8L	*1	25°C	–55 to 150°C	+15%, -40%	–55 to 150°C	-	-	-	-	-	-		
R7	R7 X7R		25°C	–55 to 125°C	±15%	–55 to 125°C	-	-	-	-	-	-		
R9	X8R	EIA	25°C	–55 to 150°C	±15%	−55 to 150°C	-	-	-	-	-	-		

^{*1} Murata Temperature Characteristic Code.

Continued on the following page.





^{*2} Rated Voltage 100Vdc max: 25 to 85° C

^{*3 –25°}C (Reference Temperature 20°C) / –30°C (Reference Temperature 25°C)

(Part Number)

GC	М	18	8	R7	1H	102	K	A37	D	1
0	2	8	4	6	6	7	8	9	1	

Continued from the preceding page.

6 Rated Voltage

Code	Rated Voltage
0J	DC6.3V
1A	DC10V
1C	DC16V
1E	DC25V
YA	DC35V
1H	DC50V
1J	DC63V
1K	DC80V
2A	DC100V
2E	DC250V
2W	DC450V
2J	DC630V
3A	DC1kV

Capacitance

Expressed by three-digit alphanumerics. The unit is pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two numbers.

If there is a decimal point, it is expressed by the capital letter "R." In this case, all figures are significant digits.

If any letter, other than " \mathbf{R} " is included, this indicates the specific part number is a non-standard part.

	·						
Ex.)	Code	Capacitance					
	R50	0.50pF					
	1R0	1.0pF					
	100	10pF					
	103	10000pF					

8 Capacitance Tolerance

Code	Capacitance Tolerance					
С	±0.25pF					
D	±0.5pF					
J	±5%					
K	±10%					
М	±20%					

Individual Specification Code Expressed by three figures.

Package

Code	Package				
L	ø180mm Embossed Taping				
D/W	ø180mm Paper Taping				
K	ø330mm Embossed Taping				
J	ø330mm Paper Taping				
В	Bulk				
С	Bulk Case				

Please contact us if you find any part number not provided in this table.



Selection Guide for Chip Monolithic Ceramic Capacitors

			/	Spot	n nhi0			crack	cirack	distortic	r /	ditons
	Series		Utra smi	July tranologi Londissi	PationHiQ LowEst	Edilsate	Antideste	scind crack Anti-solds	Aritholise	Fordordi	Specific ?	RDitaiton's stated to Sales stated to
For	GCM	page p16										
Aut	GCD	p23										
For Automotive	GCE	p25										
tive	GCG	p27										
	GCJ	p32										
	GC3	p38										
	КСМ	p40										
	ксз	p43										
For	GRM											
r Ge	GA2											
General Purpose	GA3											
Pur	GJM											
pose	GJ4											
	GJ8											
	GMA											
	GMD											
	GQM											
	GRJ											
	GR3											
	GR4											
	GR7											
	KRM						de la					
	KR3						(A)					
	LLA											
	LLL											
	LLM											
	LLR											
	ZRA											

Capacitance Table

How to read the Capacitance Table

L×W (mm)	0.6× 0.3	1.0× 0.5	1.6	×0.8			
T max. (mm)	0.33	0.55	0	.9			The values can be narrowed down in the order of size,
Rated Voltage (Vdc)	25	50	100	50	10		rated voltage, and temperature characteristics.
Cap. / TC Code	COG	COG	COG	COG	C0		
1.0pF	p17	p17	p17	p17		_	
2.0pF	p17	p17	p17	p17			
3.0pF	p17	p17	p17	p17			Refers to the page of the part number list. Check the part number list for the applicable product number.
4.0pF	p17	p17	p17	p17			Griodic the part number list for the applicable product number.
5.0pF	p17	p17	p17	p17			

Temperature Characteristics Table

The Table is colored by temperature characteristic codes. Refer to the following Table for the meaning of each code.

Temperatur Characteristic C		Те	mperature Char	racteristics	Operating	Capacitance Change Each Temperature (%)							
Public		Reference	Temperature	Capacitance Change	Temperature Range	-5	5°C	*	3	-10	D°C		
STD Code		Temperature	Range	or Temperature Coefficient		Max.	Min.	Max.	Min.	Max.	Min.		
C0G	EIA	25°C	25 to 125°C	0±30ppm/°C	–55 to 125°C	0.58	-0.24	0.4	-0.17	0.25	-0.11		
X8G	*1	25°C	25 to 150°C	0±30ppm/°C	−55 to 150°C	0.58	-0.24	0.4	-0.17	0.25	-0.11		
U2J	EIA	25°C 25 to 125°C *2		-750±120ppm/°C	–55 to 125°C	8.78	5.04	6.04	3.47	3.84	2.21		
71.54	*1	0000	–25 to 20°C	-4700+1000/-2500ppm/°C	FF +- 40F00	-	-	-	-	-	-		
ZLM	"	20°C	20 to 85°C	-4700+500/-1000ppm/°C	–55 to 125°C	-	-	-	-	-	-		
X7S	EIA	25°C	−55 to 125°C	±22%	–55 to 125°C	-	-	-	-	-	-		
X7T	EIA	25°C	−55 to 125°C	+22%, -33%	–55 to 125°C	-	-	-	-	-	-		
X8L	*1	25°C	−55 to 150°C	+15%, -40%	−55 to 150°C	-	-	-	-	-	-		
X7R	EIA	25°C	−55 to 125°C	±15%	–55 to 125°C	-	-	-	-	-	-		
X8R	EIA	25°C	−55 to 150°C	±15%	–55 to 150°C	-	-	-	-	ı	-		

^{*1} Murata Temperature Characteristic Code.



^{*2} Rated Voltage 100Vdc max: 25 to 85°C

^{*3 –25°}C (Reference Temperature 20°C) / –30°C (Reference Temperature 25°C)

■ GCM Series Temperature Compensating Type

L×W (mm)	0.6×	1.0x 0.5	1.6	×0.8			2	.0×1.2	25								3	3.2×1.	6						3.2:	×2.5
T max. (mm)				.9	0	.7		95	1.0	1.4	1.45		0.9	95			1.0			1.3	 25		1	.8	1.0	_
ited Voltage (Vdc)	_	50	100		100		100		250	50		100	80	63	50	1000		250	1000	630		50	_	630	630	+
Cap. / TC Code					_	_														_				U2J		-
1.0pF		p17																								
2.0pF	p17	p17	p17	p17																						
3.0pF	-	p17		p17																						
4.0pF		p17	p17	p17																						
5.0pF	p17	p17		p17																						
6.0pF	p17	p17	p17	p17																						
7.0pF	p17	p17	p17	p17																						
8.0pF	p17	p17	p17	p17																						
9.0pF	p17	p17	p17	p18																						
10pF	p17	p17	p17	p18												p19	p19							1		
12pF	p17	p17	p17	p18												p19	p19									
15pF	p17	p17	p17	p18												p19	p19									
18pF	p17	p17	p17	p18												p19	p19									
22pF		p17	p17	p18												p19	p19									
27pF	p17	p17	p17	p18												p19	p19									
33pF		p17	p17	p18												p19	p19									
39pF		p17	p17	p18												p19	p19									
47pF		p17	p17	p18												p19	p19									
56pF	p17	p17	p17	p18												p19	p19									
68pF	p17	p17	p17	p18												p19	p19									
82pF	p17	p17	p17	p18												p19	p19									
100pF	p17	p17	p17	p18	p18				p18							p19	p19							1		
120pF		p17	p17	p18	p18				p18							p19	p19									
150pF		p17	p17	p18	p18				p18							p19	p19									
180pF		p17	p17	p18	p18				p18							p19	p19									
220pF		p17	p17	p18	p18				p18							p19	p19									
270pF		p17	p17	p18	p18				p18							p19	p19									
330pF		p17	p17	p18	p18				p18							p19	p19									
390pF		p17	p17	p18	p18				p18								p19		p19							
470pF		p17	p17	p18	p18				p18								p19		p19							
560pF			p17	p18	p18				p18								p19		p19							
680pF			p17	p18	p18				p18								p19		p19							
820pF			p17	p18	p18				p18								p19						p19	ĺ		
1000pF			p17	p18	p18	p18	p18		p18								p19						p19			
1100pF							p18																			
1200pF			p17	p18	p18	p18	p18		p18								p19								p19	I
1300pF							p18																			
1500pF			p17	p18	p18	p18	p18		p18								p19								p19	ĺ
1800pF				p18	p18				p18			p19					p19								p19	ı
2200pF				p18	p18	p18			p18			p19					p19								p19	١
2700pF				p18	p18	p18					p18	p19						p19		p19						
3300pF				p18	p18	p18					p18	p19						p19		p19						
3900pF				p18		p18					p18	p19			p19	ĺ		p19						p19		
4700pF						p18					p18	p19			p19			p19						p19		
5600pF								p18			p18	p19			p19			p19								
6800pF								p18				p19			p19						p19					
8200pF								p18				p19			p19						p19					
10000pF								p18				p19			p19						p19					
12000pF								p18							р19											
15000pF								р18							р19											
18000pF										p18					p19											l
22000pF										p18					p19											-
27000pF															p19											
33000pF													p19	p19	p19											
39000pF															p19											
47000pF																						p19				
										1	1		1			1						p19		1		1

$(\rightarrow \blacksquare$ GCM Series Temperature Compensating Type)

p00]← P	art N	umbe	r List	E	EIA:	C0G	U2J		Mura	ta Ter	mpera	ature Characteristic: ZI
	3	3.2×2.	5			4.5	<3.2			5.7	×5.0		L×W (mm)
1.25	1.	.5	2.	.0	1.	.5	2	.0	1.	.5	2.	.0	T max. (mm)
630	1000	630	1000	630	1000	630	1000	630	1000	630	1000	630	Rated Voltage (Vdc)
U2J	U2J	U2J	U2J	U2J	U2J	U2J	U2J	U2J	U2J	U2J	U2J	U2J	Cap. / TC Code
													1.0pF
													2.0pF
													3.0pF
													4.0pF
													5.0pF
													6.0pF
													7.0pF
													8.0pF
													9.0pF
													10pF
													12pF
													15pF
													18pF
													22pF
													27pF
													33pF
													39pF
													47pF
													56pF
													68pF
													82pF
													100pF
													120pF
													150pF
													180pF
													220pF
													270pF
													330pF
													390pF
													470pF
													560pF
													680pF
													820pF
													1000pF
													1100pF
													1200pF
													1300pF
	p19												
	ртэ		p20	i									1500pF
													1800pF
			p20		-20								2200pF
					p20								2700pF
					p20		00						3300pF
							p20						3900pF
40	i						p20		00				4700pF
p19		-10							p20				5600pF
		p19		.00					p20		.00		6800pF
				p20							p20		8200pF
				p20		00					p20		10000pF
						p20							12000pF
								p20					15000pF
								p20					18000pF
								p20					22000pF
										p20			27000pF
												p20	33000pF
												p20	39000pF
												p20	47000pF
<u></u>	1			:									56000pF

Capacitance Table Part Number List refers to the page number printed at the bottom of the page.

■ GCM Series High Dielectric Constant Type

p00	← Part Number List	EIA: X7S	X7R
-----	--------------------	----------	-----

L×W (mm)	C).6×0.	3		1.0	×0.5		1.6×0.8									2.0×	1.25						3.2>	<1.6	
T max. (mm)		0.33			0.	55				0.9			0.7		0.	95					1.4				0.95	1.25
Rated Voltage (Vdc)	25	16	10	100	50	25	16	100	50	25	16	6.3	100	100	50	25	16	100	50	35	25	16	10	6.3	100	100
Cap. / TC Code	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	Χ7Δ	X7R	X7R	X7R
100pF	p21																									
150pF	p21																									
220pF	p21			p21	p21																					
330pF	p21			p21	p21																					
470pF	p21			p21	p21																			İ		
680pF	p21			p21	p21											ļ										
1000pF	p21			p21	p21			p21	p21																	
1500pF	p21			p21	p21			p21	p21																	
2200pF		p21		p21	p21			p21	p21							1										
3300pF		p21		p21	p21			p21	p21																	
4700pF			p21	p21	p21			p21	p21															İ		
6800pF			p21		p21			p21	p21				p21											İ		
10000pF			p21		p21	p21		p21	p21				p21			ļ										
15000pF					p21	p21		p21	p21				p21													
22000pF					p21	p21		p21	p21				p21													
33000pF					p21	p21	p21		p21	p21				p22	p22											
47000pF					p21	p21	p21		p21	p21								p22	p22							
68000pF					p21		p21		p21	p21								p22	p22							
0.10μF					p21		p21		p21	p21	p21							p22	p22						p22	
0.15μF							p21		p21	p21									p22		p22					p22
0.22µF							p21		p21	p21									p22		p22					p22
0.33µF											p21				p22						p22					
0.47µF										p21	p21					p22			p22							
0.68µF																	p22			p22	p22					
1.0µF										p21	p21						p22		p22	p22	p22					
1.5µF																ļ				p22						
2.2µF												p21									p22	p22	p22			
4.7µF																						p22	p22			
10μF																							p22	p22		
22µF																										
47μF																										
																										\supset

$(\rightarrow \blacksquare$ GCM Series High Dielectric Constant Type)

p00 ← Part Number List	EIA: X7S	X7R
------------------------	----------	-----

			3	3.2×1.	6							3.2	×2.5				L×W (mm)
1.25	1.3			1	.8			1.9	2	.2			2	.7			T max. (mm)
50	25	100	50	25	16	10	6.3	25	25	16	50	35	25	16	10	6.3	Rated Voltage (Vdc)
X7R	X7R	X7R	Χ7Δ	X7R	X7R	X7R	X7R	X7S	X7R	X7R	Χ7Δ	X7S	X7R	X7R	X7R	X7R	Cap. / TC Code
																	100pF
																	150pF
																	220pF
																	330pF
																	470pF
																	680pF
																	1000pF
																	1500pF
																	2200pF
																	3300pF
																	4700pF
																	6800pF
																	10000pF
																	15000pF
																	22000pF
																	33000pF
																	47000pF
																	68000pF
																	0.10µF
																	0.15µF
																	0.22µF
p22																	0.33µF
p22																	0.47µF
p22																	0.68µF
p22		p22									p22						1.0µF
																	1.5µF
	p22		p22														2.2µF
			p22	p22	p22				p22		p22						4.7µF
					p22	p22		p22		p22	p22	p22	p22				10µF
						p22	p22							p22	p22		22µF
																p22	47µF

■ GCD Series High Dielectric Constant Type

p00	← Part Number List	EIA:	X7R	

			-				_	
L×W (mm)	1	.6×0.	8			0×1.2	_	
T max. (mm)		0.9	1	-	.7	0.95		.4
Rated Voltage (Vdc)	100	50	25	100	50	100	100	50
Cap. / TC Code	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R
1000pF	p24	p24		p24	p24			
1200pF	p24	p24		p24	p24			
1500pF	p24	p24		p24	p24			
1800pF	p24	p24		p24	p24			
2200pF	p24	p24		p24	p24			
2700pF	p24	p24		p24	p24			
3300pF	p24	p24		p24	p24			
3900pF	p24	p24		p24	p24			
4700pF	p24	p24		p24	p24			
5600pF	p24	p24		p24	p24			
6800pF	p24	p24				p24		
8200pF	p24	p24					p24	
10000pF	p24	p24					p24	
12000pF	p24	p24					p24	
15000pF	p24	p24					p24	p24
18000pF	p24	p24					p24	p24
22000pF	p24	p24					p24	p24
27000pF			p24				p24	p24
33000pF			p24				p24	p24
39000pF			p24				p24	p24
47000pF			p24				p24	p24
56000pF							p24	p24
68000pF							p24	p24
82000pF							p24	p24
0.10μF							p24	p24

■ GCE Series High Dielectric Constant Type

p00	$\leftarrow PartNumberList$	EIA:	X7R

L×W (mm)	1.6	<0.8		2	.0×1.2	25				
T max. (mm)	0	.9	0	.7	0.95	1.	45			
Rated Voltage (Vdc)	100	50	100	50	100	100	50			
Cap. / TC Code	X7R	X7R	X7R	X7R	X7R	X7R	X7R			
1000pF	p26	p26	p26	p26						
1200pF	p26	p26	p26	p26						
1500pF	p26	p26	p26	p26						
1800pF	p26	p26	p26	p26						
2200pF	p26	p26	p26	p26						
2700pF	p26	p26	p26	p26						
3300pF	p26	p26	p26	p26						
3900pF	p26	p26	p26	p26						
4700pF	p26	p26	p26	p26						
5600pF	p26	p26	p26	p26						
6800pF	p26	p26			p26					
8200pF	p26	p26				p26				
10000pF	p26	p26				p26				
12000pF	p26	p26				p26				
15000pF	p26	p26				p26	p26			
18000pF	p26	p26				p26	p26			
22000pF	p26	p26				p26	p26			
27000pF						p26	p26			
33000pF						p26	p26			
39000pF						p26	p26			
47000pF						p26	p26			
56000pF						p26	p26			
68000pF						p26	p26			
82000pF						p26	p26			
0.10µF						p26	p26			

■ GCG Series

Temperature Compensating Type

p00 ← Part Number List

Murata Temperature Characteristic: X8G

L×W (mm)	1.0× 0.5	1.6× 0.8	2.0×	1.25
T max. (mm)	0.55	0.9	0.7	0.95
Rated Voltage (Vdc)	50	50	50	50
Cap. / TC Code	X8G	X8G	X8G	X8G
10pF		p28		
12pF		p28		
15pF		p28		
18pF		p28		
22pF		p28		
27pF		p28		
33pF		p28		
39pF		p28		
47pF		p28		
56pF		p28		
68pF		p28		
82pF		p28		
100pF		p28	p28	
120pF	p28	p28	p28	
150pF	p28	p28	p28	
180pF	p28	p28	p28	
220pF	p28	p28	p28	
270pF	p28	p28	p28	
330pF	p28	p28	p28	
390pF	p28	p28	p28	
470pF	p28	p28	p28	
560pF		p28	p28	
680pF		p28	p28	
820pF		p28	p28	
1000pF		p28	p28	
1200pF		p28	p28	
1500pF		p28	p28	
1800pF		p28	p28	
2200pF		p28	p28	
2700pF			p28	
3300pF			p28	
3900pF			p28	
4700pF			p28	
5600pF				p28
6800pF				p28
8200pF				p28

10000pF

High Dielectric Constant Type

EIA: X7R X8R Murata Temperature Characteristic: X8L

L×W (mm)		1	.0×0.	5					1.6	<0.8				2.0×	1.25
T max. (mm)			0.55						0	.9				0.9	95
Rated Voltage (Vdc)	50	2	5	1	6	100		50		2	5	1	6	50	25
Cap. / TC Code	X7R	X8L	X7R	X8L	X7R	X8R	X8L	X8R	X7R	X8R	X7R	X8L	X8R	X8R	X8R
220pF	p29						p29								
270pF	p29						p29								
330pF	p29						p29								
390pF	p29						p29								
470pF	p29						p29								
560pF	p29						p29								
680pF	p29						p29								
820pF	p29						p29								
1000pF	p29					p29	p29			p30					
1200pF	p29					p29	p29	p29		p30					
1500pF	p29					p29	p29	p29		p30					
1800pF	p29					p29	p29	βES		p30					
	p29					p29	p29	p29		p30					
2200pF						-	-								
2700pF	p29					p29	p29	p29		p30					
3300pF	p29					p29	p29	p29		p30					
3900pF	p29					p29	p29	p29		p30					
4700pF	p29					p29	p29	p29		p30					
5600pF		p29	p29			p29	p29	p29		p30					
6800pF		p29	p29			p29	p29	p29		p30					
8200pF		p29	p29			p29	p29	p29		p30					
10000pF		p29	p29			p29	p29	p30		p30				p30	p30
12000pF						p29	p29								
15000pF				p29	p29	p29	p29	p30		p30				p30	p30
18000pF				p29	p29	p29	p29							p30	
22000pF				p29	p29	p29	p29	p30		p30				p30	p30
27000pF				p29	p29	p29			p30						
33000pF				p29	p29	p29		p30	p30	p30					
39000pF				p29	p29	p29			p30						
47000pF				p29	p29	p29		p30	p30	p30					
56000pF					p29	p29			p30						
68000pF					p29	p29			p30	p30			p30		
82000pF					p29				p30	,					
0.10µF					p29			p30					p30		
0.12µF					p_o			p30			p30		μου		
0.15μF								p30			p30	n30			
0.18μF								p30			p30	ροσ			
0.18μF 0.22μF								p30			p30	p30			
								pou			ρου	Pou			
0.27µF										p.20					
0.33µF										p30					
0.39µF										p30					
0.47µF										p30					
0.56µF															
0.68µF															
0.82µF															
1.0µF															
1.2µF															
1.5µF															
2.2µF															
3.3µF															
3.9µF															
4.7μF															
10μF															
. [-															

$(\rightarrow \blacksquare$ GCG Series High Dielectric Constant Type)

p00 ← Part Number List

EIA: X7R X8R

Murata Temperature Characteristic: X8L

L×W (mm)				2.0×	1 25							3 2	<1.6				3.2>	/25
T max. (mm)					45					1 1	35	0.2	1.0	1	.9		2.3	2.8
Rated Voltage (Vdc)		50		1.	25		1	6	50	2		16	2			6	25	25
Cap. / TC Code	VOI		X7R	X8L		X7R		X7R				X8L				X8R		X7R
220pF	AOL	XOIT	A/ N	AOL	XOIT	Α/11	XOL	7/11	XOIT	XOIT	7/11	AOL	XOIT	Χ/11	XOL	XON	7/11	7/11
270pF																1		
																1		
330pF																i		
390pF																1		
470pF																		
560pF																1		
680pF																		
820pF 1000pF																1		
1200pF																		
1500pF																i		
																!		
1800pF																		
2200pF																		
2700pF																		
3300pF																		
3900pF 4700pF																		
5600pF																		
6800pF																		
																!		
8200pF																		
10000pF																i		
12000pF																!		
15000pF																l		
18000pF																		
22000pF	-00																	
27000pF		.00			.00											i		
33000pF	p30	p30			p30											!		
39000pF	p30	.00			p30											!		
47000pF	p30	p30			p30													
56000pF		p30																
68000pF		p30			20													
82000pF	-00	.00		.00	p30													
0.10µF	p30	p30		p30	p30													
0.12µF			. 00		.00				.00	.00								
0.15µF			p30		p30				p30	p30								
0.18µF			p30		p30 p30				20	n 20						1		
0.22µF			p30		ρ30	n20			p30	p30								
0.27μF				n20		p30	n20		p30	p30								
0.33µF				p30		p30	p30		ρ30	ρ30								
0.39µF						p30	p30 p30											
0.47µF						p30	_											
0.56µF						p30	p30						n 04			n04		
0.68µF						p30	p30						p31			p31		
0.82µF						p30	p30				n 20	n01				n04		
1.0µF						p30					p30	p31				p31		
1.2µF											p31	m 0.4						
1.5µF											p31	p31						
2.2µF											p31			04			04	
3.3µF														p31	p31		p31	
3.9µF								.00						p31				. 0.1
4.7µF								p30						p31	p31			p31
10µF																		p31

■ GCJ Series High Dielectric Constant Type

1.34//							I 6:-0	0											0	0.4.	25				
L×W (mm)						1	0.6×0.	8							0.7			0.0		.0×1.2				1.45	
T max. (mm)	11	00		50		35	0.9	25		1	6	10	6.3	100	50	25	100	50	25	16	1.0 250	250	100	1.45	n
Cap. / TC Code			VQI		V7D		X8L		V7D							X7R					X7R				
220pF	NON	λ/π	VOL	ZON	A/11	AOL	VOL	AON	Λ/Π	VOL	A/n	A/11	A/11	λ/η	λ/π	A/H		A/ N	A/11	A/11	A/ N	λ/π	A/11	VOL	Λ/Π
270pF											İ					1	p35 p35								
330pF					i						i				0.4	i									
390pF											İ				p34		p35								
· ·															p34	.05	p35								
470pF		i			İ						ĺ				p34	p35	p35								
560pF															p34	p35	p35								
680pF															p34	p35	p35								
820pF															p34	p35	p35								
1000pF					p33				p34		į			p34	p34	p35					p35				
1200pF		p33	_		p33				p34					p34	p34	p35									
1500pF	p33	p33	_		p33				p34		ĺ			p34	p34	p35					p35				
1800pF	p33	p33	p33		p33				p34					p34	p34	p35									
2200pF	p33	p33	p33		p33				p34					p34	p34	p35					p35				
2700pF	p33	p33	p33		p33				p34					p34	p34	p35									
3300pF	p33	p33	p33		p33				p34					p34	p34	p35					p35				
3900pF	р33	р33	p33		p33				p34					p34	р34	p35									
4700pF	p33	р33	p33	р33	р33				p34					p34	p34	p35					p35				
5600pF	р33	p33	p33		р33				p34					p34	p34	p35									
6800pF	p33	р33	p33		р33		i		p34		İ			p34	p34	p35					p35				
8200pF	p33	p33	p33		p33				p34					p34	p34	p35									
10000pF		p33	-	p33	p33				p34		p34	İ		p34	p34	p35						p35			
12000pF		p33	p33		p33				p34					p34	p34	p35									
15000pF		p33	p33		p33				p34					p34	p34	poo			p35	ĺ		p35			
18000pF		p33	-		p33				p34					p34	p34				p35			ροσ			
22000pF		p33	-		p33				p34					p34	p34				p35			p35			
27000pF		poo	poo		ροσ				p34		p34	i		μ34	μ34		n 25	n25	μου			μου		n25	
					00	-00	-00	İ		-04						1	p35	p35						p35	
33000pF					p33	p33	p33		p34	p34	p34						p35	p35						p35	
39000pF					p33	p33	p33		p34	p34	p34					1	p35	p35						p35	
47000pF					p33				p34	p34	p34												p35	p35	p35
56000pF					p33	p33	p33		p34	p34	p34												p35	p35	p35
68000pF	p33				p33	p33	p33		p34	p34	p34		İ			į							p35	p35	p35
82000pF					p33		p33		p34	p34	p34												p35		p35
0.10µF		р33		p33	p33				p34	p34	p34					1							p35	p35	p35
0.12µF				p33					p34	p34	p34														p35
0.15µF				p33	p33		p33		p34	p34	p34	p34													p35
0.18µF				p33			p33		p34	p34	p34	p34													p35
0.22µF				p33	p33		p33		p34	p34	p34	p34													p35
0.27µF											p34														
0.33µF								p33			p34							p35	p35						
0.39µF								p33			p34														
0.47µF								p33			p34								p35	ĺ				İ	p35
0.56µF																									
0.68µF																				p35					
0.82µF																				p35					
1.0µF									p34	i										p35					p35
1.5µF									P04							!				POJ					p 55
2.2µF													p34												
													ρ34			1									
3.3µF																									
4.7µF																									
6.8µF																									
10µF																i									
22µF																									
47µF		į	1	1	į	i		į			į	i	i	I		i					1 1	1			

$(\rightarrow \blacksquare$ GCJ Series High Dielectric Constant Type)

p00 ← Part Numbe	r List	E	ΞIA:	X7S	X7R	X8F	R	Mura	ata Te	emper	ature	Char	acteri	stic:	X8L											
L×W (mm)		2.	.0×1.2	25											3	3.2×1.	.6									
T max. (mm)			1.45			0.			1.25				35			1.8						1.9				
Rated Voltage (Vdc)		25		6	10	100		1000			100	50	25		1000			100	50	35		25	1		10	6.3
Cap. / TC Code	_	X7R	X8L	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	Χ7Δ	X8L	X8L	X7R	X8L	X7R	X7R	X7R
220pF	-															!										
270pF	-																									
330pF	-																									
390pF	-																									
470pF	-																									
560pF	-																									
680pF																										
820pF	-																									
1000pF	-							p36	p36																	
1200pF	-																									
1500pF	-							p36	p36							İ										
1800pF	-																									
2200pF	-							p36	p36																	
2700pF	-																									
3300pF	_							p36	p36																	
3900pF	-																									
4700pF	-							p36	p36																	
5600pF																										
6800pF	_			i	İ			İ	p36						p36				İ	i	i					
8200pF	-															i										
10000pF	-								p36						p36											
12000pF	-																									
15000pF								1		p36						p36										
18000pF	-																									
22000pF	-									p36						p36										
27000pF	-	p35																								
33000pF	_	p35			ļ			ļ								į	p36									
39000pF	-	p35														į										
47000pF	-	p35															p36									
56000pF	-	p35														:										
68000pF	-	p35						i		p36						:										
82000pF	-	p35						i						i				i								
0.10µF		p35				p36							p36			į.	p36									
0.12µF							p36						p36													
0.15µF											p36	p36	p36			į										
0.18µF											p36	p36	p36													
0.22µF											p36	p36	p36													
0.27µF		p35		p36								p36														
0.33µF		.05		p36				!				p36				!										
0.39µF		p35		p36								p36														
0.47µF				p36								p36														
0.56µF		p35		p36								p36								p36	_					
0.68µF												p36									p36					
0.82µF												p36	-0-0							p36	_					
1.0µF			p36	p36				!				p36		p36				p36		p36	p36					
1.5µF		p35			-0-1								p36	p36					p36							
2.2µF		p35		p36	p36								p36						p36							
3.3µF													p36										p36	p36		
4.7µF				p36															p36			p36	p36			
6.8µF																									p36	
10µF					p36																			p36		
22µF																										p36
47μF		<u> </u>		<u> </u>	<u> </u>			!								<u> </u>			<u> </u>	<u> </u>						7

$(\rightarrow \blacksquare$ GCJ Series High Dielectric Constant Type)

p00	— P	art N	umbe	r List	ı	EIA:	X7S	X7R	X8F	R	Mura	ata Te	emper	rature	Char	acteri	stic:	X8L	
3.2× 1.6					3.2	×2.5						4	1.5×3.	2		5	5.7×5.	0	L×W (mm)
2.0	1.	.5		2.0		2.3		2	.8		1	.5		2.0			2.0		T max. (mm)
25	630	250	1000	630	250	100	50	25	16	6.3	630	250	1000	630	250	1000	630	250	Rated Voltage (Vdc)
X7S	X7R	X7R	X7R	X7R	X7R	X7R	Χ7Δ	X8L	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	Cap. / TC Code
																			220pF
																			270pF
																			330pF
																			390pF
																			470pF
																			560pF
																			680pF
																			820pF
																			1000pF
																			1200pF
																			1500pF
														l					1800pF
			İ					i	i										2200pF
																			2700pF
			1																3300pF
																			3900pF
																			4700pF
	n26																		5600pF 6800pF
	p36													İ					8200pF
	00		İ					İ						į					
	p36													į					10000pF
			.00	.00	i														12000pF
			рзь	p36															15000pF
			- 00	- 00				i						i					18000pF
			p36	p36										i					22000pF
				- 00	i								07	0=	i				27000pF
				p36									p37	p37					33000pF
			1		i	1									i				39000pF
				p36		į							p37	p37					47000pF
			i																56000pF
		p36									p37					p37			68000pF
														_	i				82000pF
					p36									p37		p37	p37		0.10µF
																			0.12µF
		p36	ļ									p37					p37		0.15µF
																			0.18µF
					p36										p37		p37		0.22µF
																			0.27μF
															p37			p37	0.33µF
																			0.39µF
															p37			p37	0.47µF
																			0.56µF
																		p37	0.68µF
																			0.82µF
																		p37	1.0µF
																			1.5µF
						p36													2.2µF
																			3.3µF
							p37	p37											4.7µF
																			6.8µF
p36							p37												10μF
									p37										22µF
										p37									47μF

■ GC3 Series High Dielectric Constant Type

p00 ← Part Number List	EIA: X7T
------------------------	----------

L×W (mm)	2.0	1 25				2 2	×1.6					-	.2×2.	<u> </u>			1 5.	×3.2				5.7>	.E.O.		
` '					ı			I									4.5					5./>	(5.0		
T max. (mm)	1.0	1.45	1	.0		1.25			1.8		1.	.5		2.0		1.5		2.0			2.0			2.7	
Rated Voltage (Vdc)	250	250	450	250	630	450	250	630	450	250	630	250	630	450	250	250	630	450	250	630	450	250	630	450	250
Cap. / TC Code	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T
10000pF	p39		p39		p39																				
15000pF	p39		p39					p39																	
22000pF		p39				p39					p39														
33000pF				p39		p39							p39												
47000pF							p39		p39				p39												
68000pF										p39				p39			p39								
0.10μF												p39		p39						p39					
0.15µF															p39			p39		p39					
0.22μF																p39					p39		p39		
0.27μF																							p39		
0.33µF																			p39		p39				
0.47μF																					p39	p39			
0.56µF																								p39	
0.68µF																						p39			
1.0µF																									p39

■ KCM Series High Dielectric Constant Type

p00 ← Part Number List EIA: X7R

L×W (mm)									6	5.1×5.	3								
T max. (mm)			3.0					3.9				5.	.0				6.7		
Rated Voltage (Vdc)	100	63	50	35	25	100	63	50	35	25	100	50	35	25	100	63	50	35	25
Cap. / TC Code	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R	X7R
4.7µF	p42	p42	p42																
6.8µF						p42													
10μF			p42	p42			p42				p42								
15µF				p42	p42										p42				
17µF								p42	p42										
22µF									p42	p42		p42	p42			p42			
33µF										p42			p42	p42			p42		
47µF																		p42	p42
68µF																			p42

■ KC3 Series High Dielectric Constant Type


p00 ← Part Number List EIA: X7T

L×W (mm)					6	6.1×5.	3				
T max. (mm)		3.0			3.9		5	.0		6.7	
Rated Voltage (Vdc)	630	450	250	630	450	250	450	250	630	450	250
Cap. / TC Code	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T	X7T
0.10μF	p45										
0.15μF	p45										
0.22μF		p45		p45							
0.27μF				p45							
0.33μF		p45									
0.47µF		p45	p45						p45		
0.56μF					p45				p45		
0.68µF			p45				p45				
1.0µF						p45	p45				
1.2µF										p45	
1.5µF								p45			
2.2µF											p45

Search Capacitors

Specifications and Test Methods, Package, Chart of Characteristic Data, please refer to the search web page.

http://www.murata.com/products/capacitor/

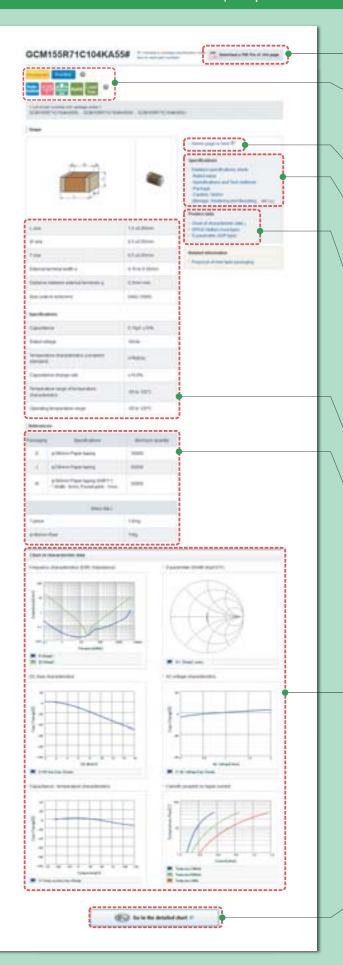

Data Sheet

The product details page can be output in PDF.

Status and Features Icons

The status and features of products can be checked at once. When ③ is clicked, a description of each icon will be displayed.

Characteristics & Applications

This links to the introduction page of each series.

Detailed Specifications Sheet

- Rated value
- Specifications and Test Methods
- Package
- Caution, Notice
 (Storage, Soldering and Mounting,etc.)

Characteristics Data

The following characteristics data of the main products can be acquired.

- SPICE Netlist (mod type)
- S parameter (S2P type)
- Reliability Test Data *Typical data
- Shape (Dimensions)
- Rated Values
- Specification by Packaging Code/ Minimum Order Quantity
- Weight (1 pc/ø180mm reel)

Chart of Characteristic Data

The main products published characteristic data.

- Frequency characteristics (ESR, Impedance)
- S parameter (Smith chart S11)
- DC bias characteristics
- AC voltage characteristics
- Capacitance temperature characteristics
- Calorific property by ripple current

Design Tools SimSurfing

The SimSurfing design tools are useful for displaying the graph, downloading CSV data and overwriting the product number graph. GCG Series

General Purpose Product

GCM Series





Capacitor for automotive applications such as power train and safety equipment.

Features

1 Ideal for power trains and safety devices in automobiles.


This product can be used for safety devices, such as the drive system control for engine ECU, air bags, and ABS. This product has cleared test conditions more severe than that of general products (GRM Series) even in temperature cycle and humidity load tests.

	General Purpose GRM Series Maximum operating temperature: 85°C/105°C/125°C	GCM Series for Automobiles Maximum operating temperature: 125°C
Items	Test Method	Test Method
Temperature Cycle	Temperature Cycle: 5 cycles	Temperature Cycle: 100 cycles (1,000 cycles for AEC-Q200 conforming products)
Humidity Loading	Test temperature: 40±2°C Test humidity: 90 to 95%RH Test time: 500 hours	Test temperature: 85±2°C Test humidity: 80 to 85%RH Test time: 500 hours (1,000 hours for AEC-Q200 conforming products)

2 Can be used at 125°C and 150°C temperatures.


We also offer a lineup for 150°C that can be used in the engine room.

3 Sn plating is applied to the external electrodes; excellent solder ability.



Specifications

Size	0.6×0.3mm to 5.7×5.0mm
Rated Voltage	6.3Vdc to 1kVdc
Capacitance	0.1pF to 47μF
Main Applications	Drive system control of engine ECU, Airbag, Safety equipment such as ABS





GCM Series Temperature Compensating Type (Part Number List

■ 0.6×0.3mm Ultra-



T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.33mm	25Vdc	COG	1.0pF	±0.25pF	GCM0335C1E1R0CD03#
			2.0pF	±0.25pF	GCM0335C1E2R0CD03#
			3.0pF	±0.25pF	GCM0335C1E3R0CD03#
			4.0pF	±0.25pF	GCM0335C1E4R0CD03#
			5.0pF	±0.25pF	GCM0335C1E5R0CD03#
			6.0pF	±0.5pF	GCM0335C1E6R0DD03#
			7.0pF	±0.5pF	GCM0335C1E7R0DD03#
			8.0pF	±0.5pF	GCM0335C1E8R0DD03#
			9.0pF	±0.5pF	GCM0335C1E9R0DD03#
			10pF	±5%	GCM0335C1E100JD03#
			12pF	±5%	GCM0335C1E120JD03#
			15pF	±5%	GCM0335C1E150JD03#
			18pF	±5%	GCM0335C1E180JD03#
			22pF	±5%	GCM0335C1E220JD03#
			27pF	±5%	GCM0335C1E270JD03#
			33pF	±5%	GCM0335C1E330JD03#
			39pF	±5%	GCM0335C1E390JD03#
			47pF	±5%	GCM0335C1E470JD03#
			56pF	±5%	GCM0335C1E560JD03#
			68pF	±5%	GCM0335C1E680JD03#
			82pF	±5%	GCM0335C1E820JD03#
			100pF	±5%	GCM0335C1E101JD03#

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
0.55mm	50Vdc	C0G	220pF	±5%	GCM1555C1H221JA16#
			270pF	±5%	GCM1555C1H271JA16#
			330pF	±5%	GCM1555C1H331JA16#
			390pF	±5%	GCM1555C1H391JA16#
			470pF	±5%	GCM1555C1H471JA16#

■ 1.6×0.8mm

Rated

max.	Voltage	Code	Cap.	101.	Part Number
0.9mm	100Vdc	COG	1.0pF	±0.25pF	GCM1885C2A1R0CA16#
			2.0pF	±0.25pF	GCM1885C2A2R0CA16#
			3.0pF	±0.25pF	GCM1885C2A3R0CA16#
			4.0pF	±0.25pF	GCM1885C2A4R0CA16#
			5.0pF	±0.25pF	GCM1885C2A5R0CA16#
			6.0pF	±0.5pF	GCM1885C2A6R0DA16#
			7.0pF	±0.5pF	GCM1885C2A7R0DA16#
			8.0pF	±0.5pF	GCM1885C2A8R0DA16#
			9.0pF	±0.5pF	GCM1885C2A9R0DA16#
			10pF	±5%	GCM1885C2A100JA16#
			12pF	±5%	GCM1885C2A120JA16#
			15pF	±5%	GCM1885C2A150JA16#
			18pF	±5%	GCM1885C2A180JA16#
			22pF	±5%	GCM1885C2A220JA16#
			27pF	±5%	GCM1885C2A270JA16#
			33pF	±5%	GCM1885C2A330JA16#
			39pF	±5%	GCM1885C2A390JA16#
			47pF	±5%	GCM1885C2A470JA16#
			56pF	±5%	GCM1885C2A560JA16#
			68pF	±5%	GCM1885C2A680JA16#
			82pF	±5%	GCM1885C2A820JA16#
			100pF	±5%	GCM1885C2A101JA16#
			120pF	±5%	GCM1885C2A121JA16#
			150pF	±5%	GCM1885C2A151JA16#
			180pF	±5%	GCM1885C2A181JA16#
			220pF	±5%	GCM1885C2A221JA16#
			270pF	±5%	GCM1885C2A271JA16#
			330pF	±5%	GCM1885C2A331JA16#
			390pF	±5%	GCM1885C2A391JA16#
			470pF	±5%	GCM1885C2A471JA16#
			560pF	±5%	GCM1885C2A561JA16#
			680pF	±5%	GCM1885C2A681JA16#
			820pF	±5%	GCM1885C2A821JA16#
			1000pF	±5%	GCM1885C2A102JA16#
			1200pF	±5%	GCM1885C2A122JA16#
			1500pF	±5%	GCM1885C2A152JA16#
	50Vdc	C0G	1.0pF	±0.25pF	GCM1885C1H1R0CA16#
			2.0pF	±0.25pF	GCM1885C1H2R0CA16#
			3.0pF	±0.25pF	GCM1885C1H3R0CA16#
			4.0pF	±0.25pF	GCM1885C1H4R0CA16#
			5.0pF	±0.25pF	GCM1885C1H5R0CA16#
			6.0pF	±0.5pF	GCM1885C1H6R0DA16#
			7.0pF	±0.5pF	GCM1885C1H7R0DA16#

■ 1.0×0.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.55mm	50Vdc	COG	1.0pF	±0.25pF	GCM1555C1H1R0CA16#
			2.0pF	±0.25pF	GCM1555C1H2R0CA16#
			3.0pF	±0.25pF	GCM1555C1H3R0CA16#
			4.0pF	±0.25pF	GCM1555C1H4R0CA16#
			5.0pF	±0.25pF	GCM1555C1H5R0CA16#
			6.0pF	±0.5pF	GCM1555C1H6R0DA16#
			7.0pF	±0.5pF	GCM1555C1H7R0DA16#
			8.0pF	±0.5pF	GCM1555C1H8R0DA16#
			9.0pF	±0.5pF	GCM1555C1H9R0DA16#
			10pF	±5%	GCM1555C1H100JA16#
			12pF	±5%	GCM1555C1H120JA16#
			15pF	±5%	GCM1555C1H150JA16#
			18pF	±5%	GCM1555C1H180JA16#
			22pF	±5%	GCM1555C1H220JA16#
			27pF	±5%	GCM1555C1H270JA16#
			33pF	±5%	GCM1555C1H330JA16#
			39pF	±5%	GCM1555C1H390JA16#
			47pF	±5%	GCM1555C1H470JA16#
			56pF	±5%	GCM1555C1H560JA16#
			68pF	±5%	GCM1555C1H680JA16#
			82pF	±5%	GCM1555C1H820JA16#
			100pF	±5%	GCM1555C1H101JA16#
			120pF	±5%	GCM1555C1H121JA16#
			150pF	±5%	GCM1555C1H151JA16#
			180pF	±5%	GCM1555C1H181JA16#

Part number # indicates the package specification code.

GCM1885C1H8R0DA16#

±0.5pF

Part Number

GCM Series Temperature Compensating Type (SS) Part Number List

(→ **■** 1.6×0.8mm)

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.9mm	50Vdc	COG	9.0pF	±0.5pF	GCM1885C1H9R0DA16#
			10pF	±5%	GCM1885C1H100JA16#
			12pF	±5%	GCM1885C1H120JA16#
			15pF	±5%	GCM1885C1H150JA16#
			18pF	±5%	GCM1885C1H180JA16#
			22pF	±5%	GCM1885C1H220JA16#
			27pF	±5%	GCM1885C1H270JA16#
			33pF	±5%	GCM1885C1H330JA16#
			39pF	±5%	GCM1885C1H390JA16#
			47pF	±5%	GCM1885C1H470JA16#
			56pF	±5%	GCM1885C1H560JA16#
			68pF	±5%	GCM1885C1H680JA16#
			82pF	±5%	GCM1885C1H820JA16#
			100pF	±5%	GCM1885C1H101JA16#
			120pF	±5%	GCM1885C1H121JA16#
			150pF	±5%	GCM1885C1H151JA16#
			180pF	±5%	GCM1885C1H181JA16#
			220pF	±5%	GCM1885C1H221JA16#
			270pF	±5%	GCM1885C1H271JA16#
			330pF	±5%	GCM1885C1H331JA16#
			390pF	±5%	GCM1885C1H391JA16#
			470pF	±5%	GCM1885C1H471JA16#
			560pF	±5%	GCM1885C1H561JA16#
			680pF	±5%	GCM1885C1H681JA16#
			820pF	±5%	GCM1885C1H821JA16#
			1000pF	±5%	GCM1885C1H102JA16#
			1200pF	±5%	GCM1885C1H122JA16#
			1500pF	±5%	GCM1885C1H152JA16#
			1800pF	±5%	GCM1885C1H182JA16#
			2200pF	±5%	GCM1885C1H222JA16#
			2700pF	±5%	GCM1885C1H272JA16#
			3300pF	±5%	GCM1885C1H332JA16#
			3900pF	±5%	GCM1885C1H392JA16#

■ 2.0×1.25mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number	
0.7mm	100Vdc	COG	100pF	±5%	GCM2165C2A101JA16#	
			120pF	±5%	GCM2165C2A121JA16#	
			150pF	±5%	GCM2165C2A151JA16#	
			180pF	±5%	GCM2165C2A181JA16#	
			220pF	±5%	GCM2165C2A221JA16#	
			270pF	±5%	GCM2165C2A271JA16#	
			330pF	±5%	GCM2165C2A331JA16#	
			390pF	±5%	GCM2165C2A391JA16#	
			470pF	±5%	GCM2165C2A471JA16#	
			560pF	±5%	GCM2165C2A561JA16#	
			680pF	±5%	GCM2165C2A681JA16#	
				820pF	±5%	GCM2165C2A821JA16#
			1000pF	±5%	GCM2165C2A102JA16#	
			1200pF	±5%	GCM2165C2A122JA16#	
			1500pF	±5%	GCM2165C2A152JA16#	
			1800pF	±5%	GCM2165C2A182JA16#	

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.7mm	100Vdc	C0G	2200pF	±5%	GCM2165C2A222JA16#
			2700pF	±5%	GCM2165C2A272JA16#
			3300pF	±5%	GCM2165C2A332JA16#
	50Vdc	COG	1000pF	±5%	GCM2165C1H102JA16#
			1200pF	±5%	GCM2165C1H122JA16#
			1500pF	±5%	GCM2165C1H152JA16#
			1800pF	±5%	GCM2165C1H182JA16#
			2200pF	±5%	GCM2165C1H222JA16#
			2700pF	±5%	GCM2165C1H272JA16#
			3300pF	±5%	GCM2165C1H332JA16#
			3900pF	±5%	GCM2165C1H392JA16#
			4700pF	±5%	GCM2165C1H472JA16#
0.95mm	100Vdc	ZLM	1000pF	±10%	GCM2199E2A102KA05#
				±20%	GCM2199E2A102MA05#
			1100pF	±10%	GCM2199E2A112KA05#
				±20%	GCM2199E2A112MA05#
			1200pF	±10%	GCM2199E2A122KA05#
				±20%	GCM2199E2A122MA05#
			1300pF	±10%	GCM2199E2A132KA05#
				±20%	GCM2199E2A132MA05#
			1500pF	±10%	GCM2199E2A152KA05#
				±20%	GCM2199E2A152MA05#
	50Vdc	COG	5600pF	±5%	GCM2195C1H562JA16#
			6800pF	±5%	GCM2195C1H682JA16#
			8200pF	±5%	GCM2195C1H822JA16#
			10000pF	±5%	GCM2195C1H103JA16#
			12000pF	±5%	GCM2195C1H123JA16#
			15000pF	±5%	GCM2195C1H153JA16#
1.0mm	250Vdc	U2J	100pF	±5%	GCM21A7U2E101JX01#
			120pF	±5%	GCM21A7U2E121JX01#
			150pF	±5%	GCM21A7U2E151JX01#
			180pF	±5%	GCM21A7U2E181JX01#
			220pF	±5%	GCM21A7U2E221JX01#
			270pF	±5%	GCM21A7U2E271JX01#
			330pF	±5%	GCM21A7U2E331JX01#
			390pF	±5%	GCM21A7U2E391JX01#
			470pF	±5%	GCM21A7U2E471JX01#
			560pF	±5%	GCM21A7U2E561JX01#
			680pF	±5%	GCM21A7U2E681JX01#
			820pF	±5%	GCM21A7U2E821JX01#
			1000pF	±5%	GCM21A7U2E102JX01#
			1200pF	±5%	GCM21A7U2E122JX01#
			1500pF	±5%	GCM21A7U2E152JX01#
			1800pF	±5%	GCM21A7U2E182JX01#
			2200pF	±5%	GCM21A7U2E222JX01#
1.4mm	50Vdc	C0G	18000pF	±5%	GCM21B5C1H183JA16#
			22000pF	±5%	GCM21B5C1H223JA16#
1.45mm	250Vdc	U2J	2700pF	±5%	GCM21B7U2E272JX03#
			3300pF	±5%	GCM21B7U2E332JX03#
			3900pF	±5%	GCM21B7U2E392JX03#
			4700pF	±5%	GCM21B7U2E472JX03#
			5600pF	±5%	GCM21B7U2E562JX03#

C.M. Spripe

GCM Series Temperature Compensating Type Part Number List

■ 3.2×1.6mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
).95mm	100Vdc	COG	1800pF	±5%	GCM3195C2A182JA16#
			2200pF	±5%	GCM3195C2A222JA16#
			2700pF	±5%	GCM3195C2A272JA16#
			3300pF	±5%	GCM3195C2A332JA16#
			3900pF	±5%	GCM3195C2A392JA16#
			4700pF	±5%	GCM3195C2A472JA16#
			5600pF	±5%	GCM3195C2A562JA16#
			6800pF	±5%	GCM3195C2A682JA16#
			8200pF	±5%	GCM3195C2A822JA16#
			10000pF	±5%	GCM3195C2A103JA16#
	80Vdc	COG	33000pF	±5%	GCM3195C1K333JA16#
	63Vdc	COG	33000pF	±5%	GCM3195C1J333JA16#
	50Vdc	COG		±5%	
	50 vac	CoG	3900pF		GCM3195C1H392JA16#
			4700pF	±5%	GCM3195C1H472JA16#
			5600pF	±5%	GCM3195C1H562JA16#
			6800pF	±5%	GCM3195C1H682JA16#
			8200pF	±5%	GCM3195C1H822JA16#
			10000pF	±5%	GCM3195C1H103JA16#
			12000pF	±5%	GCM3195C1H123JA16#
			15000pF	±5%	GCM3195C1H153JA16#
			18000pF	±5%	GCM3195C1H183JA16#
			22000pF	±5%	GCM3195C1H223JA16#
			27000pF	±5%	GCM3195C1H273JA16#
			33000pF	±5%	GCM3195C1H333JA16#
			39000pF	±5%	GCM3195C1H393JA16#
1.0mm	1000Vdc	U2J	10pF	±5%	GCM31A7U3A100JX01#
			12pF	±5%	GCM31A7U3A120JX01#
			15pF	±5%	GCM31A7U3A150JX01#
			18pF	±5%	GCM31A7U3A180JX01#
			22pF	±5%	GCM31A7U3A220JX01#
			27pF	±5%	GCM31A7U3A270JX01#
			33pF	±5%	GCM31A7U3A330JX01#
			39pF	±5%	GCM31A7U3A390JX01#
			47pF	±5%	GCM31A7U3A470JX01#
			56pF	±5%	GCM31A7U3A560JX01#
			68pF	±5%	GCM31A7U3A680JX01#
			· ·		GCM31A7U3A820JX01#
			82pF	±5%	
			100pF	±5%	GCM31A7U3A101JX01#
			120pF	±5%	GCM31A7U3A121JX01#
			150pF	±5%	GCM31A7U3A151JX01#
			180pF	±5%	GCM31A7U3A181JX01#
			220pF	±5%	GCM31A7U3A221JX01#
			270pF	±5%	GCM31A7U3A271JX01#
			330pF	±5%	GCM31A7U3A331JX01#
	630Vdc	U2J	10pF	±5%	GCM31A7U2J100JX01#
			12pF	±5%	GCM31A7U2J120JX01#
			15pF	±5%	GCM31A7U2J150JX01#
			18pF	±5%	GCM31A7U2J180JX01#
			22pF	±5%	GCM31A7U2J220JX01#
			27pF	±5%	GCM31A7U2J270JX01#
			33pF	±5%	GCM31A7U2J330JX01#
			39pF	±5%	GCM31A7U2J390JX01#

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.0mm	630Vdc	U2J	47pF	±5%	GCM31A7U2J470JX01#
			56pF	±5%	GCM31A7U2J560JX01#
			68pF	±5%	GCM31A7U2J680JX01#
			82pF	±5%	GCM31A7U2J820JX01#
			100pF	±5%	GCM31A7U2J101JX01#
			120pF	±5%	GCM31A7U2J121JX01#
			150pF	±5%	GCM31A7U2J151JX01#
			180pF	±5%	GCM31A7U2J181JX01#
			220pF	±5%	GCM31A7U2J221JX01#
			270pF	±5%	GCM31A7U2J271JX01#
			330pF	±5%	GCM31A7U2J331JX01#
			390pF	±5%	GCM31A7U2J391JX01#
			470pF	±5%	GCM31A7U2J471JX01#
			560pF	±5%	GCM31A7U2J561JX01#
			680pF	±5%	GCM31A7U2J681JX01#
			820pF	±5%	GCM31A7U2J821JX01#
			1000pF	±5%	GCM31A7U2J102JX01#
			1200pF	±5%	GCM31A7U2J122JX01#
			1500pF	±5%	GCM31A7U2J152JX01#
			1800pF	±5%	GCM31A7U2J182JX01#
			2200pF	±5%	GCM31A7U2J222JX01#
	250Vdc	U2J	2700pF	±5%	GCM31A7U2E272JX01#
			3300pF	±5%	GCM31A7U2E332JX01#
			3900pF	±5%	GCM31A7U2E392JX01#
			4700pF	±5%	GCM31A7U2E472JX01#
			5600pF	±5%	GCM31A7U2E562JX01#
1.25mm	1000Vdc	U2J	390pF	±5%	GCM31B7U3A391JX01#
			470pF	±5%	GCM31B7U3A471JX01#
			560pF	±5%	GCM31B7U3A561JX01#
			680pF	±5%	GCM31B7U3A681JX01#
	630Vdc	U2J	2700pF	±5%	GCM31B7U2J272JX01#
			3300pF	±5%	GCM31B7U2J332JX01#
	250Vdc	U2J	6800pF	±5%	GCM31B7U2E682JX01#
			8200pF	±5%	GCM31B7U2E822JX01#
			10000pF	±5%	GCM31B7U2E103JX01#
	50Vdc	COG	47000pF	±5%	GCM31M5C1H473JA16#
			56000pF	±5%	GCM31M5C1H563JA16#
1.8mm	1000Vdc	U2J	820pF	±5%	GCM31C7U3A821JX03#
			1000pF	±5%	GCM31C7U3A102JX03#
	630Vdc	U2J	3900pF	±5%	GCM31C7U2J392JX03#
			4700pF	±5%	GCM31C7U2J472JX03#

■ 3.2×2.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.0mm	630Vdc	U2J	1200pF	±5%	GCM32A7U2J122JX01#
			1500pF	±5%	GCM32A7U2J152JX01#
			1800pF	±5%	GCM32A7U2J182JX01#
			2200pF	±5%	GCM32A7U2J222JX01#
1.25mm	1000Vdc	U2J	1200pF	±5%	GCM32B7U3A122JX01#
	630Vdc	U2J	5600pF	±5%	GCM32B7U2J562JX01#
1.5mm	1000Vdc	U2J	1500pF	±5%	GCM32Q7U3A152JX01#
	630Vdc	U2J	6800pF	±5%	GCM32Q7U2J682JX01#

Part number # indicates the package specification code.

GCM Series Temperature Compensating Type (Part Number List

(→ **■** 3.2×2.5mm)

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
2.0mm	1000Vdc	U2J	1800pF	±5%	GCM32D7U3A182JX01#
			2200pF	±5%	GCM32D7U3A222JX01#
	630Vdc	U2J	8200pF	±5%	GCM32D7U2J822JX01#
			10000pF	±5%	GCM32D7U2J103JX01#

■ 4.5×3.2mm

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
1.5mm	1000Vdc	U2J	2700pF	±5%	GCM43Q7U3A272JX01#
			3300pF	±5%	GCM43Q7U3A332JX01#
	630Vdc	U2J	12000pF	±5%	GCM43Q7U2J123JX01#
2.0mm	1000Vdc	U2J	3900pF	±5%	GCM43D7U3A392JX01#
			4700pF	±5%	GCM43D7U3A472JX01#
	630Vdc	U2J	15000pF	±5%	GCM43D7U2J153JX01#
			18000pF	±5%	GCM43D7U2J183JX01#
			22000pF	±5%	GCM43D7U2J223JX01#

■ 5.7×5.0mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.5mm	1000Vdc	U2J	5600pF	±5%	GCM55Q7U3A562JX01#
			6800pF	±5%	GCM55Q7U3A682JX01#
	630Vdc	U2J	27000pF	±5%	GCM55Q7U2J273JX01#
2.0mm	1000Vdc	U2J	8200pF	±5%	GCM55D7U3A822JX01#
			10000pF	±5%	GCM55D7U3A103JX01#
	630Vdc	U2J	33000pF	±5%	GCM55D7U2J333JX01#
			39000pF	±5%	GCM55D7U2J393JX01#
			47000pF	±5%	GCM55D7U2J473JX01#

GCM Series High Dielectric Constant Type 🔀 Part Number List

■ 0.6×0.3mm Ultra-



T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
0.33mm	25Vdc	X7R	100pF	±10%	GCM033R71E101KA03#
			150pF	±10%	GCM033R71E151KA03#
			220pF	±10%	GCM033R71E221KA03#
			330pF	±10%	GCM033R71E331KA03#
			470pF	±10%	GCM033R71E471KA03#
			680pF	±10%	GCM033R71E681KA03#
			1000pF	±10%	GCM033R71E102KA03#
			1500pF	±10%	GCM033R71E152KA03#
	16Vdc	X7R	2200pF	±10%	GCM033R71C222KA55#
			3300pF	±10%	GCM033R71C332KA55#
	10Vdc	X7R	4700pF	±10%	GCM033R71A472KA03#
			6800pF	±10%	GCM033R71A682KA03#
			10000pF	±10%	GCM033R71A103KA03#

Rated TC Cap. Tol. Part Number Voltage Code max. 0.55mm 16Vdc X7R $0.10 \mu F$ GCM155R71C104KA55# ±10% 0.15µF ±10% GCM155R71C154KE02# 0.22µF GCM155R71C224KE02# ±10%

■ 1.6×0.8mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
).9mm	100Vdc	X7R	1000pF	±10%	GCM188R72A102KA37#
			1500pF	±10%	GCM188R72A152KA37#
			2200pF	±10%	GCM188R72A222KA37#
			3300pF	±10%	GCM188R72A332KA37#
			4700pF	±10%	GCM188R72A472KA37#
			6800pF	±10%	GCM188R72A682KA37#
			10000pF	±10%	GCM188R72A103KA37#
			15000pF	±10%	GCM188R72A153KA37#
			22000pF	±10%	GCM188R72A223KA37#
	50Vdc	X7R	1000pF	±10%	GCM188R71H102KA37#
			1500pF	±10%	GCM188R71H152KA37#
			2200pF	±10%	GCM188R71H222KA37#
			3300pF	±10%	GCM188R71H332KA37#
			4700pF	±10%	GCM188R71H472KA37#
			6800pF	±10%	GCM188R71H682KA37#
			10000pF	±10%	GCM188R71H103KA37#
			15000pF	±10%	GCM188R71H153KA37#
			22000pF	±10%	GCM188R71H223KA37#
			33000pF	±10%	GCM188R71H333KA55#
			47000pF	±10%	GCM188R71H473KA55#
			68000pF	±10%	GCM188R71H683KA57#
			0.10µF	±10%	GCM188R71H104KA57#
			0.15µF	±10%	GCM188R71H154KA64#
			0.22µF	±10%	GCM188R71H224KA64#
	25Vdc	X7R	33000pF	±10%	GCM188R71E333KA37#
			47000pF	±10%	GCM188R71E473KA37#
			68000pF	±10%	GCM188R71E683KA57#
			0.10µF	±10%	GCM188R71E104KA57#
			0.15µF	±10%	GCM188R71E154KA37#
			0.22µF	±10%	GCM188R71E224KA55#
			0.47µF	±10%	GCM188R71E474KA64#
			1.0µF	±10%	GCM188R71E105KA64#
	16Vdc	X7R	0.10µF	±10%	GCM188R71C104KA37#
			0.33µF	±10%	GCM188R71C334KA37#
			0.47µF	±10%	GCM188R71C474KA55#
			1.0µF	±10%	GCM188R71C105KA64#
	6.3Vdc	X7R	2.2µF	±10%	GCM188R70J225KE22#

■ 1.0×0.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.55mm	100Vdc	X7R	220pF	±10%	GCM155R72A221KA37#
			330pF	±10%	GCM155R72A331KA37#
			470pF	±10%	GCM155R72A471KA37#
			680pF	±10%	GCM155R72A681KA37#
			1000pF	±10%	GCM155R72A102KA37#
			1500pF	±10%	GCM155R72A152KA37#
			2200pF	±10%	GCM155R72A222KA37#
			3300pF	±10%	GCM155R72A332KA37#
			4700pF	±10%	GCM155R72A472KA37#
	50Vdc	X7R	220pF	±10%	GCM155R71H221KA37#
			330pF	±10%	GCM155R71H331KA37#
			470pF	±10%	GCM155R71H471KA37#
			680pF	±10%	GCM155R71H681KA37#
			1000pF	±10%	GCM155R71H102KA37#
			1500pF	±10%	GCM155R71H152KA37#
			2200pF	±10%	GCM155R71H222KA37#
			3300pF	±10%	GCM155R71H332KA37#
			4700pF	±10%	GCM155R71H472KA37#
			6800pF	±10%	GCM155R71H682KA55#
			10000pF	±10%	GCM155R71H103KA55#
			15000pF	±10%	GCM155R71H153KA55#
			22000pF	±10%	GCM155R71H223KA55#
			33000pF	±10%	GCM155R71H333KE02#
			47000pF	±10%	GCM155R71H473KE02#
			68000pF	±10%	GCM155R71H683KE02#
			0.10µF	±10%	GCM155R71H104KE02#
	25Vdc	X7R	10000pF	±10%	GCM155R71E103KA37#
			15000pF	±10%	GCM155R71E153KA55#
			22000pF	±10%	GCM155R71E223KA55#
			33000pF	±10%	GCM155R71E333KA55#
			47000pF	±10%	GCM155R71E473KA55#
	16Vdc	X7R	33000pF	±10%	GCM155R71C333KA37#
			47000pF	±10%	GCM155R71C473KA37#
			68000pF	±10%	GCM155R71C683KA55#

■ 2.0×1.25mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.7mm	100Vdc	X7R	6800pF	±10%	GCM216R72A682KA37#
			10000pF	±10%	GCM216R72A103KA37#
			15000pF	±10%	GCM216R72A153KA37#
			22000pF	±10%	GCM216R72A223KA37#

GCM Series High Dielectric Constant Type 闭 Part Number List

(→ **■** 2.0×1.25mm)

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.95mm	100Vdc	X7R	33000pF	±10%	GCM219R72A333KA37#
	50Vdc	X7R	33000pF	±10%	GCM219R71H333KA37#
			0.33µF	±10%	GCM219R71H334KA55#
	25Vdc	X7R	0.47µF	±10%	GCM219R71E474KA55#
	16Vdc	X7R	0.68µF	±10%	GCM219R71C684KA37#
			1.0µF	±10%	GCM219R71C105KA37#
1.4mm	100Vdc	X7R	47000pF	±10%	GCM21BR72A473KA37#
			68000pF	±10%	GCM21BR72A683KA37#
			0.10µF	±10%	GCM21BR72A104KA37#
	50Vdc	X7R	47000pF	±10%	GCM21BR71H473KA37#
			68000pF	±10%	GCM21BR71H683KA37#
			0.10µF	±10%	GCM21BR71H104KA37#
			0.15µF	±10%	GCM21BR71H154KA37#
			0.22µF	±10%	GCM21BR71H224KA37#
			0.47µF	±10%	GCM21BR71H474KA55#
			1.0µF	±10%	GCM21BR71H105KA03#
	35Vdc	X7R	0.68µF	±10%	GCM21BR7YA684KA55#
			1.0µF	±10%	GCM21BR7YA105KA55#
			1.5µF	±10%	GCM21BR7YA155KA54#
	25Vdc	X7R	0.15µF	±10%	GCM21BR71E154KA37#
			0.22µF	±10%	GCM21BR71E224KA37#
			0.33µF	±10%	GCM21BR71E334KA37#
			0.68µF	±10%	GCM21BR71E684KA55#
			1.0µF	±10%	GCM21BR71E105KA56#
			2.2µF	±10%	GCM21BR71E225KA73#
	16Vdc	X7R	2.2µF	±10%	GCM21BR71C225KA64#
			4.7μF	±10%	GCM21BR71C475KA73#
	10Vdc	X7R	2.2µF	±10%	GCM21BR71A225KA37#
			10µF	±10%	GCM21BR71A106KE22#
		X7S	4.7µF	±10%	GCM21BC71A475KA73#
	6.3Vdc	X7R	10µF	±10%	GCM21BR70J106KE22#

■ 3.2×2.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
2.2mm	25Vdc	X7R	4.7µF	±10%	GCM32DR71E475KA55#
	16Vdc	X7R	10µF	±10%	GCM32DR71C106KA37#
2.7mm	50Vdc	X7R	1.0µF	±10%	GCM32ER71H105KA37#
			4.7µF	±10%	GCM32ER71H475KA55#
		X7S	10µF	±10%	GCM32EC71H106KA03#
	35Vdc	X7S	10µF	±10%	GCM32EC7YA106KA03#
	25Vdc	X7R	10µF	±10%	GCM32ER71E106KA57#
	16Vdc	X7R	22µF	±20%	GCM32ER71C226ME19#
	10Vdc	X7R	22µF	±20%	GCM32ER71A226ME12#
	6.3Vdc	X7R	47µF	±20%	GCM32ER70J476ME19#

■ 3.2×1.6mm

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
0.95mm	100Vdc	X7R	0.10µF	±10%	GCM319R72A104KA37#
1.25mm	100Vdc	X7R	0.15µF	±10%	GCM31MR72A154KA37#
			0.22µF	±10%	GCM31MR72A224KA37#
	50Vdc	X7R	0.33µF	±10%	GCM31MR71H334KA37#
			0.47µF	±10%	GCM31MR71H474KA37#
			0.68µF	±10%	GCM31MR71H684KA55#
			1.0µF	±10%	GCM31MR71H105KA55#
1.3mm	25Vdc	X7R	2.2µF	±10%	GCM31MR71E225KA57#
1.8mm	100Vdc	X7R	1.0µF	±10%	GCM31CR72A105KA03#
	50Vdc	X7R	2.2µF	±10%	GCM31CR71H225KA55#
		X7S	4.7µF	±10%	GCM31CC71H475KA03#
	25Vdc	X7R	4.7µF	±10%	GCM31CR71E475KA55#
	16Vdc	X7R	4.7µF	±10%	GCM31CR71C475KA37#
			10µF	±10%	GCM31CR71C106KA64#
	10Vdc	X7R	10µF	±10%	GCM31CR71A106KA64#
			22µF	±10%	GCM31CR71A226KE02#
	6.3Vdc	X7R	22µF	±20%	GCM31CR70J226ME23#
1.9mm	25Vdc	X7S	10µF	±10%	GCM31CC71E106KA03#

Specially Designed Product to Reduce Shorts

GCD Series










Prevents momentary dielectric breakdown by a two-element array structure!

Features

1) Prevents momentary dielectric breakdown by a two-element array structure!

This product consists of two elements arranged in one capacitor. It is structured so that even when one element is shorted, the other capacitor element will not short.




2) This AEC-Q200 conforming product is ideal for battery lines of automobiles.

Space can be reduced in battery lines where two capacitors are arranged in an array.

Specifications

Size	1.6×0.8mm to 2.0×1.25mm			
Rated Voltage	25Vdc to 100Vdc			
Capacitance	1,000pF to 0.1µF			
Main Applications	Battery lines and power trains for automobiles			



GCD Series High Dielectric Constant Type 🐯 🖼 Part Number List

■ 1.6×0.8mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.9mm	100Vdc	X7R	1000pF	±10%	GCD188R72A102KA01#
			1200pF	±10%	GCD188R72A122KA01#
			1500pF	±10%	GCD188R72A152KA01#
			1800pF	±10%	GCD188R72A182KA01#
			2200pF	±10%	GCD188R72A222KA01#
			2700pF	±10%	GCD188R72A272KA01#
			3300pF	±10%	GCD188R72A332KA01#
			3900pF	±10%	GCD188R72A392KA01#
			4700pF	±10%	GCD188R72A472KA01#
			5600pF	±10%	GCD188R72A562KA01#
			6800pF	±10%	GCD188R72A682KA01#
			8200pF	±10%	GCD188R72A822KA01#
			10000pF	±10%	GCD188R72A103KA01#
			12000pF	±10%	GCD188R72A123KA01#
			15000pF	±10%	GCD188R72A153KA01#
			18000pF	±10%	GCD188R72A183KA01#
			22000pF	±10%	GCD188R72A223KA01#
	50Vdc	X7R	1000pF	±10%	GCD188R71H102KA01#
			1200pF	±10%	GCD188R71H122KA01#
			1500pF	±10%	GCD188R71H152KA01#
			1800pF	±10%	GCD188R71H182KA01#
			2200pF	±10%	GCD188R71H222KA01#
			2700pF	±10%	GCD188R71H272KA01#
			3300pF	±10%	GCD188R71H332KA01#
			3900pF	±10%	GCD188R71H392KA01#
			4700pF	±10%	GCD188R71H472KA01#
			5600pF	±10%	GCD188R71H562KA01#
			6800pF	±10%	GCD188R71H682KA01#
			8200pF	±10%	GCD188R71H822KA01#
			10000pF	±10%	GCD188R71H103KA01#
			12000pF	±10%	GCD188R71H123KA01#
			15000pF	±10%	GCD188R71H153KA01#
			18000pF	±10%	GCD188R71H183KA01#
			22000pF	±10%	GCD188R71H223KA01#
	25Vdc	X7R	27000pF	±10%	GCD188R71E273KA01#
			33000pF	±10%	GCD188R71E333KA01#
			39000pF	±10%	GCD188R71E393KA01#
			47000pF	±10%	GCD188R71E473KA01#

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.7mm	100Vdc	X7R	5600pF	±10%	GCD216R72A562KA01#
	50Vdc	X7R	1000pF	±10%	GCD216R71H102KA01#
			1200pF	±10%	GCD216R71H122KA01#
			1500pF	±10%	GCD216R71H152KA01#
			1800pF	±10%	GCD216R71H182KA01#
			2200pF	±10%	GCD216R71H222KA01#
			2700pF	±10%	GCD216R71H272KA01#
			3300pF	±10%	GCD216R71H332KA01#
			3900pF	±10%	GCD216R71H392KA01#
			4700pF	±10%	GCD216R71H472KA01#
			5600pF	±10%	GCD216R71H562KA01#
0.95mm	100Vdc	X7R	6800pF	±10%	GCD219R72A682KA01#
1.4mm	100Vdc	X7R	8200pF	±10%	GCD21BR72A822KA01#
			10000pF	±10%	GCD21BR72A103KA01#
			12000pF	±10%	GCD21BR72A123KA01#
			15000pF	±10%	GCD21BR72A153KA01#
			18000pF	±10%	GCD21BR72A183KA01#
			22000pF	±10%	GCD21BR72A223KA01#
			27000pF	±10%	GCD21BR72A273KA01#
			33000pF	±10%	GCD21BR72A333KA01#
			39000pF	±10%	GCD21BR72A393KA01#
			47000pF	±10%	GCD21BR72A473KA01#
			56000pF	±10%	GCD21BR72A563KA01#
			68000pF	±10%	GCD21BR72A683KA01#
			82000pF	±10%	GCD21BR72A823KA01#
			0.10µF	±10%	GCD21BR72A104KA01#
	50Vdc	X7R	15000pF	±10%	GCD21BR71H153KA01#
			18000pF	±10%	GCD21BR71H183KA01#
			22000pF	±10%	GCD21BR71H223KA01#
			27000pF	±10%	GCD21BR71H273KA01#
			33000pF	±10%	GCD21BR71H333KA01#
			39000pF	±10%	GCD21BR71H393KA01#
			47000pF	±10%	GCD21BR71H473KA01#
			56000pF	±10%	GCD21BR71H563KA01#
			68000pF	±10%	GCD21BR71H683KA01#
			82000pF	±10%	GCD21BR71H823KA01#
			0.10µF	±10%	GCD21BR71H104KA01#

■ 2.0×1.25mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.7mm	100Vdc	X7R	1000pF	±10%	GCD216R72A102KA01#
			1200pF	±10%	GCD216R72A122KA01#
			1500pF	±10%	GCD216R72A152KA01#
			1800pF	±10%	GCD216R72A182KA01#
			2200pF	±10%	GCD216R72A222KA01#
			2700pF	±10%	GCD216R72A272KA01#
			3300pF	±10%	GCD216R72A332KA01#
			3900pF	±10%	GCD216R72A392KA01#
			4700pF	±10%	GCD216R72A472KA01#



GCE Series








Further improved safety performance with a combination of a two-element array structure & resin external electrodes!

Features

1 Avoid instantaneous dielectric breakdown with the two-element array structure.


This product is configured with two elements arranged in one capacitor. Even if one element short circuits, the other element in the capacitor does not short.




2 Provides additional safety performance in combination with resin electrodes.

Adopting resin electrodes as the external electrodes will suppress the occurrence of cracking in the capacitor by mechanical stress.





Fail Safe Type (GCE Series)




3 Ideal for battery lines of on-board applications.

Space can be reduced for battery lines, when two capacitors are configured in an array.

Specifications

Size	1.6×0.8mm to 2.0×1.25mm			
Rated Voltage	50Vdc to 100Vdc			
Capacitance	1000pF to 0.1μF			
Main Applications	For automotive, battery lines, power trains			



GCE Series High Dielectric Constant Type 🐯 🖫 Part Number List

■ 1.6×0.8mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.9mm	100Vdc	X7R	1000pF	±10%	GCE188R72A102KA01#
			1200pF	±10%	GCE188R72A122KA01#
			1500pF	±10%	GCE188R72A152KA01#
			1800pF	±10%	GCE188R72A182KA01#
			2200pF	±10%	GCE188R72A222KA01#
			2700pF	±10%	GCE188R72A272KA01#
			3300pF	±10%	GCE188R72A332KA01#
			3900pF	±10%	GCE188R72A392KA01#
			4700pF	±10%	GCE188R72A472KA01#
			5600pF	±10%	GCE188R72A562KA01#
			6800pF	±10%	GCE188R72A682KA01#
			8200pF	±10%	GCE188R72A822KA01#
			10000pF	±10%	GCE188R72A103KA01#
			12000pF	±10%	GCE188R72A123KA01#
			15000pF	±10%	GCE188R72A153KA01#
			18000pF	±10%	GCE188R72A183KA01#
			22000pF	±10%	GCE188R72A223KA01#
	50Vdc	X7R	1000pF	±10%	GCE188R71H102KA01#
			1200pF	±10%	GCE188R71H122KA01#
			1500pF	±10%	GCE188R71H152KA01#
			1800pF	±10%	GCE188R71H182KA01#
			2200pF	±10%	GCE188R71H222KA01#
			2700pF	±10%	GCE188R71H272KA01#
			3300pF	±10%	GCE188R71H332KA01#
			3900pF	±10%	GCE188R71H392KA01#
			4700pF	±10%	GCE188R71H472KA01#
			5600pF	±10%	GCE188R71H562KA01#
			6800pF	±10%	GCE188R71H682KA01#
			8200pF	±10%	GCE188R71H822KA01#
			10000pF	±10%	GCE188R71H103KA01#
			12000pF	±10%	GCE188R71H123KA01#
			15000pF	±10%	GCE188R71H153KA01#
			18000pF	±10%	GCE188R71H183KA01#
			22000pF	±10%	GCE188R71H223KA01#

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number	
0.7mm	50Vdc	X7R	1800pF	±10%	GCE216R71H182KA01#	
			2200pF	±10%	GCE216R71H222KA01#	
			2700pF	±10%	GCE216R71H272KA01#	
			3300pF	±10%	GCE216R71H332KA01#	
			3900pF	±10%	GCE216R71H392KA01#	
			4700pF	±10%	GCE216R71H472KA01#	
			5600pF	±10%	GCE216R71H562KA01#	
0.95mm	100Vdc	X7R	6800pF	±10%	GCE219R72A682KA01#	
1.45mm	100Vdc	X7R	8200pF	±10%	GCE21BR72A822KA01#	
			10000pF	±10%	GCE21BR72A103KA01#	
			12000pF	±10%	GCE21BR72A123KA01#	
			15000pF	±10%	GCE21BR72A153KA01#	
			18000pF	±10%	GCE21BR72A183KA01#	
			22000pF	±10%	GCE21BR72A223KA01#	
			27000pF	±10%	GCE21BR72A273KA01#	
			33000pF	±10%	GCE21BR72A333KA01#	
			39000pF	±10%	GCE21BR72A393KA01#	
			47000pF	±10%	GCE21BR72A473KA01#	
			56000pF	±10%	GCE21BR72A563KA01#	
			68000pF	±10%	GCE21BR72A683KA01#	
			82000pF	±10%	GCE21BR72A823KA01#	
			0.10µF	±10%	GCE21BR72A104KA01#	
	50Vdc	X7R	15000pF	±10%	GCE21BR71H153KA01#	
			18000pF	±10%	GCE21BR71H183KA01#	
			22000pF	±10%	GCE21BR71H223KA01#	
			27000pF	±10%	GCE21BR71H273KA01#	
			33000pF	±10%	GCE21BR71H333KA01#	
			39000pF	±10%	GCE21BR71H393KA01#	
			47000pF	±10%	GCE21BR71H473KA01#	
			56000pF	±10%	GCE21BR71H563KA01#	
			68000pF	±10%	GCE21BR71H683KA01#	
			82000pF	±10%	GCE21BR71H823KA01#	
			0.10µF	±10%	GCE21BR71H104KA01#	

■ 2.0×1.25mm

r	T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
0.	.7mm	100Vdc	X7R	1000pF	±10%	GCE216R72A102KA01#
				1200pF	±10%	GCE216R72A122KA01#
				1500pF	±10%	GCE216R72A152KA01#
				1800pF	±10%	GCE216R72A182KA01#
				2200pF	±10%	GCE216R72A222KA01#
				2700pF	±10%	GCE216R72A272KA01#
				3300pF	±10%	GCE216R72A332KA01#
				3900pF	±10%	GCE216R72A392KA01#
				4700pF	±10%	GCE216R72A472KA01#
				5600pF	±10%	GCE216R72A562KA01#
		50Vdc	X7R	1000pF	±10%	GCE216R71H102KA01#
				1200pF	±10%	GCE216R71H122KA01#
				1500pF	±10%	GCE216R71H152KA01#



Conductivity Adhesive Compatible Type

GCG Series








Improved mechanical and thermal strength by adopting AgPd external electrodes, which can be mounted with a conductive adhesive!

Features

1 Conductive adhesives can be used.

This capacitor can be mounted with a conductive adhesive* in power trains and safety devices of automobiles.



2 Adopted AgPd external electrodes.

Adopted AgPd, which is excellent in bonding strength with a conductive adhesive.


3 Compatible up to 150 °C.

This capacitor lineup with X8L and X8R characteristics can be used in high-temperature environments, such as in ABS and transmission control.

* The conductive adhesive buffers the expansion and contraction difference between the substrate and parts caused by temperature changes, and has a high temperature cycle life span.

Specifications

Size	1.0×0.5mm to 3.2×2.5mm
Rated Voltage	16Vdc to 100Vdc
Capacitance	10pF to 10μF
Main Applications	For automotive, power trains, sensors



GCG Series Temperature Compensating Type (25) Part Number List

■ 1.0×0.5mm

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number	
0.55mm	50Vdc	X8G	120pF	±5%	GCG1555G1H121JA01#	
			150pF	±5%	GCG1555G1H151JA01#	
			180pF	±5%	GCG1555G1H181JA01#	
			220pF	±5%	GCG1555G1H221JA01#	
			270pF	±5%	GCG1555G1H271JA01#	
			330pF	±5%	GCG1555G1H331JA01#	
			390pF	±5%	GCG1555G1H391JA01#	
			470pF	±5%	GCG1555G1H471JA01#	

■ 1.6×0.8mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number	
0.9mm	50Vdc	X8G	10pF	±5%	GCG1885G1H100JA01#	
			12pF	±5%	GCG1885G1H120JA01#	
			15pF	±5%	GCG1885G1H150JA01#	
			18pF	±5%	GCG1885G1H180JA01#	
			22pF	±5%	GCG1885G1H220JA01#	
			27pF	±5%	GCG1885G1H270JA01#	
			33pF	±5%	GCG1885G1H330JA01#	
			39pF	±5%	GCG1885G1H390JA01#	
			47pF	±5%	GCG1885G1H470JA01#	
		56pF	±5%	GCG1885G1H560JA01#		
			68pF	±5%	GCG1885G1H680JA01#	
					82pF	±5%
			100pF	±5%	GCG1885G1H101JA01#	
			120pF	±5%	GCG1885G1H121JA01#	
			150pF	±5%	GCG1885G1H151JA01#	
			180pF	±5%	GCG1885G1H181JA01#	
			220pF	±5%	GCG1885G1H221JA01#	
			270pF	±5%	GCG1885G1H271JA01#	
			330pF	±5%	GCG1885G1H331JA01#	
			390pF	±5%	GCG1885G1H391JA01#	
			470pF	±5%	GCG1885G1H471JA01#	
			560pF	±5%	GCG1885G1H561JA01#	
			680pF	±5%	GCG1885G1H681JA01#	
			820pF	±5%	GCG1885G1H821JA01#	
			1000pF	±5%	GCG1885G1H102JA01#	
			1200pF	±5%	GCG1885G1H122JA01#	
			1500pF	±5%	GCG1885G1H152JA01#	
			1800pF	±5%	GCG1885G1H182JA01#	
			2200pF	±5%	GCG1885G1H222JA01#	

■ 2.0×1.25mm

T max.	Rated Voltage	TC Code	Cap.	Tol. Part Number	
0.7mm	50Vdc	X8G	100pF	±5%	GCG2165G1H101JA01#
			120pF	±5%	GCG2165G1H121JA01#
			150pF	±5%	GCG2165G1H151JA01#
			180pF	±5%	GCG2165G1H181JA01#
			220pF	±5%	GCG2165G1H221JA01#

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.7mm	50Vdc	X8G	270pF	±5%	GCG2165G1H271JA01#
			330pF	±5%	GCG2165G1H331JA01#
			390pF	±5%	GCG2165G1H391JA01#
			470pF	±5%	GCG2165G1H471JA01#
			560pF	±5%	GCG2165G1H561JA01#
			680pF	±5%	GCG2165G1H681JA01#
			820pF	±5%	GCG2165G1H821JA01#
			1000pF	±5%	GCG2165G1H102JA01#
			1200pF	±5%	GCG2165G1H122JA01#
			1500pF	±5%	GCG2165G1H152JA01#
			1800pF	±5%	GCG2165G1H182JA01#
			2200pF	±5%	GCG2165G1H222JA01#
			2700pF	±5%	GCG2165G1H272JA01#
			3300pF	±5%	GCG2165G1H332JA01#
			3900pF	±5%	GCG2165G1H392JA01#
			4700pF	±5%	GCG2165G1H472JA01#
0.95mm	50Vdc	X8G	5600pF	±5%	GCG2195G1H562JA01#
			6800pF	±5%	GCG2195G1H682JA01#
			8200pF	±5%	GCG2195G1H822JA01#
			10000pF	±5%	GCG2195G1H103JA01#



GCG Series High Dielectric Constant Type (Part Number List

Т

max.

0.9mm

Rated

Voltage

100Vdc

TC

Code

X8R

■ 1.0×0.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.55mm	50Vdc	X7R	220pF	±10%	GCG155R71H221KA01#
			270pF	±10%	GCG155R71H271KA01#
			330pF	±10%	GCG155R71H331KA01#
			390pF	±10%	GCG155R71H391KA01#
			470pF	±10%	GCG155R71H471KA01#
			560pF	±10%	GCG155R71H561KA01#
			680pF	±10%	GCG155R71H681KA01#
			820pF	±10%	GCG155R71H821KA01#
			1000pF	±10%	GCG155R71H102KA01#
			1200pF	±10%	GCG155R71H122KA01#
			1500pF	±10%	GCG155R71H152KA01#
			1800pF	±10%	GCG155R71H182KA01#
			2200pF	±10%	GCG155R71H222KA01#
			2700pF	±10%	GCG155R71H272KA01#
			3300pF	±10%	GCG155R71H332KA01#
			3900pF	±10%	GCG155R71H392KA01#
			4700pF	±10%	GCG155R71H472KA01#
	25Vdc	X8L	5600pF	±10%	GCG155L81E562KA01#
			6800pF	±10%	GCG155L81E682KA01#
			8200pF	±10%	GCG155L81E822KA01#
			10000pF	±10%	GCG155L81E103KA01#
		X7R	5600pF	±10%	GCG155R71E562KA01#
			6800pF	±10%	GCG155R71E682KA01#
			8200pF	±10%	GCG155R71E822KA01#
			10000pF	±10%	GCG155R71E103KA01#
	16Vdc	X8L	15000pF	±10%	GCG155L81C153KA01#
			18000pF	±10%	GCG155L81C183KA01#
			22000pF	±10%	GCG155L81C223KA01#
			27000pF	±10%	GCG155L81C273KA01#
			33000pF	±10%	GCG155L81C333KA01#
			39000pF	±10%	GCG155L81C393KA01#
			47000pF	±10%	GCG155L81C473KA01#
		X7R	15000pF	±10%	GCG155R71C153KA01#
			18000pF	±10%	GCG155R71C183KA01#
			22000pF	±10%	GCG155R71C223KA01#
			27000pF	±10%	GCG155R71C273KA01#
			33000pF	±10%	GCG155R71C333KA01#
			39000pF	±10%	GCG155R71C393KA01#
			47000pF	±10%	GCG155R71C473KA01#
			56000pF	±10%	GCG155R71C563KA01#
			68000pF	±10%	GCG155R71C683KA01#
			82000pF	±10%	GCG155R71C823KA01#
			0.10µF	±10%	GCG155R71C104KA01#

■ 1.6×0.8mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number	
0.9mm	100Vdc	X8R	1000pF	±10%	GCG188R92A102KA01#	
			1200pF	±10%	GCG188R92A122KA01#	
			1500pF	±10%	GCG188R92A152KA01#	
			1800pF	±10%	GCG188R92A182KA01#	

y	PC	Q200	crack	Crack	_	art	Hull	IDCI	LIST

Tol.

±10%

±10%

Part Number

GCG188R92A222KA01#

GCG188R92A272KA01#

Cap.

2200pF

2700pF

		3300pF	±10%	GCG188R92A332KA01#
		3900pF	±10%	GCG188R92A392KA01#
		4700pF	±10%	GCG188R92A472KA01#
		5600pF	±10%	GCG188R92A562KA01#
		6800pF	±10%	GCG188R92A682KA01#
		8200pF	±10%	GCG188R92A822KA01#
		10000pF	±10%	GCG188R92A103KA01#
		12000pF	±10%	GCG188R92A123KA01#
		15000pF	±10%	GCG188R92A153KA01#
		18000pF	±10%	GCG188R92A183KA01#
		22000pF	±10%	GCG188R92A223KA01#
		27000pF	±10%	GCG188R92A273KA01#
		33000pF	±10%	GCG188R92A333KA01#
		39000pF	±10%	GCG188R92A393KA01#
		47000pF	±10%	GCG188R92A473KA01#
		56000pF	±10%	GCG188R92A563KA01#
		68000pF	±10%	GCG188R92A683KA01#
50Vdc	X8L	220pF	±10%	GCG188L81H221KA01#
		270pF	±10%	GCG188L81H271KA01#
		330pF	±10%	GCG188L81H331KA01#
		390pF	±10%	GCG188L81H391KA01#
		470pF	±10%	GCG188L81H471KA01#
		560pF	±10%	GCG188L81H561KA01#
		680pF	±10%	GCG188L81H681KA01#
		820pF	±10%	GCG188L81H821KA01#
		1000pF	±10%	GCG188L81H102KA01#
		1200pF	±10%	GCG188L81H122KA01#
		1500pF	±10%	GCG188L81H152KA01#
		1800pF	±10%	GCG188L81H182KA01#
		2200pF	±10%	GCG188L81H222KA01#
		2700pF	±10%	GCG188L81H272KA01#
		3300pF	±10%	GCG188L81H332KA01#
		3900pF	±10%	GCG188L81H392KA01#

4700pF

5600pF

6800pF

8200pF

10000pF

12000pF

15000pF

18000pF

22000pF

1200pF

X8R

±10%

±10%

±10%

±10%

±10%

±10% GCG188L81H123KA01# ±10% GCG188L81H153KA01# ±10% GCG188L81H183KA01# ±10% GCG188L81H223KA01# ±10% GCG188R91H122KA03#

GCG188L81H472KA01#

GCG188L81H562KA01#

GCG188L81H682KA01#

GCG188L81H822KA01#

GCG188L81H103KA01#

1500pF ±10% GCG188R91H152KA03# 2200pF ±10% GCG188R91H222KA03# 2700pF ±10% GCG188R91H272KA03# 3300pF GCG188R91H332KA03# ±10% 3900pF GCG188R91H392KA03# 4700pF ±10% GCG188R91H472KA03#

5600pF ±10% GCG188R91H562KA03# 6800pF ±10% GCG188R91H682KA03# 8200pF ±10% GCG188R91H822KA03#

Part number # indicates the package specification code.



GCM Series

GCD Series

GCE Series

GCG Series

GCJ Series

GC3 Series

KCM Series

KC3 Series

∆Caution/Notice

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
0.9mm	50Vdc	X8R	10000pF	±10%	GCG188R91H103KA03#
			15000pF	±10%	GCG188R91H153KA03#
			22000pF	±10%	GCG188R91H223KA03#
			33000pF	±10%	GCG188R91H333KA03#
			47000pF	±10%	GCG188R91H473KA03#
			0.10µF	±10%	GCG188R91H104KA01#
			0.12µF	±10%	GCG188R91H124KA01#
			0.15µF	±10%	GCG188R91H154KA01#
			0.18µF	±10%	GCG188R91H184KA01#
			0.22µF	±10%	GCG188R91H224KA01#
		X7R	27000pF	±10%	GCG188R71H273KA12#
			33000pF	±10%	GCG188R71H333KA12#
			39000pF	±10%	GCG188R71H393KA12#
			47000pF	±10%	GCG188R71H473KA12#
			56000pF	±10%	GCG188R71H563KA12#
			68000pF	±10%	GCG188R71H683KA12#
			82000pF	±10%	GCG188R71H823KA12#
	25Vdc	X8R	1000pF	±10%	GCG188R91E102KA01#
			1200pF	±10%	GCG188R91E122KA01#
			1500pF	±10%	GCG188R91E152KA01#
			1800pF	±10%	GCG188R91E182KA01#
			2200pF	±10%	GCG188R91E222KA01#
			2700pF	±10%	GCG188R91E272KA01#
			3300pF	±10%	GCG188R91E332KA01#
			3900pF	±10%	GCG188R91E392KA01#
			4700pF	±10%	GCG188R91E472KA01#
			5600pF	±10%	GCG188R91E562KA01#
			6800pF	±10%	GCG188R91E682KA01#
			8200pF	±10%	GCG188R91E822KA01#
			10000pF	±10%	GCG188R91E103KA01#
			15000pF 22000pF	±10% ±10%	GCG188R91E153KA01# GCG188R91E223KA01#
			33000pF	±10%	GCG188R91E333KA01#
			47000pF	±10%	GCG188R91E473KA01#
			68000pF	±10%	GCG188R91E683KA03#
			0.33µF	±10%	GCG188R91E334KA01#
			0.39µF	±10%	GCG188R91E394KA01#
			0.47µF	±10%	GCG188R91E474KA01#
		X7R	0.12µF	±10%	GCG188R71E124KA12#
			0.15µF	±10%	GCG188R71E154KA12#
			0.18µF	±10%	GCG188R71E184KA12#
			0.22µF	±10%	GCG188R71E224KA12#
	16Vdc	X8L	0.15µF	±10%	GCG188L81C154KA01#
			0.22µF	±10%	GCG188L81C224KA01#
		X8R	68000pF	±10%	GCG188R91C683KA01#
			0.10µF	±10%	GCG188R91C104KA01#

■ 2.0×1.25mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.95mm	50Vdc	X8R	10000pF	±10%	GCG219R91H103KA03#
			15000pF	±10%	GCG219R91H153KA03#
			18000pF	±10%	GCG219R91H183KA03#

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.95mm	50Vdc	X8R	22000pF	±10%	GCG219R91H223KA03#
	25Vdc	X8R	10000pF	±10%	GCG219R91E103KA01#
			15000pF	±10%	GCG219R91E153KA01#
			22000pF	±10%	GCG219R91E223KA01#
1.45mm	50Vdc	X8L	27000pF	±10%	GCG21BL81H273KA01#
			33000pF	±10%	GCG21BL81H333KA01#
			39000pF	±10%	GCG21BL81H393KA01#
			47000pF	±10%	GCG21BL81H473KA01#
			0.10µF	±10%	GCG21BL81H104KA03#
		X8R	33000pF	±10%	GCG21BR91H333KA03#
			47000pF	±10%	GCG21BR91H473KA03#
			56000pF	±10%	GCG21BR91H563KA03#
			68000pF	±10%	GCG21BR91H683KA03#
			0.10µF	±10%	GCG21BR91H104KA03#
		X7R	0.15µF	±10%	GCG21BR71H154KA01#
			0.18µF	±10%	GCG21BR71H184KA01#
			0.22µF	±10%	GCG21BR71H224KA01#
	25Vdc	X8L	0.10µF	±10%	GCG21BL81E104KA01#
			0.33µF	±10%	GCG21BL81E334KA01#
		X8R	33000pF	±10%	GCG21BR91E333KA01#
			39000pF	±10%	GCG21BR91E393KA01#
			47000pF	±10%	GCG21BR91E473KA01#
			82000pF	±10%	GCG21BR91E823KA01#
			0.10µF	±10%	GCG21BR91E104KA01#
			0.15µF	±10%	GCG21BR91E154KA03#
			0.18µF	±10%	GCG21BR91E184KA03#
			0.22µF	±10%	GCG21BR91E224KA03#
		X7R	0.27µF	±10%	GCG21BR71E274KA01#
			0.33µF	±10%	GCG21BR71E334KA01#
			0.39µF	±10%	GCG21BR71E394KA01#
			0.47µF	±10%	GCG21BR71E474KA01#
			0.56µF	±10%	GCG21BR71E564KA01#
			0.68µF	±10%	GCG21BR71E684KA01#
			0.82µF	±10%	GCG21BR71E824KA01#
			1.0µF	±10%	GCG21BR71E105KA12#
	16Vdc	X8L	0.33µF	±10%	GCG21BL81C334KA01#
			0.39µF	±10%	GCG21BL81C394KA01#
			0.47µF	±10%	GCG21BL81C474KA01#
			0.56µF	±10%	GCG21BL81C564KA01#
			0.68µF	±10%	GCG21BL81C684KA01#
			0.82µF	±10%	GCG21BL81C824KA01#
		X7R	4.7µF	±10%	GCG21BR71C475KA12#

■ 3.2×1.6mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.35mm	50Vdc	X8R	0.15µF	±10%	GCG31MR91H154KA03#
			0.22µF	±10%	GCG31MR91H224KA03#
			0.33µF	±10%	GCG31MR91H334KA03#
	25Vdc	X8R	0.15µF	±10%	GCG31MR91E154KA01#
			0.22µF	±10%	GCG31MR91E224KA01#
			0.33µF	±10%	GCG31MR91E334KA01#
		X7R	1.0µF	±10%	GCG31MR71E105KA01#



GCG Series High Dielectric Constant Type (25) Part Number List

(→ **■** 3.2×1.6mm)

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
1.35mm	25Vdc	X7R	1.2µF	±10%	GCG31MR71E125KA01#
			1.5µF	±10%	GCG31MR71E155KA01#
			2.2µF	±10%	GCG31MR71E225KA12#
	16Vdc	X8L	1.0µF	±10%	GCG31ML81C105KA01#
			1.5µF	±10%	GCG31ML81C155KA01#
1.9mm	25Vdc	X8R	0.68µF	±10%	GCG31CR91E684KA03#
		X7R	3.3µF	±10%	GCG31CR71E335KA01#
			3.9µF	±10%	GCG31CR71E395KA01#
			4.7µF	±10%	GCG31CR71E475KA01#
	16Vdc	X8L	3.3µF	±10%	GCG31CL81C335KA01#
			4.7µF	±10%	GCG31CL81C475KA01#
		X8R	0.68µF	±10%	GCG31CR91C684KA01#
			1.0µF	±10%	GCG31CR91C105KA01#

■ 3.2×2.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
2.3mm	25Vdc	X7R	3.3µF	±10%	GCG32DR71E335KA01#
2.8mm	25Vdc	X7R	4.7µF	±10%	GCG32ER71E475KA01#
			10µF	±10%	GCG32ER71E106KA12#

GCJ Series








The resin external electrodes prevent the occurrence of cracking caused by deflection stress after board mounting!


Features

The resin external electrodes suppress cracks by board deflection.

Cracking of the ceramic element is suppressed by the resin of the external electrodes, which releases the stress.

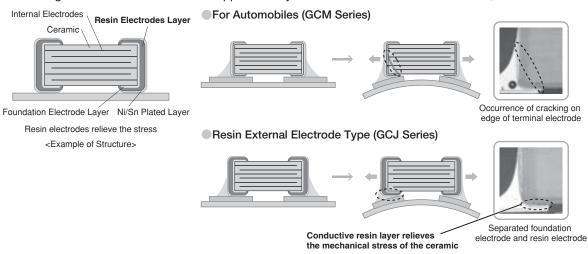

Suppresses the occurrence of cracking caused by deflection stress at the time of board mounting, etc.




Due to the specification of the measuring instrument, measurements can be performed up to 8mm.

Ideal for automobiles.


This AEC-Q200 conforming product is ideal for the ECU, control circuits of headlights, etc. of automobiles.

Specifications

Size	1.6×0.8mm to 5.7×5.0mm
Rated Voltage	6.3Vdc to 1kVdc
Capacitance	220pF to 47μF
Main Applications	Battery lines and power trains for automobiles



32



GCJ Series High Dielectric Constant Type 🐯 🖼 🗪 Part Number List

■ 1.6×0.8mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.9mm	100Vdc	X8R	1000pF	±10%	GCJ188R92A102KA01#
			1200pF	±10%	GCJ188R92A122KA01#
			1500pF	±10%	GCJ188R92A152KA01#
			1800pF	±10%	GCJ188R92A182KA01#
			2200pF	±10%	GCJ188R92A222KA01#
			2700pF	±10%	GCJ188R92A272KA01#
			3300pF	±10%	GCJ188R92A332KA01#
			3900pF	±10%	GCJ188R92A392KA01#
			4700pF	±10%	GCJ188R92A472KA01#
			5600pF	±10%	GCJ188R92A562KA01#
			6800pF	±10%	GCJ188R92A682KA01#
			8200pF	±10%	GCJ188R92A822KA01#
			10000pF	±10%	GCJ188R92A103KA01#
			12000pF	±10%	GCJ188R92A123KA01#
			15000pF	±10%	GCJ188R92A153KA01#
			18000pF	±10%	GCJ188R92A183KA01#
			22000pF	±10%	GCJ188R92A223KA01#
			27000pF	±10%	GCJ188R92A273KA01#
			33000pF	±10%	GCJ188R92A333KA01#
			39000pF	±10%	GCJ188R92A393KA01#
			47000pF	±10%	GCJ188R92A473KA01#
			56000pF	±10%	GCJ188R92A563KA01#
			68000pF	±10%	GCJ188R92A683KA01#
		X7R	1000pF	±10%	GCJ188R72A102KA01#
			1200pF	±10%	GCJ188R72A122KA01#
			1500pF	±10%	GCJ188R72A152KA01#
			1800pF	±10%	GCJ188R72A182KA01#
			2200pF	±10%	GCJ188R72A222KA01#
			2700pF	±10%	GCJ188R72A272KA01#
			3300pF	±10%	GCJ188R72A332KA01#
			3900pF	±10%	GCJ188R72A392KA01#
			4700pF	±10%	GCJ188R72A472KA01#
			5600pF	±10%	GCJ188R72A562KA01#
			6800pF	±10%	GCJ188R72A682KA01#
			8200pF	±10%	GCJ188R72A822KA01#
			10000pF	±10%	GCJ188R72A103KA01#
			12000pF	±10%	GCJ188R72A123KA01#
			15000pF	±10%	GCJ188R72A153KA01#
			18000pF	±10%	GCJ188R72A183KA01#
			22000pF	±10%	GCJ188R72A223KA01#
			0.10µF	±10%	GCJ188R72A104KA01#
	50Vdc	X8L	1000pF	±10%	GCJ188L81H102KA01#
			1200pF	±10%	GCJ188L81H122KA01#
			1500pF	±10%	GCJ188L81H152KA01#
			1800pF	±10%	GCJ188L81H182KA01#
			2200pF	±10%	GCJ188L81H222KA01#
			2700pF	±10%	GCJ188L81H272KA01#
			3300pF	±10%	GCJ188L81H332KA01#
			3900pF	±10%	GCJ188L81H392KA01#
			4700pF	±10%	GCJ188L81H472KA01#
			5600pF	±10%	GCJ188L81H562KA01#
			6800pF		GCJ188L81H562KA01#
			υσσορε	±10%	G00100L0111002RAU1#

					1
T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.9mm	50Vdc	X8L	8200pF	±10%	GCJ188L81H822KA01#
			10000pF	±10%	GCJ188L81H103KA01#
			12000pF	±10%	GCJ188L81H123KA01#
			15000pF	±10%	GCJ188L81H153KA01#
			18000pF	±10%	GCJ188L81H183KA01#
			22000pF	±10%	GCJ188L81H223KA01#
		X8R	4700pF	±10%	GCJ188R91H472KA01#
			10000pF	±10%	GCJ188R91H103KA01#
			0.10µF	±10%	GCJ188R91H104KA01#
			0.12µF	±10%	GCJ188R91H124KA01#
			0.15µF	±10%	GCJ188R91H154KA01#
			0.18µF	±10%	GCJ188R91H184KA01#
			0.22µF	±10%	GCJ188R91H224KA01#
		X7R	1000pF	±10%	GCJ188R71H102KA01#
			1200pF	±10%	GCJ188R71H122KA01#
			1500pF	±10%	GCJ188R71H152KA01#
			1800pF	±10%	GCJ188R71H182KA01#
			2200pF	±10%	GCJ188R71H222KA01#
			2700pF	±10%	GCJ188R71H272KA01#
			3300pF	±10%	GCJ188R71H332KA01#
			3900pF	±10%	GCJ188R71H392KA01#
			4700pF	±10%	GCJ188R71H472KA01#
			5600pF	±10%	GCJ188R71H562KA01#
			6800pF	±10%	GCJ188R71H682KA01#
			8200pF	±10%	GCJ188R71H822KA01#
			10000pF	±10%	GCJ188R71H103KA01#
			12000pF	±10%	GCJ188R71H123KA01#
			15000pF	±10%	GCJ188R71H153KA01#
			18000pF	±10%	GCJ188R71H183KA01#
			22000pF	±10%	GCJ188R71H223KA01#
			33000pF	±10%	GCJ188R71H333KA12#
			39000pF	±10%	GCJ188R71H393KA12#
			47000pF	±10%	GCJ188R71H473KA12#
			56000pF	±10%	GCJ188R71H563KA12#
			68000pF	±10%	GCJ188R71H683KA12#
			82000pF	±10%	GCJ188R71H823KA12#
			0.10µF	±10%	GCJ188R71H104KA12#
			0.15µF	±10%	GCJ188R71H154KA01#
			0.22µF	±10%	GCJ188R71H224KA01#
	35Vdc	X8L	33000pF	±10%	GCJ188L8YA333KA01#
			39000pF	±10%	GCJ188L8YA393KA01#
			56000pF	±10%	GCJ188L8YA563KA01#
			68000pF	±10%	GCJ188L8YA683KA01#
	25Vdc	X8L	33000pF	±10%	GCJ188L81E333KA01#
			39000pF	±10%	GCJ188L81E393KA01#
			56000pF	±10%	GCJ188L81E563KA01#
			68000pF	±10%	GCJ188L81E683KA01#
			82000pF	±10%	GCJ188L81E823KA01#
			0.15µF	±10%	GCJ188L81E154KA01#
			0.18µF	±10%	GCJ188L81E184KA01#
			0.22µF	±10%	GCJ188L81E224KA01#
		X8R	0.33µF	±10%	GCJ188R91E334KA01#
			0.39µF	±10%	GCJ188R91E394KA01#
			0.47µF	±10%	GCJ188R91E474KA01#

1200pF	Part Number J188R71C274KA0 J188R71C334KA0 J188R71C394KA1 J188R71A124KA0 J188R71A154KA0 J188R71A184KA0 J188R71A184KA0 J188R71A224KA0
Day	J188R71C274KA0 J188R71C334KA0 J188R71C394KA1 J188R71C474KA1 J188R71A124KA0 J188R71A154KA0 J188R71A184KA0
1200pF	J188R71C334KA0 J188R71C394KA1 J188R71C474KA1 J188R71A124KA0 J188R71A154KA0 J188R71A184KA0 J188R71A224KA0
1500pF	J188R71C394KA1 J188R71C474KA1 J188R71A124KA0 J188R71A154KA0 J188R71A184KA0 J188R71A224KA0
1800pF	J188R71C474KA1 J188R71A124KA0 J188R71A154KA0 J188R71A184KA0 J188R71A224KA0
2200pF	J188R71A124KA(J188R71A154KA(J188R71A184KA(J188R71A224KA(
2700pF ±10% GCJ188R71E32KA01# 3300pF ±10% GCJ188R71E32KA01# 4700pF ±10% GCJ188R71E32KA01# 6800pF ±10% GCJ188R71E32KA01# 12000pF ±10% GCJ188R71E32KA01# 12000pF ±10% GCJ188R71E32KA01# 12000pF ±10% GCJ188R71E32KA01# 12000pF ±10% GCJ188R71E32KA01# 12000pF ±10% GCJ188R71E32KA01# 12000pF ±10% GCJ188R71E123KA01# 12000pF ±10% GCJ188R71E123KA01# 12000pF ±10% GCJ188R71E123KA01# 12000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E334KA01# 12000pF ±10% GCJ18RA01* 12000pF ±10% GCJ18RA01* 12000pF ±10% GCJ18RA01* 12000pF ±10% GCJ18RA01* 12000pF ±10% GCJ18RA01* 12000pF ±10% GCJ18RA01* 12000pF ±10% G	J188R71A154KA(J188R71A184KA(J188R71A224KA(
3300pF ±10% GCJ188R71E332KA01# G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC G.22µF ±10% GC GC GC GC GC GC GC G	J188R71A184KA(J188R71A224KA(
3900pF ±10% GCJ188R71E392KA01# 6.3Vdc X7R 2.2µF ±10% GC 6.3Vdc X7R 2	J188R71A224KA(
4700pF ±10% GCJ188R71E472KA01# 6.3Vdc X7R 2.2µF ±10% GC 5600pF ±10% GCJ188R71E562KA01# 8200pF ±10% GCJ188R71E822KA01# 10000pF ±10% GCJ188R71E133KA01# 15000pF ±10% GCJ188R71E133KA01# 15000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E233KA01# 12000pF ±10% GCJ188R71E233KA01# 12000pF ±10% GCJ188R71E233KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E333KA01# 12000pF ±10% GCJ188R71E633KA12# 12000pF ±10% GCJ188R71E633KA12# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E124KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224KA01# 12000pF ±10% GCJ188R71E1224K	
S600pF ±10% GCJ188R71E562KA01# 8200pF ±10% GCJ188R71E82ZKA01# 10000pF ±10% GCJ188R71E103KA01# 12000pF ±10% GCJ188R71E123KA01# 15000pF ±10% GCJ188R71E133KA01# 15000pF ±10% GCJ188R71E133KA01# 12000pF ±10% GCJ188R71E133KA01# 22000pF ±10% GCJ188R71E23XA01# 22000pF ±10% GCJ188R71E23XA01# 27000pF ±10% GCJ188R71E23XA01# 27000pF ±10% GCJ188R71E23XA01# 33000pF ±10% GCJ188R71E33XA01# 47000pF ±10% GCJ188R71E53XA01# 47000pF ±10% GCJ188R71E53XA01# 56000pF ±10% GCJ188R71E563KA12# 68000pF ±10% GCJ188R71E563KA12# 68000pF ±10% GCJ188R71E32XA01# 68000pF ±10% GCJ188R71E124KA01# 0.15µF ±10% GCJ188R71E14XA01# 0.15µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.18µF ±10% GCJ188R71E154KA01# 0.22µF ±10% GCJ188R71E154KA01# 0.22µF ±10% GCJ188R71E154KA01# 0.22µF ±10% GCJ188R71E155KA01# 16Vdc X8L 33000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ188R71E33XA01# 39000pF ±10% GCJ18R71E33XA01# 39000pF ±10% GCJ18R71E33XA01# 39000pF ±10% GCJ18R71E33XA01# 39000pF ±10% GCJ18R71E33XA01# 39000pF ±10% GCJ18R71E33XA01# 39000pF ±10% GCJ18R71E33XA0	J188R70J225KE0
6800pF ±10% GCJ188R71E682KA01# 8200pF ±10% GCJ188R71E03KA01# 10000pF ±10% GCJ188R71E123KA01# 15000pF ±10% GCJ188R71E123KA01# 15000pF ±10% GCJ188R71E13KA01# 15000pF ±10% GCJ188R71E183KA01# 18000pF ±10% GCJ188R71E183KA01# 22000pF ±10% GCJ188R71E23KA01# 27000pF ±10% GCJ188R71E23KA01# 33000pF ±10% GCJ188R71E33KA01# 39000pF ±10% GCJ188R71E33KA01# 47000pF ±10% GCJ188R71E33KA01# 47000pF ±10% GCJ188R71E33KA01# 47000pF ±10% GCJ188R71E33KA01# 47000pF ±10% GCJ188R71E33KA01# 68000pF ±10% GCJ188R71E363KA12# 68000pF ±10% GCJ188R71E38KA12# 68000pF ±10% GCJ188R71E34KA01# 0.15µF ±10% GCJ188R71E134KA01# 0.15µF ±10% GCJ188R71E134KA01# 0.15µF ±10% GCJ188R71E134KA01# 0.18µF ±10% GCJ188R71E134KA01# 0.18µF ±10% GCJ188R71E124KA01# 0.18µF ±10% GCJ188R71E155KA01# 16Vdc X8L 33000pF ±10% GCJ188R81C333KA01# 39000pF ±10% GCJ188L81C333KA01#	
R200pF	
1000pF	
12000pF	
12000pF	5
18000pF ±10%	Part Number
22000pF ±10% CJ188R71E23KA01# 1500pF ±10% GC	J216R72A102KA(
22000pF ±10%	J216R72A122KA0
33000pF	J216R72A152KA(
39000pF ±10% GCJ188R71E393KA01# 47000pF ±10% GCJ188R71E563KA12# 56000pF ±10% GCJ188R71E683KA12# 68000pF ±10% GCJ188R71E823KA12# 82000pF ±10% GCJ188R71E823KA12# 0.10μF ±10% GCJ188R71E104KA12# 0.15μF ±10% GCJ188R71E14KA01# 0.18μF ±10% GCJ188R71E154KA01# 0.22μF ±10% GCJ188R71E124KA12# 1.0μF ±10% GCJ188R71E105KA01# 16Vdc X8L 33000pF ±10% GCJ188L81C333KA01# 39000pF ±10% GCJ188L81C333KA01# 2700pF ±10% GC 3300pF ±10% GC 4700pF ±10% GC 4700pF ±10% GC 6800pF ±10% GC 6800pF ±10% GC 6800pF ±10% GC 10000pF ±10% GC 10000pF ±10% GC 15000pF ±10% GC 15000pF ±10% GC 18000pF ±10% GC 22000pF ±10% GC 22000pF ±10% GC	J216R72A182KA(
47000pF ±10% GCJ188R71E473KA01# 3300pF ±10% GCJ88R71E563KA12# 3900pF ±10% GCJ188R71E683KA12# 4700pF ±10% GCJ188R71E683KA12# 5600pF ±10% GCJ188R71E323KA12# 5600pF ±10% GCJ188R71E104KA12# 6800pF ±10% GCJ188R71E124KA01# 6800pF ±10% GCJ188R71E124KA01# 60.15μF ±10% GCJ188R71E154KA01# 60.15μF ±10% GCJ188R71E154KA01# 60.22μF ±10% GCJ188R71E224KA12# 60.22μF ±10% GCJ188R71E105KA01# 60.22μF ±10% GCJ188R71E105KA01# 60.22μF ±10% GCJ188R71E105KA01# 60.22000pF ±10% GCJ188R71E105KA01# 60.22000pF ±10% GCJ188L81C333KA01# 60.22000pF ±10% GCJ188L81C333KA01# 60.22000pF ±10% GCJ188L81C393KA01# 60.22000pF ±10% 60.22000pF ±10	J216R72A222KA(
S6000pF	J216R72A272KA(
S6000pF	J216R72A332KA
68000pF ±10% GCJ188R71E683KA12# 4700pF ±10% GC 82000pF ±10% GCJ188R71E823KA12# 5600pF ±10% GC 0.10μF ±10% GCJ188R71E104KA12# 6800pF ±10% GC 0.15μF ±10% GCJ188R71E124KA01# 10000pF ±10% GC 0.18μF ±10% GCJ188R71E184KA12# 12000pF ±10% GC 0.22μF ±10% GCJ188R71E224KA12# 15000pF ±10% GC 1.0μF ±10% GCJ188R71E105KA01# 18000pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C333KA01# 50Vdc X7R 330pF ±10% GC GC GC GC GC GC GC	J216R72A392KA
82000pF ±10% GCJ188R71E823KA12# 5600pF ±10% GC	J216R72A472KA0
0.10μF	J216R72A562KA
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	J216R72A682KA
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	J216R72A822KA
0.18μF ±10% GCJ188R71E184KA12# 12000pF ±10% GC 0.22μF ±10% GCJ188R71E224KA12# 15000pF ±10% GC 1.0μF ±10% GCJ188R71E105KA01# 18000pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C333KA01# 22000pF ±10% GC 39000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C39JKA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GCJ188L81C39JKA01# 50Vdc X7R 330pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L 33000pF ±10% GC 16Vdc X8L	J216R72A103KA(
0.22μF	J216R72A123KA
1.0μF ±10% GCJ188R71E105KA01# 16Vdc X8L 33000pF ±10% GCJ188L81C333KA01# 39000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC	J216R72A153KA
16Vdc X8L 33000pF ±10% GCJ188L81C333KA01# 22000pF ±10% GC 39000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC	
39000pF ±10% GCJ188L81C393KA01# 50Vdc X7R 330pF ±10% GC	J216R72A183KA0 J216R72A223KA0
	J216R71H331KA(
	J216R71H391KA(
	J216R71H471KA(
	J216R71H561KA(
	J216R71H681KA
	J216R71H821KA
	J216R71H102KA0
	J216R71H122KA0
	J216R71H152KA0
0.22μF ±10% GCJ188L81C224KA01# 1800pF ±10% GC	J216R71H182KA0
	J216R71H222KA0
27000pF ±10% GCJ188R71C273KA01# 2700pF ±10% GC	J216R71H272KA0
33000pF ±10% GCJ188R71C333KA01# 3300pF ±10% GC	J216R71H332KA0
39000pF ±10% GCJ188R71C393KA01# 3900pF ±10% GC	J216R71H392KA
47000pF ±10% GCJ188R71C473KA01# 4700pF ±10% GC	
56000pF ±10% GCJ188R71C563KA01# 5600pF ±10% GC	J216R71H472KA
68000pF ±10% GCJ188R71C683KA01# 6800pF ±10% GC	J216R71H472KA0 J216R71H562KA0
82000pF ±10% GCJ188R71C823KA01# 8200pF ±10% GC	J216R71H562KA0
0.10μF ±10% GCJ188R71C104KA01# 10000pF ±10% GC	J216R71H562KA(J216R71H682KA(
0.12μF ±10% GCJ188R71C124KA01# 12000pF ±10% GC	J216R71H562KA0 J216R71H682KA0 J216R71H822KA0
0.15μF ±10% GCJ188R71C154KA01# 15000pF ±10% GC	
0.18μF ±10% GCJ188R71C184KA01# 18000pF ±10% GC	J216R71H562KA0 J216R71H682KA0 J216R71H822KA0 J216R71H103KA0

±10%

GCJ188R71C224KA01#

 $0.22 \mu F$

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
0.9mm	16Vdc	X7R	0.27µF	±10%	GCJ188R71C274KA01#
			0.33µF	±10%	GCJ188R71C334KA01#
			0.39µF	±10%	GCJ188R71C394KA12#
			0.47µF	±10%	GCJ188R71C474KA12#
	10Vdc	X7R	0.12µF	±10%	GCJ188R71A124KA01#
			0.15µF	±10%	GCJ188R71A154KA01#
			0.18µF	±10%	GCJ188R71A184KA01#
			0.22µF	±10%	GCJ188R71A224KA01#
	6.3Vdc	X7R	2.2µF	±10%	GCJ188R70J225KE01#

■ 2.0×1.25mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.7mm	100Vdc	X7R	1000pF	±10%	GCJ216R72A102KA01#
			1200pF	±10%	GCJ216R72A122KA01#
			1500pF	±10%	GCJ216R72A152KA01#
			1800pF	±10%	GCJ216R72A182KA01#
			2200pF	±10%	GCJ216R72A222KA01#
			2700pF	±10%	GCJ216R72A272KA01#
			3300pF	±10%	GCJ216R72A332KA01#
			3900pF	±10%	GCJ216R72A392KA01#
			4700pF	±10%	GCJ216R72A472KA01#
			5600pF	±10%	GCJ216R72A562KA01#
			6800pF	±10%	GCJ216R72A682KA01#
			8200pF	±10%	GCJ216R72A822KA01#
			10000pF	±10%	GCJ216R72A103KA01#
			12000pF	±10%	GCJ216R72A123KA01#
			15000pF	±10%	GCJ216R72A153KA01#
			18000pF	±10%	GCJ216R72A183KA01#
			22000pF	±10%	GCJ216R72A223KA01#
	50Vdc	X7R	330pF	±10%	GCJ216R71H331KA01#
			390pF	±10%	GCJ216R71H391KA01#
			470pF	±10%	GCJ216R71H471KA01#
			560pF	±10%	GCJ216R71H561KA01#
			680pF	±10%	GCJ216R71H681KA01#
			820pF	±10%	GCJ216R71H821KA01#
			1000pF	±10%	GCJ216R71H102KA01#
			1200pF	±10%	GCJ216R71H122KA01#
			1500pF	±10%	GCJ216R71H152KA01#
			1800pF	±10%	GCJ216R71H182KA01#
			2200pF	±10%	GCJ216R71H222KA01#
			2700pF	±10%	GCJ216R71H272KA01#
			3300pF	±10%	GCJ216R71H332KA01#
			3900pF	±10%	GCJ216R71H392KA01#
			4700pF	±10%	GCJ216R71H472KA01#
			5600pF	±10%	GCJ216R71H562KA01#
			6800pF	±10%	GCJ216R71H682KA01#
			8200pF	±10%	GCJ216R71H822KA01#
			10000pF	±10%	GCJ216R71H103KA01#
			12000pF	±10%	GCJ216R71H123KA01#
			15000pF	±10%	GCJ216R71H153KA01#
			18000pF	±10%	GCJ216R71H183KA01#
			22000pF	±10%	GCJ216R71H223KA01#
		F	Part number	# indicates	the package specification code.

GCJ Series High Dielectric Constant Type 🐯 🖼 🗪 Part Number List

(→ **■** 2.0×1.25mm)

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
0.7mm	25Vdc	X7R	470pF	±10%	GCJ216R71E471KA01#
			560pF	±10%	GCJ216R71E561KA01#
			680pF	±10%	GCJ216R71E681KA01#
			820pF	±10%	GCJ216R71E821KA01#
			1000pF	±10%	GCJ216R71E102KA01#
			1200pF	±10%	GCJ216R71E122KA01#
			1500pF	±10%	GCJ216R71E152KA01#
			1800pF	±10%	GCJ216R71E182KA01#
			2200pF	±10%	GCJ216R71E222KA01#
			2700pF	±10%	GCJ216R71E272KA01#
			3300pF	±10%	GCJ216R71E332KA01#
			3900pF	±10%	GCJ216R71E392KA01#
			4700pF	±10%	GCJ216R71E472KA01#
			5600pF	±10%	GCJ216R71E562KA01#
			6800pF	±10%	GCJ216R71E682KA01#
			8200pF	±10%	GCJ216R71E822KA01#
			10000pF	±10%	GCJ216R71E103KA01#
			12000pF	±10%	GCJ216R71E123KA01#
).95mm	100Vdc	X7R	220pF	±10%	GCJ219R72A221KA01#
			270pF	±10%	GCJ219R72A271KA01#
			330pF	±10%	GCJ219R72A331KA01#
			390pF	±10%	GCJ219R72A391KA01#
			470pF	±10%	GCJ219R72A471KA01#
			560pF	±10%	GCJ219R72A561KA01#
			680pF	±10%	GCJ219R72A681KA01#
			820pF	±10%	GCJ219R72A821KA01#
			27000pF	±10%	GCJ219R72A273KA01#
			33000pF	±10%	GCJ219R72A333KA01#
			39000pF	±10%	GCJ219R72A393KA01#
	50Vdc	X7R	27000pF	±10%	GCJ219R71H273KA01#
			33000pF	±10%	GCJ219R71H333KA01#
			39000pF	±10%	GCJ219R71H393KA01#
			0.33µF	±10%	GCJ219R71H334KA12#
	25Vdc	X7R	15000pF	±10%	GCJ219R71E153KA01#
			18000pF	±10%	GCJ219R71E183KA01#
			22000pF	±10%	GCJ219R71E223KA01#
			0.33µF	±10%	GCJ219R71E334KA01#
			0.47µF	±10%	GCJ219R71E474KA12#
	16Vdc	X7R	0.68µF	±10%	GCJ219R71C684KA01#
			0.82µF	±10%	GCJ219R71C824KA01#
			1.0µF	±10%	GCJ219R71C105KA01#
1.0mm	250Vdc	X7R	1000pF	±10%	GCJ21AR72E102KXJ1#
			1500pF	±10%	GCJ21AR72E152KXJ1#
			2200pF	±10%	GCJ21AR72E222KXJ1#
			3300pF	±10%	GCJ21AR72E332KXJ1#
			4700pF	±10%	GCJ21AR72E472KXJ1#
			6800pF	±10%	GCJ21AR72E682KXJ1#
.45mm	250Vdc	X7R	10000pF	±10%	GCJ21BR72E103KXJ3#
			15000pF	±10%	GCJ21BR72E153KXJ3#
			22000pF	±10%	GCJ21BR72E223KXJ3#
	100Vdc	X7R	47000pF	±10%	GCJ21BR72A473KA01#
			56000pF	±10%	GCJ21BR72A563KA01#
			68000pF	±10%	GCJ21BR72A683KA01#
			ососорі	-10/0	5.502 15111 ZA0001(A01#

100Vdc X7R 0.10μF ±10% GCJ21BL81H273KA01# 30000pF ±10% GCJ21BL81H373KA01# 30000pF ±10% GCJ21BL81H333KA01# 47000pF ±10% GCJ21BL81H333KA01# 66000pF ±10% GCJ21BL81H333KA01# 66000pF ±10% GCJ21BL81H563KA01# 66000pF ±10% GCJ21BL81H563KA01# 66000pF ±10% GCJ21BL81H563KA01# 66000pF ±10% GCJ21BL81H563KA01# 66000pF ±10% GCJ21BL81H563KA01# 66000pF ±10% GCJ21BR71H473KA01# 66000pF ±10% GCJ21BR71H633KA01# 66000pF ±10% GCJ21BR71H633KA01# 66000pF ±10% GCJ21BR71H633KA01# 60000pF ±10% GCJ21BR71H633KA01# 60000pF ±10% GCJ21BR71H164KA01# 60.15μF ±10% GCJ21BR71H164KA01# 60.15μF ±10% GCJ21BR71H164KA01# 60.47μF ±10% GCJ21BR71H164KA01# 60.15μF ±10% GCJ21BR71H164KA01# 60.15μF ±10% GCJ21BR71H164KA01# 60.15μF ±10% GCJ21BR71H164KA01# 60.15μF ±10% GCJ21BL87A124KA01# 60.15μF ±10% GCJ21BL87A124KA01# 60.15μF ±10% GCJ21BL87A124KA01# 60.15μF ±10% GCJ21BL87A124KA01# 60.2μF ±10% GCJ21BL87A124KA01# 60.2μF ±10% GCJ21BL87A124KA01# 60.2μF ±10% GCJ21BL87A124KA01# 60.3μF ±10% GCJ21BL87A124KA01# 60.3μF ±10% GCJ21BL87A124KA01# 60.3μF ±10% GCJ21BL87A124KA01# 60.3μF ±10% GCJ21BL81E224KA01# 60.3μF ±10% GCJ21BL81E224KA01# 60.3μF ±10% GCJ21BL81E24KA01# 60.3μF ±10% GCJ21BL81E24KA01# 60.3μF ±10% GCJ21BL81E24KA01# 60.3μF ±10% GCJ21BL81E234KA01# 60.3μF ±10% GCJ21BL81E234KA01# 60.3μF ±10% GCJ21BL81E234KA01# 60.3μF ±10% GCJ21BL81E234KA01# 60.3μF ±10% GCJ21BL81E234KA01# 60.3μF ±10% GCJ21BL81E234KA01# 60.3μF ±10% GCJ21BR71E233KA01# 60.0μF ±10% GCJ21BR71E233KA01# 60.0μF ±10% GCJ21BR71E233KA01# 60.0μF ±10% GCJ21BR71E233KA01# 60.0μF ±10% GCJ21BR71E333KA01# 60.0μF ±10% GCJ21BR71E333KA01# 60.0μF ±10% GCJ21BR71E333KA01# 60.0μF ±10% GCJ21BR71E333KA01# 60.0μF ±10% GCJ21BR71E333KA01# 60.0μF ±10% GCJ21BR71E333KA01# 60.0μF ±10% GCJ21BR71E333KA01# 60.0μF	T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
33000pF	45mm	100Vdc	X7R	0.10µF	±10%	GCJ21BR72A104KA01#
39000pF		50Vdc	X8L	27000pF	±10%	GCJ21BL81H273KA01#
47000pF				33000pF	±10%	GCJ21BL81H333KA01#
S6000pF				39000pF	±10%	GCJ21BL81H393KA01#
68000pF				47000pF	±10%	GCJ21BL81H473KA01#
S2000pF				56000pF	±10%	GCJ21BL81H563KA01#
No.10μF				68000pF	±10%	GCJ21BL81H683KA01#
X7R				82000pF	±10%	GCJ21BL81H823KA01#
S6000pF				0.10µF	±10%	GCJ21BL81H104KA01#
68000pF			X7R	47000pF	±10%	GCJ21BR71H473KA01#
82000pF				56000pF	±10%	GCJ21BR71H563KA01#
0.10μF				68000pF	±10%	GCJ21BR71H683KA01#
0.12μF				82000pF	±10%	GCJ21BR71H823KA01#
0.15μF				0.10µF	±10%	GCJ21BR71H104KA01#
0.18μF				0.12µF	±10%	GCJ21BR71H124KA01#
0.22µF				0.15µF	±10%	GCJ21BR71H154KA01#
0.47μF ±10% GCJ21BR71H474KA12# 1.0μF ±10% GCJ21BR71H105KA01# 2.15μF ±10% GCJ21BL8YA124KA01# 0.18μF ±10% GCJ21BL8YA134KA01# 0.22μF ±10% GCJ21BL8YA334KA01# 0.33μF ±10% GCJ21BL8YA334KA01# 0.47μF ±10% GCJ21BL8YA334KA01# 0.47μF ±10% GCJ21BL8YA334KA01# 0.47μF ±10% GCJ21BL8YA474KA01# 0.15μF ±10% GCJ21BL81E124KA01# 0.15μF ±10% GCJ21BL81E124KA01# 0.18μF ±10% GCJ21BL81E154KA01# 0.18μF ±10% GCJ21BL81E34KA01# 0.22μF ±10% GCJ21BL81E34KA01# 0.27μF ±10% GCJ21BL81E334KA01# 0.33μF ±10% GCJ21BL81E334KA01# 0.39μF ±10% GCJ21BL81E394KA01# 0.47μF ±10% GCJ21BL81E684KA01# 0.68μF ±10% GCJ21BL81E684KA01# 0.82μF ±10% GCJ21BL81E333KA01# 33000F ±10% GCJ21BR71E333KA01# 39000F ±10% GCJ21BR71E333KA01# 47000F ±10% GCJ21BR71E333KA01# 56000F ±10% GCJ21BR71E33KA01# 68000F ±10% GCJ21BR71E333KA01# 68000F ±10% GCJ21BR71E334KA01# 0.27μF ±10% GCJ21BR71E334KA01# 0.27μF ±10% GCJ21BR71E334KA01# 0.27μF ±10% GCJ21BR71E334KA01# 0.27μF ±10% GCJ21BR71E334KA01# 0.27μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E334KA01# 0.29μF ±10% GCJ21BR71E356AKA12# 0.29μF ±10% GCJ21BR71E356AKA12# 0.29μF ±10% GCJ21BR71E356AKA12# 0.29μF ±10% GCJ21BR71E356AKA12# 0.29μF ±10% GCJ21BR71E325KA01# 0.29μF ±10% GCJ21BR71E325KA01# 0.29μF ±10% GCJ21BR71E325KA01# 0.29μF ±10% GCJ21BR71E325KA01# 0.29μF ±10% GCJ21BR71E325KA01# 0.29μF ±10% GCJ21BR71E325KA01# 0.29μF ±10%				0.18µF	±10%	GCJ21BR71H184KA01#
1.0µF				0.22µF	±10%	GCJ21BR71H224KA01#
35Vdc				0.47µF	±10%	GCJ21BR71H474KA12#
0.15μF				1.0µF	±10%	GCJ21BR71H105KA01#
0.18μF		35Vdc	X8L	· ·	±10%	
0.22μF				0.15µF	±10%	GCJ21BL8YA154KA01#
0.33μF ±10% GCJ21BL8YA334KA01# 0.47μF ±10% GCJ21BL8YA474KA01# 0.15μF ±10% GCJ21BL81E124KA01# 0.15μF ±10% GCJ21BL81E154KA01# 0.22μF ±10% GCJ21BL81E24KA01# 0.22μF ±10% GCJ21BL81E24KA01# 0.27μF ±10% GCJ21BL81E274KA01# 0.33μF ±10% GCJ21BL81E334KA01# 0.39μF ±10% GCJ21BL81E394KA01# 0.47μF ±10% GCJ21BL81E394KA01# 0.82μF ±10% GCJ21BL81E394KA01# 0.82μF ±10% GCJ21BL81E324KA01# 1.0μF ±10% GCJ21BL81E324KA01# 33000pF ±10% GCJ21BL81E33KA01# 39000pF ±10% GCJ21BR71E333KA01# 39000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 68000pF ±10% GCJ21BR71E333KA01# 68000pF ±10% GCJ21BR71E333KA01# 68000pF ±10% GCJ21BR71E334KA01# 0.10μF ±10% GCJ21BR71E334KA01# 0.27μF ±10% GCJ21BR71E334KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR71E356KA01# 0.56μF ±10% GCJ21BR316564KA01# 0.56μF ±10% GCJ21BR316564KA01# 0.56μF ±10				· ·		
0.47μF				0.22µF	±10%	GCJ21BL8YA224KA01#
25Vdc X8L 0.12μF				· ·	±10%	
0.15μF ±10% GCJ21BL81E154KA01# 0.18μF ±10% GCJ21BL81E24KA01# 0.22μF ±10% GCJ21BL81E224KA01# 0.27μF ±10% GCJ21BL81E224KA01# 0.33μF ±10% GCJ21BL81E334KA01# 0.39μF ±10% GCJ21BL81E334KA01# 0.47μF ±10% GCJ21BL81E394KA01# 0.68μF ±10% GCJ21BL81E684KA01# 0.82μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E33KA01# 33000pF ±10% GCJ21BR71E273KA01# 33000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 56000pF ±10% GCJ21BR71E333KA01# 68000pF ±10% GCJ21BR71E333KA01# 68000pF ±10% GCJ21BR71E333KA01# 0.10μF ±10% GCJ21BR71E683KA01# 0.27μF ±10% GCJ21BR71E683KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E55KA01# 1.5μF ±10% GCJ21BR71E55KA01# 2.2μF ±10% GCJ21BR71E55KA01#				0.47µF	±10%	
0.18μF ±10% GCJ21BL81E184KA01# 0.22μF ±10% GCJ21BL81E224KA01# 0.27μF ±10% GCJ21BL81E274KA01# 0.33μF ±10% GCJ21BL81E334KA01# 0.39μF ±10% GCJ21BL81E394KA01# 0.47μF ±10% GCJ21BL81E684KA01# 0.68μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E105KA01# 33000pF ±10% GCJ21BR71E273KA01# 33000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 6800pF ±10% GCJ21BR71E633KA01# 6800pF ±10% GCJ21BR71E633KA01# 6800pF ±10% GCJ21BR71E683KA01# 0.10μF ±10% GCJ21BR71E683KA01# 0.27μF ±10% GCJ21BR71E683KA01# 0.39μF ±10% GCJ21BR71E74KA01# 0.39μF ±10% GCJ21BR71E74KA01# 0.39μF ±10% GCJ21BR71E74KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E55KA01# 1.5μF ±10% GCJ21BR71E55KA01# 2.2μF ±10% GCJ21BR71E55KA01# 2.2μF ±10% GCJ21BR71E55KA01#		25Vdc	X8L	· ·		
0.22μF ±10% GCJ21BL81E224KA01# 0.27μF ±10% GCJ21BL81E274KA01# 0.33μF ±10% GCJ21BL81E334KA01# 0.39μF ±10% GCJ21BL81E394KA01# 0.47μF ±10% GCJ21BL81E474KA01# 0.68μF ±10% GCJ21BL81E684KA01# 0.82μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E105KA01# 33000pF ±10% GCJ21BR71E273KA01# 33000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 0.10μF ±10% GCJ21BR71E74KA01# 0.27μF ±10% GCJ21BR71E394KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E684KA12# 1.5μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E155KA01#				· ·		
0.27μF ±10% GCJ21BL81E274KA01# 0.33μF ±10% GCJ21BL81E334KA01# 0.39μF ±10% GCJ21BL81E394KA01# 0.47μF ±10% GCJ21BL81E474KA01# 0.68μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E105KA01# X7R 27000pF ±10% GCJ21BR71E273KA01# 33000pF ±10% GCJ21BR71E333KA01# 39000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 68000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 0.10μF ±10% GCJ21BR71E683KA01# 0.27μF ±10% GCJ21BR71E74KA01# 0.27μF ±10% GCJ21BR71E394KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 1.0μF ±10% GCJ21BR71E564KA12# 1.5μF ±10% GCJ21BR71E55KA01# 2.2μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E155KA01#						
0.33μF ±10% GCJ21BL81E334KA01# 0.39μF ±10% GCJ21BL81E394KA01# 0.47μF ±10% GCJ21BL81E474KA01# 0.68μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E824KA01# 1.0μF ±10% GCJ21BL81E824KA01# 33000pF ±10% GCJ21BR71E273KA01# 39000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E683KA01# 0.10μF ±10% GCJ21BR71E743KA01# 0.27μF ±10% GCJ21BR71E74KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 1.0μF ±10% GCJ21BR71E564KA12# 1.5μF ±10% GCJ21BR71E55KA01# 2.2μF ±10% GCJ21BR71E55KA01# 2.2μF ±10% GCJ21BR71E105KA12#						
0.39μF ±10% GCJ21BL81E394KA01# 0.47μF ±10% GCJ21BL81E474KA01# 0.68μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E105KA01# 1.0μF ±10% GCJ21BL81E105KA01# 33000pF ±10% GCJ21BR71E273KA01# 39000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E393KA01# 47000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E683KA01# 0.10μF ±10% GCJ21BR71E74AKA01# 0.27μF ±10% GCJ21BR71E74KA01# 0.39μF ±10% GCJ21BR71E74KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.68μF ±10% GCJ21BR71E564KA12# 1.0μF ±10% GCJ21BR71E564KA12# 1.5μF ±10% GCJ21BR71E55KA01# 2.2μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E55KA01#				· ·		
0.47μF ±10% GCJ21BL81E474KA01# 0.68μF ±10% GCJ21BL81E684KA01# 0.82μF ±10% GCJ21BL81E105KA01# 1.0μF ±10% GCJ21BL81E105KA01# 33000pF ±10% GCJ21BR71E273KA01# 39000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E683KA01# 0.10μF ±10% GCJ21BR71E433KA01# 0.27μF ±10% GCJ21BR71E74KA01# 0.39μF ±10% GCJ21BR71E74KA01# 0.56μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 1.0μF ±10% GCJ21BR71E564KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E155KA01#				· ·		
0.68μF ±10% GCJ21BL81E684KA01# 1.0μF ±10% GCJ21BL81E824KA01# 1.0μF ±10% GCJ21BL81E105KA01# X7R 27000pF ±10% GCJ21BR71E273KA01# 33000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E333KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E683KA01# 0.10μF ±10% GCJ21BR71E823KA01# 0.27μF ±10% GCJ21BR71E71E4A01# 0.39μF ±10% GCJ21BR71E564KA01# 0.39μF ±10% GCJ21BR71E564KA01# 0.56μF ±10% GCJ21BR71E564KA12# 1.0μF ±10% GCJ21BR71E564KA12# 1.0μF ±10% GCJ21BR71E555KA01# 2.2μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E155KA01#				· ·		
0.82μF				· ·		
1.0μF ±10% GCJ21BL81E105KA01# X7R 27000pF ±10% GCJ21BR71E273KA01# 33000pF ±10% GCJ21BR71E333KA01# 47000pF ±10% GCJ21BR71E393KA01# 47000pF ±10% GCJ21BR71E473KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E155KA01#				<u> </u>		
X7R 27000pF ±10% GCJ21BR71E273KA01# 33000pF ±10% GCJ21BR71E333KA01# 39000pF ±10% GCJ21BR71E393KA01# 47000pF ±10% GCJ21BR71E473KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E823KA01# 0.27μF ±10% GCJ21BR71E74KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E564KA12# 1.0μF ±10% GCJ21BR71E564KA12# 1.5μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E55KA01#				· ·		
33000pF ±10% GCJ21BR71E333KA01# 39000pF ±10% GCJ21BR71E393KA01# 47000pF ±10% GCJ21BR71E473KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E55KA01#						
39000pF ±10% GCJ21BR71E393KA01# 47000pF ±10% GCJ21BR71E563KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E824KA12# 1.5μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E525KA01#			X/R	· ·		
47000pF ±10% GCJ21BR71E473KA01# 56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E824KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01#				-		
56000pF ±10% GCJ21BR71E563KA01# 68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01#				· ·		
68000pF ±10% GCJ21BR71E683KA01# 82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E684KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01#				· ·		
82000pF ±10% GCJ21BR71E823KA01# 0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E824KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01#				-		
0.10μF ±10% GCJ21BR71E104KA01# 0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E824KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01#				· ·		
0.27μF ±10% GCJ21BR71E274KA01# 0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E824KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01#				· ·		
0.39μF ±10% GCJ21BR71E394KA01# 0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E824KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01#				· ·		
0.56μF ±10% GCJ21BR71E564KA12# 0.68μF ±10% GCJ21BR71E684KA12# 0.82μF ±10% GCJ21BR71E824KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01# 16Vdc X8L 0.56μF ±10% GCJ21BL81C564KA01#				· ·		
0.68μF				· ·		
1.6Vdc X8L 0.82μF ±10% GCJ21BR71E824KA12# 1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01# 16Vdc X8L 0.56μF ±10% GCJ21BL81C564KA01#				· ·		
1.0μF ±10% GCJ21BR71E105KA12# 1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01# 16Vdc X8L 0.56μF ±10% GCJ21BL81C564KA01#				· ·		
1.5μF ±10% GCJ21BR71E155KA01# 2.2μF ±10% GCJ21BR71E225KA01# 16Vdc X8L 0.56μF ±10% GCJ21BL81C564KA01#				· ·		
2.2μF ±10% GCJ21BR71E225KA01# 16Vdc X8L 0.56μF ±10% GCJ21BL81C564KA01#				· ·		
16Vdc X8L 0.56μF ±10% GCJ21BL81C564KA01#				· ·		
		16Vdc	XXI			
-		. 3. 40				

GCJ Series High Dielectric Constant Type 🐯 🖼 Part Number List

(→ **■** 2.0×1.25mm)

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
1.45mm	16Vdc	X8L	0.68µF	±10%	GCJ21BL81C684KA01#
			0.82µF	±10%	GCJ21BL81C824KA01#
			1.0µF	±10%	GCJ21BL81C105KA01#
		X7R	0.27µF	±10%	GCJ21BR71C274KA01#
			0.33µF	±10%	GCJ21BR71C334KA01#
			0.39µF	±10%	GCJ21BR71C394KA01#
			0.47µF	±10%	GCJ21BR71C474KA01#
			0.56µF	±10%	GCJ21BR71C564KA01#
			1.0µF	±10%	GCJ21BR71C105KA01#
			2.2µF	±10%	GCJ21BR71C225KA13#
			4.7µF	±10%	GCJ21BR71C475KA01#
	10Vdc	X7R	2.2µF	±10%	GCJ21BR71A225KA01#
			10µF	±10%	GCJ21BR71A106KE01#

■ 3.2×1.6mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
0.95mm	100Vdc	X7R	0.10µF	±10%	GCJ319R72A104KA01#
	50Vdc	X7R	0.10µF	±10%	GCJ319R71H104KA01#
			0.12µF	±10%	GCJ319R71H124KA01#
1.25mm	1000Vdc	X7R	1000pF	±10%	GCJ31BR73A102KXJ1#
			1500pF	±10%	GCJ31BR73A152KXJ1#
			2200pF	±10%	GCJ31BR73A222KXJ1#
			3300pF	±10%	GCJ31BR73A332KXJ1#
			4700pF	±10%	GCJ31BR73A472KXJ1#
	630Vdc	X7R	1000pF	±10%	GCJ31BR72J102KXJ1#
			1500pF	±10%	GCJ31BR72J152KXJ1#
			2200pF	±10%	GCJ31BR72J222KXJ1#
			3300pF	±10%	GCJ31BR72J332KXJ1#
			4700pF	±10%	GCJ31BR72J472KXJ1#
			6800pF	±10%	GCJ31BR72J682KXJ1#
			10000pF	±10%	GCJ31BR72J103KXJ1#
	250Vdc	X7R	15000pF	±10%	GCJ31BR72E153KXJ1#
			22000pF	±10%	GCJ31BR72E223KXJ1#
			68000pF	±10%	GCJ31BR72E683KXJ1#
1.35mm	100Vdc	X7R	0.15µF	±10%	GCJ31MR72A154KA01#
			0.18µF	±10%	GCJ31MR72A184KA01#
			0.22µF	±10%	GCJ31MR72A224KA01#
	50Vdc	X7R	0.15µF	±10%	GCJ31MR71H154KA01#
			0.18µF	±10%	GCJ31MR71H184KA01#
			0.22µF	±10%	GCJ31MR71H224KA01#
			0.27µF	±10%	GCJ31MR71H274KA01#
			0.33µF	±10%	GCJ31MR71H334KA01#
			0.39µF	±10%	GCJ31MR71H394KA01#
			0.47µF	±10%	GCJ31MR71H474KA01#
			0.56µF	±10%	GCJ31MR71H564KA12#
			0.68µF	±10%	GCJ31MR71H684KA12#
			0.82µF	±10%	GCJ31MR71H824KA12#
			1.0µF	±10%	GCJ31MR71H105KA12#
	25Vdc	X7R	0.10µF	±10%	GCJ31MR71E104KA01#
			0.12µF	±10%	GCJ31MR71E124KA01#
			0.15µF	±10%	GCJ31MR71E154KA01#
			0.18µF	±10%	GCJ31MR71E184KA01#

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.35mm	25Vdc	X7R	0.22µF	±10%	GCJ31MR71E224KA01#
			1.0µF	±10%	GCJ31MR71E105KA01#
			1.5µF	±10%	GCJ31MR71E155KA12#
			2.2µF	±10%	GCJ31MR71E225KA12#
			3.3µF	±10%	GCJ31MR71E335KA12#
	16Vdc	X7R	1.0µF	±10%	GCJ31MR71C105KA01#
			1.5µF	±10%	GCJ31MR71C155KA01#
1.8mm	1000Vdc	X7R	6800pF	±10%	GCJ31CR73A682KXJ3#
			10000pF	±10%	GCJ31CR73A103KXJ3#
	630Vdc	X7R	15000pF	±10%	GCJ31CR72J153KXJ3#
			22000pF	±10%	GCJ31CR72J223KXJ3#
	250Vdc	X7R	33000pF	±10%	GCJ31CR72E333KXJ3#
			47000pF	±10%	GCJ31CR72E473KXJ3#
			0.10µF	±10%	GCJ31CR72E104KXJ3#
1.9mm	100Vdc	X7R	1.0µF	±10%	GCJ31CR72A105KA01#
	50Vdc	X7R	1.5µF	±10%	GCJ31CR71H155KA12#
			2.2µF	±10%	GCJ31CR71H225KA12#
		X7S	4.7µF	±10%	GCJ31CC71H475KA01#
	35Vdc	X8L	0.56µF	±10%	GCJ31CL8YA564KA01#
			0.68µF	±10%	GCJ31CL8YA684KA01#
			0.82µF	±10%	GCJ31CL8YA824KA01#
			1.0µF	±10%	GCJ31CL8YA105KA01#
	25Vdc	X8L	0.56µF	±10%	GCJ31CL81E564KA01#
			0.68µF	±10%	GCJ31CL81E684KA01#
			0.82µF	±10%	GCJ31CL81E824KA01#
			1.0µF	±10%	GCJ31CL81E105KA01#
		X7R	4.7µF	±10%	GCJ31CR71E475KA12#
	16Vdc	X8L	3.3µF	±10%	GCJ31CL81C335KA01#
			4.7µF	±10%	GCJ31CL81C475KA01#
		X7R	3.3µF	±10%	GCJ31CR71C335KA01#
			4.7µF	±10%	GCJ31CR71C475KA01#
			10µF	±10%	GCJ31CR71C106KA15#
	10Vdc	X7R	6.8µF	±10%	GCJ31CR71A685KA13#
			10µF	±10%	GCJ31CR71A106KA13#
	6.3Vdc	X7R	22µF	±10%	GCJ31CR70J226KE01#
2.0mm	25Vdc	X7S	10µF	±10%	GCJ31CC71E106KA15#

■ 3.2×2.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.5mm	630Vdc	X7R	6800pF	±10%	GCJ32QR72J682KXJ1#
			10000pF	±10%	GCJ32QR72J103KXJ1#
	250Vdc	X7R	68000pF	±10%	GCJ32QR72E683KXJ1#
			0.15µF	±10%	GCJ32QR72E154KXJ1#
2.0mm	1000Vdc	X7R	15000pF	±10%	GCJ32DR73A153KXJ1#
			22000pF	±10%	GCJ32DR73A223KXJ1#
	630Vdc	X7R	15000pF	±10%	GCJ32DR72J153KXJ1#
			22000pF	±10%	GCJ32DR72J223KXJ1#
			33000pF	±10%	GCJ32DR72J333KXJ1#
			47000pF	±10%	GCJ32DR72J473KXJ1#
	250Vdc	X7R	0.10µF	±10%	GCJ32DR72E104KXJ1#
			0.22µF	±10%	GCJ32DR72E224KXJ1#
2.3mm	100Vdc	X7R	2.2µF	±10%	GCJ32DR72A225KA01#

Part number # indicates the package specification code.



GCJ Series High Dielectric Constant Type (25) File Part Number List

(→ **■** 3.2×2.5mm)

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
2.8mm	50Vdc	X7R	4.7µF	±10%	GCJ32ER71H475KA12#
		X7S	10µF	±10%	GCJ32EC71H106KA01#
	25Vdc	X8L	4.7µF	±10%	GCJ32EL81E475KA01#
	16Vdc	X7R	22µF	±10%	GCJ32ER71C226KE01#
	6.3Vdc	X7R	47µF	±10%	GCJ32ER70J476KE01#

■ 4.5×3.2mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.5mm	630Vdc	X7R	68000pF	±10%	GCJ43QR72J683KXJ1#
	250Vdc	X7R	0.15µF	±10%	GCJ43QR72E154KXJ1#
2.0mm	1000Vdc	X7R	33000pF	±10%	GCJ43DR73A333KXJ1#
			47000pF	±10%	GCJ43DR73A473KXJ1#
	630Vdc	X7R	33000pF	±10%	GCJ43DR72J333KXJ1#
			47000pF	±10%	GCJ43DR72J473KXJ1#
			0.10µF	±10%	GCJ43DR72J104KXJ1#
	250Vdc	X7R	0.22µF	±10%	GCJ43DR72E224KXJ1#
			0.33µF	±10%	GCJ43DR72E334KXJ1#
			0.47µF	±10%	GCJ43DR72E474KXJ1#

■ 5.7×5.0mm

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
2.0mm	1000Vdc	X7R	68000pF	±10%	GCJ55DR73A683KXJ1#
			0.10µF	±10%	GCJ55DR73A104KXJ1#
	630Vdc	X7R	0.10µF	±10%	GCJ55DR72J104KXJ1#
			0.15µF	±10%	GCJ55DR72J154KXJ1#
			0.22µF	±10%	GCJ55DR72J224KXJ1#
	250Vdc	X7R	0.33µF	±10%	GCJ55DR72E334KXJ1#
			0.47µF	±10%	GCJ55DR72E474KXJ1#
			0.68µF	±10%	GCJ55DR72E684KXJ1#
			1.0µF	±10%	GCJ55DR72E105KXJ1#

High Effective Capacitance & High Allowable Ripple Current

GC3 Series




This is a high ripple resistance product for automobiles, excellent in DC voltage characteristics.

Features


When a DC voltage is applied, a capacitance higher than conventional products (X7R characteristics) can be acquired.

When DC600V is applied, about twice the capacitance can be secured.

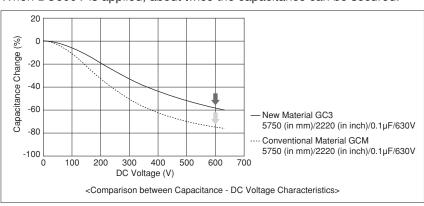

Improved ripple resistance performance compared to conventional products (X7R characteristics).

In the case of a product with a capacitance of 0.1 µF, when the exothermic temperature reaches 20°C at frequency f=300kHz, the amount of resistance of a product with conventional material is 1.8Arms; however, the new material is 2.3 Arms.

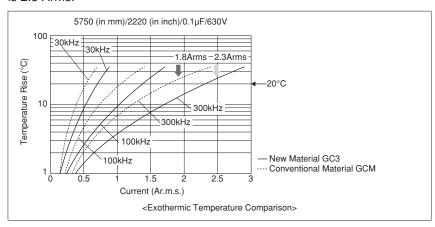


This product has a noise reduction effect.

Since dielectric materials that enable a reduction of noise are used, this product is more effective for reducing noise compared to the GCM series for automobiles.

Specifications

Size	2.0×1.25mm to 5.7×5.0mm
Rated Voltage	250Vdc to 630Vdc
Capacitance	10000pF to 1.0μF
Main Applications	For PFC (Power Factor Correction) circuits of power supplies, EMI suppression, and smoothing circuits of automobiles





GC3 Series High Dielectric Constant Type 🚟 🤼 Part Number List

■ 2.0×1.25mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.0mm	250Vdc	X7T	10000pF	±10%	GC321AD72E103KX01#
			15000pF	±10%	GC321AD72E153KX01#
1.45mm	250Vdc	X7T	22000pF	±10%	GC321BD72E223KX03#

T max.	Rated Voltage	TC Code	Cap.	Tol.	Part Number
2.7mm	630Vdc	X7T	0.27µF	±10%	GC355XD72J274KX05#
	450Vdc	X7T	0.56µF	±10%	GC355XD72W564KX05#
	250Vdc	X7T	1.0µF	±10%	GC355XD72E105KX05#

■ 3.2×1.6mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.0mm	450Vdc	X7T	10000pF	±10%	GC331AD72W103KX01#
			15000pF	±10%	GC331AD72W153KX01#
	250Vdc	X7T	33000pF	±10%	GC331AD72E333KX01#
1.25mm	630Vdc	X7T	10000pF	±10%	GC331BD72J103KX01#
	450Vdc	X7T	22000pF	±10%	GC331BD72W223KX01#
			33000pF	±10%	GC331BD72W333KX01#
	250Vdc	X7T	47000pF	±10%	GC331BD72E473KX01#
1.8mm	630Vdc	X7T	15000pF	±10%	GC331CD72J153KX03#
	450Vdc	X7T	47000pF	±10%	GC331CD72W473KX03#
	250Vdc	X7T	68000pF	±10%	GC331CD72E683KX03#

■ 3.2×2.5mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.5mm	630Vdc	X7T	22000pF	±10%	GC332QD72J223KX01#
	250Vdc	X7T	0.10µF	±10%	GC332QD72E104KX01#
2.0mm	630Vdc	X7T	33000pF	±10%	GC332DD72J333KX01#
			47000pF	±10%	GC332DD72J473KX01#
	450Vdc	X7T	68000pF	±10%	GC332DD72W683KX01#
			0.10µF	±10%	GC332DD72W104KX01#
	250Vdc	X7T	0.15µF	±10%	GC332DD72E154KX01#

■ 4.5×3.2mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
1.5mm	250Vdc	X7T	0.22µF	±10%	GC343QD72E224KX01#
2.0mm	630Vdc	X7T	68000pF	±10%	GC343DD72J683KX01#
	450Vdc	X7T	0.15µF	±10%	GC343DD72W154KX01#
	250Vdc	X7T	0.33µF	±10%	GC343DD72E334KX01#

■ 5.7×5.0mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
2.0mm	630Vdc	X7T	0.10µF	±10%	GC355DD72J104KX01#
			0.15µF	±10%	GC355DD72J154KX01#
	450Vdc	X7T	0.22µF	±10%	GC355DD72W224KX01#
			0.33µF	±10%	GC355DD72W334KX01#
			0.47µF	±10%	GC355DD72W474KX01#
	250Vdc	X7T	0.47µF	±10%	GC355DD72E474KX01#
			0.68µF	±10%	GC355DD72E684KX01#
2.7mm	630Vdc	X7T	0.22µF	±10%	GC355XD72J224KX05#








By bonding metal terminals to the external electrodes of the chip, the problem of how to design a capacitor to enable it to be mounted on a large MLCC has been solved!

Features

1 Bond the metal terminals to the external electrodes of the chip.

The stress on the chip is reduced due to the elastic behavior of the metal terminals.

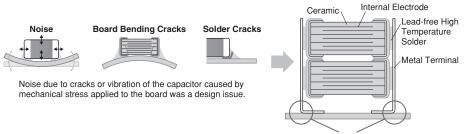


Stress is reduced due to the elastic behavior of the metal terminals!

2 Noise, board deflection cracks, and solder cracks are greatly reduced.

No breakage occurs even when the board deflection is 6mm. Solder cracks were not found even after 2000 heat stress cycles.






Evaluation Items: 2220 size/DC630V/220nF Test Conditions: 50V, AC10Vp-p/3kHz Sample Board: Glass-epoxy Board (T: 1.6mm) Number of samples: 3 Distance between microphone and board: 3mm

Note: Results obtained using Murata's evaluation board

Stress caused by board deflection is reduced.



Solder cracks due to heat stress are reduced.

Chip Size	Individual Chip (2220 size)	Metal Terminal (2220 size)
1000 cycles	∬Solder cracks	
2000 cycles	ÎSolder cracks	

Test Conditions: -55 to +125°C, 5 minutes (liquid phase) Board used: Glass-epoxy Board (FR-4)


41

3 Chip Stacking

A large capacitance can be realized by stacking two capacitors on top of each other.

Specifications

Size	6.1×5.3mm
Rated Voltage	25Vdc to 100Vdc
Capacitance	4.7μF to 68μF
Main Applications	For drive control of engine ECU, etc. For other drive system control and safety equipment



muRata

KCM Series High Dielectric Constant Type (Part Number List

■ 6.1×5.3mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
3.0mm	100Vdc	X7R	4.7µF	±10%	KCM55LR72A475KH01#
	63Vdc	X7R	4.7µF	±10%	KCM55LR71J475KH01#
	50Vdc	X7R	4.7µF	±10%	KCM55LR71H475KH01#
			10µF	±10%	KCM55LR71H106KH01#
	35Vdc	X7R	10µF	±10%	KCM55LR7YA106KH01#
			15µF	±10%	KCM55LR7YA156KH01#
	25Vdc	X7R	15µF	±10%	KCM55LR71E156KH01#
3.9mm	100Vdc	X7R	6.8µF	±10%	KCM55QR72A685KH01#
	63Vdc	X7R	10µF	±10%	KCM55QR71J106KH01#
	50Vdc	X7R	17µF	±10%	KCM55QR71H176KH01#
	35Vdc	X7R	17µF	±10%	KCM55QR7YA176KH01#
			22µF	±10%	KCM55QR7YA226KH01#
	25Vdc	X7R	22µF	±10%	KCM55QR71E226KH01#
			33µF	±10%	KCM55QR71E336KH01#
5.0mm	100Vdc	X7R	10µF	±20%	KCM55TR72A106MH01#
	50Vdc	X7R	22µF	±20%	KCM55TR71H226MH01#
	35Vdc	X7R	22µF	±20%	KCM55TR7YA226MH01#
			33µF	±20%	KCM55TR7YA336MH01#
	25Vdc	X7R	33µF	±20%	KCM55TR71E336MH01#
6.7mm	100Vdc	X7R	15µF	±20%	KCM55WR72A156MH01#
	63Vdc	X7R	22µF	±20%	KCM55WR71J226MH01#
	50Vdc	X7R	33µF	±20%	KCM55WR71H336MH01#
	35Vdc	X7R	47µF	±20%	KCM55WR7YA476MH01#
	25Vdc	X7R	47µF	±20%	KCM55WR71E476MH01#
			68µF	±20%	KCM55WR71E686MH01#






By bonding metal terminals to the external electrodes of the chip, the problem of how to design a capacitor to enable it to be mounted on a large MLCC has been solved!

Features

Bond the metal terminals to the external electrodes of the chip.

The stress on the chip is reduced due to the elastic behavior of the metal terminals.

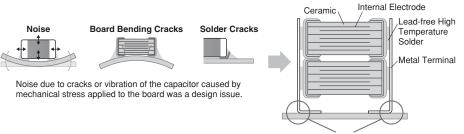


Stress is reduced due to the elastic behavior of the metal terminals!

Noise, board deflection cracks, and solder cracks are greatly reduced.

No breakage occurs even when the board deflection is 6mm. Solder cracks were not found even after 2000 heat stress cycles.

With Metal Terminals




Chip Capacitor

Evaluation Items: 2220 size/DC630V/220nF Test Conditions: 50V, AC10Vp-p/3kHz Sample Board: Glass-epoxy Board (T: 1.6mm) Number of samples: 3 Distance between microphone and board: 3mm

Note: Results obtained using Murata's evaluation board

Stress caused by board deflection is reduced.




Solder cracks due to heat stress are reduced.

Chip Size	Individual Chip (2220 size)	Metal Terminal (2220 size)	
1000 cycles	∬Solder cracks		
2000 cycles	ÎSolder cracks		

Test Conditions: -55 to +125°C, 5 minutes (liquid phase) Board used: Glass-epoxy Board (FR-4)

Uses material of low dielectric constant.

Compared to a conventional capacitor (X7R characteristics), this series has higher effective capacitance and better anti-ripple performance.




4 Chip Stacking

A large capacitance can be realized by stacking two capacitors on top of each other.

Specifications

Size	6.1×5.3mm
Rated Voltage	250Vdc to 630Vdc
Capacitance	0.1μF to 2.2μF
Main Applications	For drive control of engine ECU, etc. For other drive system control and safety equipment



KC3 Series High Dielectric Constant Type (25) (Alls) (25) Part Number List

■ 6.1×5.3mm

T max.	Rated Voltage	TC Code	Сар.	Tol.	Part Number
3.0mm	630Vdc	X7T	0.10µF	±10%	KC355LD72J104KH01#
			0.15µF	±10%	KC355LD72J154KH01#
	450Vdc	X7T	0.22µF	±10%	KC355LD72W224KH01#
			0.33µF	±10%	KC355LD72W334KH01#
			0.47µF	±10%	KC355LD72W474KH01#
	250Vdc	X7T	0.47µF	±10%	KC355LD72E474KH01#
			0.68µF	±10%	KC355LD72E684KH01#
3.9mm	630Vdc	X7T	0.22µF	±10%	KC355QD72J224KH01#
			0.27µF	±10%	KC355QD72J274KH01#
	450Vdc	X7T	0.56µF	±10%	KC355QD72W564KH01#
	250Vdc	X7T	1.0µF	±10%	KC355QD72E105KH01#
5.0mm	450Vdc	X7T	0.68µF	±20%	KC355TD72W684MH01#
			1.0µF	±20%	KC355TD72W105MH01#
	250Vdc	X7T	1.5µF	±20%	KC355TD72E155MH01#
6.7mm	630Vdc	X7T	0.47µF	±20%	KC355WD72J474MH01#
			0.56µF	±20%	KC355WD72J564MH01#
	450Vdc	X7T	1.2µF	±20%	KC355WD72W125MH01#
	250Vdc	X7T	2.2µF	±20%	KC355WD72E225MH01#



For Automotive

⚠ Caution/Notice

⚠Caution

Storage and Operation Conditions 47	7
Rating47	7
1. Temperature Dependent Characteristics 47	7
2. Measurement of Capacitance 47	7
3. Applied Voltage ····· 48	3
4. Type of Applied Voltage and Self-heating Temperature 48	3
5. DC Voltage and AC Voltage Characteristics 50)
6. Capacitance Aging ······ 50)
7. Vibration and Shock ······51	1
Soldering and Mounting51	1
1. Mounting Position51	1
2. Information before Mounting52	2
Maintenance of the Mounting (pick and place) Machine	2
4-1. Reflow Soldering53	3
4-2. Flow Soldering 5-2	1
4-3. Correction of Soldered Portion 55	5
5. Washing 56	3
6. Electrical Test on Printed Circuit Board 56	3
7. Printed Circuit Board Cropping56	3
8. Assembly)
Selection of Conductive Adhesive, Mounting Process, and Bonding Strength60)
10. Moisture Proof Process60)
11. Application 60)
Other60)
1. Under Operation of Equipment 60)

2. Other------60

Notice

■ Rating ······61
1. Operating Temperature61
2. Atmosphere Surroundings61
3. Piezo-electric Phenomenon61
■ Soldering and Mounting ······61
1. PCB Design61
1. Notice for Pattern Forms ······61
2. Land Dimensions 62
3. Board Design63
2. Adhesive Application63
3. Adhesive Curing63
4. Flux for Reflow and Flow Soldering64
5. Flow Soldering64
6. Washing64
7. Coating 64
■ Other65
1. Transportation65
Characteristics Evaluation in the Actual System65

GCM Series

■ Storage and Operation Conditions

- 1. The performance of chip monolithic ceramic capacitors may be affected by the storage conditions.
 - 1-1. Store the capacitors in the following conditions: Room Temperature of +5°C to +40°C and a Relative Humidity of 20% to 70%.
 - (1) Sunlight, dust, rapid temperature changes, corrosive gas atmosphere, or high temperature and humidity conditions during storage may affect solderability and packaging performance. Therefore, please maintain the storage temperature and humidity. Use the product within six months, as prolonged storage may cause oxidation of the electrodes.
 - (2) Please confirm solderability before using after six months. Store the capacitors without opening the original bag. Even if the storage period is short, do not exceed the specified atmospheric conditions.


- 1-2. Corrosive gas can react with the termination (external) electrodes or lead wires of capacitors, and result in poor solderability. Do not store the capacitors in an atmosphere consisting of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas, etc.).
- 1-3. Due to moisture condensation caused by rapid humidity changes, or the photochemical change caused by direct sunlight on the terminal electrodes and/or the resin/epoxy coatings, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or in high humidity conditions.
- <Applicable to GCG Series>
- 1-4. After unpacking, immediately reseal, or store in a desiccator containing a desiccant.

Rating


1. Temperature Dependent Characteristics

- 1. The electrical characteristics of a capacitor can change with temperature.
 - 1-1. For capacitors having larger temperature dependency, the capacitance may change with temperature changes.
 - The following actions are recommended in order to ensure suitable capacitance values.
 - (1) Select a suitable capacitance for the operating temperature range.
 - (2) The capacitance may change within the rated temperature.

When you use a high dielectric constant type capacitor in a circuit that needs a tight (narrow) capacitance tolerance (e.g., a time-constant circuit), please carefully consider the temperature characteristics, and carefully confirm the various characteristics in actual use conditions and the actual system.



- 1. Measure capacitance with the voltage and frequency specified in the product specifications.
 - 1-1. The output voltage of the measuring equipment may decrease occasionally when capacitance is high. Please confirm whether a prescribed measured voltage is impressed to the capacitor.
 - 1-2. The capacitance values of high dielectric constant type capacitors change depending on the AC voltage applied. Please consider the AC voltage characteristics when selecting a capacitor to be used in an AC circuit.

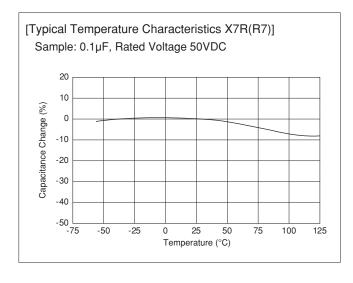

Continued on the following page.





Continued from the preceding page.

3. Applied Voltage

- 1. Do not apply a voltage to the capacitor that exceeds the rated voltage as called out in the specifications.
 - 1-1. Applied voltage between the terminals of a capacitor shall be less than or equal to the rated voltage.
 - (1) When AC voltage is superimposed on DC voltage. the zero-to-peak voltage shall not exceed the rated DC voltage.
 - When AC voltage or pulse voltage is applied, the peak-to-peak voltage shall not exceed the rated DC voltage.
 - (2) Abnormal voltages (surge voltage, static electricity, pulse voltage, etc.) shall not exceed the rated DC voltage.

Typical Voltage Applied to the DC Capacitor

DC Voltage	DC Voltage+AC	AC Voltage	Pulse Voltage
E	E O	0	E

(E: Maximum possible applied voltage.)

1-2. Influence of over voltage

Over voltage that is applied to the capacitor may result in an electrical short circuit caused by the breakdown of the internal dielectric layers.

The time duration until breakdown depends on the applied voltage and the ambient temperature.

2. Use a safety standard certified capacitor in a power supply input circuit (AC filter), as it is also necessary to consider the withstand voltage and impulse withstand voltage defined for each device.

4. Type of Applied Voltage and Self-heating Temperature


1. Confirm the operating conditions to make sure that no large current is flowing into the capacitor due to the continuous application of an AC voltage or pulse voltage.

When a DC rated voltage product is used in an AC voltage circuit or a pulse voltage circuit, the AC current or pulse current will flow into the capacitor; therefore check the self-heating condition.

Please confirm the surface temperature of the capacitor so that the temperature remains within the upper limits of the operating temperature, including the rise in temperature due to self-heating. When the capacitor is used with a high-frequency voltage or pulse voltage, heat may be generated by dielectric loss.

<Applicable to Rated Voltage of less than 100VDC>

1-1. The load should be contained to the level such that when measuring at atmospheric temperature of 25°C, the product's self-heating remains below 20°C and the surface temperature of the capacitor in the actual circuit remains within the maximum operating temperature.

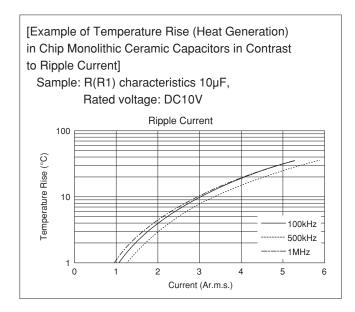


<Applicable to Temperature Characteristics X7R(R7),</p> X7T(D7) beyond Rated Voltage of 250VDC>

1-2. The load should be contained so that the self-heating of the capacitor body remains below 20°C, when measuring at an ambient temperature of 25°C. In addition, use a K thermocouple of Ø0.1mm with less heat capacity when measuring, and measure in a condition where there is no effect from the radiant heat of other components or air flow caused by convection. Excessive generation of heat may cause deterioration of the characteristics and reliability of the capacitor. (Absolutely do not perform measurements while the cooling fan is operating, as an accurate measurement may not be performed.)

< Applicable to Temperature Characteristics U2J(7U) beyond Rated Voltage of 250VDC>

1-3. Since the self-heating is low in the low loss series, the allowable power becomes extremely high compared to the common X7R(R7) characteristics. However, when a load with self-heating of 20°C is applied at the rated voltage, the allowable power may be exceeded. When the capacitor is used in a high-frequency voltage circuit of 1kHz or more, the frequency of the applied voltage should be less than 500kHz sine wave (less than 100kHz for a product with rated voltage of DC3.15kV), to limit the voltage load so that the load remains within the derating shown in the following figure. In the case of non-sine wave, high-frequency components exceeding the fundamental frequency may be included. In such a case, please contact Murata. The excessive generation of heat may cause deterioration of the characteristics and reliability of the capacitor.

(Absolutely do not perform measurements while the cooling fan is operating, as an accurate measurement may not be performed.)

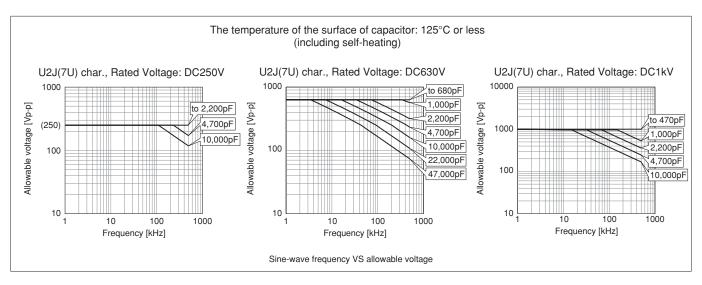

<Design Tool>

Simsurfina Simsurfing is a web application to display the characteristics charts and download the characteristics data of our products. The frequency characteristics, temperature characteristics, bias characteristics etc. can be checked.

(Address: http://www.murata.com/simsurfing/)

Medium Voltage Ceramic Capacitor Selection Tool The selection tool "Murata Medium Voltage Capacitors Selection Tool by Voltage Form" is installed in the above SimSurfing, where the usability of the preferred medium voltage ceramic capacitors can be determined according to the application including automobiles.

By using this tool, the preferred products* can be checked by specifications, such as the power, voltage, and fundamental frequency of the voltage waveform to be input into the capacitor.

*Supported Series

Temperature characteristics U2J(7U) of GCM/DC250V or more

Continued on the following page.



49

GCD Series

GCE Series

GCG Series

GCJ Series

KCM Series

KC3 Series


Continued from the preceding page.


5. DC Voltage and AC Voltage Characteristics

- 1. The capacitance value of a high dielectric constant type capacitor changes depending on the DC voltage applied. Please consider the DC voltage characteristics when a capacitor is selected for use in a DC circuit.
 - 1-1. The capacitance of ceramic capacitors may change sharply depending on the applied voltage (see

Please confirm the following in order to secure the capacitance.

- (1) Determine whether the capacitance change caused by the applied voltage is within the allowed range.
- (2) In the DC voltage characteristics, the rate of capacitance change becomes larger as voltage increases, even if the applied voltage is below the rated voltage. When a high dielectric constant type capacitor is used in a circuit that requires a tight (narrow) capacitance tolerance (e.g., a time constant circuit), please carefully consider the voltage characteristics, and confirm the various characteristics in actual operating conditions in an actual system.
- 2. The capacitance values of high dielectric constant type capacitors changes depending on the AC voltage applied. Please consider the AC voltage characteristics when selecting a capacitor to be used in an AC circuit.

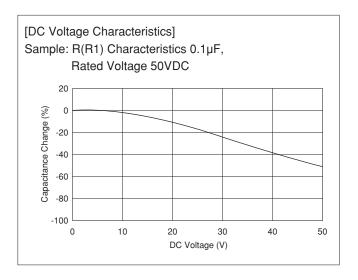


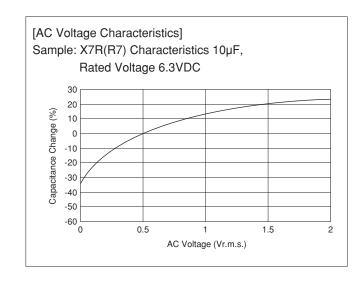

6. Capacitance Aging

1. The high dielectric constant type capacitors have the Characteristics in which the capacitance value decreases with the passage of time.

When you use high dielectric constant type capacitors in a circuit that needs a tight (narrow) capacitance tolerance (e.g., a time-constant circuit), please carefully consider the characteristics of these capacitors, such as their aging, voltage, and temperature characteristics. In addition, check capacitors using your actual appliances at the intended environment and operating conditions.



Continued on the following page.





7. Vibration and Shock

- 1. Please confirm the kind of vibration and/or shock, its condition, and any generation of resonance. Please mount the capacitor so as not to generate resonance, and do not allow any impact on the terminals.
- 2. Mechanical shock due to being dropped may cause damage or a crack in the dielectric material of the capacitor.

Do not use a dropped capacitor because the quality and reliability may be deteriorated.

3. When printed circuit boards are piled up or handled, the corner of another printed circuit board should not be allowed to hit the capacitor, in order to avoid a crack or other damage to the capacitor.







■ Soldering and Mounting

1. Mounting Position

- 1. Confirm the best mounting position and direction that minimizes the stress imposed on the capacitor during flexing or bending the printed circuit board.
 - 1-1. Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.






Locate chip horizontal to the direction in which stress

[Chip Mounting Close to Board Separation Point]

It is effective to implement the following measures, to reduce stress in separating the board.


It is best to implement all of the following three measures; however, implement as many measures as possible to reduce stress.

Contents of Measures	Stress Level
(1) Turn the mounting direction of the component parallel to the board separation surface.	A > D
(2) Add slits in the board separation part.	A > B
(3) Keep the mounting position of the component away from the board separation surface.	A > C



[Mounting Capacitors Near Screw Holes]

When a capacitor is mounted near a screw hole, it may be affected by the board deflection that occurs during the tightening of the screw. Mount the capacitor in a position as far away from the screw holes as possible.



GCM Series

GCM Series


Continued from the preceding page.

2. Information before Mounting

- 1. Do not re-use capacitors that were removed from the equipment.
- 2. Confirm capacitance characteristics under actual applied voltage.
- 3. Confirm the mechanical stress under actual process and equipment use.
- 4. Confirm the rated capacitance, rated voltage and other electrical characteristics before assembly.
- 5. Prior to use, confirm the solderability of capacitors that were in long-term storage.
- 6. Prior to measuring capacitance, carry out a heat treatment for capacitors that were in long-term storage.
- 7. The use of Sn-Zn based solder will deteriorate the reliability of the MLCC.
 - Please contact our sales representative or product engineers on the use of Sn-Zn based solder in advance.
- 8. We have also produced a DVD which shows a summary of our opinions, regarding the precautions for mounting. Please contact our sales representative to request the DVD.

3. Maintenance of the Mounting (pick and place) Machine

- 1. Make sure that the following excessive forces are not applied to the capacitors.
 - 1-1. In mounting the capacitors on the printed circuit board, any bending force against them shall be kept to a minimum to prevent them from any bending damage or cracking. Please take into account the following precautions and recommendations for use in your process.
 - (1) Adjust the lowest position of the pickup nozzle so as not to bend the printed circuit board.
 - (2) Adjust the nozzle pressure within a static load of 1N to 3N during mounting.
- 2. Dirt particles and dust accumulated between the suction nozzle and the cylinder inner wall prevent the nozzle from moving smoothly. This imposes greater force upon the chip during mounting, causing cracked chips. Also, the locating claw, when worn out, imposes uneven forces on the chip when positioning, causing cracked chips. The suction nozzle and the locating claw must be maintained, checked, and replaced periodically.

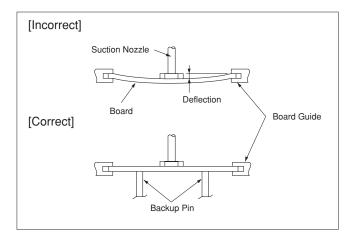

Continued on the following page.





4-1. Reflow Soldering

- 1. When sudden heat is applied to the components, the mechanical strength of the components will decrease because a sudden temperature change causes deformation inside the components. In order to prevent mechanical damage to the components, preheating is required for both the components and the PCB. Preheating conditions are shown in table 1. It is required to keep the temperature differential between the solder and the components surface (ΔT) as small as possible.
- 2. Solderability of tin plating termination chips might be deteriorated when a low temperature soldering profile where the peak solder temperature is below the melting point of tin is used. Please confirm the solderability of tin plated termination chips before use.
- 3. When components are immersed in solvent after mounting, be sure to maintain the temperature difference (ΔT) between the component and the solvent within the range shown in table 1.

Table 1

Part Number	Temperature Differential	
GC3/GCD/GCE/GCJ/GCM Series 03/15/18/21/31 sizes	ΔT≦190°C	
GCJ/GCM Series 32/43/55 sizes	ΛΤ≤130°C	
KC3/KCM Series 55 size	Δ1≥130°C	

Recommended Conditions

	Pb-Si	Lead Free Solder	
	Reflow Vapor Reflow		
Peak Temperature	230 to 250°C	230 to 240°C	240 to 260°C
Atmosphere	Air	Saturated vapor of inactive solvent	Air or N2

Pb-Sn Solder: Sn-37Pb Lead Free Solder: Sn-3.0Ag-0.5Cu

4. Optimum Solder Amount for Reflow Soldering

4-1. Overly thick application of solder paste results in a excessive solder fillet height.


This makes the chip more susceptible to mechanical and thermal stress on the board and may cause the chips to crack.

- 4-2. Too little solder paste results in a lack of adhesive strength on the outer electrode, which may result in chips breaking loose from the PCB.
- 4-3. Make sure the solder has been applied smoothly to the end surface to a height of 0.2mm* min.


Inverting the PCB

Make sure not to impose any abnormal mechanical shocks to the PCB.


[Standard Conditions for Reflow Soldering]




Temperature Incase of Lead Free Solder (): In case of Pb-Sn Solder



[Allowable Reflow Soldering Temperature and Time]



In the case of repeated soldering, the accumulated soldering time must be within the range shown above.

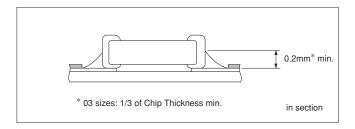



Continued from the preceding page.

4-2. Flow Soldering

1. Do not apply flow soldering to chips not listed in table 2.

Table 2

Part Number	Temperature Differential
GC3/GCD/GCM Series 18/21/31 sizes (Except for characteristics of X8L(L8), X8G(5G))	ΔΤ≦150°C
GCJ Series Rated Voltage 250VDC or more 18/21/31 sizes	


- 2. When sudden heat is applied to the components, the mechanical strength of the components will decrease because a sudden temperature change causes deformation inside the components. In order to prevent mechanical damage to the components, preheating is required for both of the components and the PCB. Preheating conditions are shown in table 2. It is required to keep the temperature differential between the solder and the components surface (ΔT) as low as possible.
- 3. Excessively long soldering time or high soldering temperature can result in leaching of the outer electrodes, causing poor adhesion or a reduction in capacitance value due to loss of contact between the electrodes and end termination.
- 4. When components are immersed in solvent after mounting, be sure to maintain the temperature differential (ΔT) between the component and solvent within the range shown in the table 2.


Recommended Conditions

	Pb-Sn Solder	Lead Free Solder
Preheating Peak Temperature	90 to 110°C	100 to 120°C
Soldering Peak Temperature	240 to 250°C	250 to 260°C
Atmosphere	Air	Air

Pb-Sn Solder: Sn-37Pb Lead Free Solder: Sn-3.0Ag-0.5Cu

- 5. Optimum Solder Amount for Flow Soldering
 - 5-1. The top of the solder fillet should be lower than the thickness of the components. If the solder amount is excessive, the risk of cracking is higher during board bending or any other stressful condition.

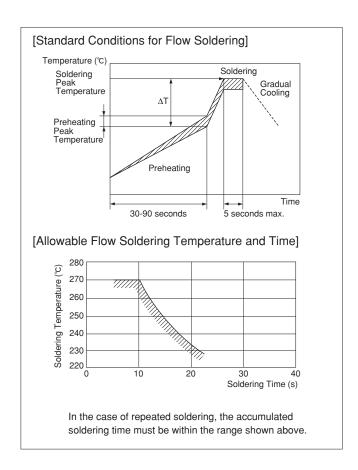



Continued on the following page.



Continued from the preceding page.

4-3. Correction of Soldered Portion

When sudden heat is applied to the capacitor, distortion caused by the large temperature difference occurs internally, and can be the cause of cracks. Capacitors also tend to be affected by mechanical and thermal stress depending on the board preheating temperature or the soldering fillet shape, and can be the cause of cracks. Please refer to "1. PCB Design" or "3. Optimum solder amount" for the solder amount and the fillet shapes.

- 1. Correction with a Soldering Iron
 - 1-1. In order to reduce damage to the capacitor, be sure to preheat the capacitor and the mounting board. Preheat to the temperature range shown in Table 3. A hot plate, hot air type preheater, etc. can be used for preheating.
 - 1-2. After soldering, do not allow the component/PCB to cool down rapidly.
 - 1-3. Perform the corrections with a soldering iron as quickly as possible. If the soldering iron is applied too long, there is a possibility of causing solder leaching on the terminal electrodes, which will cause deterioration of the adhesive strength and other problems.
- 2. Correction with Spot Heater

Compared to local heating with a soldering iron, hot air heating by a spot heater heats the overall component and board, therefore, it tends to lessen the thermal shock. In the case of a high density mounted board, a spot heater can also prevent concerns of the soldering iron making direct contact with the component.

2-1. If the distance from the hot air outlet of the spot heater to the component is too close, cracks may occur due to thermal shock. To prevent this problem, follow the conditions shown in Table 4.

2-2. In order to create an appropriate solder fillet shape, it is recommended that hot air be applied at the angle shown in Figure 1.

3. Optimum solder amount when re-working with a soldering iron

3-1. In the case of sizes smaller than 0603, (GC3/GCD/GCE/ GCJ/GCM Series, 03/15/18 sizes), the top of the solder fillet should be lower than 2/3 of the thickness of the component or 0.5mm, whichever is smaller. In the case of 0805 and larger sizes, (GC3/GCD/GCE/GCJ/GCM Series, 21/31/32/43/55 sizes), the top of the solder fillet should be lower than 2/3 of the thickness of the component. If the solder amount is excessive, the risk of cracking is higher during board bending or under any other stressful condition.

Table 3

Part Number	Temperature of Soldering Iron Tip	Preheating Temperature	Temperature Differential (∆T)	Atmosphere	
GC3/GCD/GCE/ GCJ/GCM Series 03/15/18/21/31 sizes	350°C max.	150°C min.	ΔT≦190°C	Air	
GCJ/GCM Series 32/43/55 sizes	280°C max.	150°C min.	ΔΤ≦130°C	Air	


*Applicable for both Pb-Sn and Lead Free Solder.


Pb-Sn Solder: Sn-37Pb

Lead Free Solder: Sn-3.0Ag-0.5Cu

Table 4

Distance	5mm or more
Hot Air Application Angle	45° *Figure 1
Hot Air Temperature Nozzle Outlet	400°C max.
	Less than 10 seconds (1206 (3216 in mm) size or smaller)
Application Time	Less than 30 seconds (1210 (3225 in mm) size or larger)

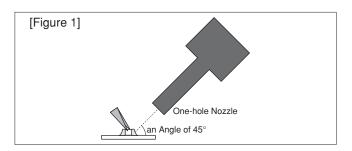





GCJ Series

⚠Caution

- Continued from the preceding page.
 - 3-2. A soldering iron with a tip of ø3mm or smaller should be used. It is also necessary to keep the soldering iron from touching the components during the re-work.
 - 3-3. Solder wire with Ø0.5mm or smaller is required for soldering.
- <Applicable to KC3/KCM Series>
- 4. For the shape of the soldering iron tip, refer to the figure on the right.

Regarding the type of solder, use a wire diameter of \emptyset 0.5mm or less (rosin core wire solder).

- 4-1. How to Apply the Soldering Iron
 Apply the tip of the soldering iron against the lower
 end of the metal terminal.
 - In order to prevent cracking caused by sudden heating of the ceramic device, do not touch the ceramic base directly.
 - 2) In order to prevent deviations and dislocating of the chip, do not touch the junction of the chip and the metal terminal, and the metal portion on the outside directly.
- 4-2. Appropriate Amount of Solder

 The amount of solder for corrections by soldering iron, should be lower than the height of the lower side of the chip.

Tip of Soldering Iron Tip temperature: 350°C or less/ 5 sec. or less/60W or less Copper Land Apply the tip of the soldering iron only on the terminal portion, without touching the body of the chip. Cross Section

5. Washing

Excessive ultrasonic oscillation during cleaning can cause the PCBs to resonate, resulting in cracked chips or broken solder joints. Take note not to vibrate PCBs.

6. Electrical Test on Printed Circuit Board


- 1. Confirm position of the backup pin or specific jig, when inspecting the electrical performance of a capacitor after mounting on the printed circuit board.
 - 1-1. Avoid bending the printed circuit board by the pressure of a test-probe, etc.


The thrusting force of the test probe can flex the PCB, resulting in cracked chips or open solder joints. Provide backup pins on the back side of the PCB to prevent warping or flexing. Install backup pins as close to the test-probe as possible.

1-2. Avoid vibration of the board by shock when a test-probe contacts a printed circuit board.

7. Printed Circuit Board Cropping

- After mounting a capacitor on a printed circuit board, do not apply any stress to the capacitor that causes bending or twisting the board.
 - 1-1. In cropping the board, the stress as shown at right may cause the capacitor to crack.Avoid this type of stress to a capacitor.

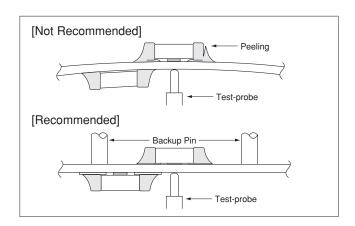



GCE Series

- Continued from the preceding page.
- 2. Check the cropping method for the printed circuit board in advance.
 - 2-1. Printed circuit board cropping shall be carried out by using a jig or an apparatus (Disk separator, router type separator, etc.) to prevent the mechanical stress that can occur to the board.


Board Separation Method	Hand Separation	(1) Board Concretion lie	Board Separation Apparatus		
board Separation Method	Nipper Separation	(1) Board Separation Jig	(2) Disk Separator	(3) Router Type Separator	
Level of stress on board	High	Medium	Medium	Low	
Recommended	×	△*	△*	0	
			· Board handling		
	Hand and nipper	· Board handling	· Layout of slits		
Notes	separation apply a high level of stress.	· Board bending direction	· Design of V groove	Board handling	
	Use another method.	· Layout of capacitors	· Arrangement of blades		
			· Controlling blade life		

^{*} When a board separation jig or disk separator is used, if the following precautions are not observed, a large board deflection stress will occur and the capacitors may crack. Use router type separator if at all possible

(1) Example of a suitable jig

[In the case of Single-side Mounting]

An outline of the board separation jig is shown as follows. Recommended example: Stress on the component mounting position can be minimized by holding the portion close to the jig, and bend in the direction towards the side where the capacitors are mounted. Not recommended example: The risk of cracks occurring in the capacitors increases due to large stress being applied to the component mounting position, if the portion away from the jig is held and bent in the direction opposite the side where the capacitors are mounted.

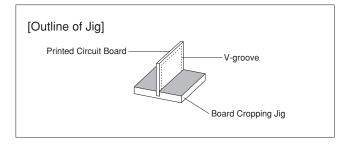

Recommended	Not Recommended
Printed Circuit Board — Components Load Point	Load Point Direction of Load Printed Circuit Board Components

[In the case of Double-sided Mounting]

Since components are mounted on both sides of the board, the risk of cracks occurring can not be avoided with the above method.

Therefore, implement the following measures to prevent stress from being applied to the components. (Measures)

- (1) Consider introducing a router type separator. If it is difficult to introduce a router type separator, implement the following measures. (Refer to item 1. Mounting Position)
- (2) Mount the components parallel to the board separation surface.
- (3) When mounting components near the board separation point, add slits in the separation position near the component.
- (4) Keep the mounting position of the components away from the board separation point.

Continued from the preceding page.


(2) Example of a Disk Separator

An outline of a disk separator is shown as follows. As shown in the Principle of Operation, the top blade and bottom blade are aligned with the V-grooves on the printed circuit board to separate the board.

In the following case, board deflection stress will be applied and cause cracks in the capacitors.

- (1) When the adjustment of the top and bottom blades are misaligned, such as deviating in the top-bottom, left-right or front-rear directions
- (2) The angle of the V groove is too low, depth of the V groove is too shallow, or the V groove is misaligned top-bottom

IF V groove is too deep, it is possible to brake when you handle and carry it. Carefully design depth of the V groove with consideration about strength of material of the printed circuit board.

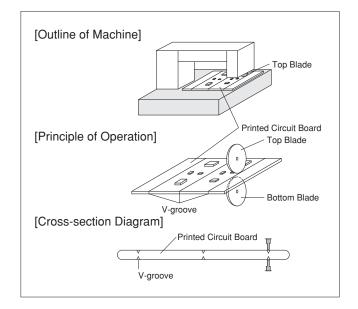


Recommended Top-bottom Misaligr		Not Recommended					
		lisalignment	Left-right Misalignment		Front-rear Misalignment		
	Top Blade		Top Blade		Top Blade		Top Blade
	Bottom Blade		Bottom Blade		Bottom Blade		Bottom Blade

Example of Recommended	Not Recommended				
V-groove Design	Left-right Misalignment	Low-Angle	Depth too Shallow	Depth too Deep	

(3) Example of Router Type Separator

The router type separator performs cutting by a router rotating at a high speed. Since the board does not bend in the cutting process, stress on the board can be suppressed during board separation.

When attaching or removing boards to/from the router type separator, carefully handle the boards to prevent bending.

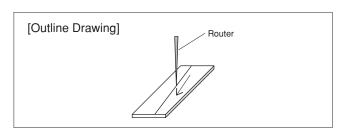

Continued on the following page.







Continued from the preceding page.

8. Assembly

Handling

If a board mounted with capacitors is held with one hand, the board may bend. Firmly hold the edges of the board with both hands when handling.

If a board mounted with capacitors is dropped, cracks may occur in the capacitors.

Do not use dropped boards, as there is a possibility that the quality of the capacitors may be impaired.

2. Attachment of Other Components

2-1. Mounting of Other Components

Pay attention to the following items, when mounting other components on the back side of the board after capacitors have been mounted on the opposite side. When the bottom dead point of the suction nozzle is set too low, board deflection stress may be applied to the capacitors on the back side (bottom side), and cracks may occur in the capacitors.

- · After the board is straightened, set the bottom dead point of the nozzle on the upper surface of the board.
- · Periodically check and adjust the bottom dead point.
- 2-2. Inserting Components with Leads into Boards When inserting components (transformers, IC, etc.) into boards, bending the board may cause cracks in the capacitors or cracks in the solder.

Pay attention to the following.

- · Increase the size of the holes to insert the leads, to reduce the stress on the board during insertion.
- · Fix the board with backup pins or a dedicated jig before insertion.
- · Support below the board so that the board does not bend. When using multiple backup pins on the board, periodically confirm that there is no difference in the height of each backup pin.

2-3. Attaching/Removing Sockets


When the board itself is a connector, the board may bend when a socket is attached or removed. Plan the work so that the board does not bend when a socket is attached or removed.


2-4. Tightening Screws


The board may be bent, when tightening screws, etc. during the attachment of the board to a shield or chassis.


Pay attention to the following items before performing

- · Plan the work to prevent the board from bending.
- · Use a torque screwdriver, to prevent over-tightening of the screws.
- · The board may bend after mounting by reflow soldering, etc. Please note, as stress may be applied to the chips by forcibly flattening the board when tightening the screws.

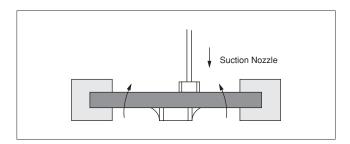





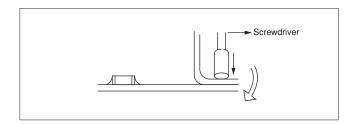





1 Caution

Ontinued from the preceding page.

<Applicable to GCG Series>

Selection of Conductive Adhesive, Mounting Process, and Bonding Strength

The acquired bonding strength may change greatly depending on the conductive adhesive to be used. Be sure to confirm if the desired performance can be acquired in the assumed mounting process with the conductive adhesive to be used.

10. Moisture Proof Process

In order to prevent the occurrence of migration, perform a moisture proof process, such as applying a resin coating or enclosing with a dry inert gas.

11. Application

This product is for conductive adhesive mounting. When performing solder mounting, contact Murata in advance.

Other

1. Under Operation of Equipment

- 1-1. Do not touch a capacitor directly with bare hands during operation in order to avoid the danger of an electric shock.
- 1-2. Do not allow the terminals of a capacitor to come in contact with any conductive objects (short-circuit). Do not expose a capacitor to a conductive liquid, including any acid or alkali solutions.
- 1-3. Confirm the environment in which the equipment will operate is under the specified conditions. Do not use the equipment under the following environments.
 - (1) Being spattered with water or oil.
 - (2) Being exposed to direct sunlight.
 - (3) Being exposed to ozone, ultraviolet rays, or radiation.
 - (4) Being exposed to toxic gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas, etc.)
 - (5) Any vibrations or mechanical shocks exceeding the specified limits.
 - (6) Moisture condensing environments.
- 1-4. Use damp proof countermeasures if using under any conditions that can cause condensation.

2. Other

2-1. In an Emergency

- (1) If the equipment should generate smoke, fire, or smell, immediately turn off or unplug the equipment. If the equipment is not turned off or unplugged, the hazards may be worsened by supplying continuous power.
- (2) In this type of situation, do not allow face and hands to come in contact with the capacitor or burns may be caused by the capacitor's high temperature.

2-2. Disposal of Waste

When capacitors are disposed of, they must be burned or buried by an industrial waste vendor with the appropriate licenses.

2-3. Circuit Design

- (1) Addition of Fail Safe Function Capacitors that are cracked by dropping or bending of the board may cause deterioration of the insulation resistance, and result in a short. If the circuit being used may cause an electrical shock, smoke or fire when a capacitor is shorted, be sure to install fail-safe functions, such as a fuse, to prevent secondary accidents.
- (2) Capacitors used to prevent electromagnetic interference in the primary AC side circuit, or as a connection/insulation, must be a safety standard certified product, or satisfy the contents stipulated in the Electrical Appliance and Material Safety Law. Install a fuse for each line in case of a short.
- (3) The GC3, GCD, GCE, GCG, GCJ, GCM, KC3, and KCM series are not safety standard certified products.

2-4. Remarks

Failure to follow the cautions may result, worst case, in a short circuit and smoking when the product is used.

The above notices are for standard applications and conditions. Contact us when the products are used in special mounting conditions.

Select optimum conditions for operation as they determine the reliability of the product after assembly. The data herein are given in typical values, not guaranteed ratings.



Rating

1. Operating Temperature

- 1. The operating temperature limit depends on the capacitor.
 - 1-1. Do not apply temperatures exceeding the upper operating temperature.
 - It is necessary to select a capacitor with a suitable rated temperature that will cover the operating temperature range.
 - It is also necessary to consider the temperature distribution in equipment and the seasonal temperature variable factor.
 - 1-2. Consider the self-heating factor of the capacitor. The surface temperature of the capacitor shall be the upper operating temperature or less when including the self-heating factors.

2. Atmosphere Surroundings (gaseous and liquid)

- 1. Restriction on the operating environment of capacitors.
 - 1-1. Capacitors, when used in the above, unsuitable,

- operating environments may deteriorate due to the corrosion of the terminations and the penetration of moisture into the capacitor.
- 1-2. The same phenomenon as the above may occur when the electrodes or terminals of the capacitor are subject to moisture condensation.
- 1-3. The deterioration of characteristics and insulation resistance due to the oxidization or corrosion of terminal electrodes may result in breakdown when the capacitor is exposed to corrosive or volatile gases or solvents for long periods of time.

3. Piezo-electric Phenomenon

1. When using high dielectric constant type capacitors in AC or pulse circuits, the capacitor itself vibrates at specific frequencies and noise may be generated. Moreover, when the mechanical vibration or shock is added to the capacitor, noise may occur.

■ Soldering and Mounting

1. PCB Design

- 1. Notice for Pattern Forms
 - 1-1. Unlike leaded components, chip components are susceptible to flexing stresses since they are mounted directly on the substrate.

They are also more sensitive to mechanical and thermal stresses than leaded components.

Excess solder fillet height can multiply these stresses and cause chip cracking. When designing substrates, take land patterns and dimensions into consideration to eliminate the possibility of excess solder fillet height.

1-2. There is a possibility of chip cracking caused by PCB expansion/contraction with heat, because stress on a chip is different depending on PCB material and structure. When the thermal expansion coefficient greatly differs between the board used for mounting and the chip, it will cause cracking of the chip due to the thermal expansion and contraction. When small size capacitors of 0402 size or less are mounted on a single-layered glass epoxy board, it will also cause cracking of the chip for the same reason.

Pattern Forms		
	Prohibited	Correct
Placing Close to Chassis	Chassis Solder (ground) Electrode Pattern	Solder Resist
Placing of Chip Components and Leaded Components	Lead Wire	Solder Resist
Placing of Leaded Components after Chip Component	Soldering Iron Lead Wire	Solder Resist
Lateral Mounting		Solder Resist

Continued on the following page.





Notice

Continued from the preceding page.

2. Land Dimensions

2-1. Chip capacitors can be cracked due to the stress of PCB bending, etc. if the land area is larger than needed and has an excess amount of solder. Please refer to the land dimensions in table 1 for flow soldering, table 2 for reflow soldering. Please confirm the suitable land dimension by evaluating of the actual SET / PCB.

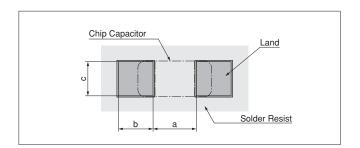


Table 1 Flow Soldering Method

Dimensions Part Number	Chip (L×W)	a	b	С
GC3/GCD/GCM/GCJ Series 18 size (Rated Voltage: above 250VDC (for GCJ alone))	1.6×0.8	0.6 to 1.0	0.8 to 0.9	0.6 to 0.8
GC3/GCD/GCM/GCJ Series 21 size (Rated Voltage: above 250VDC (for GCJ alone))	2.0×1.25	1.0 to 1.2	0.9 to 1.0	0.8 to 1.1
GC3/GCD/GCM/GCJ Series 31 size (Rated Voltage: above 250VDC (for GCJ alone))	3.2×1.6	2.2 to 2.6	1.0 to 1.1	1.0 to 1.4

Flow soldering can only be used for products with a chip size from 1.6x0.8mm to 3.2x1.6mm.

(in mm)

Table 2 Reflow Soldering Method

Dimensions Part Number	Chip (L×W)	a	b	С
GC3/GCD/GCE/GCJ/GCM Series 03 size	0.6×0.3	0.2 to 0.3	0.2 to 0.35	0.2 to 0.4
GC3/GCD/GCE/GCJ/GCM Series 15 size	1.0×0.5	0.3 to 0.5	0.35 to 0.45	0.4 to 0.6
GQM/GR3/GRJ/GRM Series 18 size	1.6×0.8	0.6 to 0.8	0.6 to 0.7	0.6 to 0.8
GC3/GCD/GCE/GCJ/GCM Series 21 size	2.0×1.25	1.0 to 1.2	0.6 to 0.7	0.8 to 1.1
GC3/GCD/GCE/GCJ/GCM Series 31 size	3.2×1.6	2.2 to 2.4	0.8 to 0.9	1.0 to 1.4
GC3/GCD/GCE/GCJ/GCM Series 32 size	3.2×2.5	2.0 to 2.4	1.0 to 1.2	1.8 to 2.3
GC3/GCD/GCE/GCJ/GCM Series 43 size	4.5×3.2	3.0 to 3.5	1.2 to 1.4	2.3 to 3.0
GC3/GCD/GCE/GCJ/GCM Series 55 size	5.7×5.0	4.0 to 4.6	1.4 to 1.6	3.5 to 4.8
				(in mm

<Applicable to Part Number KC3/KCM>

a applicable to Fair Hallisof Respired				
Dimensions Part Number	Chip (L×W)	a	b	С
KC3/KCM Series 55 size	5.7×5.0	2.6	2.7	5.6

(in mm)

<Applicable to beyond Rated Voltage of 250VDC>


2-2. Dimensions of Slit (Example)

Preparing the slit helps flux cleaning and resin coating on the back of the capacitor.

However, the length of the slit design should be as short as possible to prevent mechanical damage in the capacitor.

A longer slit design might receive more severe mechanical stress from the PCB.

Recommended slit design is shown in the Table.





Continued from the preceding page.


3. Board Design

When designing the board, keep in mind that the amount of strain which occurs will increase depending on the size and material of the board.

[Relationship with amount of strain to the board thickness, length, width, etc.]

$$\varepsilon = \frac{3PL}{2Ewh^2}$$
 Relationship between load and strain

- ε: Strain on center of board (μst)
- L: Distance between supporting points (mm)
- w: Board width (mm)
- h: Board thickness (mm)
- E: Elastic modulus of board (N/m²=Pa)
- Y: Deflection (mm)
- P: Load (N)



When the load is constant, the following relationship can be established. \cdot As the distance between the supporting points (L) increases,

- the amount of strain also increases
- →Reduce the distance between the supporting points.
- · As the elastic modulus (E) decreases, the amount of strain increases. →Increase the elastic modulus.
- · As the board width (w) decreases, the amount of strain increases.
- →Increase the width of the board.
- As the board thickness (h) decreases, the amount of strain increases. →Increase the thickness of the board

Since the board thickness is squared, the effect on the amount of strain becomes even greater.

2. Adhesive Application

- 1. Thin or insufficient adhesive can cause the chips to loosen or become disconnected during flow soldering. The amount of adhesive must be more than dimension c, shown in the drawing at right, to obtain the correct bonding strength.
 - The chip's electrode thickness and land thickness must also be taken into consideration.
- 2. Low viscosity adhesive can cause chips to slip after mounting. The adhesive must have a viscosity of 5000Pa · s (500ps) min. (at 25°C).

3. Adhesive Coverage


or rancerro corerage			
Size (L×W) (in mm)	Adhesive Coverage*		
1.6×0.8	0.05mg min.		
2.0×1.25	0.1mg min.		
3.2×1.6	0.15mg min.		

*Nominal Value

3. Adhesive Curing

1. Insufficient curing of the adhesive can cause chips to disconnect during flow soldering and causes deterioration in the insulation resistance between the outer electrodes due to moisture absorption.

Control curing temperature and time in order to prevent insufficient hardening.

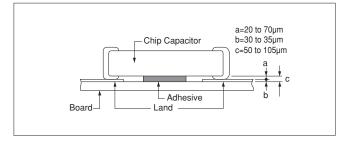





Notice


Continued from the preceding page.

4. Flux for Reflow and Flow Soldering

- 1. An excessive amount of flux generates a large quantity of flux gas, which can cause a deterioration of solder ability, so apply flux thinly and evenly throughout. (A foaming system is generally used for flow soldering.)
- 2. Flux containing too high a percentage of halide may cause corrosion of the outer electrodes unless there is sufficient cleaning. Use flux with a halide content of 0.1% max.
- 3. Do not use strong acidic flux.
- 4. Do not use water-soluble flux.* (*Water-soluble flux can be defined as non-rosin type flux including wash-type flux and non-wash-type flux.)

5. Flow Soldering

Set temperature and time to ensure that leaching of the outer electrode does not exceed 25% of the chip end area as a single chip (full length of the edge A-B-C-D shown at right) and 25% of the length A-B shown as mounted on substrate.

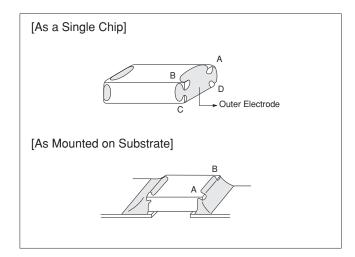

6. Washing

- 1. Please evaluate the capacitor using actual cleaning equipment and conditions to confirm the quality, and select the solvent for cleaning.
- 2. Unsuitable cleaning solvent may leave residual flux or other foreign substances, causing deterioration of electrical characteristics and the reliability of the capacitors.
- 3. Select the proper cleaning conditions.
 - 3-1. Improper cleaning conditions (excessive or insufficient) may result in deterioration of the performance of the capacitors.

7. Coating

1. A crack may be caused in the capacitor due to the stress of the thermal contraction of the resin during curing

The stress is affected by the amount of resin and curing contraction.

Select a resin with low curing contraction.

The difference in the thermal expansion coefficient between a coating resin or a molding resin and the capacitor may cause the destruction and deterioration of the capacitor such as a crack or peeling, and lead to the deterioration of insulation resistance or dielectric breakdown.

Select a resin for which the thermal expansion coefficient is as close to that of the capacitor as possible.

A silicone resin can be used as an under-coating to buffer against the stress.

2. Select a resin that is less hygroscopic.

Using hygroscopic resins under high humidity conditions may cause the deterioration of the insulation resistance of a capacitor.

An epoxy resin can be used as a less hygroscopic resin.





GCM Series

Continued from the preceding page.

Other

1. Transportation

- 1. The performance of a capacitor may be affected by the conditions during transportation.
 - 1-1. The capacitors shall be protected against excessive temperature, humidity, and mechanical force during transportation.
 - (1) Climatic condition
 - low air temperature: -40°C
 - change of temperature air/air: -25°C/+25°C
 - · low air pressure: 30 kPa
 - change of air pressure: 6 kPa/min.
 - (2) Mechanical condition

Transportation shall be done in such a way that the boxes are not deformed and forces are not directly passed on to the inner packaging.

- 1-2. Do not apply excessive vibration, shock, or pressure to the capacitor.
 - (1) When excessive mechanical shock or pressure is applied to a capacitor, chipping or cracking may occur in the ceramic body of the capacitor.
 - (2) When the sharp edge of an air driver, a soldering iron, tweezers, a chassis, etc. impacts strongly on the surface of the capacitor, the capacitor may crack and short-circuit.
- 1-3. Do not use a capacitor to which excessive shock was applied by dropping, etc. A capacitor dropped accidentally during processing may be damaged.

2. Characteristics Evaluation in the Actual System

- 1. Evaluate the capacitor in the actual system, to confirm that there is no problem with the performance and specification values in a finished product before using.
- 2. Since a voltage dependency and temperature dependency exists in the capacitance of high dielectric type ceramic capacitors, the capacitance may change depending on the operating conditions in the actual system. Therefore, be sure to evaluate the various characteristics, such as the leakage current and noise absorptivity, which will affect the capacitance value of the capacitor.
- 3. In addition, voltages exceeding the predetermined surge may be applied to the capacitor by the inductance in the actual system. Evaluate the surge resistance in the actual system as required.

Design assistant tool: SimSurfing SimSurfing

MLCC is now available!

Design assistant tool "SimSurfing" has been updated and you can now find and view any kind of characteristics of MLCCs.

Available function for MLCCs:

- 1) Products search
- ② View frequency characteristics (S parameters, Z, R, X, Q, DF, L, C) DC bias can be applied to available part number.
- ③ DC voltage bias characteristics (absolute capacitance/change rate)
- 4 Temperature characteristics (absolute capacitance/change rate)
- ⑤ AC voltage bias characteristics (absolute capacitance/change rate)
- 6 Download SPICE netlist/ S parameter




- (1) By part number
- (2) By specification

2 View characteristics

By clicking buttons in this area with part number selected, you can view any electrical characteristics chart.

3 Data download

You can download SPICE netlist and S parameter files (S2P)

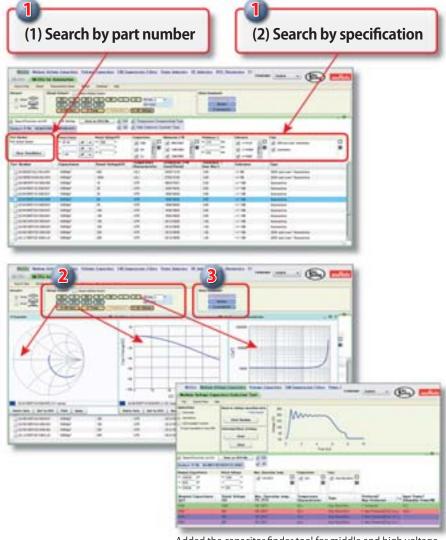

Added the capacitor finder tool for middle and high voltage capacitor which are capable for specified voltage waveform.

These images are captured at May/2013. Be sure that this software will be updated frequently.



Please check Murata's newsletter! You can learn about electric parts with fun. http://www.murata.com/products/emicon_fun/

EMICON-FUN! disseminated widely from basics (principles, characteristics, mounting, etc.) of capacitors, inductors and EMI suppression filters to information can practically be used.


Updated information is also distributed via the mail magazine.

Click here to register as reader -> http://go.murata.co.jp/Email_Newsletter_EN.html

You can register from the Products page on Murata Manufacturing website.

http://www.murata.com/products/



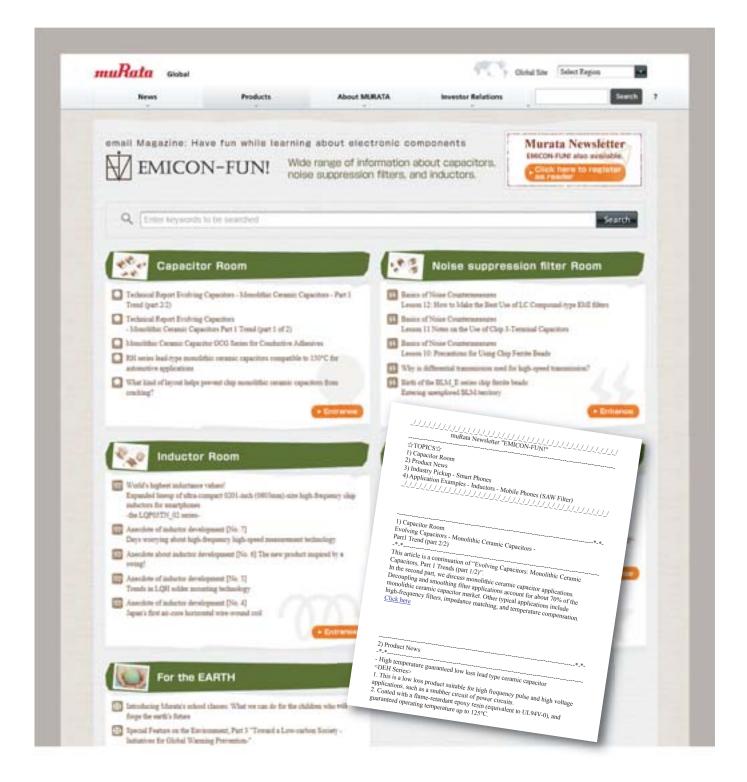

Capacitor Website Introduction

The website and search engine of ceramic capacitors has been drastically renewed.

Search capacitor murata

http://www.murata.com/products/capacitor/

Convenient Search | The type of searches has been increased to respond to various ways of searching.


The products you are searching for can easily be found from about 40,000 part numbers!

The frequency of revisions and discontinuance has been increased to provide the latest information at all times!

Substantial **Technical** Information Reference drawings (Specifications and Test Methods) can be downloaded in PDF format.

Graphs of the electrical characteristic data (Capacitance - Temperature characteristics / DC bias characteristics / AC voltage characteristics / Frequency characteristics) can be displayed.

Reliability test data can be downloaded.

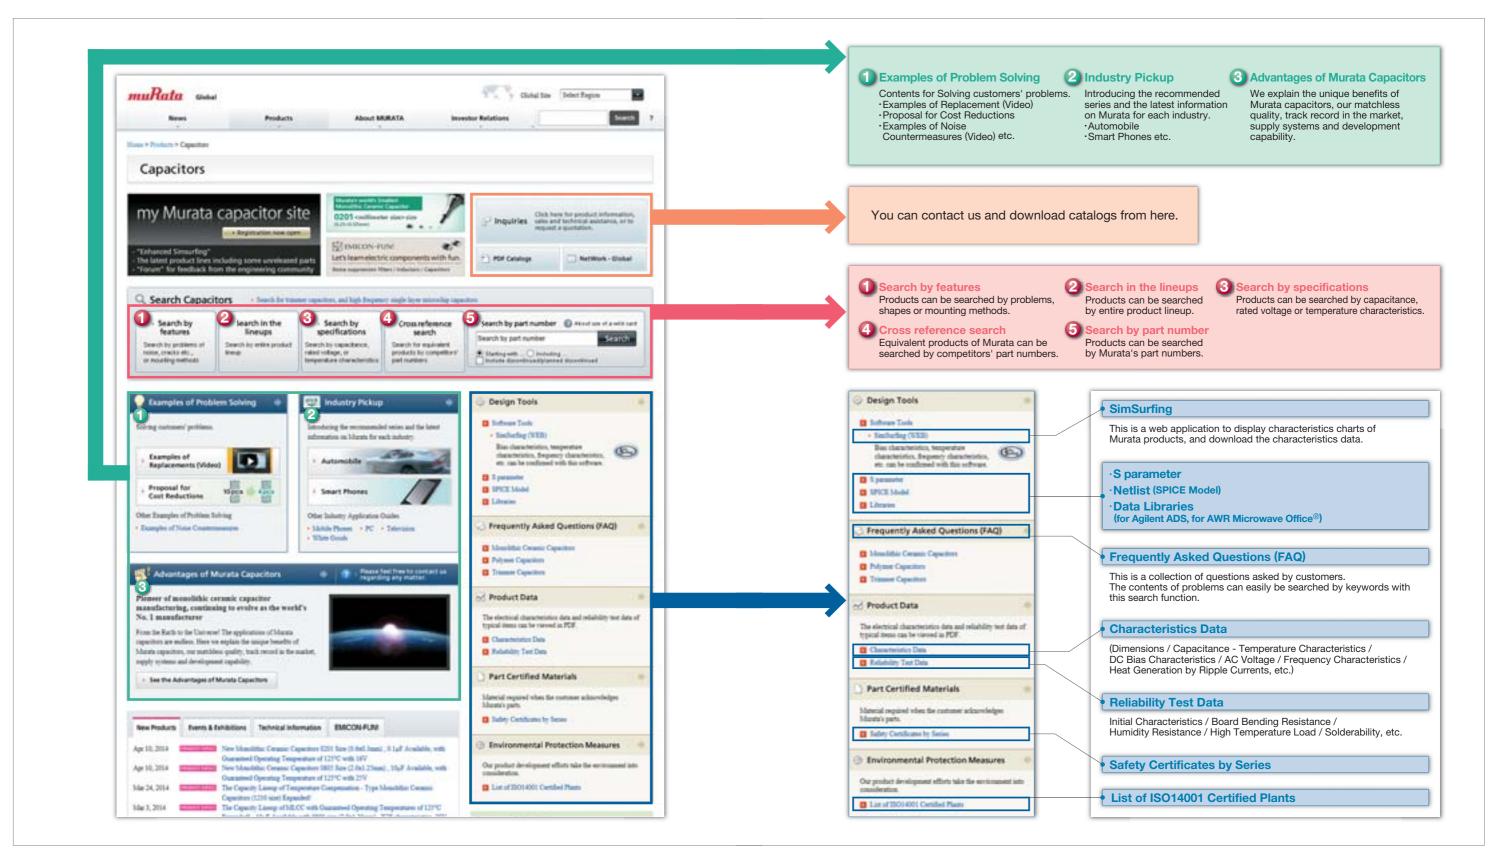

69

Global Locations

For details please visit www.murata.com



⚠Note

1 Export Control

For customers outside Japan:

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

For customers in Japan:

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

- Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.
 - Aircraft equipment
 - Aerospace equipment
 - 3 Undersea equipment
 - Power plant equipment
 - Medical equipment
 - (6) Transportation equipment (vehicles, trains, ships, etc.)
 - Traffic signal equipment
 - S Disaster prevention / crime prevention equipment
 - O Data-processing equipment
 - Application of similar complexity and/or reliability requirements to the applications listed above

- 3 Product specifications in this catalog are as of March 2014. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.
- 4 Please read rating and &CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
- 5 This catalog has only typical specifications.
 Therefore, please approve our product
 specifications or transact the approval sheet
 for product specifications before ordering.
- Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.
- 7 No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.

Murata Manufacturing Co., Ltd.

www.murata.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

GCM2195C2A120JD27J	GCM219R72A271KD46F	GCM2165C1H471JA02D	GCM1885C1H470JA16D
GCM319R72A681KD79D	GCM1885C1H101JA02D	GCM21BR71C334KC01L	GCM21BR71H104KA02K
GCM188R71C104KA13D	GCM1885C1H3R0CD43D	GCM1885C1H3R0CD27E	GCM1885C1H4R0CD27D
GCM2165C1H180JD01D	GCM2165C1H180JD14D	GCM21BR71A105KC16L	GCM21BR71A105KC02K
GCM1885C1H120JD30E	GCM188R71E273JA02D	GCM188R71E223KA02D	GCM2165C1H820JD43D
GCM219R71H123KA01D	GCM188R71C473KA02J	GCM21BR71H473KD58E	GCM2165C1H220JD43D
GCM21BR72A103KA02L	GCM21BR72A103KA01K	GCM188R71H331KD01D	GCM1885C1H180JA02D
GCM1885C1H9R1CD43D	GCM32ER71E225KA02L	GCM31MR71A225KC25L	GCM32ER71E225MA02L
GCM216R71H472KA19D	GCM216R71H472KA26D	GCM216R71H472KA01K	GCM1885C1H270JA01D
GCM31MR71H154KA37L	GCM1885C2A102JA16D	GCM188R71C104KA37D	GCM188R72A103KA37D
GCM1885C1H1R0CZ13D	GCM3195C1H223JA16D	GCM21BR71C225KA64L	GCM1555C1H100JZ13D
GCM32ER71H475KA55L	GCM155R71C104KA55D	GCM31CR71H225KA55L	GCM2195C2A152JA16D
GCM1885C2A101JA16D	GCM188R71C474KA55D	GCM188R71H104KA57D	GCM1885C2A100JA16D
GCM1555C1H1R0CZ13D	GCM31CR71A106KA64L	GCM3195C2A562JA16D	GCM1885C1H102JA16D
GCM155R72A472KA37D	GCM155R71E473KA55D	GCM155R71H102KA37D	GCM155R72A102KA37D
GCM188R71H103KA37D	GCM155R71H223KA55D	GCM31CR71E475KA55L	GCM1885C1H100JA16D
GCM2195C1H103JA16D	GCM21BR71E225KA73L	GCM32ER71A226KE12L	GCM21BR71E105KA56L
GCM1885C2A1R0CZ13D	GCM31CR71C106KA64L	GCM188R72A102KA37D	GCM188R71H102KA37D
GCM188R71E474KA64D	GCM188R72A223KA37D	GCM1555C1H471JA16D	GCM155R71H103KA55D
GCM1555C1H101JZ13D	GCM21BR72A104KA37L	GCM32ER71E106KA57L	GCM155R71H681KA37D
GCM32ER71E225KA17L	GCM31MR71C105KC23L	GCM31MR71C105KC21L	GCM31MR71C105KC02L
GCM31MR71C105KC18K	GCM31MR71C105KC16L	GCM32ER71H105MA17L	GCM216R71H222KA19D
GCM32ER71H105MA02L	GCM21BL81H104KA37L	GCM31MR71H334KA37L	GCM2165C1H120JZ13D
GCM2165C1H121JA16D	GCM2165C1H122JA16D	GCM2165C1H150JZ13D	GCM31MR71H474KA37L
GCM2165C1H100JZ13D	GCM21BR91H104KA37L	GCM2165C1H180JZ13D	GCM216R71H103KA37J