

**date** 05/03/2013

page 1 of 3

# MODEL: CT-1205C-SMT | DESCRIPTION: MAGNETIC BUZZER INDICATOR

#### **FEATURES**

- high sound pressure level
- washable
- internally driven






## **SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage			5.0		Vdc
operating voltage		4.0		7.0	Vdc
current consumption				30	mA
rated frequency		2,100	2,400	2,700	Hz
sound pressure level	at 10 cm (A-weight free air), rated voltage	90	94		dBA
dimensions	12.8 x 12.8 x 10.0				mm
weight			2.0		g
material	PPS (S-206)				
terminal	SMT type (Sn plating)				
operating temperature		-30		70	°C
storage temperature		-40		85	°C
RoHS	yes				


Note: Add suffix "-TR" to the model for tape & reel packaging

## **SOLDERABILITY**


parameter	conditions/description	min	typ	max	units
reflow soldering	see reflow profile			260	°C




#### **MECHANICAL DRAWING**

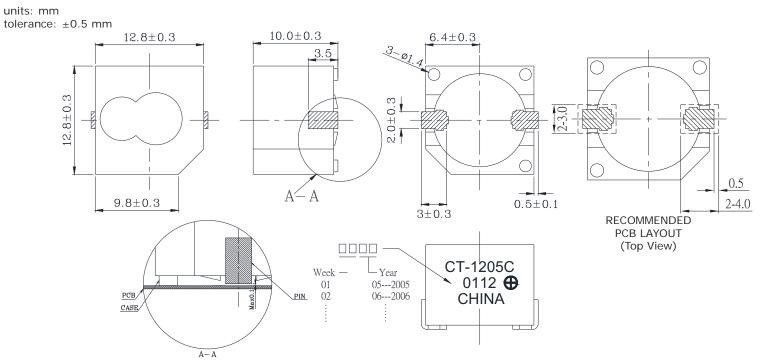

## **PERFORMANCE CURVES**

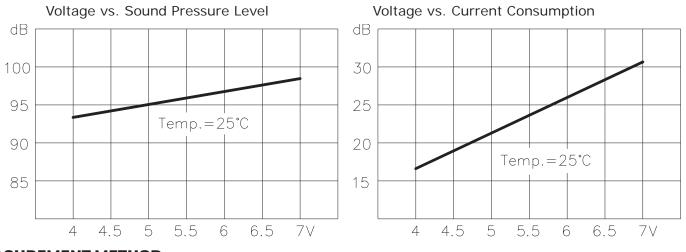

## **MEASUREMENT METHOD**



#### **REVISION HISTORY**

rev.	description	date	
1.0	initial release	09/21/2006	
1.01	new template applied, corrected performance curves	12/18/2012	
1.02	updated part number, added TR package option	05/03/2013	

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 800.275.4899

Fax 503.612.2383 cui.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Inc.:

CT-1205C-SMT-TR