
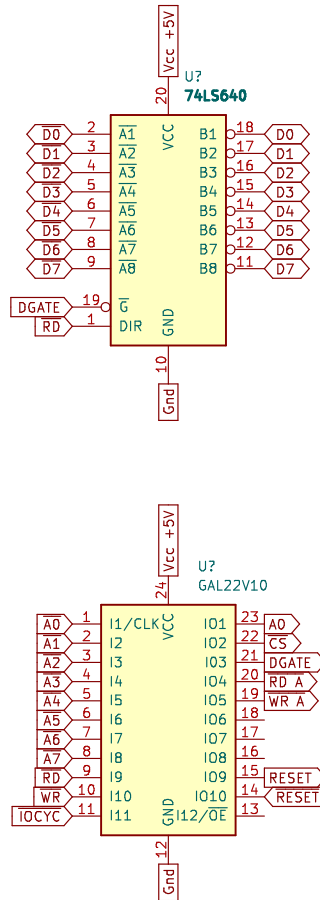


Components needed:

- Am9511
- Crystal oscillator 3MHz
- GAL 22v10 for decoding
- 74LS640 to invert D0~D7
- connector (2x40) TRS-80 Model 2 bus
- LED indicators (2xRed, Green, Orange)
- 5V Micro fan connector?
- Which resistor for LEDs?

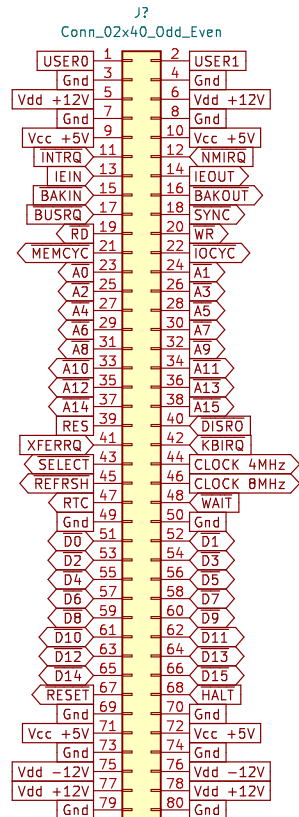







Passive

Input

Output

Bidirectional

Tr-state

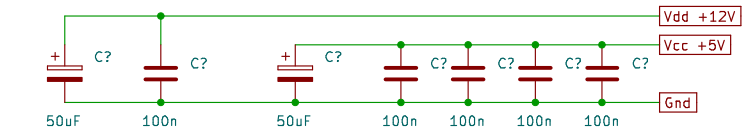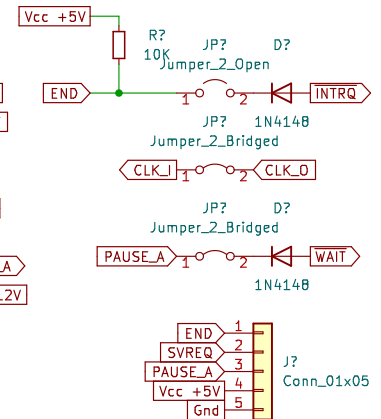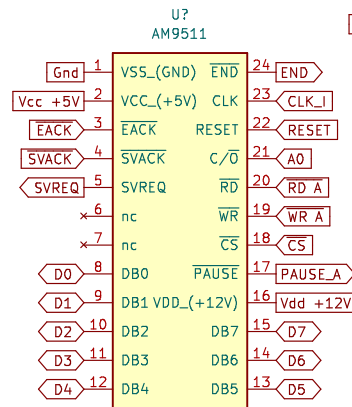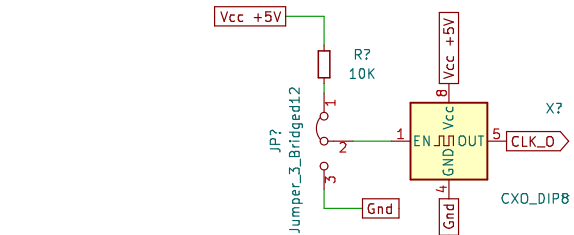

Am9511A interface to Z80.
Intel 8231A is an alternative
Note: Am9511A uses 5V and 12V

Ruud Broers (GreyZ)

Sheet: /
File: Am9511.kicad_sch

Title: Am9511A for TRS-80 Model 2

Size: A4 Date: 2024-06-15

KiCad E.D.A. kicad 6.0.11+dfsg-1

Rev: 0.1

Id: 1/1