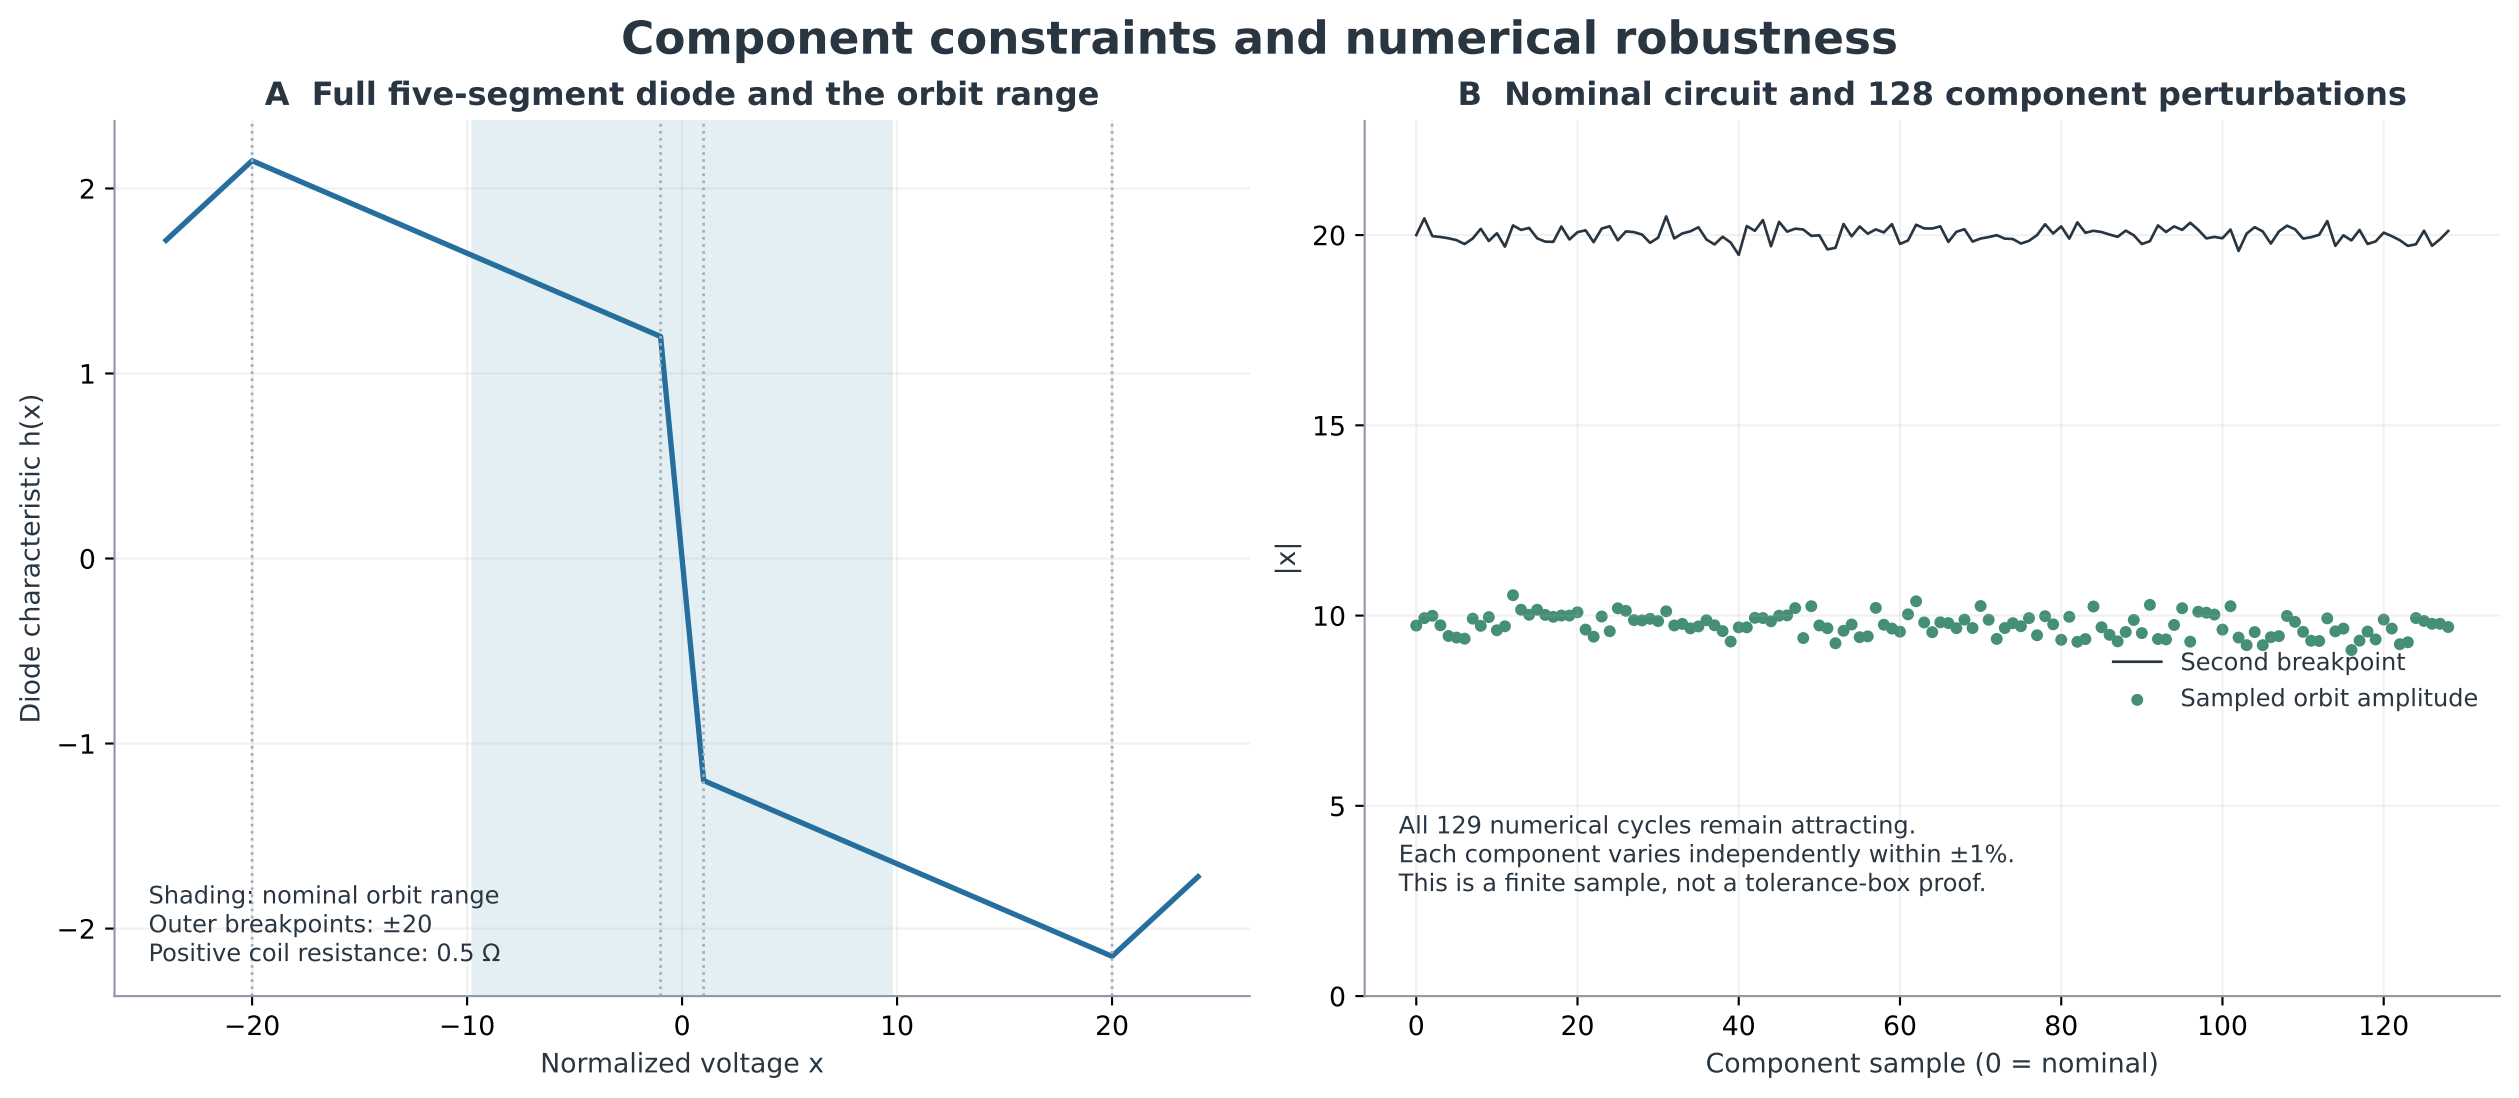
Component constraints and numerical robustness
A Full five-segment diode and the orbit range
B Nominal circuit and 128 component perturbations
Diode characteristic h(x)
Normalized voltage x
Shading: nominal orbit range
Outer breakpoints: ±20
Positive coil resistance: 0.5 Ω
|x|
Component sample (0 = nominal)
Second breakpoint
Sampled orbit amplitude
All 129 numerical cycles remain attracting.
Each component varies independently within ±1%.
This is a finite sample, not a tolerance-box proof.