



The No. T-70 Curtain Track has, over the years, proved its reputation as one of the most versatile and dependable curtain tracks available to the entertainment industry.

The main areas in which it is used being the large theatre, touring theatre, television studio cyclorama, cinema curtain track, and in most situations where heavy curtains are to be carried.


Methods of working the T-70 Curtain Track are by electric controller, hand winch, handline or walk along method. When controllers for tracks over 22m overlapped and 11m single are required, these are manufactured to suit our customers individual requirements.

Manufacture of the T-70 Curtain Track is from heavy gauge steel, electrically welded. A range of track sections are available in both curved and straight sections, from which it is possible to construct any number of track configurations.




We recommend a maximum carrying capacity of 7 Kilo per carrier for the T-70 curtain track, these should be spaced at intervals of 300mm. T-70 Curtain Tracks are also available fitted with ball race wheel runners and leaders, which increases the load capacity of each runner to 9 Kilo.



A variety of suspension fittings are manufactured for use with the curtain track, most of them allowing for final height adjustment.



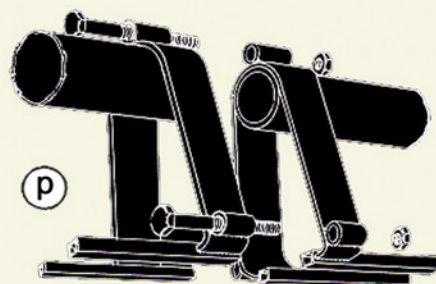

- a) T70 Face Fixing Bracket
- b) T70 M12 x 150mm Stud Bolt
- c) T70 Universal Clamp
- d) T70 Wheeled Runner
- e) T70 Hand Line Head Pulley
- f) T70 Return Pulley
- g) Cable Grip
- h) T70 "D" Ring
- i) T70 Universal Clamp
- j) T70 Master Carrier
- k) Tab Hook
- l) T70 Curve Guide Pulley
- m) T70 Curve Single Take Off Roller
- n) T70 Overlap Clip
- o) T70 End Stop with Line Support
- p) T70 Joint Bolt Set

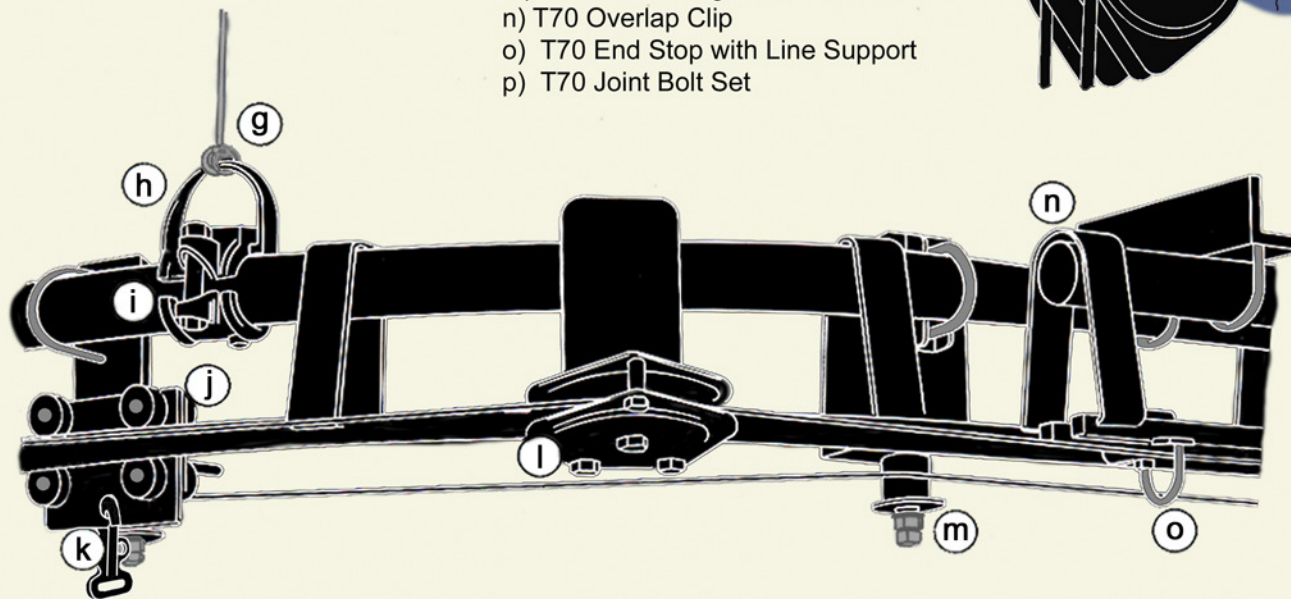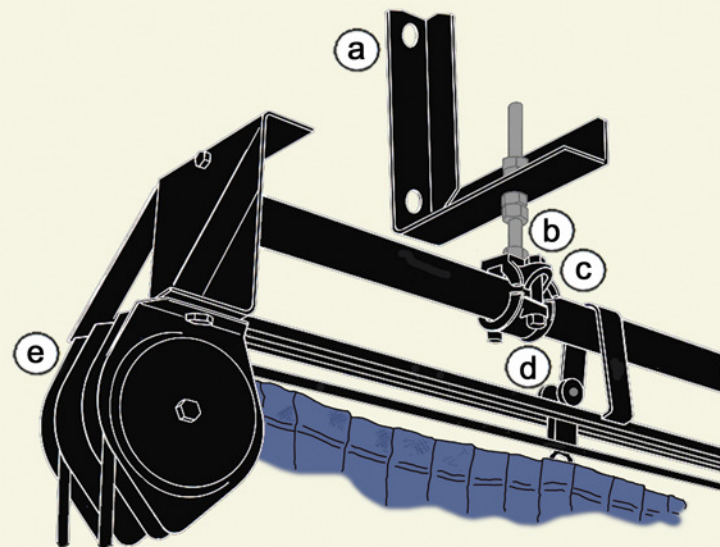

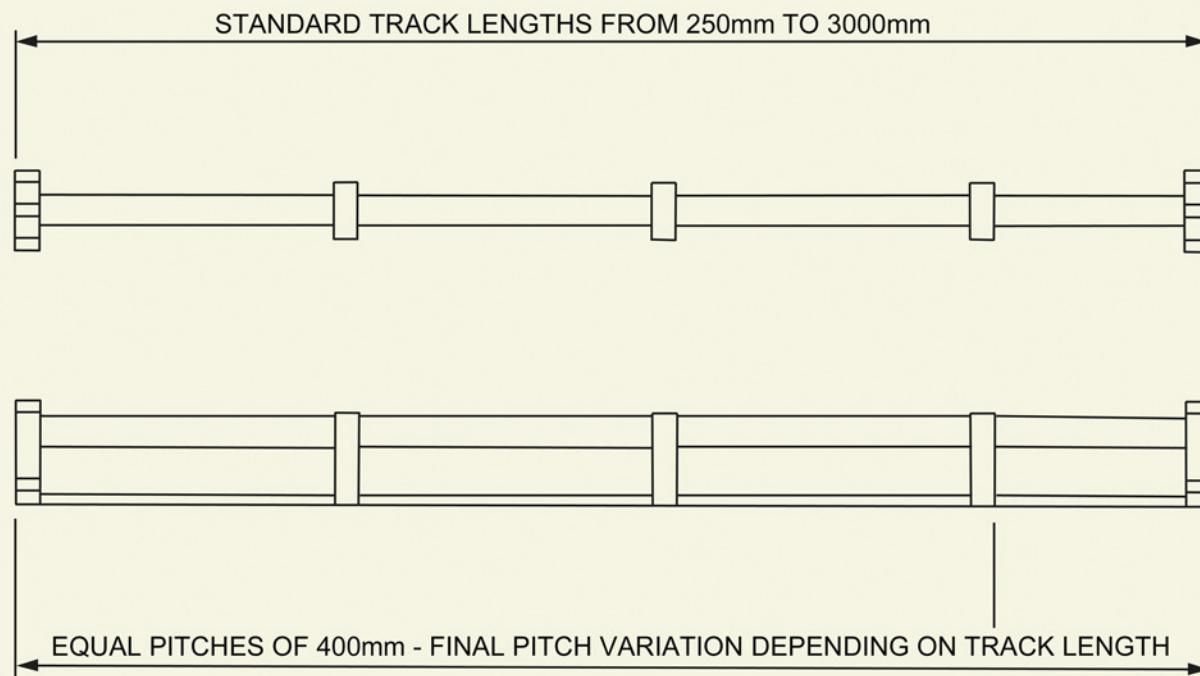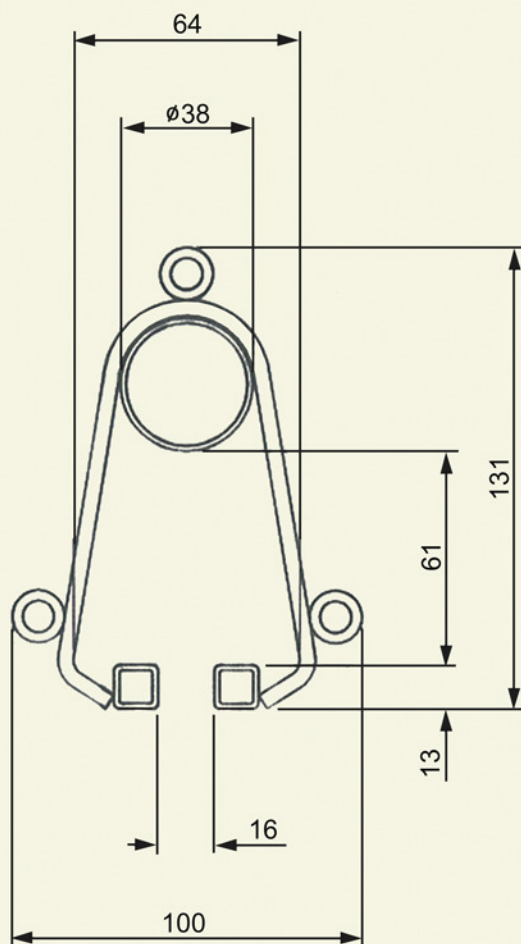

All dimensions in mm

Material: Mild Steel

Weight per mtr: 3.6kg
(approximate)

Finish: Powder Coat Black
Colour: RAL9005



Typically, T70 is fixed at 100mm centres and suspended from M12 studding.


While the image shows the track suspended from a wall bracket, T70 can be suspended from girders, tube, timber, ceilings and deadlines as standard and bespoke fixings can be manufactured for site specific situations.

150mm studding is suitable for most fixing solutions and will allow for around 70mm of adjustment.

For tube fixing 300mm stud is required to attain the same level of adjustment.

Studding can be supplied cut to non-standard lengths upon request.

Studding is connected to the curtain track with use of the T70 Universal fitting.

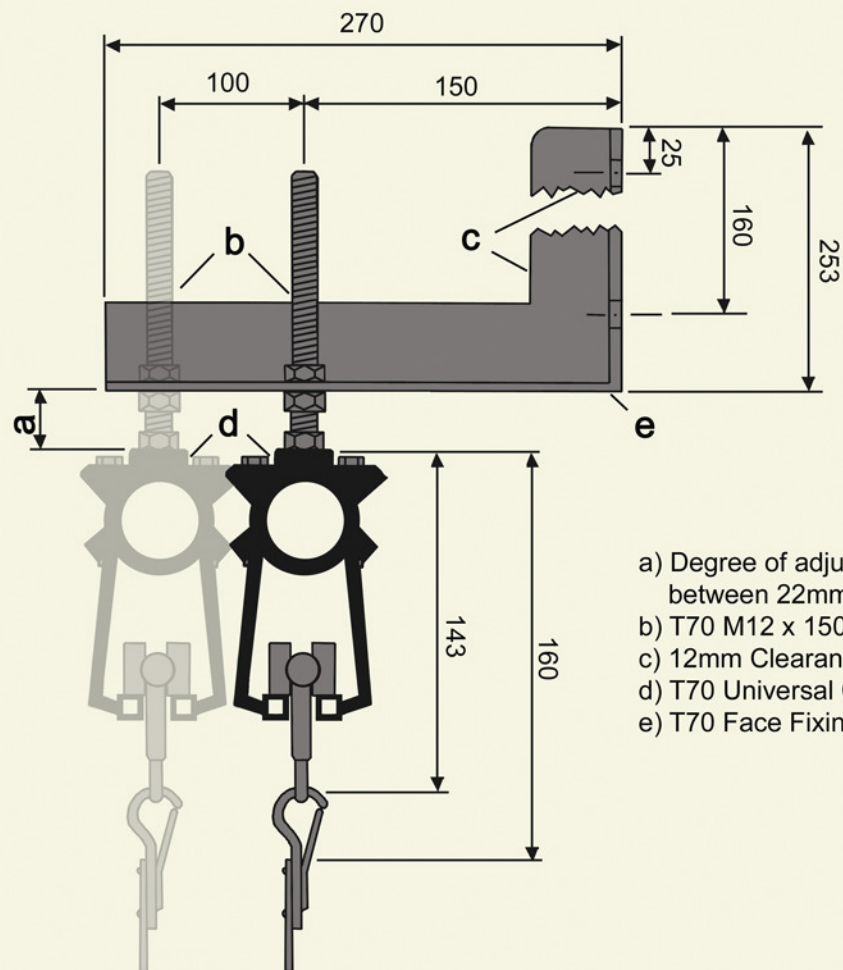

T70 curtain tracking is cored below the track. For this reason tracks are cored slightly differently depending on whether they are single or overlapped, straight or curved. Below is a typical cording solution for a single straight track (top) and a straight overlapped track (bottom).

Note that on a single track, the cable head and return pulley are both mounted centrally on the track, whereas on the overlap the cable head and return pulley are offset opposite to each other to align both with the track they are fixed to and with the track that they are not.

The master carrier can be mounted with the pins facing either way on a single track, however on an overlapped track they should be orientated as shown with pins both facing in the same direction. End stops with line support are required on overlap tracks and line supports and support pulleys are used on either style of track, to reduce cable droop, where an unsupported straight length of 8mtr or more exists.

