


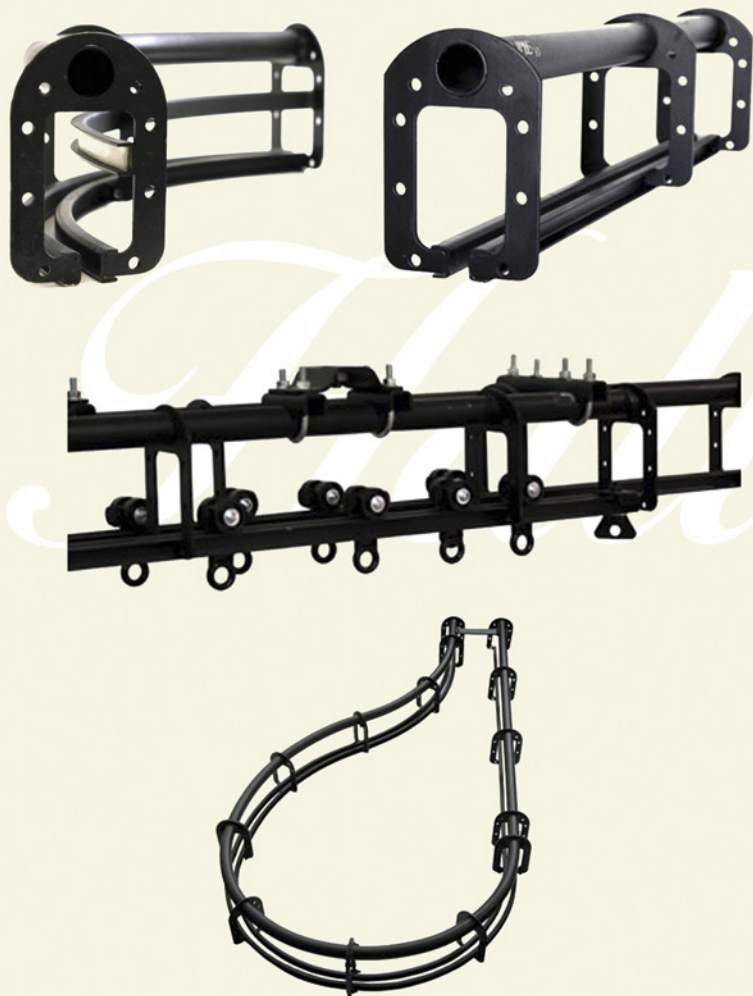

The T-60 Curtain Track is designed to meet the requirements of most small and medium sized stages.

The method of working this curtain track may be either by electric controller, handwinch, handline or walkalong method.


Manufactured from steel and electrically welded - the track is designed to allow a wide variety of configurations to be assembled at stage level with the various components, hauling line and fittings attached, ready to be hoisted and fixed in its working position.

A range of suspension fittings are manufactured for use with the T-60 track. In most cases these allow for final height adjustment. All suspension fittings should be spaced at intervals not exceeding 2.25m along the length of the track.

The maximum recommended length of the T60 Curtain Track is 18m for overlapping track and 9m for single tracks, with a maximum carrying capacity per carrier of 4 Kilo each.

T-60 tracks are also available fitted with ball raced wheeled runners and leaders, which increases the load capacity of each runner to 6 Kilo.



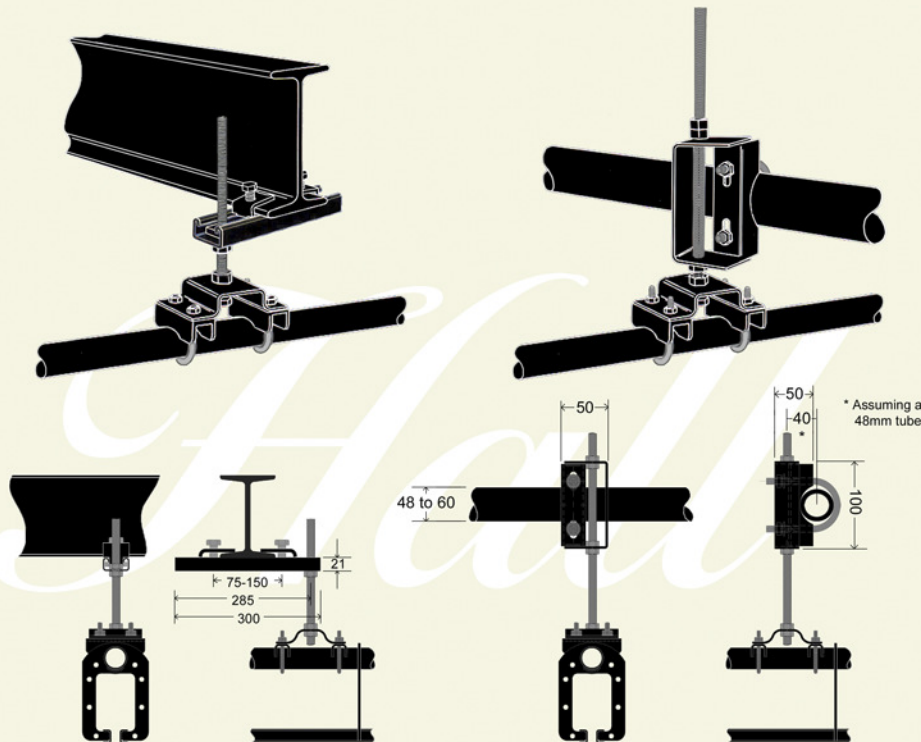


176mm minimum from underside of girder to under side of track with stud fully closed


Universal Girder Fixing Clamp designed to clamp to a flange between 75mm & 150mm wide. Accepts M8, M10 or M12 stud

205mm minimum from centre of tube to under side of track with stud fully closed

Tube Fixing Clip is used to suspend track at any horizontal angle below a 48mm or 60mm tube. Use with a 300mm stud if height adjustment is required.

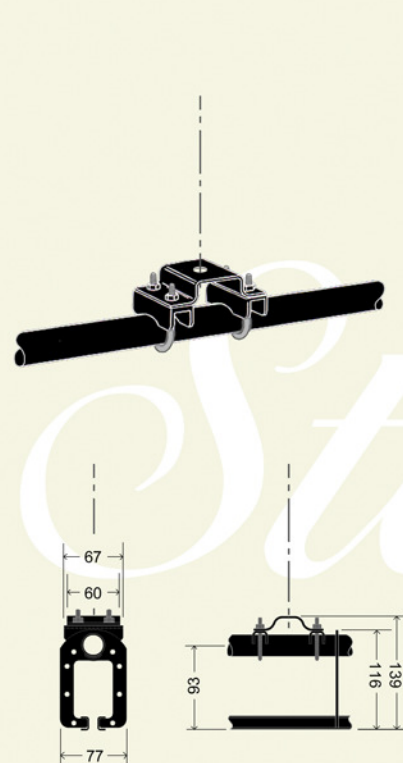


The T60 Universal Clamp is used to fix track to soffits, timber joist or ceilings via a 10mm Coach Screw / M10 Rawl Bolt, or will accept an M10 stud for connection to most other T60 fixing units.


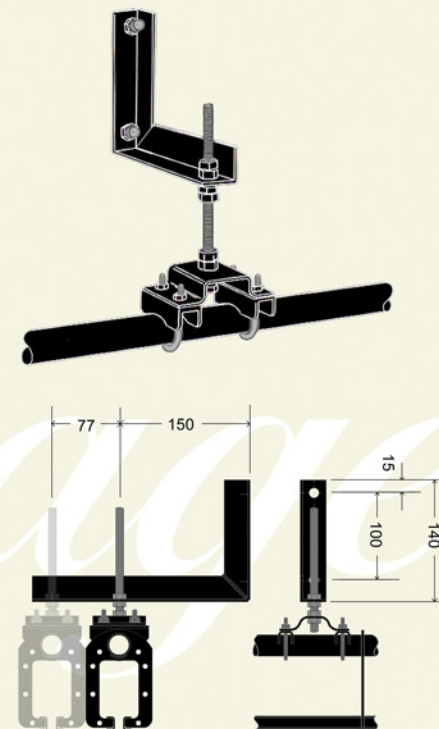


155mm minimum from underside of bracket to under side of track with stud fully closed

T60 Face Fixing Bracket Used to support a T60 single or overlapped curtain track from a vertical surface. Used in conjunction with an M10 stud bolt and T60 universal clamp.



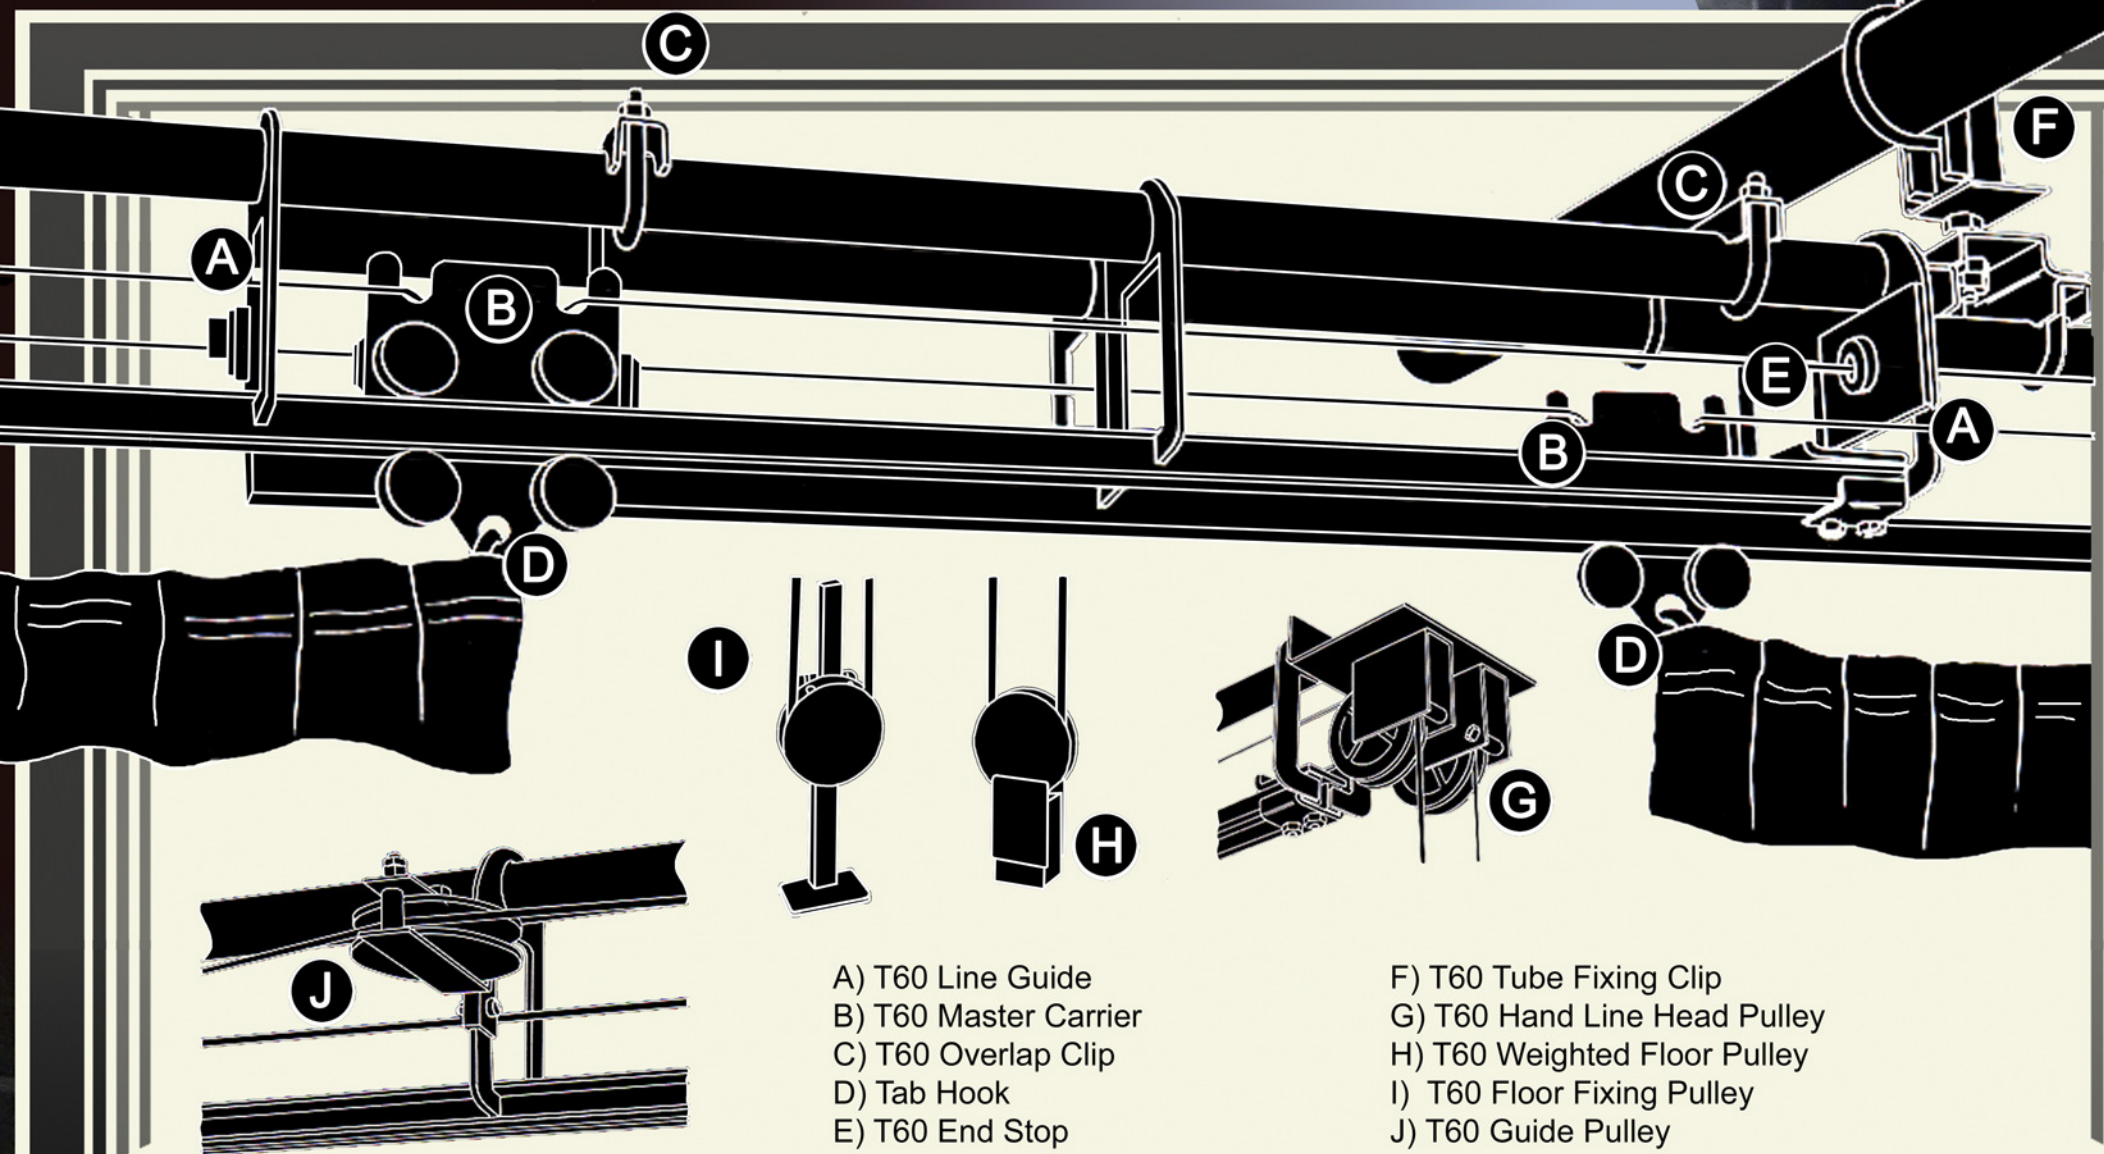

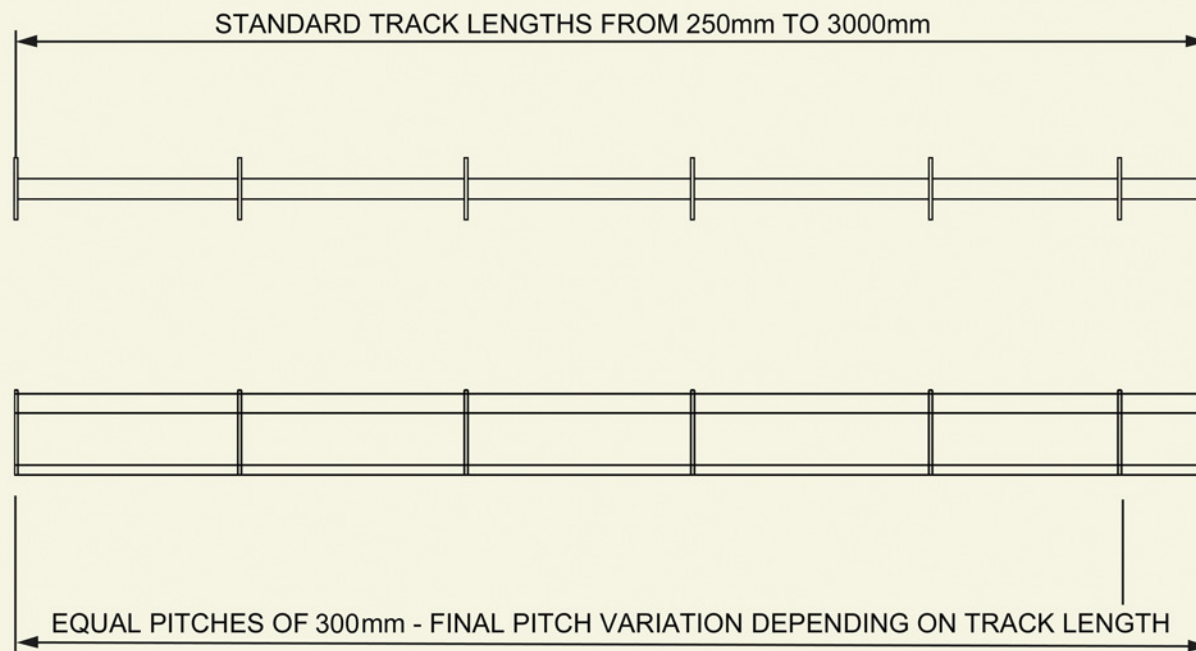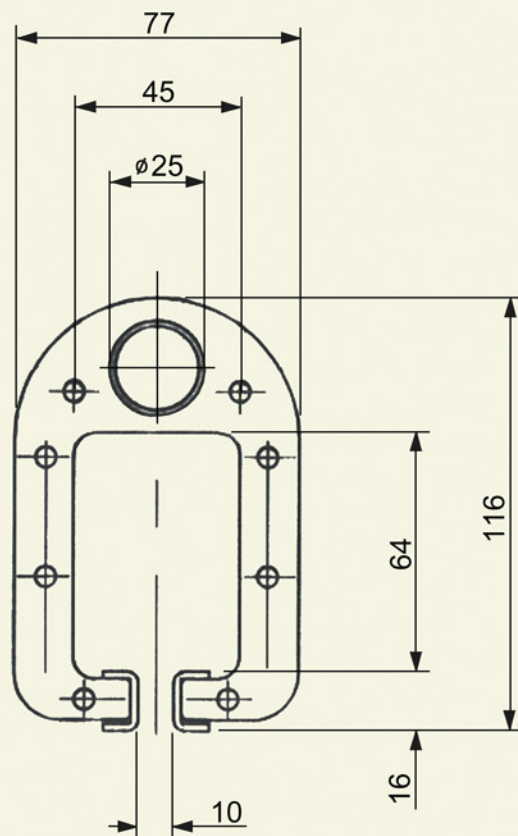

All dimensions in mm

Material: Mild Steel

Weight per mtr: 2.25kg
(approximate)

Finish: Powder Coat Black
Colour: RAL9005

