




Product Data Sheet


Doughty Hanging Clamp

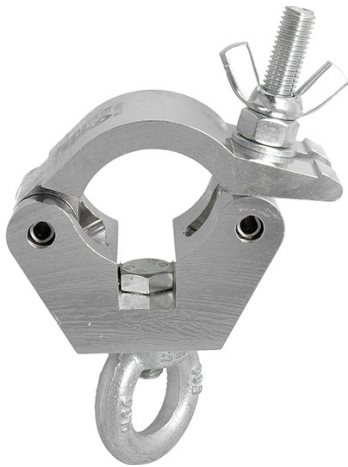



A standard half coupler fitted with an Eye Nut.	
Part Nos	T57205 - Polished T57206 - Powder Painted Satin Black
Tube Diameter	Ø48 - 51mm
Materials	Main Body - AW6082 T6 Aluminium Roll Pins - Stainless Steel Eyebolt Assy - Grade 8.8 Eye Nut - C15E Steel
Max Tightening Torque	30Nm
Fixings	M12 Eye Nut
WLL	340Kg Vertical Load
Weight	0.84Kg
Factor of Safety	5:1
Approval	TÜV Approved

Dimensions in mm

WARNING

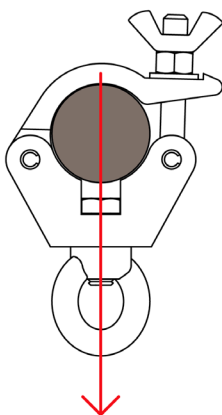

LOAD DIRECTION MUST BE IN LINE WITH THE
BOLT SECURING THE EYE NUT IN PLACE
FOR ANY OTHER LOAD DIRECTIONS
SEE OUR T42307 PINK EYE NUT

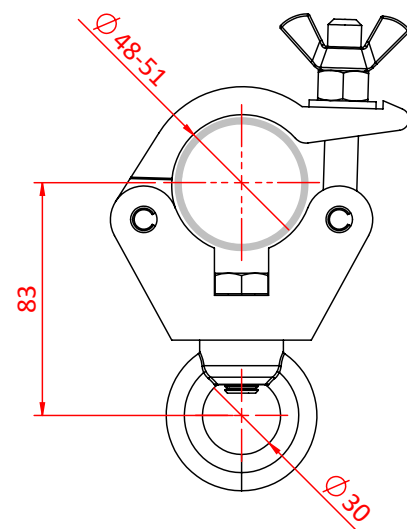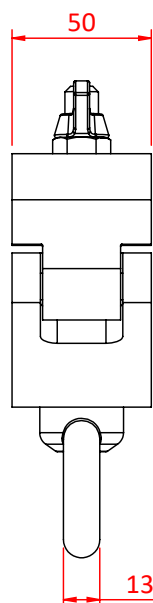

Hanging Clamp with Eye Nut

Equipment information and pre-use checks for compliance portal use

Field	Information
Equipment name	Hanging Clamp with Eye Nut
Typical example	Doughty Hanging Clamp with M12 Eye Nut - T57205 silver / T57206 black
Equipment type	Rigging clamp / suspension fixing
Typical SWL/WLL	340 kg - confirm rating on the specific item before use
Tube size	48-51 mm diameter
Typical weight	0.84 kg
Material	Aluminium clamp body with steel eye nut / fixings
Primary use	Creating a rated eye attachment point from a truss chord, lighting bar, or scaffold tube

Equipment Info

A hanging clamp with eye nut is used to provide a secure suspension point from a suitable 48-51 mm tube. The clamp fixes around the tube, while the eye nut provides an attachment point for suitable rigging hardware such as wire rope assemblies, shackles, quick links, or other approved suspension components.

This item is commonly used for suspending wire-hung loads, lightweight scenic items, signs, drapes, practicals, or other approved rigged items where a rated eye point is required. It should only be used within its stated WLL/SWL and as part of a properly assessed rigging system.

Important: This clamp is not normally used as a direct lantern hook clamp. It is intended to create a rated eye point for suspended loads.

What to Check

Before use, check that the clamp is the correct type and rating for the intended application. Confirm that the tube size is suitable, typically 48-51 mm, and that the load to be suspended does not exceed the rated WLL/SWL of the clamp or any other item in the rigging assembly.

Inspect the clamp body for cracks, distortion, dents, excessive wear, corrosion, or any signs of impact damage. The clamp should close properly around the tube and sit squarely without forcing.

Check the eye nut is secure, correctly fitted, and free from damage. Inspect the eye for elongation, cracking, deformation, sharp edges, or excessive wear. The thread should be clean and undamaged, with no signs of stripping, cross-threading, or looseness.

Check all bolts, nuts, washers, and moving parts are present, correctly fitted, and in good condition. Threads should run freely and tighten securely. Do not use the clamp if any fixing is missing, bent, seized, badly worn, or incompatible.

Check that the clamp is marked or identifiable, and that the rating is known. Do not use unmarked or unidentified clamps for suspended loads unless they can be positively verified.

When installed, check that the clamp is fully closed around the tube, tightened correctly, and positioned so that the load is applied in the intended direction. The attached rigging hardware must be compatible with the eye nut and must not side-load, twist, or distort the eye.

Do not use if the clamp has been overloaded, dropped from height, modified, drilled, welded, or repaired without manufacturer approval. Damaged or suspect clamps should be quarantined and reported for inspection.

Portal Checklist

Suggested pass criteria for inspection or compliance records

Check item	Pass criteria
Correct item selected	Hanging clamp with eye nut is suitable for the task
Rating known	WLL/SWL confirmed, typically 340 kg for the Doughty version
Tube compatibility	Suitable for 48-51 mm tube or truss chord
Clamp body condition	No cracks, distortion, corrosion, excessive wear, or impact damage
Eye nut condition	Eye is secure, round, undamaged, and not elongated
Threads and fixings	Threads clean; bolts, nuts, and washers present and tighten correctly
Identification	Product and rating can be identified
Installation	Clamp fully seated and tightened correctly
Load path	Load applied correctly with no side loading, twisting, or distortion
Compatibility	Shackles, wires, links, or other attachments are correctly rated and suitable
Exclusions	Not overloaded, modified, repaired, drilled, welded, or dropped from height
Action if failed	Remove from service, quarantine, and report for inspection

User guidance

The inspection decision should always be based on the actual item, its markings, the manufacturer's data, and the full rigging arrangement. Where any doubt exists, remove the item from service and refer it to a competent person for inspection.

Example source data referenced: Doughty Hanging Clamp with M12 Eye Nut, T57205 / T57206; CPC/Farnell product listing for Doughty T57205. Always verify against the latest manufacturer documentation before use.