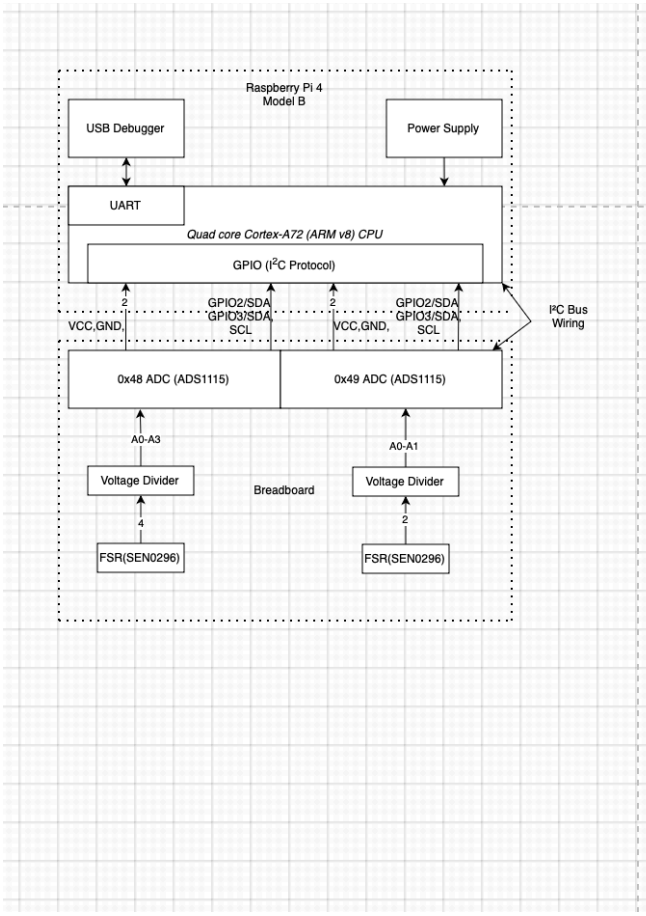
Raspberry Pi 4
Model B
USB Debugger
Power Supply
UART
Quad core Cortex-A72 (ARM v8) CPU
GPIO (I2C Protocol)
2
GPIO2/SDA
GPIO3/SDA
SCL
VCC,GND,
2
GPIO2/SDA
GPIO3/SDA
SCL
VCC,GND,
I2C Bus
Wiring
0x48 ADC (ADS1115)
0x49 ADC (ADS1115)
A0-A3
A0-A1
Voltage Divider
Breadboard
Voltage Divider
4
2
FSR(SEN0296)
FSR(SEN0296)

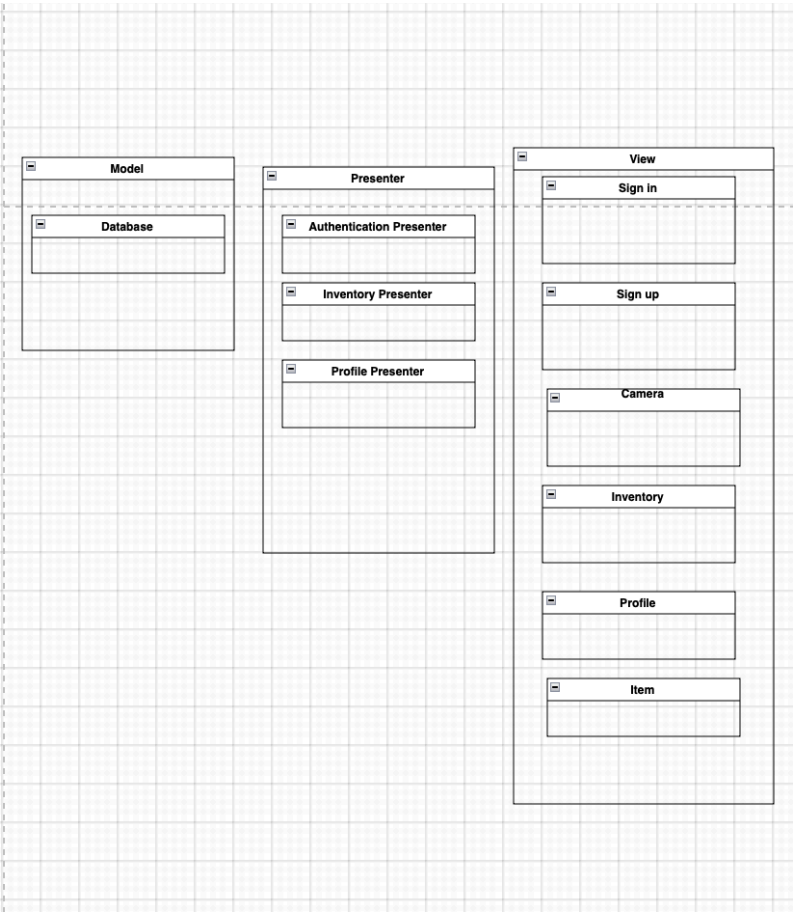
Model
Database
Presenter
Authentication Presenter
Inventory Presenter
Profile Presenter
View
Sign in
Sign up
Camera
Inventory
Profile
Item

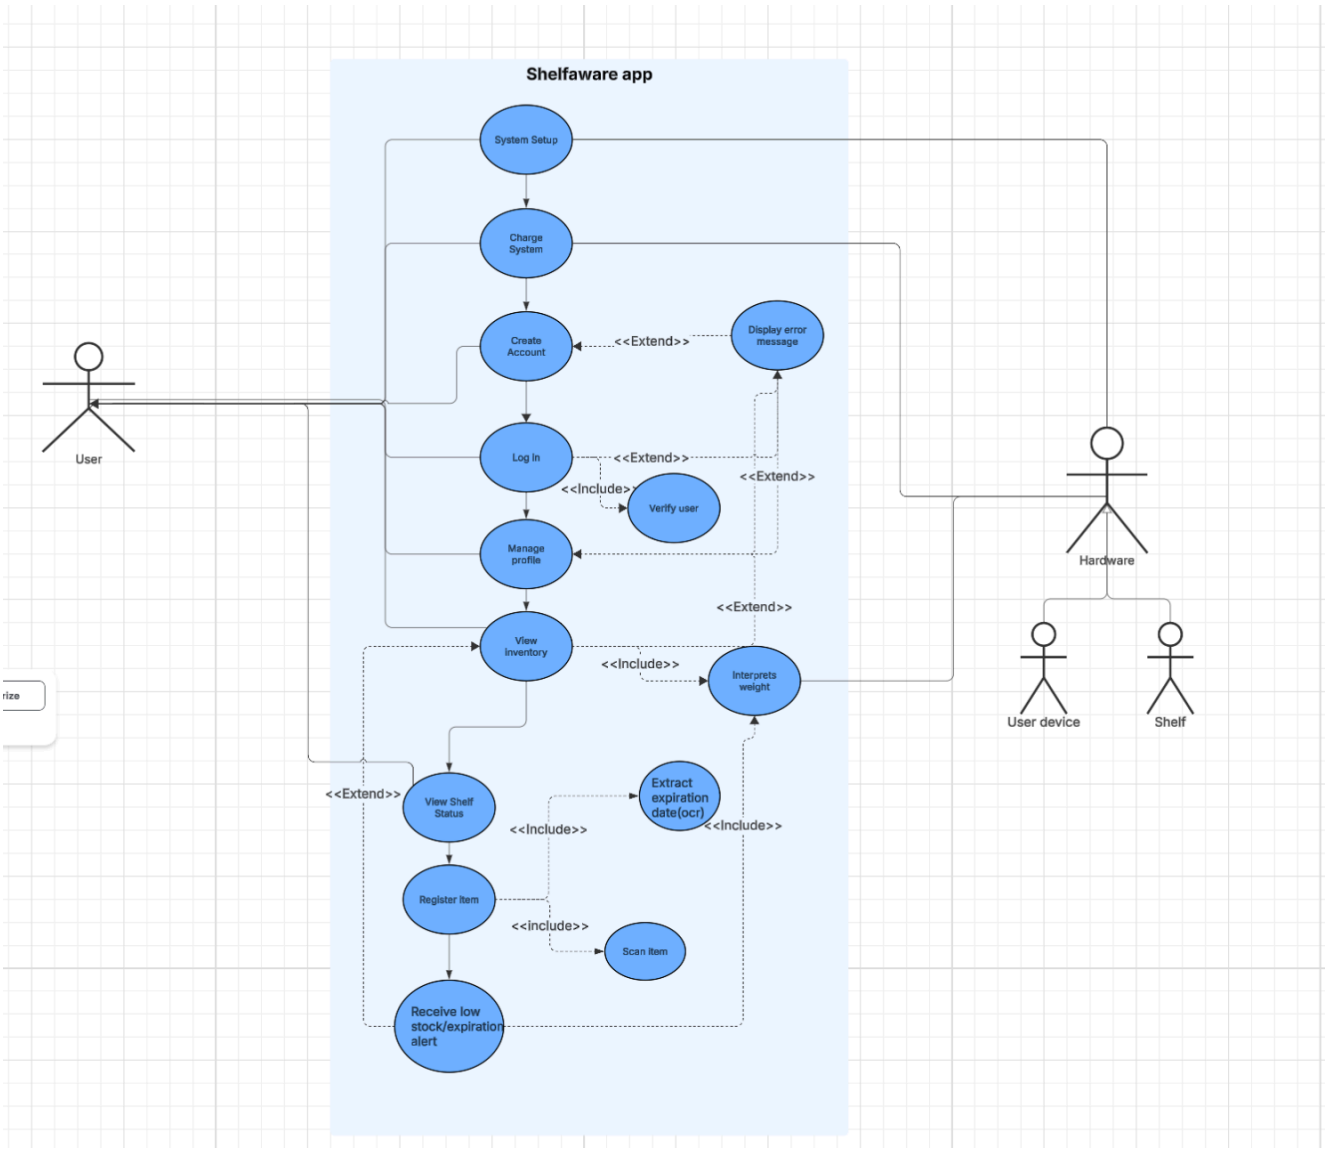
Shelfaware app
System Setup
Charge System
Create Account
<<Extend>>
Display error message
Log In
<<Extend>>
<<Include>>
Verify user
<<Extend>>
Manage profile
<<Extend>>
View inventory
<<Include>>
Interprets weight
<<Extend>>
View Shelf Status
<<Include>>
Extract expiration date(ocr)
<<Include>>
Register Item
<<include>>
Scan item
Receive low stock/expiration alert
User
Hardware
User device
Shelf