

User Manual

Project Kitchen Occupation

TSBB11 HT 2013

Version 1.0



Status

Reviewed	–	2013-12-13
Approved		

2013-12-13

Project Kitchen Occupation

Bilder och Grafik CDIO, HT 2013
Department of Electrical Engineering (ISY), Linköping University

Participants

Name	Tag	Responsibilities	Phone	E-mail
Mattias Tiger	MT	Project manager	073-695 71 53	matti166@student.liu.se
Erik Fall	EF	–	076-186 98 84	erifa226@student.liu.se
Gustav Häger	GH	System integration	070-649 03 97	gusha124@student.liu.se
Malin Rudin	MR	–	073-800 35 77	malru103@student.liu.se
Alexander Sjöholm	AS	–	076-225 11 74	alesj050@student.liu.se
Martin Svensson	MS	Documentation	070-289 01 49	marstv106@student.liu.se
Nikolaus West	NW	Testing	073-698 92 60	nikwe491@student.liu.se

Homepage: TBA

Customer: Joakim Nejdeby, Linköping University, Origo 3154

Customer contact: 013-28 17 57, joakim.nejdeby@liu.se

Project supervisor: Fahad Khan, Linköping University, fahad.khan@liu.se

Examiner: Michael Felsberg, michael.felsberg@liu.se

Contents

1 Installing the system 1

1.0.1 Hardware 1

1.0.2 Software 1

2 Calibrating the system 2

3 Configuration the system 3

References 6

List of Figures

2.1 Overview of the entire system 2

3.1 Circle placement 3

3.2 Exclusion mask 4

3.3 Exclusion mask 5

List of Tables

Document history

Version	Date	Changes	Sign	Reviewed
0.1	2013-12-13	Initial draft	MS	MT

1 Installing the system

1.0.1 Hardware

Each Kinect camera must be installed above a door with no overlapping view shared with any other Kinect camera. The Kinect must point down or slightly angled towards the room. A minimum distance of 50 cm is required from the lense of the Kinect and the top of the door. Each Kinect must be connected to a power source, and to a device running the system software using USB.

1.0.2 Software

There are two versions of the software, one with a calibration and configuration GUI and one lightweight version without a GUI. In order for the lightweight version to work a configuration file, persumably generated by the GUI version, is required. The configuration file is best generated using the configuration program, and then copied to the system running the non-GUI variant.

Linux, OS-X or Windows is required on the machine running the software. Atleast one Kinect camera must be connected before starting the software. More than one Kinect camear is currently only working on Linux and OS-X. Some software libraires are required to compile the program, these are listed in table ??

OpenCV2	Needed for general image processing
libFreenect	Needed for communication with kinect on unix like systems
OpenNI	Needed for communication with kinect on windows systems
libCurl	Needed to send http requests to the report API
QT5	Needed for the gui code, not used in headless variant

2 Calibrating the system

A threshold level is used to adjust the system for the current installation height of the camera. It sets a configuration parameter called `lowestDistanceOverFloor`. This is the limit of how short a person can be. The threshold should be set so that a "normal" person's chest is not removed by the thresholding.

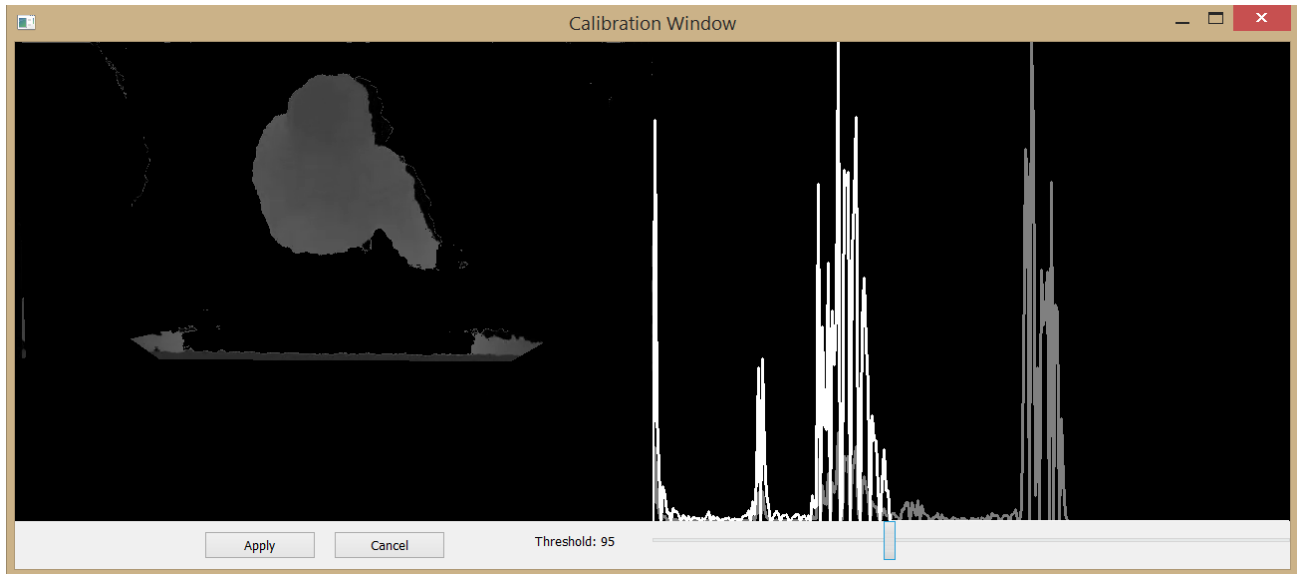


Figure 2.1: *Calibrating the `lowestDistanceOverFloor` threshold. A histogram is shown to help the user to see how much of different heights are present in the image. The selected heights are gray shaded.*

3 Configuration the system

Available configuration settings is checkpoint circles, door mask area, exclusion mask and grayscale height threshold settings.

The circles should be placed so persons walking into the room inevitable will pass all three lines. They should also be more inside the room compared to the door mask area. A good placement is illustrated in figure 3.1. Note that the red, most inner circle, includes the upper corners of the door frame. Too small inner circle will cause people to miss it and therefore not detected.

The door mask should cover the area close to the door where people appear. It is important to make this area big enough, rather too big than too small. It can, but should not cover the upper, most distant, part of the red circle, figure 3.2 illustrates this.

Exclusion masks should cover areas where people can not walk or appear. This could be areas like tables or areas behind the door (walls in this case), figure 3.3 illustrates this. Note that for long usage of the system, movable furniture should not be excluded.

This threshold level is used to adjust the system for the current installation height of the camera. It sets a configuration parameter called `lowestDistanceOverFloor`: This is the limit of how short a person can be. The threshold should be set so that a normal person's chest height is not removed by the thresholding. ALEX(ELLER NGN ANNAN) FIXA FIGUR HÄR OCH FÖRKLARA MER KANSKE. KANSKE INTE SKA STÅ HÄR ENS, KANSKE UNDER CALIBRATE THE SYSTEM?

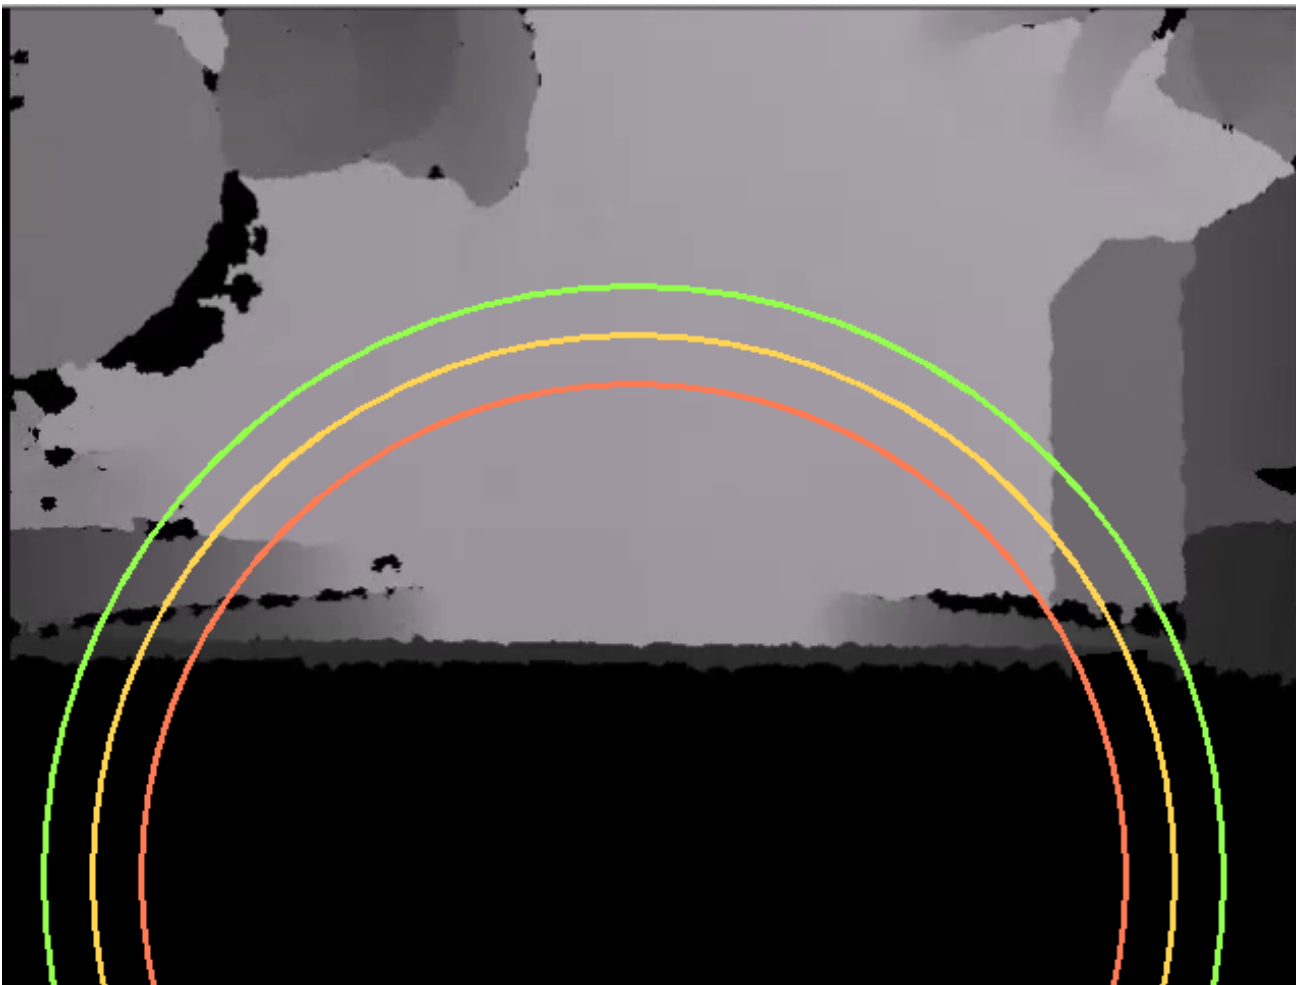


Figure 3.1: *A preferred placement of the circles.*

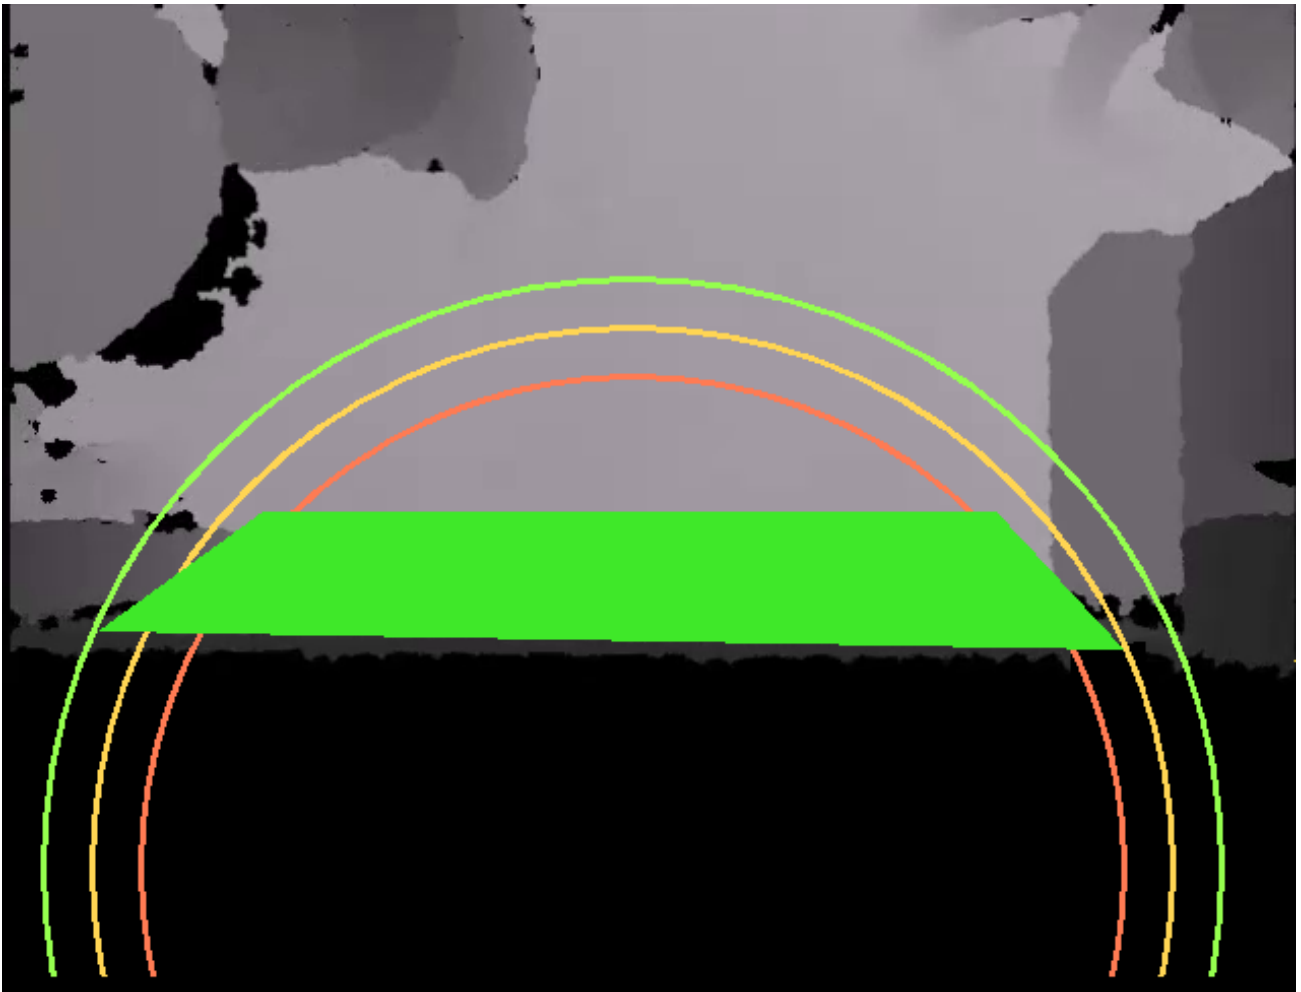


Figure 3.2: *The preferred placement of the door mask, the door mask is the green area.*

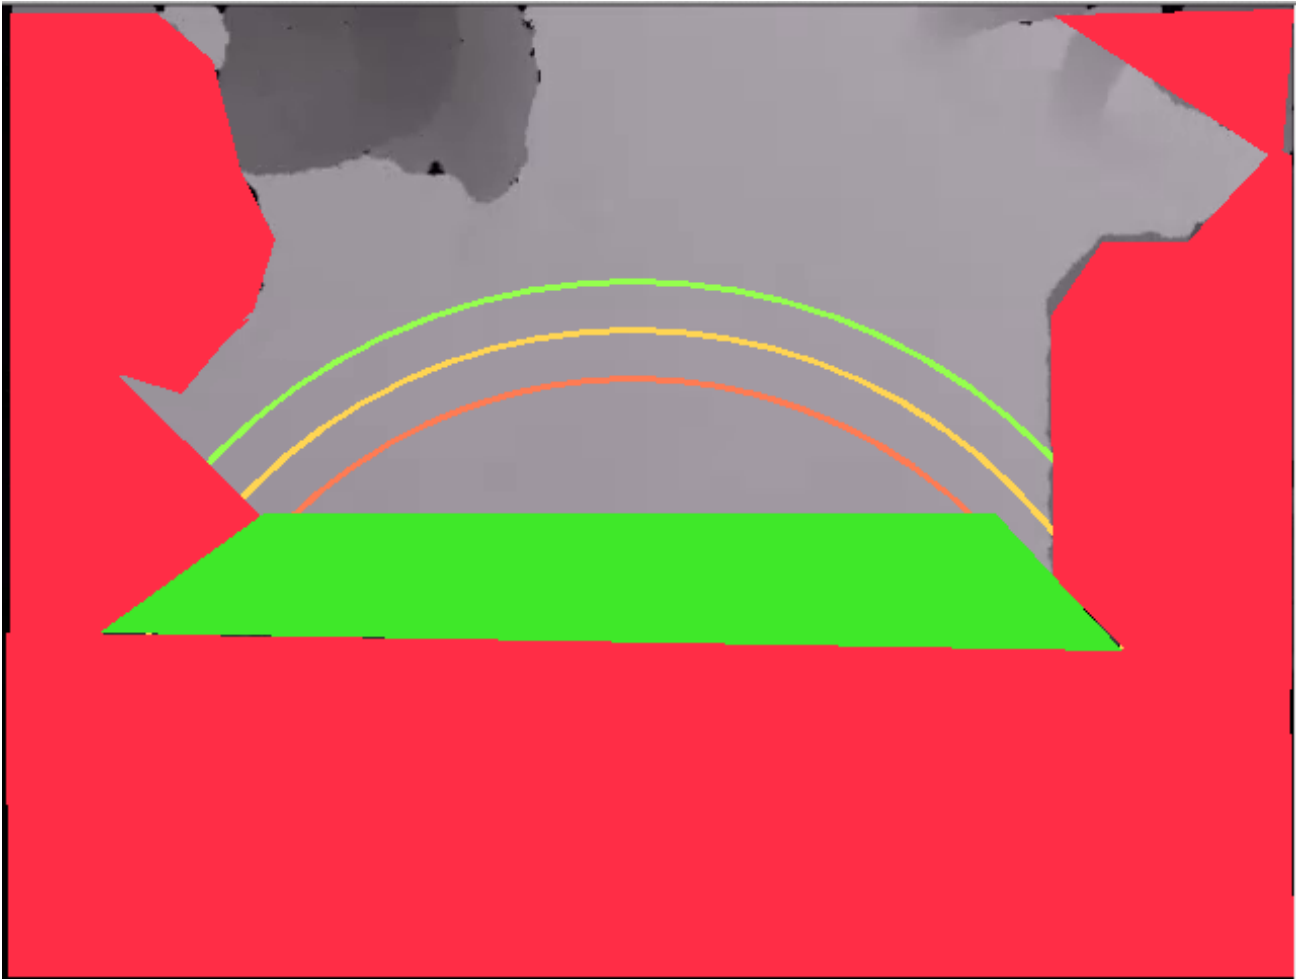


Figure 3.3: *Exclusion mask is marked as red. It covers areas where people can not walk or appear.*

References

- [1] Gardel, A., Bravo, I., Jimenez, P., Lazaro, J.L. & Torquemada, A.
 “*Statistical Background Models with Shadow Detection for Video Based Tracking*,”
 Intelligent Signal Processing, 2007. WISP 2007. IEEE International Symposium on?? Page: 1-6.
- [2] Zivkovic, Z. & Heijden, F.
 “*Efficient Adaptive Density Estimation per Image Pixel for the Task of Background Subtraction*,”
 Pattern recognition letters, Vol. 27, No. 7. (2006), pp. 773-780.
- [3] Bernardin, K. & Stiefelhagen, R (2008)
 “*Evaluating Multiple Object Tracking Performance: The CLEAR MOT Metrics*,”
 Interactive Systems Lab, Institut für Theoretische Informatik,
 Universität Karlsruhe, 76131 Karlsruhe, Germany

EXAMPLE REFERENCES ONLY, REMOVE BEFORE HANDING IN

- [4] Sonka, M., Hlavac, V. & Boyle, R. *Image Processing, Analysis, and Machine Vision*.
 Toronto: Thompson Learning, cop. 2008, 3rd ed., ISBN 0495244384.
- [5] Wood, J. (2007) “*Statistical Background Models with Shadow Detection for Video Based Tracking*,”
 Master thesis, Linköping University, Department of Electrical Engineering.
- [6] Gustafsson, F., Ljung, L. & Millnert, M. *Signal Processing*.
 Studentlitteratur, Lund, Sweden, 2011, 1st ed., ISBN 978-91-44-05835-1.
- [7] “*CAVIAR: Context Aware Vision using Image-based Active Recognition*,”
 EC Funded CAVIAR project/IST 2001 37540
<http://homepages.inf.ed.ac.uk/rbf/CAVIAR/>