

# Technical Report

Project Kitchen Occupation

TSBB11 HT 2013

Version 1.0



Status

Reviewed	–	2013-12-13
Approved		

**2013-12-13**

# Project Kitchen Occupation

Bilder och Grafik CDIO, HT 2013  
Department of Electrical Engineering (ISY), Linköping University

## Participants

Name	Tag	Responsibilities	Phone	E-mail
Mattias Tiger	MT	Project manager	073-695 71 53	matti166@student.liu.se
Erik Fall	EF	–	076-186 98 84	erifa226@student.liu.se
Gustav Häger	GH	System integration	070-649 03 97	gusha124@student.liu.se
Malin Rudin	MR	–	073-800 35 77	malru103@student.liu.se
Alexander Sjöholm	AS	–	076-225 11 74	alesj050@student.liu.se
Martin Svensson	MS	Documentation	070-289 01 49	marstv106@student.liu.se
Nikolaus West	NW	Testing	073-698 92 60	nikwe491@student.liu.se

**Homepage:** TBA

**Customer:** Joakim Nejdeby, Linköping University, Origo 3154

**Customer contact:** 013-28 17 57, joakim.nejdeby@liu.se

**Project supervisor:** Fahad Khan, Linköping University, fahad.khan@liu.se

**Examiner:** Michael Felsberg, michael.felsberg@liu.se

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Background . . . . .	1
1.2	About this document . . . . .	1
<b>2</b>	<b>System description</b>	<b>2</b>
2.1	Configuration file system . . . . .	2
2.2	Network module . . . . .	2
2.3	Algorithm Interface . . . . .	3
2.4	Debug and Config GUI . . . . .	3
<b>3</b>	<b>Current pipeline</b>	<b>4</b>
3.1	Sensors . . . . .	4
3.2	Image processing . . . . .	4
3.3	Tracking and counting . . . . .	4
3.4	Queue detection . . . . .	4
<b>4</b>	<b>System Evaluation</b>	<b>5</b>
4.1	Ground Truth . . . . .	5
4.2	Evaluation Metric . . . . .	5
<b>5</b>	<b>Results</b>	<b>6</b>
5.1	Evaluation Scores . . . . .	6
5.2	Discussion . . . . .	6
<b>6</b>	<b>Conclusions</b>	<b>7</b>
6.1	Improvement suggestions . . . . .	7
	<b>Appendices</b>	<b>8</b>
<b>A</b>	<b>Additional functionality - Tracker accuracy evaluation.</b>	<b>8</b>
<b>B</b>	<b>An unsuccessful attempt - people detection using background subtraction.</b>	<b>9</b>
<b>C</b>	<b>An unsuccessful attempt - head detection by means of circle detection.</b>	<b>10</b>
	<b>References</b>	<b>12</b>

## List of Figures

2.1	Overview of the entire system . . . . .	2
B.1	An example of scattered binary mask of a human from the background model. . . . .	9
C.1	An example of a successful Hough-circle detection . . . . .	10
C.2	An example of a failed Hough-circle detection . . . . .	11

## List of Tables

5.1	System performance . . . . .	6
-----	------------------------------	---

## Document history

Version	Date	Changes	Sign	Reviewed
0.1	2013-12-13	Initial draft	MS	MT

# 1 Introduction

There exists many places in society where the degree of human occupancy and movement flow is desirable to know as basis for decision making. Such data answers if it is necessary to build more rooms and provides knowledge of actual user or consumer patterns. Example usages are measuring resource usage of public spaces, or which part of a store that attracts most people. It provides vast opportunities in resource management, marketing, sales and scheduling. There exist some plausible solutions to estimating the number of people at a location such as using cell phones or motion detectors, but this project aims at an image based approach with the possible benefits of being both cheaper and more robust.

## 1.1 Background

Today Linköping University has many places with similar functionality, e.g. student kitchens where students are provided with the ability to warm food brought with them. Linköping University has several such kitchens all over its campuses. Critics claim that there are too few student kitchens with microwave ovens and that the existing ones usually are overcrowded. That all kitchens are overcrowded at the same time has not been confirmed by sample inspections. One standing hypothesis is that students don't know where all the kitchens are nor that they want to risk going to a kitchen in another building in case that is full as well.

Linköping University has an ongoing project with the purpose of enabling the students to see the usage of some of the schools resources (e.g. group rooms) online. The aim of this project is to supply that system with data regarding the usage of student kitchens. It will provide all students with the ability of visualizing the crowdedness of each kitchen, thus providing them with the means of finding the closest, least occupied kitchen available.

## 1.2 About this document

This document, together with the code reference manual (appendix ??) constitutes the final documentation of the project and describes the current implementation together with some failed attempts and conclusions drawn from these. Performance results of the current implementation are presented in section 4 of this document.

## 2 System description

The system is designed to be as modular as possible, allowing for testing and implementation of a number of different algorithms and processing steps without having to spend a lot of time integrating these with the rest of the system. Tuning without having to re-compile the project was also a major goal that was achieved by using a set of configuration files that specify parameter values at startup.



Figure 2.1: *System overview.*

### 2.1 Configuration file system

The system configuration file contains all image processing pipeline parameters, including which image processing algorithms to run and in what order, together with the address of the current destination web service, where counting results are to be presented. There is also a GUI configuration file containing the Debug GUI as well as camera specific settings.

### 2.2 Network module

The network module manages all system input/output, i.e. sampling the sensors and posting output data on the web server specified by the configuration file. Currently, support exists for all OpenCV-compatible cameras as well as the Microsoft Kinect depth sensor. The module is designed to be as modular as possible, allowing for a relatively easy integration of new sensor types into the system. The network module also supports running several sensors in parallel.

## 2.3 Algorithm Interface

The algorithm interface simplifies the addition of new image processing or tracking modules to the system. Together with the config file, this allows a very flexible software system that could be used for virtually any computer vision problem. (Add more here)

## 2.4 Debug and Config GUI

Debug GUI features (Image and stuff) Configuration GUI management (more image and such)

## **3 Current pipeline**

This section describes the image processing pipeline that is delivered with the system and that has yielded the best performance so far.

### **3.1 Sensors**

After reading several papers on single camera top-down view people counting and implementing the methods described in said papers, the realization was made that, in order to be able to solve the problem described in section 1, some form of depth information would be necessary. Both stereo and Kinect-style sensors were considered. However due to time limitations and a customer desire to run the system on cheap hardware, the Microsoft Kinect sensor was chosen.

### **3.2 Image processing**

Information about the current image processing steps, thresholding etc etc.

### **3.3 Tracking and counting**

Information about tracking (Kalman filter) and people counting (different area and such)

### **3.4 Queue detection**

Information about: how do i detect queue?



## 4 System Evaluation

In order to measure performance some form of performance metric need to be defined, and test data and training data needed to be collected from several different settings. A program for manually labeling these data sequences was also created and is delivered with the project.

### 4.1 Ground Truth

The evaluation needs access to some sort of ground truth which defines the best possible achievable counter output. Currently the ground truth files consist of arrays with each values for each frame denoting how many people entered or exited in that specific frame. Since the focus of the system lies on maintaining a correct count over some time, the exact moment when a person exits the room is of less importance.

### 4.2 Evaluation Metric

Reading several papers on the subject of people counting it became clear that no standard for measuring people counting performance exists. In the absence of such a standard the below measurement methods were chosen since they are thought to provide an accuracy measurement of the putputs the customer is most likely to be interested in (total number of people using the room, and total number of people currently in the room). What was decided to be most desirable and important to measure was the number of people entering, leaving, and the error in the room occupancy estimation as a function of the total number of people that have entered or left the room. The equations for the three different metrics are defined below, where the subscript *Est* denotes the value generated by the system and *GT* the true value that was read from the ground truth data.

$$A_{in} = 1 - \left| \frac{\sum_{frames} in_{Est} - \sum_{frames} in_{GT}}{\sum_{frames} in_{GT}} \right| \quad (4.2.1)$$

$$A_{out} = 1 - \left| \frac{\sum_{frames} out_{Est} - \sum_{frames} out_{GT}}{\sum_{frames} out_{GT}} \right| \quad (4.2.2)$$

$$A_{in-out} = 1 - \left| \frac{(\sum_{frames} in_{Est} - \sum_{frames} out_{Est}) - (\sum_{frames} in_{GT} - \sum_{frames} out_{GT})}{\sum_{frames} in_{GT} + out_{GT}} \right| \quad (4.2.3)$$

## 5 Results

In this section the results of the project is summarized and the evaluation results are presented.

### 5.1 Evaluation Scores

In table 5.1 below the video clips chosen for the evaluation are presented, along with the achieved accuracy measurements.

<i>Sequence Name</i>	Total entered (GT)	$A_{in}$	Total exited (GT)	$A_{out}$	$A_{in-out}$
training data	0.99	0.99	0.99	0.99	0.99
evaluation data	0.99	0.99	0.99	0.99	0.99
other data	0.99	0.99	0.99	0.99	0.99
data stuff	0.99	0.99	0.99	0.99	0.99

Table 5.1: *Counting performance according to the evaluation metric as described in section 4.*

### 5.2 Discussion

Discussion stuff and more stuff.

## 6 Conclusions

The most prominent conclusion that can be drawn from this project that the problem of counting people passing through a doorway using a single camera is much much harder than what it may seem at first glance. An other is the fact that spending time on building a good software architecture increases the possibility to handle fast changes of project circumstances, as were the case here.

Need brainstorming here.

### 6.1 Improvement suggestions

As with most projects the possible improvements are many. The single improvement however that would yield the most notable increase in performance would probably be to replace the current Micorsoft Kinect with a similar sensor that has better depth accuracy.

also needs more text here.

## A Additional functionality - Tracker accuracy evaluation.

Previous experience of group members on implementing object tracking in video sequences sparked the idea of incorporating a method for evaluating object trackers into the system evaluation. The main reason for this was that an implementation in C++ using OpenCV was already available from a previous computer vision project. The evaluation metric available was the MOTA/MOTP system defined by Bernardin & Stiefelhagen in (2008) [3].

Initially the evaluation system promised good results as the implementation easily fit into the project architecture. The first evaluation was performed on short RGB test data files. Even though the implementation went smoothly, obtaining ground truth data was a whole other matter. No suitable (top-down view of people passing a doorway) clips with pre-created ground truth data were found, which meant that ground truth data would have to be labeled manually. The ground truth data was on the format specified by the CAVIAR project [8]. A program for labeling sequences frame by frame is available on the CAVIAR homepage. Because the tracker evaluation depends on accurate object positions it soon became clear that labeling enough ground truth data by stepping through sequences frame by frame to provide a feasible basis for evaluation would be far to time consuming. This is especially noticeable when one considers the fact that the actual goal of the project is to simply count people passing by, and not to track them with perfect accuracy.

The tracking evaluator is included with the final software because it works well and might be useful if the software is to be used for an other application, for example people tracking outdoors or other open spaces.

## B An unsuccessful attempt - people detection using background subtraction.

A very simple solution was tried first in the project. It consisting of a Mixture of Gaussian model[1] used for segmenting the moving foreground from the background as a binary mask. Then all connected moving objects were found and tracked using a simple tracker.g of the moving objects. This approach was developed and performed good for tracking people moving relatively fast, but worse or not at all for people moving slow and standing still. This approach suffered from problems such as be unable to handle common occlusions when people stand and move too close to each other, especially when doing so from entering to leaving the field of view. To segment persons in such situations required more advanced methods which we tried but never managed to work well enough. Further improvements on this approach were therefore never implemented. The approach also required quite some morphological operations to connect loosely connected components of humans, as seen in figure B.1, or very restrictive limits on minimum area.

Using a more sophisticated tracker with prediction and which remembered still, persons even as they became a part of the background, most problems except the severe occlusions could possibly been coped with. Another solution would have been to identify humans and disallow the background model from learning those region, eliminating the disappearances of tracked persons.

The algorithm described in [1] was chosen since it was the most recent developed background subtractor in OpenCV, and also the best performing one according to the OpenCV reference manual.



Figure B.1: *The left image shows a moving person who is detected by the background subtractor. The right image shows the binary image generated from the left image, illustrating the scattered parts separated due to none-uniform motion.*

## C An unsuccessful attempt - head detection by means of circle detection.

In [1] Gardel et.al. a method of head detection from above based on circle detection is proposed. In their approach circles, i.e. heads, are detected by first performing canny edge detection on each image frame and then performing a form of hough voting to detect circles. The hough voting is done by combining the results of a series of different filters designed to give high responses at circle and ellipse centers. We implemented their approach and experimented with many different variations of filter sizes and canny variables, with both types of circle filters described in the paper. We also tried using background subtraction on the canny image, using a mixture of Gaussian-based foreground segmentation [2] of the raw image, which gave slightly better results in simple situations. We were however not able to get any usable results for anything but the simplest cases, and therefore gave up on this approach after many fruitless attempts at tuning the system. Outputs from some of the different steps of cases where the approach was both successful and unsuccessful can be seen in figure C.1 and C.2 below.

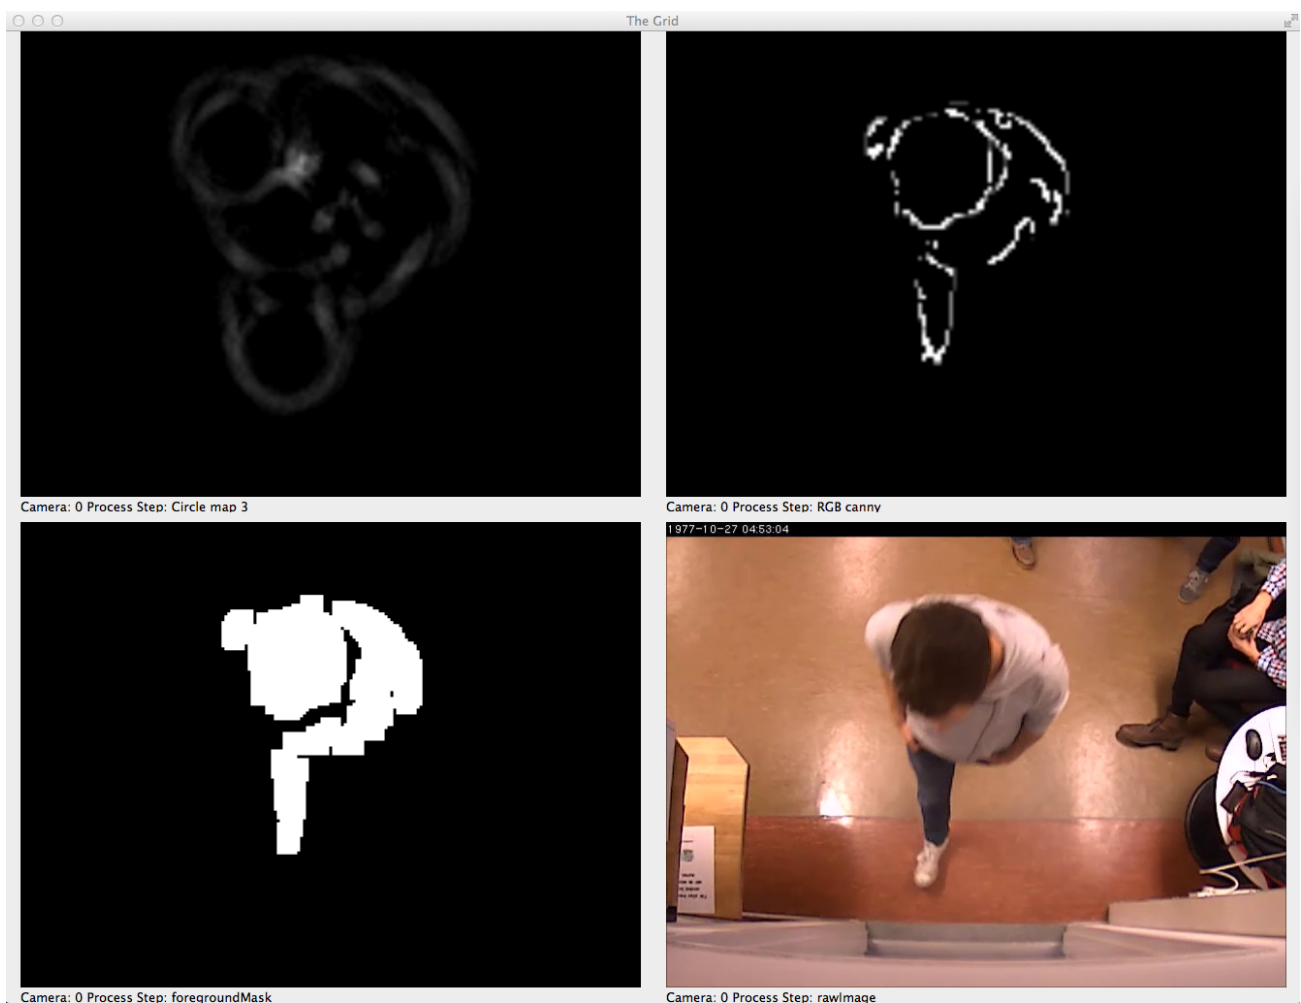


Figure C.1:

*Top left: output from one of the circle filters.*

*Top right: output from the canny edge detection after background subtraction.*

*Bottom left: foreground mask.*

*Bottom right: raw image.*

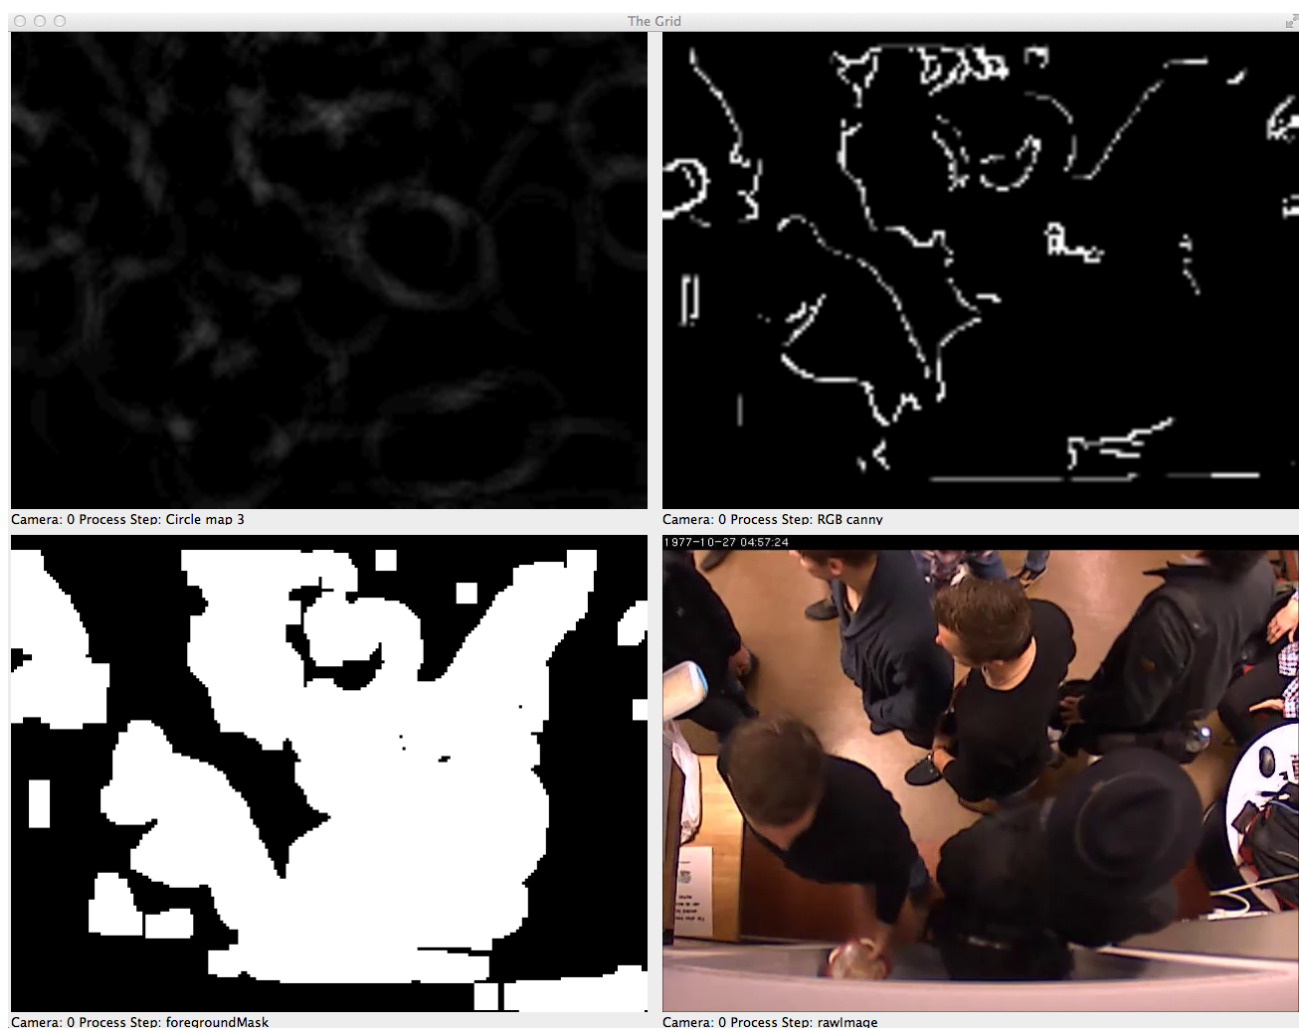


Figure C.2:

*Top left: output from one of the circle filters.*

*Top right: output from the canny edge detection after background subtraction.*

*Bottom left: foreground mask.*

*Bottom right: raw image.*

## References

- [1] Gardel, A., Bravo, I., Jimenez, P., Lazaro, J.L. & Torquemada, A.  
“*Statistical Background Models with Shadow Detection for Video Based Tracking*,”  
Intelligent Signal Processing, 2007. WISP 2007. IEEE International Symposium on?? Page: 1-6.
- [2] Zivkovic, Z. & Heijden, F.  
“*Efficient Adaptive Density Estimation per Image Pixel for the Task of Background Subtraction*,”  
Pattern recognition letters, Vol. 27, No. 7. (2006), pp. 773-780.
- [3] Bernardin, K. & Stiefelhagen, R (2008)  
“*Evaluating Multiple Object Tracking Performance: The CLEAR MOT Metrics*,”  
Interactive Systems Lab, Institut für Theoretische Informatik,  
Universität Karlsruhe, 76131 Karlsruhe, Germany
- [4] “*CAVIAR: Context Aware Vision using Image-based Active Recognition*,”  
EC Funded CAVIAR project/IST 2001 37540  
<http://homepages.inf.ed.ac.uk/rbf/CAVIAR/>

## EXAMPLE REFERENCES ONLY, REMOVE BEFORE HANDING IN

- [5] Sonka, M., Hlavac, V. & Boyle, R. *Image Processing, Analysis, and Machine Vision*.  
Toronto: Thompson Learning, cop. 2008, 3rd ed., ISBN 0495244384.
- [6] Wood, J. (2007) “*Statistical Background Models with Shadow Detection for Video Based Tracking*,”  
Master thesis, Linköping University, Department of Electrical Engineering.
- [7] Gustafsson, F., Ljung, L. & Millnert, M. *Signal Processing*.  
Studentlitteratur, Lund, Sweden, 2011, 1st ed., ISBN 978-91-44-05835-1.
- [8] “*CAVIAR: Context Aware Vision using Image-based Active Recognition*,”  
EC Funded CAVIAR project/IST 2001 37540  
<http://homepages.inf.ed.ac.uk/rbf/CAVIAR/>