DT 466

The best engine for operating and maintaining



There is simply no better engine in its class.

The International® DT 466 has long been the 'gold standard' for trucks.
medium work. Totally rebuildable in the chassis with sleeve architecture
damp, there is simply no better engine to own, operate, and maintain. The
International® DT 466, along with the rest of the International® engine family, is the
reason why the Series 4000 trucks from International® retain such value
after-sales height.

Improved performance.

The Electro-Hydraulic Fuel Injection system of International® is a
common rail design, without high-pressure external lines to drive the injectors
digital valves. This same system offers more precise synchronization control
to optimize fuel delivery, providing greater fuel economy and
lower emissions. The system is also capable of handling jet fuel 'A'
commercial, JP-8 and biodiesel (B-20).

With the Intuitive Shift™ automatic transmission interface, the shift points of the
transmission matches the engine power curves for more efficient operation
smooth and better performance, reliability, and fuel economy.

Reliability and durability.

The International® DT 466 features a design with 'wet' cylinder liners.
machined with precision, allowing the repair of the cylinders in the chassis.
Additionally, this design guarantees greater durability of the engine as it allows for
cooling in each cylinder, without hot spots. In this way the cylinders
they remain round during thermal expansion.

SPECIFICATIONS DT 466E 195/225 EPA 98

- POWER

195 / 225 / 250 hp @ 2300 rpm

- TORQUE


520 / 620 / 800 lb-ft @ 1400 rpm

 DIAMETER AND STROKE
4.59” x 4.68” (116.6mm x 118.9 mm)
 ENGINE WEIGHT (DRY)
1,425 lbs / 648 kg
 CONFIGURATION IN CYLINDERS
1-6
 VALVES PER CYLINDER
2
 BLOCK DESIGN
Wet Shirt
 DISPLACEMENT
7.6 L / 466 in.³
 OIL CAPACITY
30 quarts.
 TURBO
WG
 FUEL FILTER
Bottom part
 GOVERNOR MOTOR SPEED
2400/2600 RPM


SPECIFICATIONS DT 466E 210 EPA 04

 HP RANK
210–300 hp @ 2300 rpm
 TORQUE RANGE
520–860 lb-ft @ 1400 rpm
 ENGINE WEIGHT (DRY)
1500 lbs / 680 kg
 CONFIGURATION IN CYLINDERS
I-6
 VALVES PER CYLINDER
4
 BLOCK DESIGN
Wet Shirt
 DISPLACEMENT
7.6 L / 466 in³
 OIL CAPACITY
32 quarts.
 TURBO
EVRTTM
 FUEL FILTER
Top part
 GOVERNOR MOTOR SPEED
2400/2600 RPM


DT466

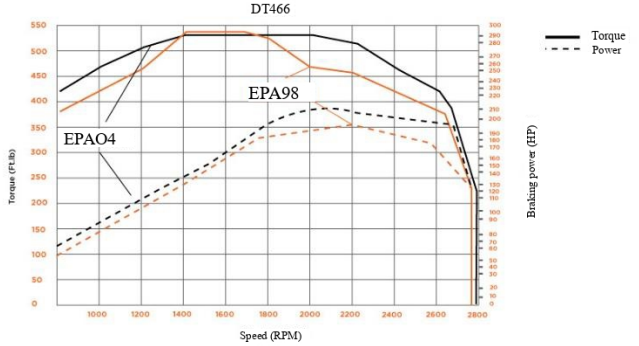

DT466E 195 EPA 98

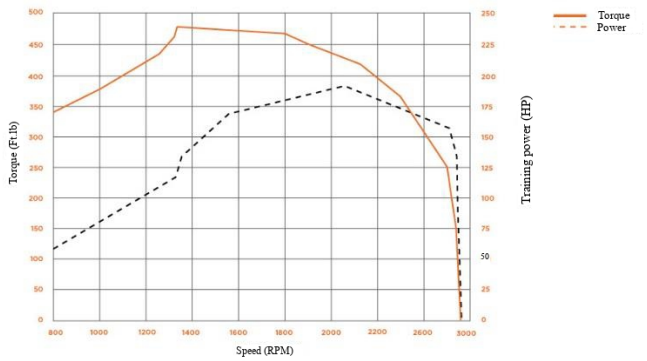

DT466E 225 EPA 98

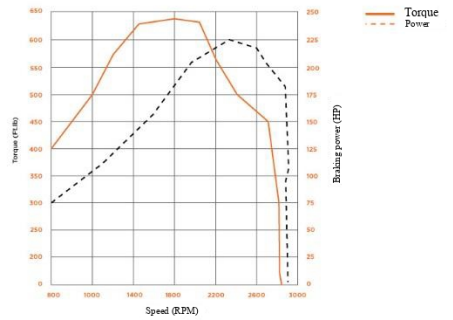

Next