


Physical Four-Carrier Modulation and Readout Architecture

45 nm compact-model transient implementation; 128×128 mapped crossbar is evaluated separately

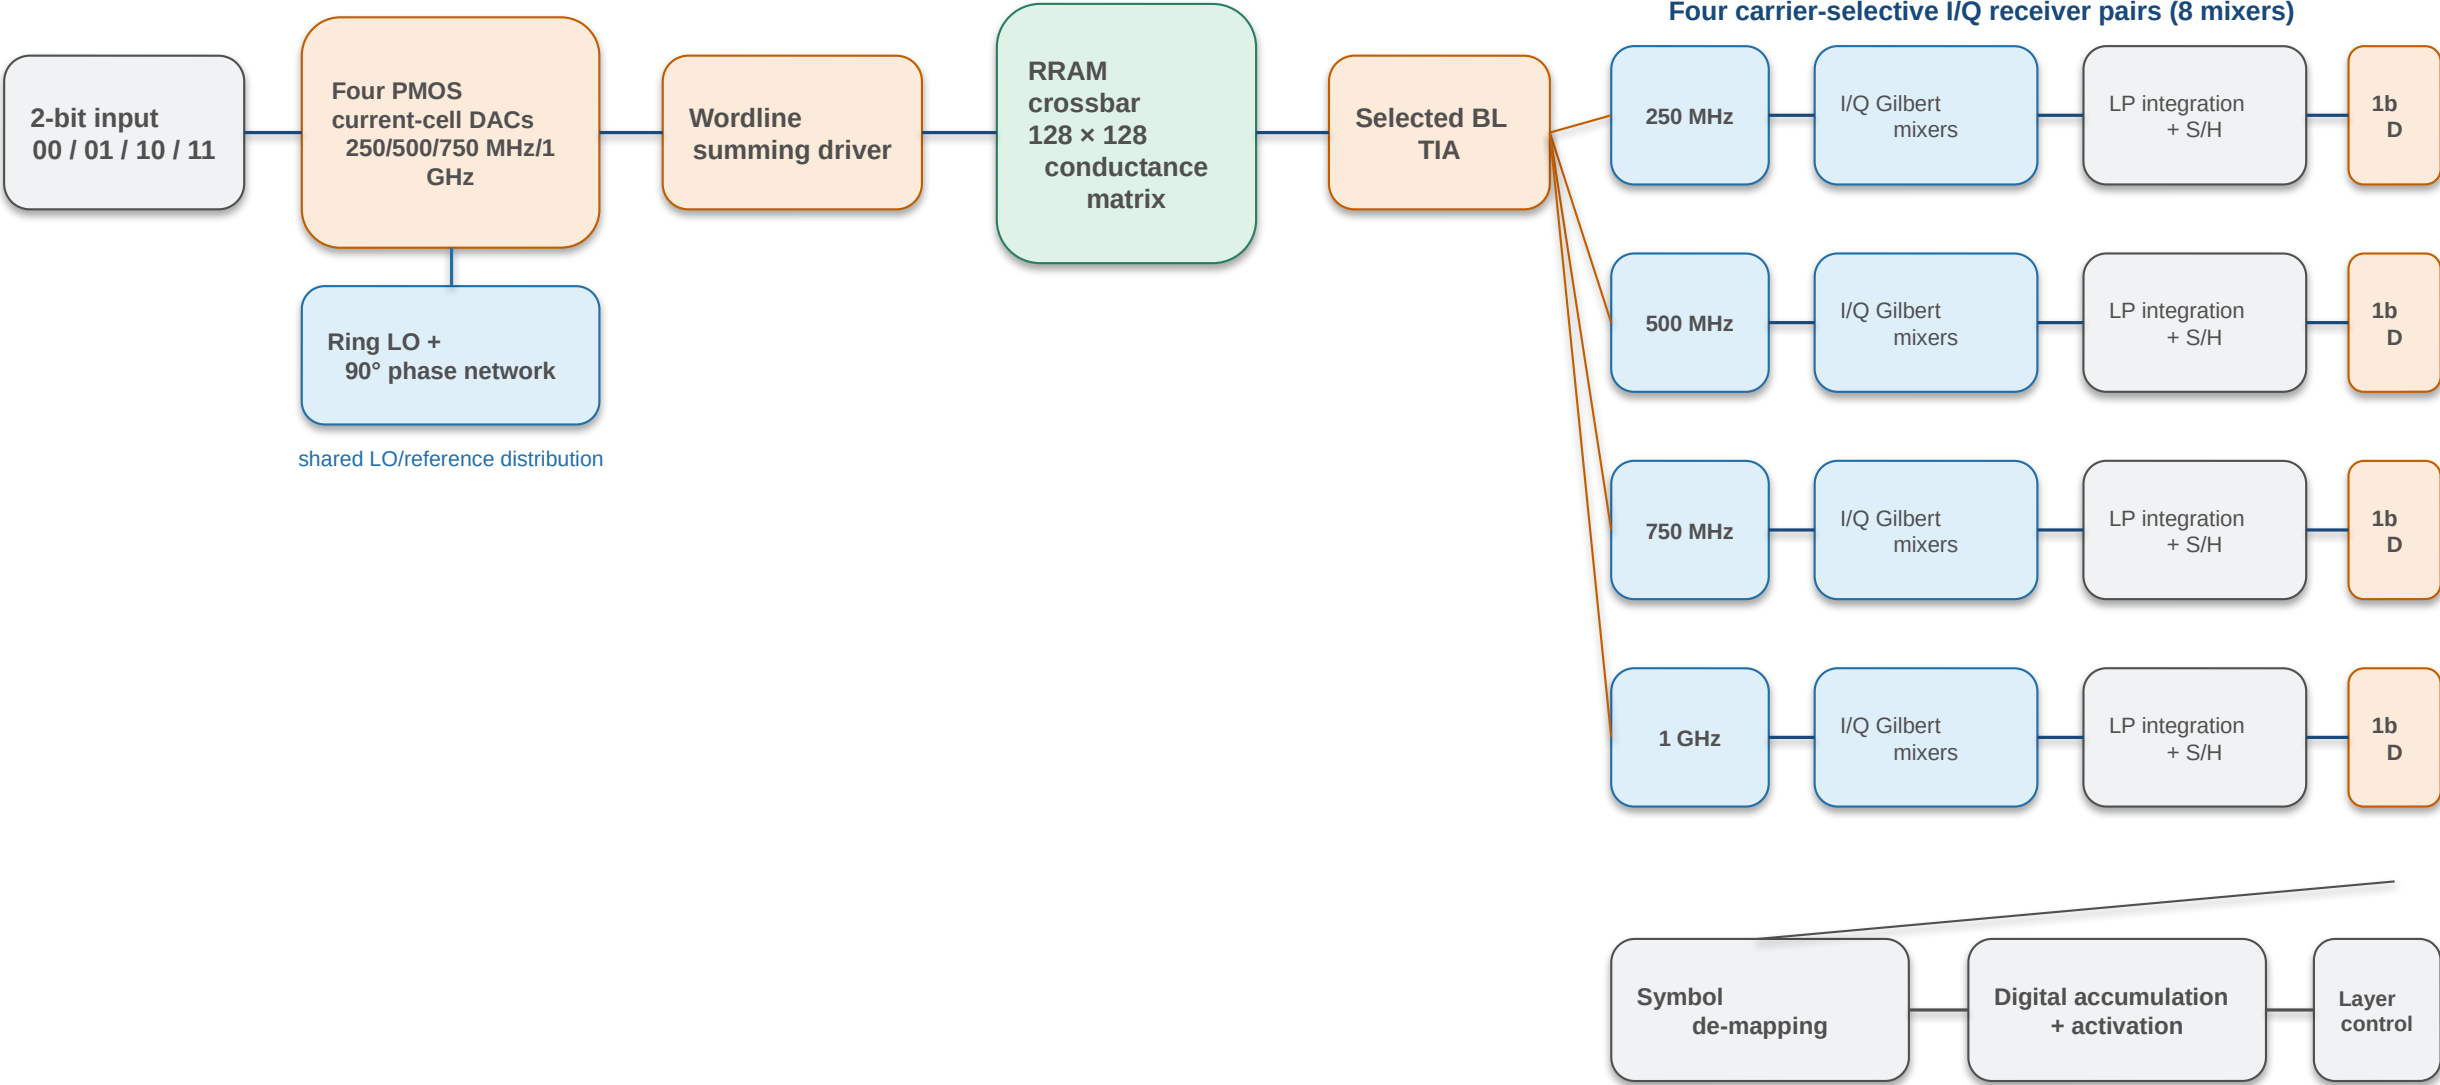

Solid blocks: transistor-level peripheral implementation. Crossbar/network mapping: separate system-level evaluation with the same carrier organization.