


FTDI 3.3V TTL to USB SERIAL CABLE
OPTIONAL FOR DEBUG OUTPUT ONLY

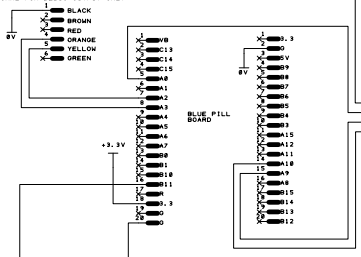

THE BLUE PILL BOARD CAN BE POWERED WITH ONE OF THESE SOURCES:

- 1) ST-LINK V2 DEBUGGER HEADER WITH 3.3V
- 2) USB SOCKET
- 3) SEPARATE 5V REGULATOR TO 5V PIN
- 4) 4.2V MODEM POWER SUPPLY TO 5V PIN

IF OPTION 4 IS USED BE CAREFUL BECAUSE IF YOU THEN PUT 5V ON THE 5V PIN OR PLUG IN THE USB THIS WILL GO TO THE MODEM WHICH MIGHT DAMAGE IT

