



Trilhos de alimentacao e terra viajam por simbolo de alimentacao, nao por linha. NADA FOI MONTADO NEM MEDIDO.

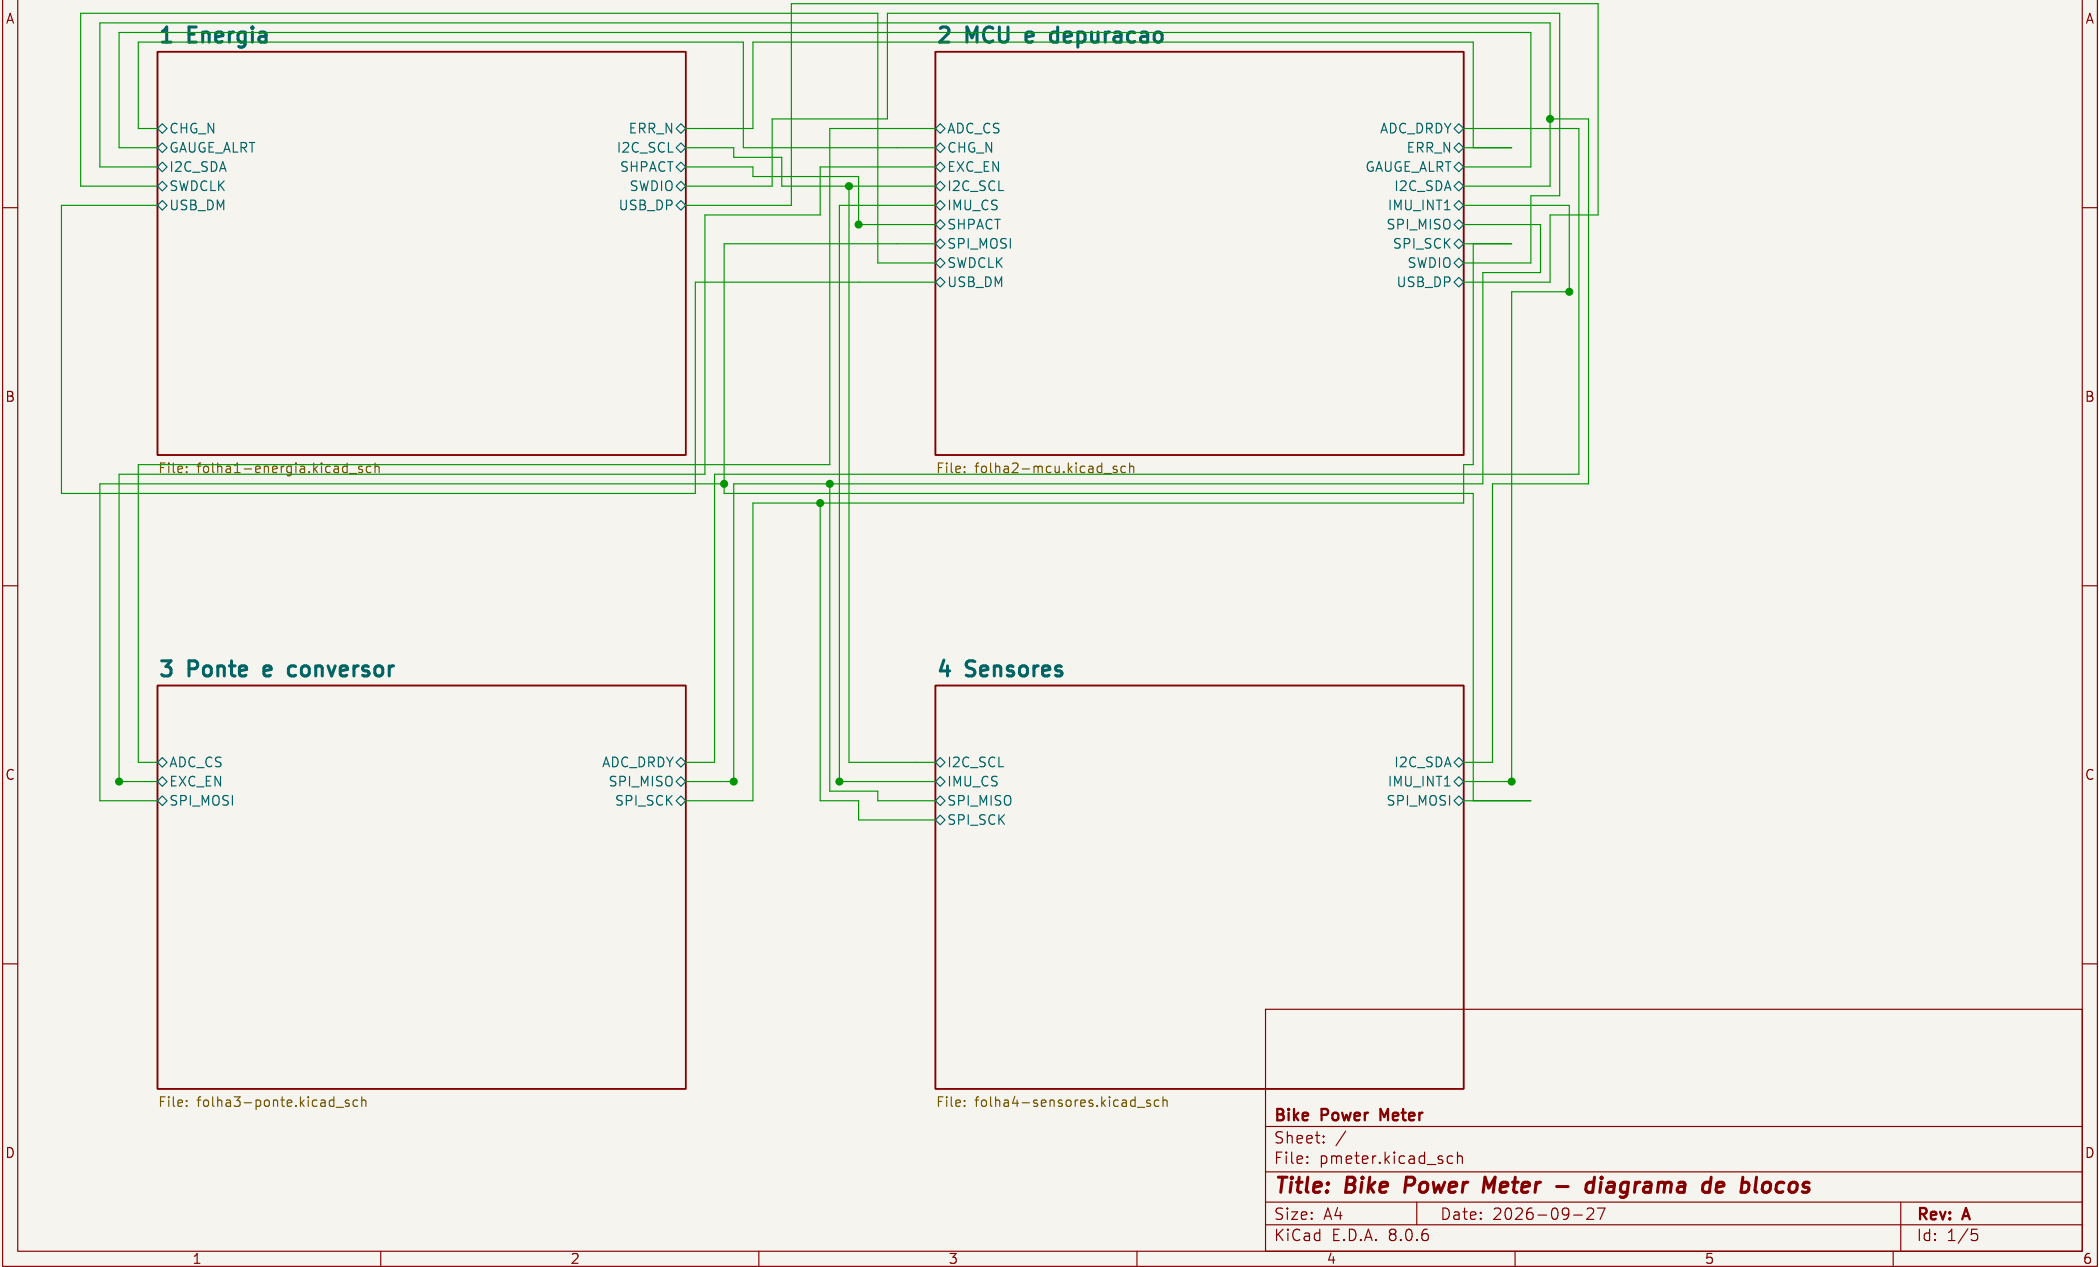


1 Energia – 24 posicoes. NADA MONTADO NEM MEDIDO.


nPM1100: carga da celula e buck de 3,0 V

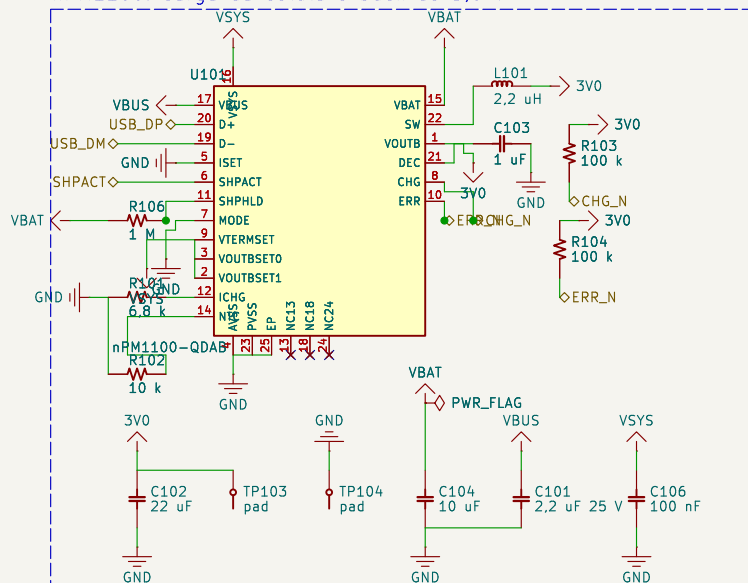

Conector magnetico e protecao

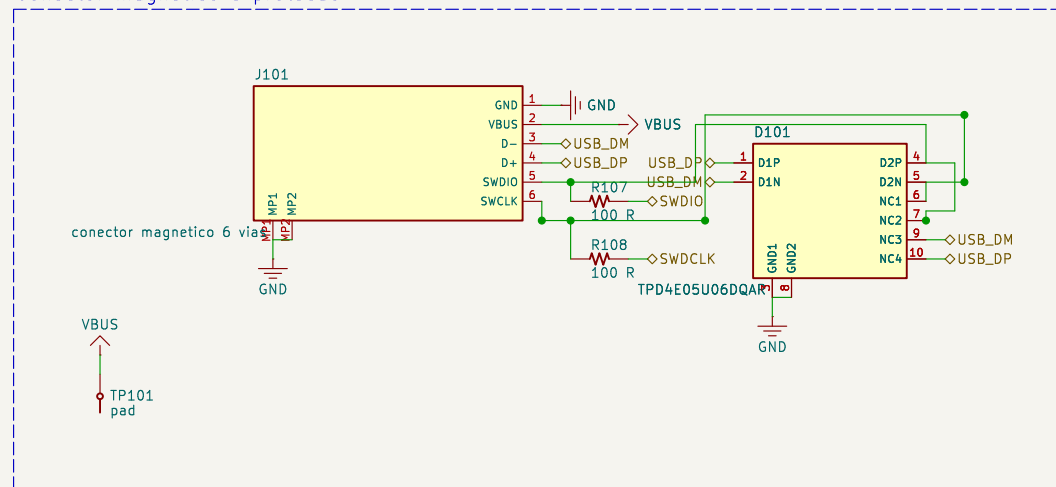

Medidor de carga e celula

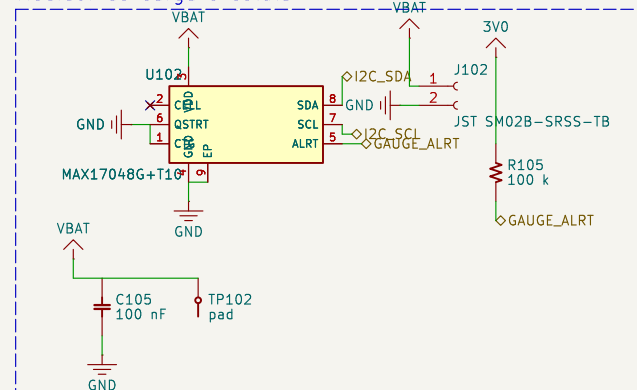

Bike Power Meter

Sheet: /1 Energia/
File: folha1-energia.kicad_sch

Title: Bike Power Meter – 1 Energia


Size: A4 Date: 2026-09-27

KiCad E.D.A. 8.0.6

Rev: A

Id: 2/5


Modulo ME54BS13 (nRF54LM20A)

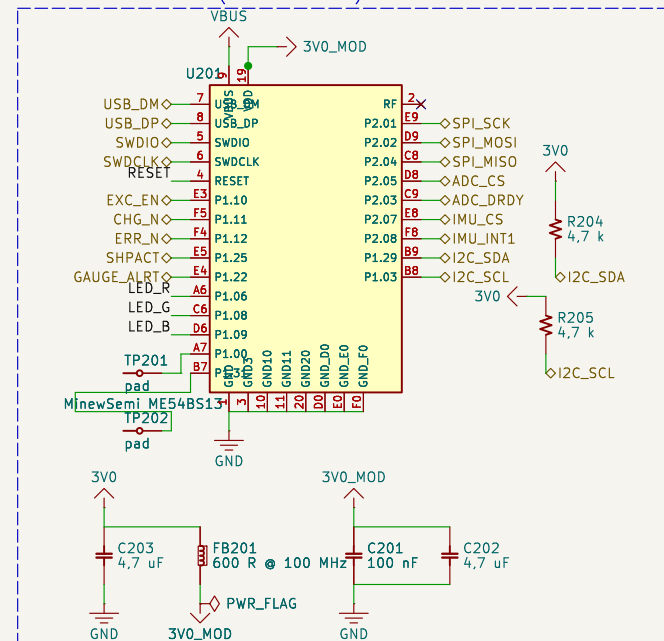


The schematic diagram illustrates the connection between the Tag-Connect TC2030-NL module and the TUOZHAN S4-3528RGBTA module. The TC2030-NL module (J201) is powered by a 3V0 source and has its ground (GND) connected to the system ground. It provides SWDIO (pin 2), RESET (pin 3), SWDCLK (pin 4), and SWO (pin 6) signals to the TUOZHAN S4-3528RGBTA module (D201). The TUOZHAN module's AN000 pin is connected to the VSYS power supply. The module also features three LEDs: LED_KG, LED_R, and LED_G, each connected to a 1.5 k resistor (R201, R202, R203) and then to the system ground. The LED_KG pin is also connected to the LED_G pin.

3 Ponte e conversor – 14 posicoes. NADA MONTADO NEM MEDIDO.


Conversor ADS1220

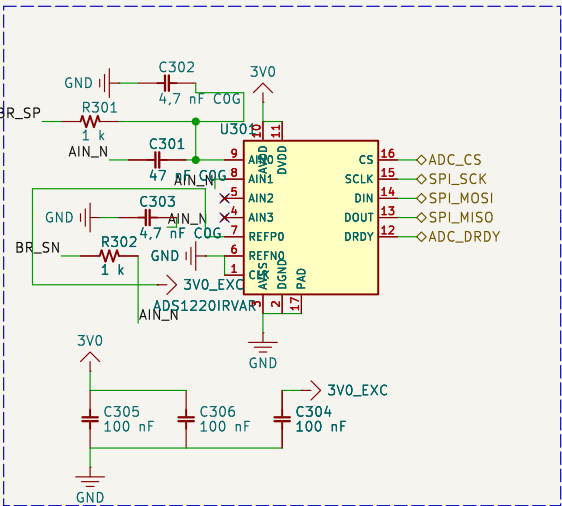

Excitacao chaveada TPS22916

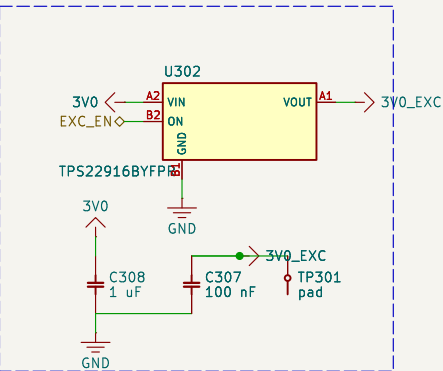

Ponte de extensometros

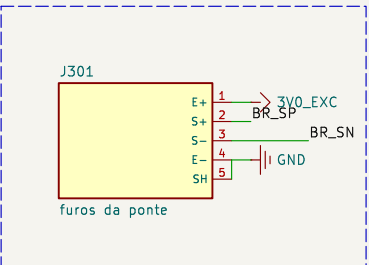

Bike Power Meter

Sheet: /3 Ponte e conversor/
File: folha3-ponte.kicad_sch

Title: Bike Power Meter – 3 Ponte e conversor

Size: A4



Date: 2026-09-27

Rev: A

KiCad E.D.A. 8.0.6

Id: 4/5

4 Sensores – 5 posicoes. NADA MONTADO NEM MEDIDO.

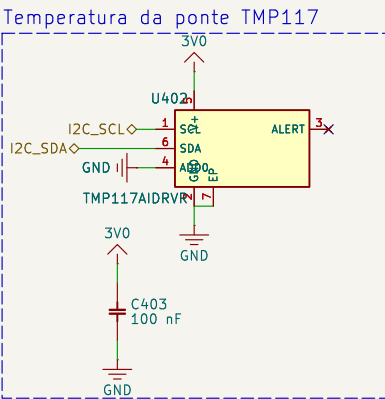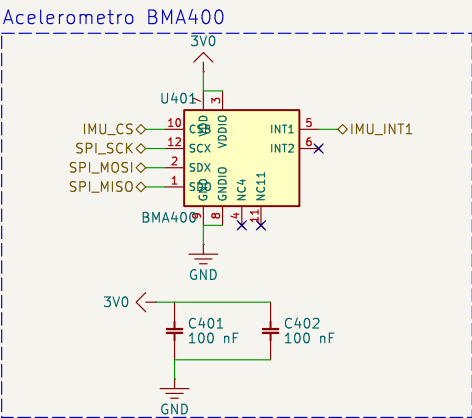

Bike Power Meter

Sheet: /4 Sensores/
File: folha4-sensores.kicad_sch

Title: Bike Power Meter – 4 Sensores

Size: A4 Date: 2026-09-27

KiCad E.D.A. 8.0.6

Rev: A

Id: 5/5