



Thesis Title

Candidate Full Name

Thesis to obtain the Master of Science Degree in

Aerospace Engineering

Supervisor(s): Prof. Full Name 1
Dr. Full Name 2

Examination Committee

Chairperson: Prof. Full Name

Supervisor: Prof. Full Name 1 (or 2)

Member of the Committee: Prof. Full Name 3

Month Year

Dedicated to someone special...

Acknowledgments

A few words about the university, financial support, research advisor, dissertation readers, faculty or other professors, lab mates, other friends and family...

Resumo

Inserir o resumo em Português aqui com o máximo de 250 palavras e acompanhado de 4 a 6 palavras-chave...

Palavras-chave: palavra-chave1, palavra-chave2,...

Abstract

Due to their inherent non-linear dynamics, designing control systems for both rotary and fixed wing aircraft is a non-trivial task, where using linear control approaches often reveal to be inaccurate. Feedback linearization is an approach to non-linear control design that algebraically transforms a non-linear system onto a linear one. From the linearised system linear control techniques can be used. However this approach, as well as other state-of-the art control systems such as model predictive control, backstepping and gain scheduling require the *a priori* exact mathematical model of the system to be controlled [1]. The lack of such a model leads to errors in the calculation of the model inversion, necessary to implement feedback linearization. Indeed, while feedback linearization control shows good tracking, it has poor disturbance rejection, that ultimately lead to these inversion errors [2]. One solution to this problem that has gained momentum over the last years is the use augmentation algorithms, namely neural networks and other intelligent algorithms, to minimize and cancel this error[3], [4], [5]. This thesis therefore aims to discuss and implement the existing alternatives to augment the precision, robustness and overall performance of feedback linearization control.

Keywords: non-linear control, feedback linearization, neural network, flight control

Contents

Acknowledgments	v
Resumo	vii
Abstract	ix
List of Tables	xiii
List of Figures	xv
Nomenclature	1
Glossary	1
1 Introduction	1
1.1 Motivation	1
1.2 Topic Overview	1
1.3 Objectives	1
1.4 Thesis Outline	1
2 Background	3
2.1 Airplane Model	3
2.2 Feedback linearisation	3
2.3 Limitations of feedback linearisation	4
2.3.1 Control improvement	4
2.4 Neural Networks	4
3 Implementation	5
3.1 Numerical Model	5
3.2 Verification and Validation	5
4 Results	7
4.1 Problem Description	7
4.2 Baseline Solution	7
4.3 Enhanced Solution	7
4.3.1 Figures	7
4.3.2 Equations	8
4.3.3 Tables	9

4.3.4	Mixing	10
5	Conclusions	13
5.1	Achievements	13
5.2	Future Work	13
	Bibliography	15
A	Vector calculus	17
A.1	Vector identities	17
B	Technical Datasheets	19
B.1	Some Datasheet	19

List of Tables

4.1	Table caption shown in TOC.	9
4.2	Memory usage comparison (in MB).	10
4.3	Another table caption.	10
4.4	Yet another table caption.	10
4.5	Very wide table.	10

List of Figures

4.1	Caption for figure in TOC.	7
4.2	Some aircrafts.	8
4.3	Schematic of some algorithm.	8
4.4	Figure and table side-by-side.	11

Chapter 1

Introduction

Insert your chapter material here...

1.1 Motivation

Define: usefulness of NLI vs robust control and problems of NLI

1.2 Topic Overview

Brief description of the solutions to be studied and how they will be used to improve control

1.3 Objectives

Goals: create systems able to adapt to changes of the airplane's dynamic

1.4 Thesis Outline

Background includes in this order: NLI theory, NLI problematic, neural network theory Implementation:
? Results: ???

Chapter 2

Background

On this chapter the aircraft model used for this work will be described firstly. A theoretical model of the plane's dynamics will be discussed, and implementation detail will be provided on the chapter 3. The control strategy used will then follow, giving an overview of the feedback linearisation approach, as well as its limitations, namely its sensitivity to inversion errors and external interferences. An attempt to solve these limitation will be made, suggesting some solutions and finally describing the chosen methodology for this case.

2.1 Airplane Model

The work made in this thesis was built on top of the work done by H. Escamilla Nuñez and F. Mora Camino on 4D trajectory tracking [?]. The model used in this work of a six degree of freedom transport aircraft will be described in this section. The first step before describing the dynamics of a commercial aircraft will be to define the frames pf reference used to do so. The first frame of reference, on which 4D trajectories are described, corresponds to the WGS84 frame of reference. A second frame of reference corresponding to the aircraft's body frame will be used to provide its fast rotational dynamics. Lastly all aerodynamic forces will be applied in the axial directions of the wind frame. This frame is aligned to the wind speed vector relative to the airplane, given by both the angle of attack α and the sideslip angle β . For these last two frames of reference, a rotation matrix can be defined from the wind frame to the body frame by

$$R_{WB} = \begin{bmatrix} c_\alpha c_\beta & -c_\alpha s_\beta & -s_\alpha \\ s_\beta & c_\beta & 0 \\ s_\alpha c_\beta & -s_\alpha s_\beta & c_\alpha \end{bmatrix} \quad (2.1)$$

To describe the attitude of the plane Euler angles will also be used,

2.2 Feedback linearisation

Feedback linearisation, also known as dynamic inversion, is an approach based on the idea of algebraically transforming a non-linear system into a linear one, from which linear control laws can be used to control the resulting system. Unlike Jacobian linearisation, that assumes linearity of the system around an equilibrium value, feedback linearisation implements a feedback loop that cancels non-linearities of the given system.

2.3 Limitations of feedback linearisation

2.3.1 Control improvement

2.4 Neural Networks

Chapter 3

Implementation

Insert your chapter material here...

3.1 Numerical Model

Description of the numerical implementation of the models explained in Chapter 2...

3.2 Verification and Validation

Basic test cases to compare the implemented model against other numerical tools (verification) and experimental data (validation)...

Chapter 4

Results

Insert your chapter material here...

4.1 Problem Description

Description of the baseline problem...

4.2 Baseline Solution

Analysis of the baseline solution...

4.3 Enhanced Solution

Quest for the optimal solution...

4.3.1 Figures

Insert your section material and possibly a few figures...

Make sure all figures presented are referenced in the text!

Images



Figure 4.1: Caption for figure.



(a) Airbus A320



(b) Bombardier CRJ200

Figure 4.2: Some aircrafts.

Make reference to Figures 4.1 and 4.2.

By default, the supported file types are *.png, .pdf, .jpg, .mps, .jpeg, .PNG, .PDF, .JPG, .JPEG*.

See http://mactex-wiki.tug.org/wiki/index.php/Graphics_inclusion for adding support to other extensions.

Drawings

Insert your subsection material and for instance a few drawings...

The schematic illustrated in Fig. 4.3 can represent some sort of algorithm.

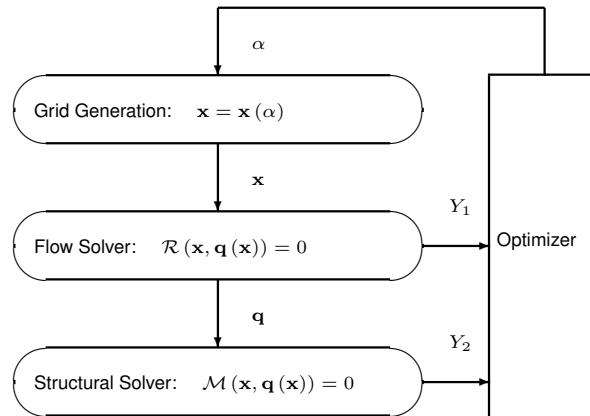


Figure 4.3: Schematic of some algorithm.

4.3.2 Equations

Equations can be inserted in different ways.

The simplest way is in a separate line like this

$$\frac{dq_{ijk}}{dt} + \mathcal{R}_{ijk}(\mathbf{q}) = 0. \quad (4.1)$$

If the equation is to be embedded in the text. One can do it like this $\partial\mathcal{R}/\partial\mathbf{q} = 0$.

It may also be split in different lines like this

$$\begin{aligned} &\text{Minimize} && Y(\alpha, \mathbf{q}(\alpha)) \\ &\text{w.r.t.} && \alpha, \\ &\text{subject to} && \mathcal{R}(\alpha, \mathbf{q}(\alpha)) = 0 \\ &&& C(\alpha, \mathbf{q}(\alpha)) = 0. \end{aligned} \tag{4.2}$$

It is also possible to use subequations. Equations 4.3a, 4.3b and 4.3c form the Navier–Stokes equations 4.3.

$$\frac{\partial \rho}{\partial t} + \frac{\partial}{\partial x_j} (\rho u_j) = 0, \tag{4.3a}$$

$$\frac{\partial}{\partial t} (\rho u_i) + \frac{\partial}{\partial x_j} (\rho u_i u_j + p \delta_{ij} - \tau_{ji}) = 0, \quad i = 1, 2, 3, \tag{4.3b}$$

$$\frac{\partial}{\partial t} (\rho E) + \frac{\partial}{\partial x_j} (\rho E u_j + p u_j - u_i \tau_{ij} + q_j) = 0. \tag{4.3c}$$

4.3.3 Tables

Insert your subsection material and for instance a few tables...

Make sure all tables presented are referenced in the text!

Follow some guidelines when making tables:

- Avoid vertical lines
- Avoid “boxing up” cells, usually 3 horizontal lines are enough: above, below, and after heading
- Avoid double horizontal lines
- Add enough space between rows

Model	C_L	C_D	C_{My}
Euler	0.083	0.021	-0.110
Navier–Stokes	0.078	0.023	-0.101

Table 4.1: Table caption.

Make reference to Table 4.1.

Tables 4.2 and 4.3 are examples of tables with merging columns:

An example with merging rows can be seen in Tab.4.4.

If the table has too many columns, it can be scaled to fit the text width, as in Tab.4.5.

	Virtual memory [MB]	
	Euler	Navier–Stokes
Wing only	1,000	2,000
Aircraft	5,000	10,000
(ratio)	5.0×	5.0×

Table 4.2: Memory usage comparison (in MB).

		$w = 2$			$w = 4$		
		$t = 0$	$t = 1$	$t = 2$	$t = 0$	$t = 1$	$t = 2$
$dir = 1$							
c		0.07	0.16	0.29	0.36	0.71	3.18
c		-0.86	50.04	5.93	-9.07	29.09	46.21
c		14.27	-50.96	-14.27	12.22	-63.54	-381.09
$dir = 0$							
c		0.03	1.24	0.21	0.35	-0.27	2.14
c		-17.90	-37.11	8.85	-30.73	-9.59	-3.00
c		105.55	23.11	-94.73	100.24	41.27	-25.73

Table 4.3: Another table caption.

ABC	header			
	1.1	2.2	3.3	4.4
IJK	group	0.5		0.6
		0.7		1.2

Table 4.4: Yet another table caption.

Variable	a	b	c	d	e	f	g	h	i	j
Test 1	10,000	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000
Test 2	20,000	40,000	60,000	80,000	100,000	120,000	140,000	160,000	180,000	200,000

Table 4.5: Very wide table.

4.3.4 Mixing

If necessary, a figure and a table can be put side-by-side as in Fig.4.4



Legend		
A	B	C
0	0	0
0	1	0
1	0	0
1	1	1

Figure 4.4: Figure and table side-by-side.

Chapter 5

Conclusions

Insert your chapter material here...

5.1 Achievements

The major achievements of the present work...

5.2 Future Work

A few ideas for future work...

Bibliography

- [1] S. et al. State-of-the-art intelligent flight control systems in unmanned aerial vehicles. *IEEE TRANSACTIONS ON AUTOMATION SCIENCE AND ENGINEERING*, 2017.
- [2] A. Zulu and S. John. A review of control algorithms for autonomous quadrotors. *Open Journal of Applied Sciences*, 2014.
- [3] A. K. S. et al. Neuro-adaptive augmented dynamic inversion controller for quadrotor. *IFAQ Papers Online*, 2016.
- [4] M. P. et al. Augmentation of a non linear dynamic inversion scheme within the nasa ifcs f-15 wvu simulator. *Proceedings of the American Control Conference*, 2013.
- [5] T. X. et al. Adaptive flight control for quadrotor uavs with dynamic inversion and neural networks. *IEEE International Conference on Multisensor Fusion and Integration for Intelligent Systems (MFI)*, 2016.

Appendix A

Vector calculus

In case an appendix is deemed necessary, the document cannot exceed a total of 100 pages...

Some definitions and vector identities are listed in the section below.

A.1 Vector identities

$$\nabla \times (\nabla \phi) = 0 \tag{A.1}$$

$$\nabla \cdot (\nabla \times \mathbf{u}) = 0 \tag{A.2}$$

Appendix B

Technical Datasheets

It is possible to add PDF files to the document, such as technical sheets of some equipment used in the work.

B.1 Some Datasheet

BENEFITS

Maximum Light Capture

SunPower's all-back contact cell design moves gridlines to the back of the cell, leaving the entire front surface exposed to sunlight, enabling up to 10% more sunlight capture than conventional cells.

Superior Temperature Performance

Due to lower temperature coefficients and lower normal cell operating temperatures, our cells generate more energy at higher temperatures compared to standard c-Si solar cells.

No Light-Induced Degradation

SunPower n-type solar cells don't lose 3% of their initial power once exposed to sunlight as they are not subject to light-induced degradation like conventional p-type c-Si cells.

Broad Spectral Response


SunPower cells capture more light from the blue and infrared parts of the spectrum, enabling higher performance in overcast and low-light conditions.

Broad Range Of Application

SunPower cells provide reliable performance in a broad range of applications for years to come.

The SunPower™ C60 solar cell with proprietary Maxeon™ cell technology delivers today's highest efficiency and performance.

The anti-reflective coating and the reduced voltage-temperature coefficients provide outstanding energy delivery per peak power watt. Our innovative all-back contact design moves gridlines to the back of the cell, which not only generates more power, but also presents a more attractive cell design compared to conventional cells.

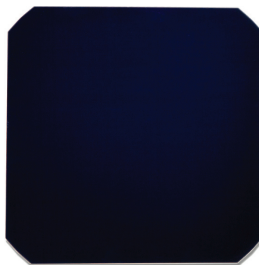

SunPower's High Efficiency Advantage


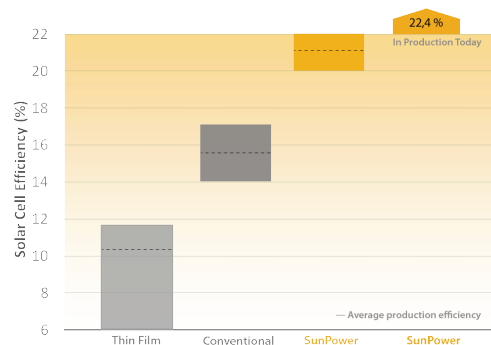


Photo courtesy of 3S Photovoltaics

Electrical Characteristics of Typical Cell at Standard Test Conditions (STC)

STC: 1000W/m², AM 1.5g and cell temp 25°C


Bin	P _{mp} (Wp)	Eff. (%)	V _{mp} (V)	I _{mp} (A)	V _{oc} (V)	I _{sc} (A)
G	3.34	21.8	0.574	5.83	0.682	6.24
H	3.38	22.1	0.577	5.87	0.684	6.26
I	3.40	22.3	0.581	5.90	0.686	6.27
J	3.42	22.5	0.582	5.93	0.687	6.28

All Electrical Characteristics parameters are nominal
Unlaminated Cell Temperature Coefficients
Voltage: -1.8 mV / °C Power: -0.32% / °C


Positive Electrical Ground

Modules and systems produced using these cells must be configured as "positive ground systems".

TYPICAL I-V CURVE

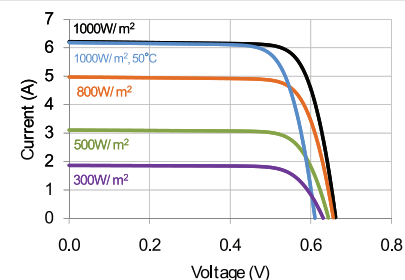


SPECTRAL RESPONSE

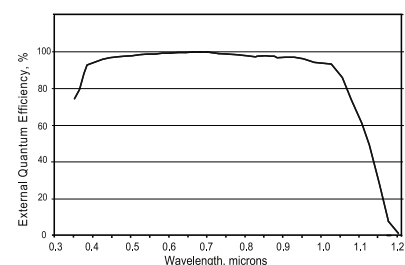

Physical Characteristics


Construction:	All back contact
Dimensions:	125mm x 125mm (nominal)
Thickness:	165µm ± 40µm
Diameter:	160mm (nominal)

Cell and Bond Pad Dimensions

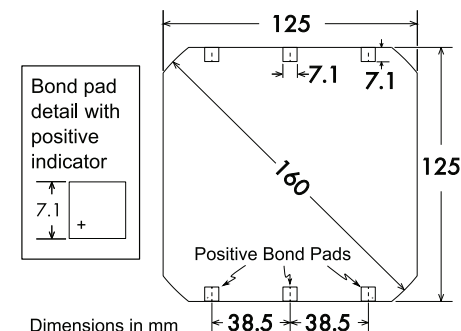

Bond pad area dimensions are 7.1mm x 7.1mm
Positive pole bond pad side has "+" indicator on leftmost and rightmost bond pads.

Interconnect Tab and Process Recommendations



Tin plated copper interconnect. Compatible with lead free process.

Packaging

Cells are packed in boxes of 1,200 each; grouped in shrink-wrapped stacks of 150 with interleaving. Twelve boxes are packed in a water-resistant "Master Carton" containing 14,400 cells suitable for air transport.

Interconnect tabs are packaged in boxes of 1,200 each.

About SunPower

SunPower designs, manufactures, and delivers high-performance solar electric technology worldwide. Our high-efficiency solar cells generate up to 50 percent more power than conventional solar cells. Our high-performance solar panels, roof tiles, and trackers deliver significantly more energy than competing systems.