## FEATURES

- Copper body material for high conductivity and easy crimping
- Tin plating for resistance to corrosion
- Added strength and excellent conductivity
- Vinyl insulation for electrical insulation and terminal protection
- Colour coded insulation for easy identification of terminal size
- Expanded insulation entry for easy wire insertion

# RS PRO Insulated Ring Terminal, M4 Stud Size, 0.5mm² to 1.5mm² Wire Size, Red

**RS Stock No.: 613-9249**



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

From RS PRO a high-quality insulated crimp ring terminal, also known as a ring connector or cable lug. Ring crimp terminals are used for connecting an electrical cable or wire to a stud or a post on an electrical component such as a battery terminal. This ring terminal is made from highly conductive copper and then tin plated for maximum electrical conductivity and corrosion resistance. A colour coded vinyl insulation provides protection to the terminal and aids quick identification of the terminal size. Once correctly crimped onto a wire or cable this ring terminal will provide a secure and reliable electrical connection.

## General Specifications

| | |
|---|---|
| **Insulation** | Insulated |
| **Insulation Material** | Vinyl |
| **Colour** | Red |
| **Contact Material** | Copper |
| **Contact Plating** | Tin |
| **Stud Size** | M4 |
| **Application** | Wide range of industries for connecting wires to electrical components. Applications include wiring in industrial control systems and industrial machines, automotive applications, communication equipment, power supplies and domestic appliances. |

## Electrical Specifications

| | |
|---|---|
| **Maximum Electrical Rating** | 105°C 600 VOLTS MAX. |
| **Maximum Electrical Current** | 22 AWG: 9A, 20AWG: 12A,18 AWG: 17A, 16AWG: 18A |

## Mechanical Specifications


| | |
|---|---|
| **Thickness** | 0.75mm |
| **Overall Length** | 20.4mm |
| **Inner Ring Diameter** | 4.3mm |
| **Outer Ring Diameter** | 6.6mm |
| **Maximum Wire Size** | 1.5mm^2 |
| **Minimum Wire Size** | 0.5mm^2 |
| **Maximum Wire Size (AWG)** | 16AWG |
| **Minimum Wire Size (AWG)** | 22AWG |


## Operation Environment Specifications

| | |
|---|---|
| **Maximum Operating Temperature** | 105°C |

## Approvals

| | |
|---|---|
| **Compliance/Certifications** | UL |

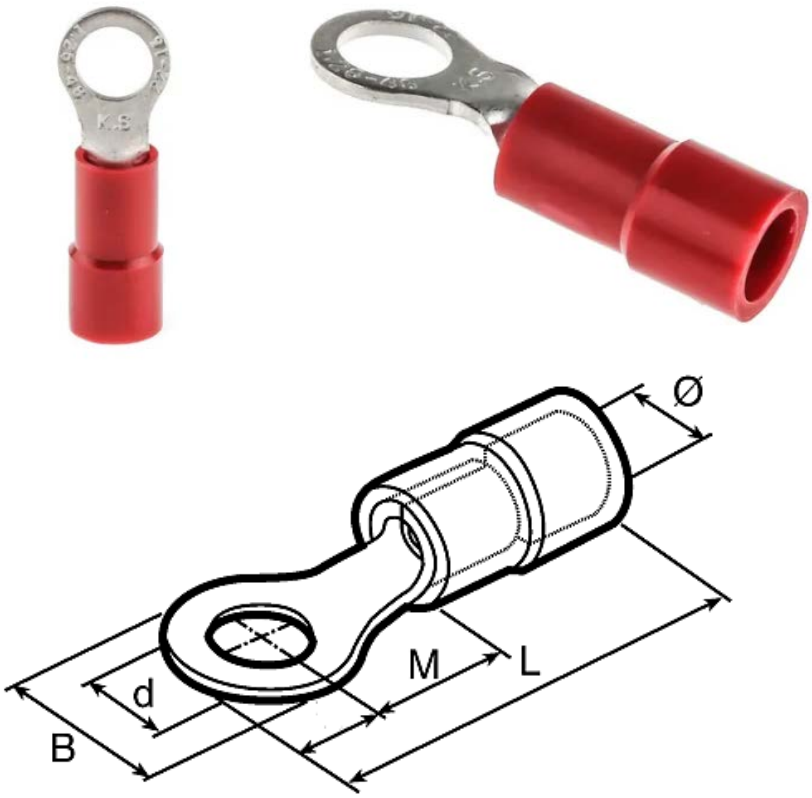
Ø
M
L
d
B

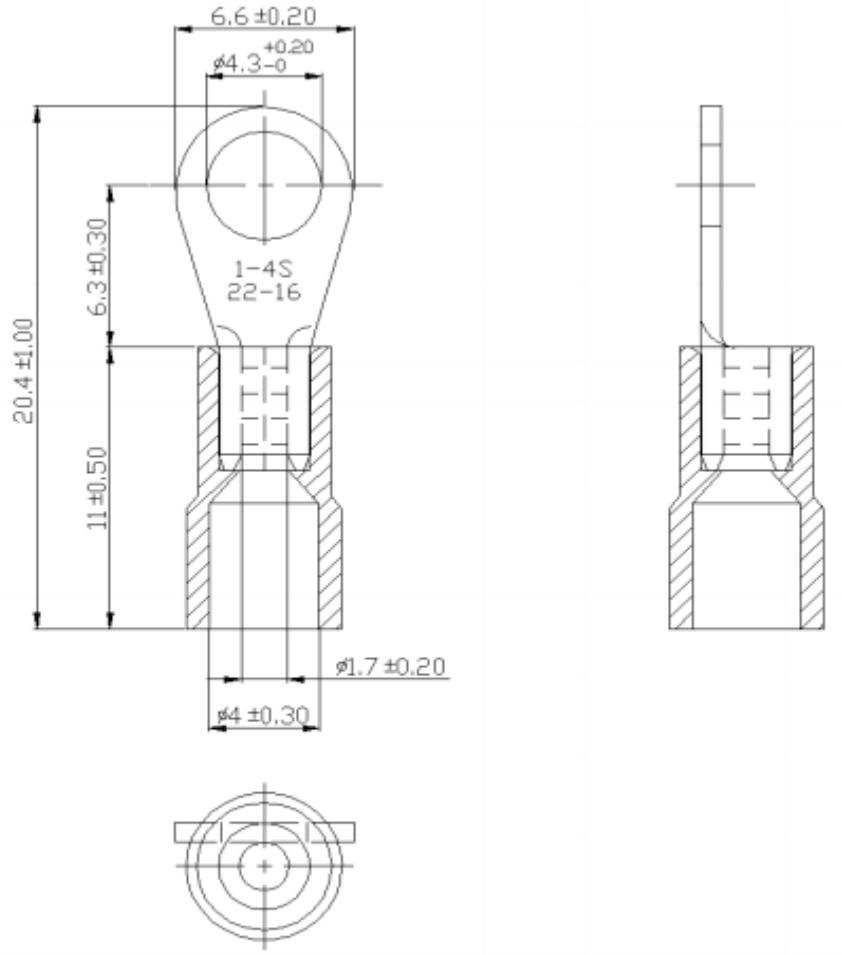


**MAXIMUM ELECTRIC CURRENT:**

| A.W.G. | 22 | 20 | 18 | 16 |
|---|---|---|---|---|
| AMP. | 9 | 12 | 17 | 18 |



**MAXIMUM ELECTRICAL RATING:** 105°C 600 VOLTS MAX.

**INSULATION MATERIAL:** VINYL

**INSULATION COLOR:** 22-16A.W.G.: RED

**TERMINAL MATERIAL:** COPPER

| WIRE RANGE A.W.G. $mm^2$ | ITEM NO. | STUD SIZE | | DIMENSION inch(mm) | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | BUTTED SEAM | d2 | | W | F | L | E | D | d1 | T |
| 22-16 A.W.G. 0.5-1.5 $mm^2$ | **613-9249** | #8 | 0.169 4.3 | 0.26 6.6 | 0.248 6.3 | 0.803 20.4 | 0.433 11 | 0.157 4.000 | 0.067 1.7 | 0.03 0.75 |

| Wire Size | Colour | Stud Size | Replacement Stock Number |
|---|---|---|---|
| 0.5 to 1.5 mm2 | Red | M4 | 613-9249 |
| 1.5 to 2.5 mm2 | Blue | M4 | 613-9508 |
| 1.5 to 2.5 mm2 | Blue | M5 | 613-9312 |
| 4 to 6 mm2 | Yellow | M6 | 613-9413 |
| 0.5 to 1.5 mm2 | Red | M4 | 613-9479 |
| 1.5 to 2.5 mm2 | Blue | M4 | 613-9435 |