

SL-850




Size: 1/2AA

› XOL – extended operating life


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	1.2 Ah
Nominal current	0.5 mA
Max. continuous discharge current	20 mA
Pulse current capability	50 mA
Anode surface area	6 cm ²
Lithium content	0.35 g
Weight	9.6 g
Volume	4 cm ³
Temperature range	–55 °C ... +85 °C

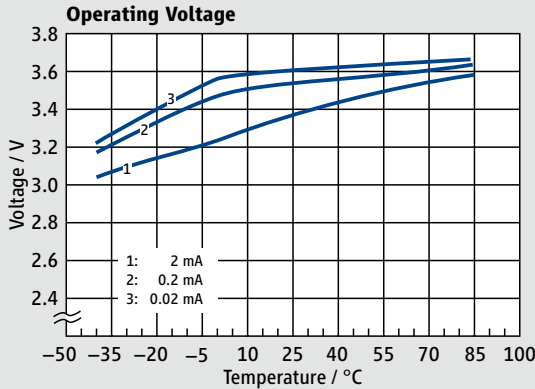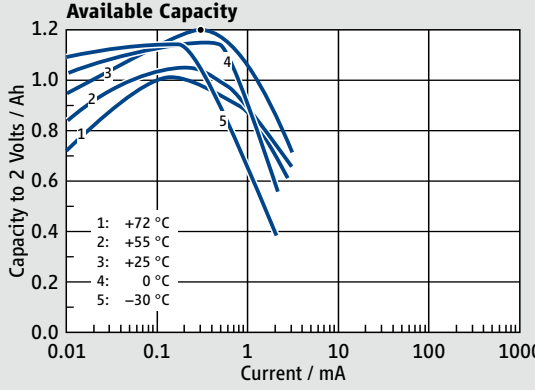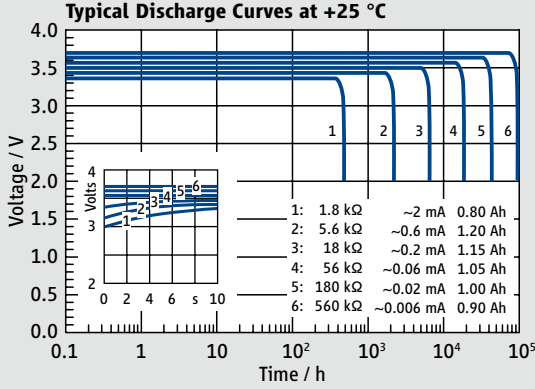


SL-850/S

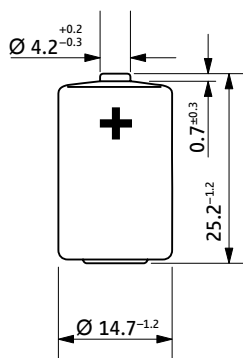


SL-850/T




SL-850/P

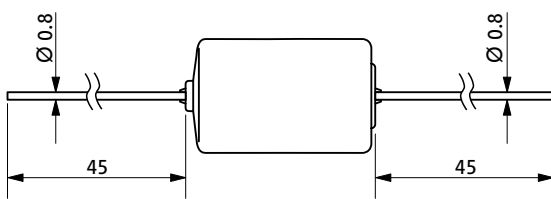

SL-850/PR



SL-850/PT



Available Terminations

Termination	Catalogue No.
SL-850/S	Standard 11 1 08501 00
SL-850/T	Tags 11 1 08502 00
SL-850/P	Pins 11 1 08503 00
SL-850/PR	Pins radial 11 1 08506 00
SL-850/PT	Polarized tags 11 1 08508 00

WARNING: Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

SL-861




Size: 2/3AA

› XOL – extended operating life


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	1.6 Ah
Nominal current	0.5 mA
Max. continuous discharge current	30 mA
Pulse current capability	75 mA
Anode surface area	9 cm ²
Lithium content	0.5 g
Weight	12.5 g
Volume	5.2 cm ³
Temperature range	–55 °C ... +85 °C

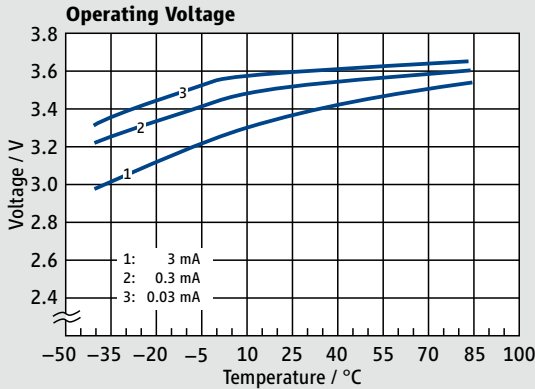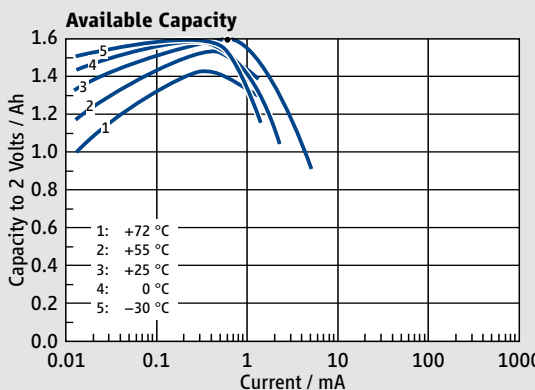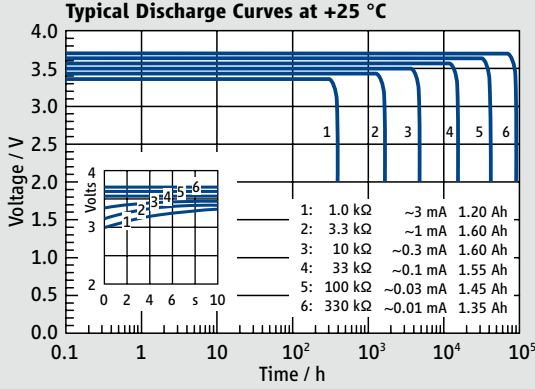


SL-861/S

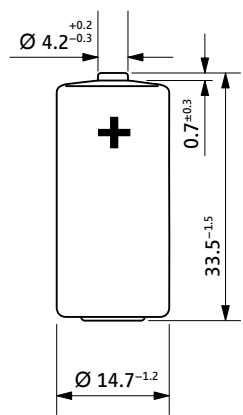


SL-861/T




SL-861/P

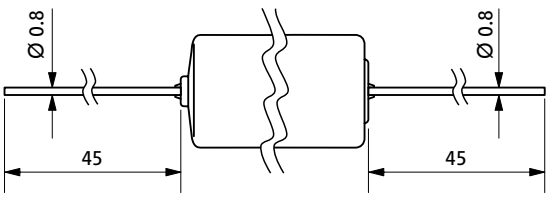

SL-861/PR



SL-861/PT



Available Terminations

Termination	Catalogue No.
SL-861/S	Standard 11 1 08611 00
SL-861/T	Tags 11 1 08612 00
SL-861/P	Pins 11 1 08613 00
SL-861/PR	Pins radial 11 1 08616 00
SL-861/PT	Polarized tags 11 1 08618 00

WARNING: Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.