PANORAMA

HOME DESIGN GUIDELINES

October 2025



TABLE OF CONTENTS

A. INTRODUCTION 3

Purpose ... 3
Disclaimer ... 3

B. RESIDENTIAL & COMMERCIAL DEVELOPMENT STANDARDS 4

Residential ... 4
Commercial ... 12

C. ARCHITECTURE 13

Required Features ... 13
Universal Required Exterior Features ... 13
Additional Features for Front of House (Choose Three) ... 14
Architectural Design Principles and Product Mix ... 15
Architectural Design Principles ... 15
Product Mix and Architectural Diversity ... 16
Product Mix ... 16

D. GENERAL DESIGN CRITERIA 17

Applicability ... 17
Principles to Achieve a Scaled and Articulated Building ... 17
Building Massing & Architectural Relief ... 18
Garages ... 20
Roof Forms and Elements ... 21
Roof Form ... 21
Architectural Elements ... 22
Building Elevations and Articulation ... 22
Covered Entryways and Porches ... 22
Garage Elevations and Doors ... 22
Future Projects ... 23
RV Pad & Extended Driveway Guidelines for Medium & Large Lots ... 24
Windows ... 26
Elevated or Walkout Decks ... 26
Columns and Supports ... 27
Skylights ... 28
Solar Panels ... 28
Exterior Materials and Colors ... 29
Building Materials Overview ... 29
Roof Materials and Colors (Type and Application) ... 29
Wall Materials (Type and Application) ... 29
Material Changes and Transitions ... 30
Building Colors ... 30
Exterior Building Lighting ... 31
Accessory Structures ... 31
Exterior Equipment and Features ... 32
Mechanical, Electrical, and Communications Equipment ... 32
Antennas and Satellite Systems ... 32
Solar Panels and Equipment ... 32
Gutters and Downspouts ... 32
Fencing ... 33




TABLE OF CONTENTS

Fencing Responsibility Exhibit....33
Fencing Restrictions....34
Fence Stepping and Racking....34

E. LANDSCAPING **35**

General Guidelines....35
Turf....35
Mulch....35
Retaining Walls....36
Storm Water & Storm Water System....36
Lot Grading....36
Plant Materials....36
Planting Beds....36
Irrigation....37
Total Irrigated Area of Lot....37
Calculating the Square Footage for Front Yard Landscaping....38
Front Yard Landscaping Completion Requirements....38
Side and Back Yard Landscaping Completion Requirements....38
Landscaping Maintenance Requirements....39
Submitting a Landscaping Plan....39
Landscaping Monotony Requirements....39
Planting Requirements for Corner Lot Landscaping....39
Minimum Landscaping....40
Minimum Plant Sizes....40
Suggested Plant List....40
Xeriscaping Guidelines....47

F. ASSOCIATIONS **48**

Master Owners Association....48
Panorama Architectural Review Committee (PARC)....48
Submittal Process....48
Submittal Fees and Timeline....48
Non-compliance....48

A. INTRODUCTION

PURPOSE

The *Design Guidelines* for Panorama was established to encourage a high level of design quality and variety, while promoting compatibility within and between residential neighborhoods. The architectural character and form of each home contributes an essential part of the community's desired ambiance and image. This *Design Guidelines Handbook* contains *General Design Criteria* on pages 17-34, which addresses a variety of design requirements applicable to all residential product types and style.

Builders are required to understand and apply the design principles established in the *General Design Criteria* which provide specific characteristics established at Panorama.

Disclaimer

In general, all elevations, designs, and colors submitted by builders must be approved by the Panorama Architectural Review Committee (PARC). Builders may apply for a variance to the Architectural Home Design Guidelines on the *Initial Base Plan Submittal Checklist* form submitted to the PARC prior to community construction. The developer will provide a link to a folder containing the *Design Guidelines Handbook* and checklists for submittals. Information contained in the Panorama *Design Guidelines Handbook* is subject to change by the PARC at anytime, for any reason, without prior notice. As these documents are updated, builders will be notified, and documents in the folder will be replaced. It is the builders' responsibility to utilize and refer to the most recent version of these documents.

If a homeowner wishes to change any part of the exterior architecture of the home including, but not limited to, the home's exterior materials/colors, and front/side yard landscaping and/or hardscapes, they must submit an application to the HOA, in accordance to the HOA's requirements.

B. RESIDENTIAL & COMMERCIAL DEVELOPMENT STANDARDS

RESIDENTIAL

Panorama includes a variety of single-family and multi-family unit types. This section sets forth the standards applicable to each of the Residential unit types.

1) SINGLE FAMILY DEVELOPMENT STANDARDS

There are four types of single-family, detached homesites in Panorama, all of which accommodate traditional front-load homes: estate lots, large lots, medium lots, and small lots.

a. Bulk Table & Standards Applicable to All Single-Family Types


The following standards apply to all single-family home types:

Type of Lot	Estate[4]	Large[4]	Medium[4]	Small[4]
Minimum Lot Size	11,000 SF	7,500 SF	4,500 SF	3,000 SF
Minimum Lot Width[1,5]	110'	75'	50'	40'
Front Setback[3,2]	25'	25'	25'	25'
Side Setback[3]	15' / 10'	8' / 5'	5'	5'
Corner Side Setback[3]	20'	15'	12'	12'
Rear Setback[3]	20'	20'	12'	10'
Maximum Building Height[6]	40'	40'	40'	40'

Reference Notes

1. Lot width is measured from either the build-to line or the front setback, whichever is farther back from the front property line to provide for curvilinear/coving design.
2. Setbacks shall be 20' on any 53' ROW and on any private road.
3. Setbacks are measured from property lines.
4. Minimum driveway length to be 20 feet.
5. All Setbacks are based off of lot width.
6. Building height is measured from the average of the highest finished grade and the lowest finished grade across the front of the structure to the highest point of the roof, excluding ancillary structures. If the roof is a mansard or flat, the building height is measured from the average of the highest finished grade and the lowest finished grade across the front of the structure to the highest point of the coping of a flat roof or the deck line of a mansard roof.



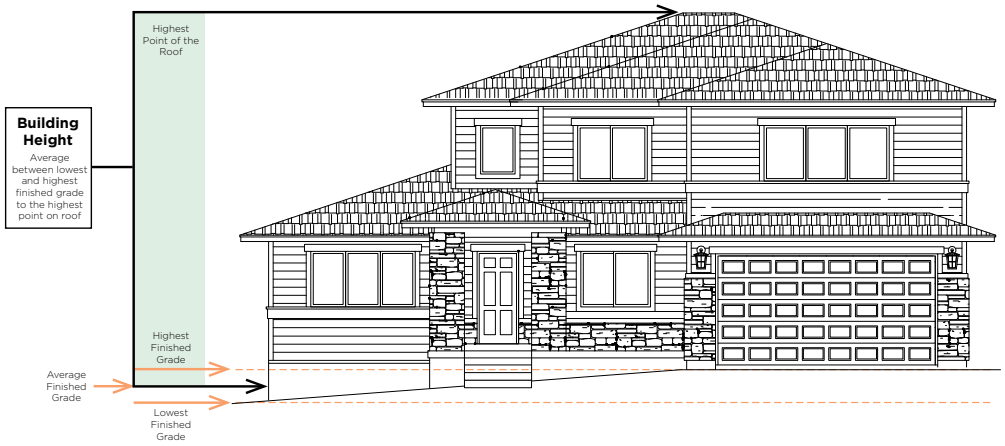

Gated Neighborhoods

Neighborhoods within Panorama may be gated. Final gate design and detail will be coordinated with each applicable plat and/or site plan application.

Three-Story Homes

Single-Family homes may include three-story designs that comply with these Design Guidelines and any applicable provisions of the City's Vested Laws.

Roof Pitch

Roof types for Single-Family Homes and any accessory buildings may be any of the following: gable, hip, gambrel, mansard, or flat. Roof type and design should match the styling of the overall home design. Roof pitches may be flat or 1/12 to 12/12.

Fencing

Materials, specifications, and locations to be approved by the Panorama Architectural Review Committee (PARC).

Architectural Relief

Street-facing portions of Single-Family Homes shall be designed to avoid flat planes or visual lines that give the appearance of one flat wall face for the length of the building facade fronting the street without a break. The same standard shall be required for sides of homes adjacent to open space or on any street-facing side. Street-facing facades greater than 40 feet in length must exhibit AT LEAST ONE change in the wall plane. Change of the wall plane shall be done by adding porches, balconies, windows, bay windows, or a change in materials.


Other Structure Setbacks

Type of Structure	Front Yard	Rear Yard	Side Yard	Corner Yard
Accessory Building	6' from Main Structure	5'	5'	N/A
Front Porch	Less 4' of Setback	N/A	N/A	N/A
Rear Deck 2' Above Grade	N/A	5'	5'	N/A
Rear Deck 2' Above Grade Adjacent to Open Space	N/A	5'	5'	N/A

b. Estate Lot Standards

Minimum Lot Size	11,000 SF
Minimum Lot Width	110'
Front Setback	25'
Side Setback	15' / 10'
Corner Side Setback	20'
Rear Setback	20'
Maximum Building Height	40'


Setback Diagram

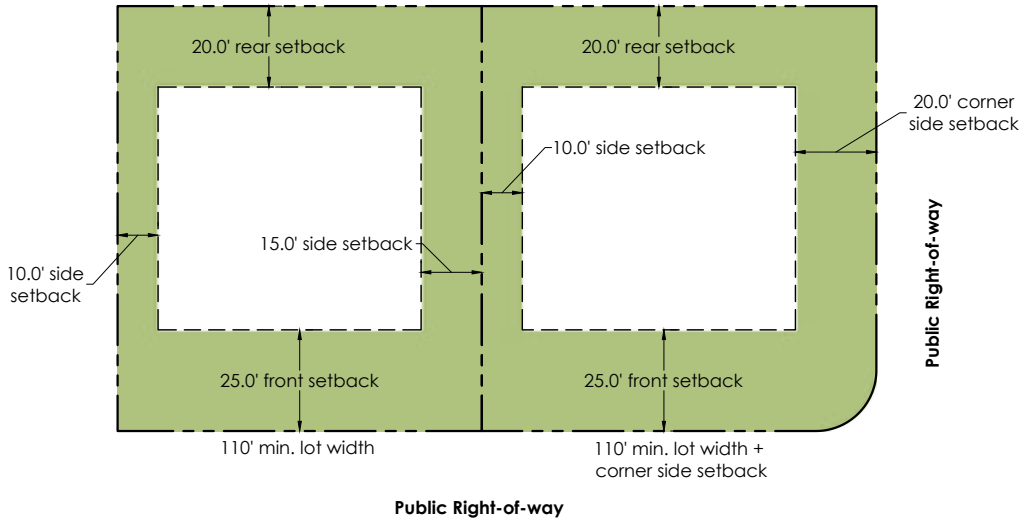

c. Large Lot Standards

Minimum Lot Size	7,500 SF
Minimum Lot Width	75’
Front Setback	25’
Side Setback	8’ /5’
Corner Side Setback	15’
Rear Setback	20’
Maximum Building Height	40’


Setback Diagram

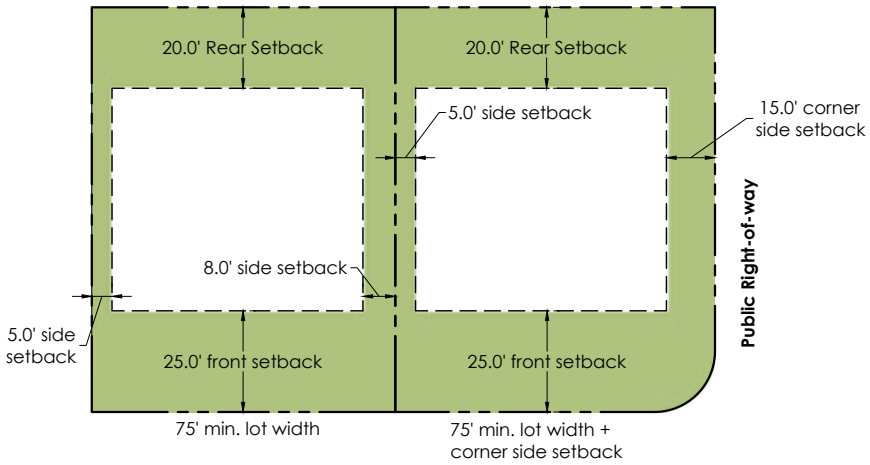

d. Medium Lot Standards

Minimum Lot Size	4,500 SF
Minimum Lot Width	50’
Front Setback	25’
Side Setback	5’
Corner Side Setback	12’
Rear Setback	12’
Maximum Building Height	40’


Setback Diagram

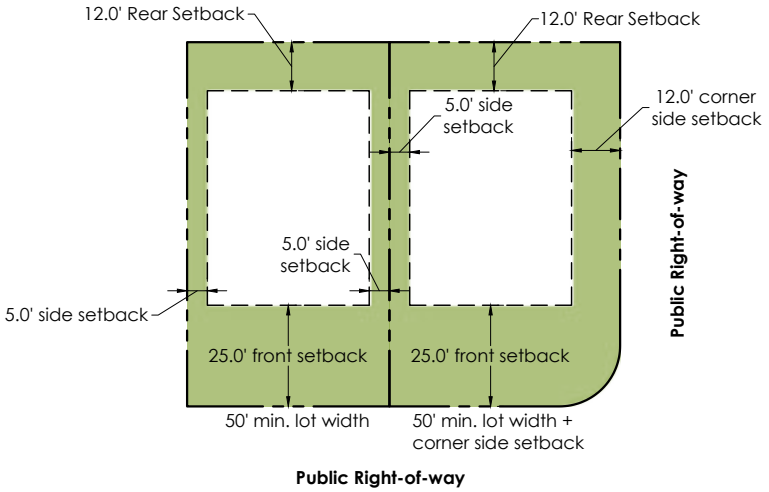

e. Small Lot Standards

Minimum Lot Size	3,000 SF
Minimum Lot Width	40’
Front Setback	25’
Side Setback	5’
Corner Side Setback	12’
Rear Setback	10’
Maximum Building Height	40’

Setback Diagram

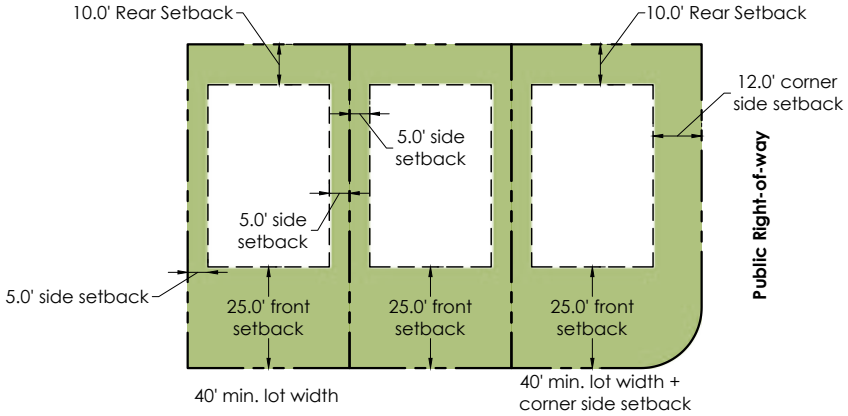

2) MULTI-FAMILY DEVELOPMENT STANDARDS

Multi-family homes are higher density residential units. Townhomes are built in a row with all units sharing a similar style. Garages may be built at the front or rear of the home. These townhomes are referred to as front-load or rear-load. Multi-family types also include apartment homes and condos, which are self-contained housing units that occupy only part of a building. The following standards apply to multi-family units within Panorama.

a. Bulk Table & Standards Applicable to All Multi-Family Types

Minimum Lot Size	Front-load	Rear-Load
Minimum Lot Size	N/A	N/A
Minimum Lot Width	N/A	N/A
Front Setback	18' (Garage Side)	10'
Corner Side Setback	10 Feet	10'
Rear Setback	10'	3' (Garage Side)
Maximum Building Height[1]	45'	45'
Minimum Driveway Length	18'	3'

Reference Note

1. Building height is measured from the average of the highest finished grade and the lowest finished grade across the front of each individual unit of the structure to the highest point of the unit's roof, excluding ancillary structures. If roof is mansard or flat, building height is measured from the average of the highest finished grade and the lowest finished grade across the front of the structure to the highest point of the coping of a flat roof or the deck line of a mansard roof.



b. Townhomes & Twin Homes

General Standards

The following shall be permitted for Townhome & Twin Home:

- One to three stories
- One to five bedrooms

Roof Pitch

Roof type of any structure may be any of the following: gable, hip, gambrel, mansard, or flat. Roof type and design should match the styling of the overall home design. Roof pitches may be flat or 1/12 to 12/12.

Parking Standards

Parking stall requirements include stalls located within a garage, driveway, private parking lot, or on a public or private street and shall be sized at a minimum of 8' wide x 18' deep. Single-car garages area allowed. A minimum of 1.5 stalls required for one-bedroom units, 2.5 stalls for two-bedroom units, 3.5 stalls for three-bedroom units, and four stalls for four-bedroom units.

Fencing

Fences or walls in front yards or side yards facing a street shall be no taller than three feet. Fences or walls along side or rear yards shall be a minimum height of six feet. Limited common area may be fenced. All fencing is to be approved by PARC before installation.

Exterior Materials

The following materials are permitted: masonry, stucco, fiber cement-type siding, metal architectural paneling, or other materials consistent with styling of the particular building. All materials and colors must be approved by the PARC.

Architectural Relief

Street-facing portions of all buildings shall be designed to avoid flat planes or visual lines that give the appearance of a single continuous wall face for the length of the building facade fronting the street. The same standard shall be required for homes adjacent to open space or on the corner side of corner lots. Street-facing facades greater than 40 feet in length must exhibit a change in the wall plane. Change of wall plane shall be done by adding porches, balconies, windows, bay windows, or a change in materials.

Building Size

Townhome and Twin Home buildings shall consist of buildings between 2 and 20 units. Buildings shall not be greater than 250 feet in length and shall share at least one structural component (e.g., concrete, pillars, piers, foundations, footings, or walls). These components may be above or underground, attached or detached, and shall be platted consistent with the footprint of the building.

c. Apartments & Condominiums

Minimum Lot Size	Not Applicable
Minimum Lot Width	Not Applicable
Front Setback	15’
Corner Side Setback	20’
Rear Setback	15’ without Garage, 3’ with Garage
Maximum Building Height	60’

Roof Pitch

Roof type of any structure may be any of the following: gable, hip, gambrel, mansard, or flat. Roof type and design should match the styling of the overall home design. Roof pitches may be flat or 1/12 to 12/12.

Parking Standards

Parking stall requirements include stalls located within a garage, driveway, private parking lot (covered or open), or on a public or private street, and shall be sized at a minimum of 8’ wide x 18’ deep. For condominiums or apartments that are part of a mixed-use project, parking may be shared and the total number of shared parking spaces required for the mixed-use project may be reduced at the Master Developer’s discretion by up to 50% of the overall minimum parking requirement. Required parking for apartment and condominiums is 1.25 stalls for one-bedroom units, 2 stalls for two-bedroom units, 2.25 stalls for three-bedroom units, and 2.5 stalls for four-bedroom units.

Exterior Materials

In addition to the any materials permitted by the City’s vested laws, the following are allowed: masonry, stucco, fiber-cement type siding, and metal architectural paneling. All materials and colors must be approved by the PARC.

Architectural Relief

Street-facing portions of all buildings shall be designed to avoid flat planes or visual lines that give the appearance of one flat wall face for the length of the building facade fronting the street without a break. The same standard shall be required for homes adjacent to open space or on the corner side of corner lots. Street-facing facades greater than 40 feet in length must exhibit a change in wall plane. Change of wall plane shall be done by adding porches, balconies, windows, bay windows, or a change in materials.

COMMERCIAL

Commercial design will follow City’s vested laws.

C. ARCHITECTURE

REQUIRED FEATURES

Elements such as roof shape and pitch, window size and shape, and placement of construction materials, such as brick, wood, and stone, can all be used to create details that foster individuality in a home.

Universal Required Exterior Features

1. Exterior recessed lighting shall be centered directly above each pillar/column on front facade with photo cell or Smart Home integration set to turn on 1/2 hour after sunset and turn off 1/2 hour before sunrise (see EXHIBIT 13 on page 31). If there are no columns, a minimum of two recessed lights must be installed in the roofline soffit(s) to light up the facade.
2. 12-inch minimum roof overhangs for roof pitches 6/12 and steeper and 18-inch minimum overhangs for roof pitches under 6/12 are required.
3. A single column must be at least 8 inches wide or 2 posts creating a single column must be a minimum of 14 inches wide (see EXHIBIT 11 on page 27).
4. Options for exterior cladding are detailed below.

PREFERRED

Minimum 20% masonry, stone or brick, is used on front of house (excluding window and door openings)




ALTERNATIVE

100% composite siding (stone or faux wood columns may be allowed, subject to PARC approval)



5. Elevations facing the street, on a corner, or adjacent to open space shall have at least one window on each above-grade level.
6. All front of house colors, materials, and siding details (stone, board and batten, shake, and lap siding, etc.) shall extend a minimum of 24 inches onto sides of home (see EXHIBIT 1a and 1c on page 14) unless side faces a street, then cladding details must extend the entire length of the side of the home facing the street. Areas on the front of house that protrude from the front elevation to create depth, have additional guidelines for wrapping materials and colors:
    - » If the distance from the front corner of the house to the inside corner of the wall is 5 feet or less, the colors, materials, and siding details (stone, board and batten, shake, and lap siding, etc.) shall wrap the entire distance of the wall, extending to the inside corner where the two walls intersect (see EXHIBIT 1b on page 14).
    - » If the distance from the front corner of the house to the inside corner of the wall is greater than 5 feet, the colors, materials, and siding details (stone, board and batten, shake, and lap siding, etc.) shall extend a minimum of 24 inches from the front corner of the house onto the side wall (see EXHIBIT 1a and 1c on page 14).
7. Covered entryways or front porches are required. For more information, refer to *Covered Entryways and Porches* on page 22.

EXHIBIT 1

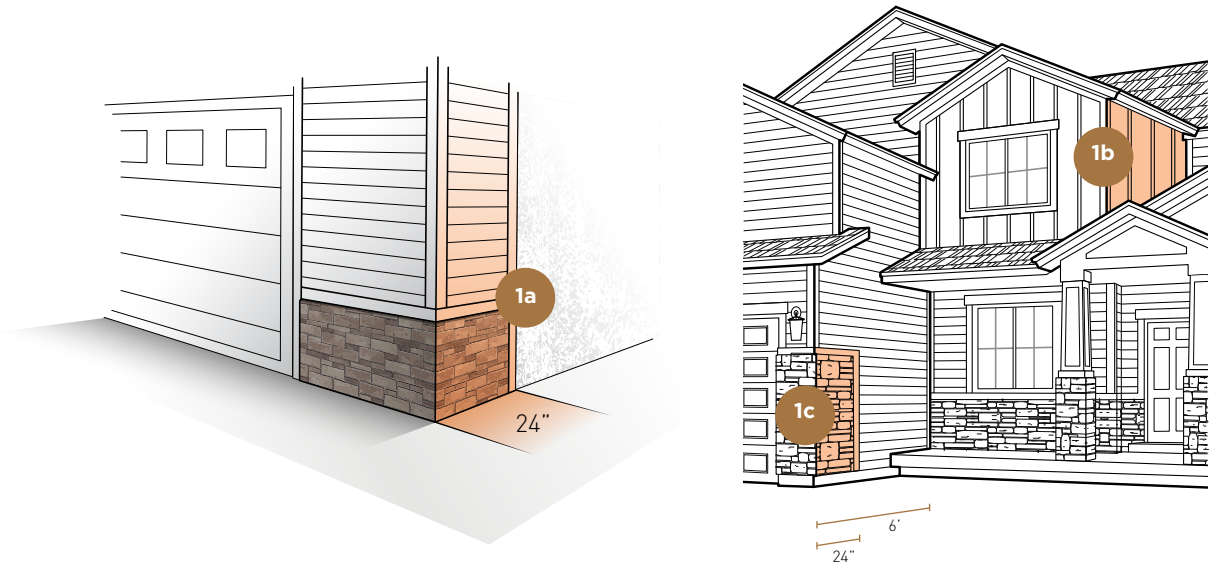

Additional Features for Front of House (Choose Three)

The overall goal of the Panorama Architectural Review Committee (PARC) is to ensure that each home has unique characteristics when compared to surrounding homes. In order to achieve this distinction, a variety of additional features on the front of house are required from the list below. Builders must incorporate at least one feature from **Group 1** and two features from **Group 2** in addition to what is required for the chosen elevation:

Group 1 (Choose One)

1. Exposed rafter tails (must be approved by PARC)
2. 24-inch roof overhangs
3. Masonry, stone or brick, increased from 20% to a total of 50% of front facade (excluding window and door openings)
4. Pergola on front of home within setbacks, per code (must be approved by PARC)
5. Slate, concrete, or other roof tiles (must be approved by PARC)
6. Metal accent roof (size, color, style, and location must be approved by PARC)
7. Dormer with window(s)
8. Substantial additional stylistic facade treatment (board and batten, shake, lap, flat panel, etc).

Group 2 (Choose Two)

1. Minimum of 5 corbels
2. Window grids on all windows
3. Shutters on all windows (if there are more than 3 windows, there must be shutters on a minimum of 3 windows)
4. Windows in all garage doors
5. 4-inch or taller frieze board at all soffits
6. Front door transom and/or sidelight
7. All single-hung windows or a minimum of 4 single-hung windows
8. Minimum of 4 recessed lights in roofline soffits

ARCHITECTURAL DESIGN PRINCIPLES AND PRODUCT MIX

Architectural Design Principles

The following general design principles and features are proposed to achieve the desired architectural character for Panorama:

- **Architectural theming**, which reflects diverse styles, include Contemporary, Craftsman, Farmhouse, Utah Traditional, and European architecture. These styles have been chosen for their contextual suitability within the Panorama community and for neighborhood compatibility. All homes are encouraged to have a strong expression of one of these styles. Minor variations and compatible alternatives will be considered, yet must be approved by the PARC.
- **Interesting and diverse streetscape architecture**, which de-emphasizes and lessens the impact of garages. Functional front porches, covered entryways, varied garage orientations, and setbacks are important components and are encouraged.
- **Articulated building forms**, including a mix of single- and multiple-story building forms and elements, which provide transitions between individual homesites and adjacent homes, as well as a comfortable scale.
- **Compatible design elements and details**, which help articulate building design. This also adds depth, shadows, visual interest, and relief to individual homes and the streetscape. Such elements include covered porches and entryways, balconies, roof overhangs, expressive materials, and the articulation of window and door openings.
- **Natural building materials with strong textures and rich colors**, including masonry and cement-based siding to provide visual interest, depth, and detail, as well as a desirable *natural* look. For more information, refer to the *Exterior Materials and Colors* section on page 29. Vinyl and aluminum siding are not permitted. Appropriate roof and wall materials, architectural requirements, as well as colors, are addressed in these *Design Guidelines*.

Product Mix and Architectural Diversity


To ensure the desired theme and architectural character for Panorama is realized, and to ensure the Community is enriched by variety in its architecture, careful attention will be paid to the mix of homes within each neighborhood. The following guidelines shall be followed for the production of single-family homes, or where individual floor plans are offered on a repeating basis within a parcel or plat:

1. A minimum of 5 unique floor plans will be required for builders who own 25 lots or less in one neighborhood. One additional plan will be required for each additional 15 lots.
2. A minimum of 2 distinctly different elevations and different color palettes shall be offered for each floor plan. Reverse elevation/floor plans shall not count as a different elevation.
3. To ensure Panorama has a diverse mix of home designs and elevations interspersed throughout each neighborhood, several guidelines have been established to help select home designs and color schemes for each building lot.
    - » Each lot must have a home design and elevation combination that is different from homes located next door and directly across the street.
    - » The main exterior paint color must be a different color than the adjacent home(s) or home(s) located directly across the street. All color/material boards must be submitted to the PARC for approval before community construction begins. When submitting color/material boards, actual paint chips must be submitted, as opposed to digital representations.
    - » The PARC reserves the ability to approve or disapprove each color or color grouping.

    In the examples below, the lots identified with an **X** may not have the same elevation and home design combination or use the same main exterior color as the subject home represented with a icon (see EXHIBIT 2 below).

Product Mix

EXHIBIT 2

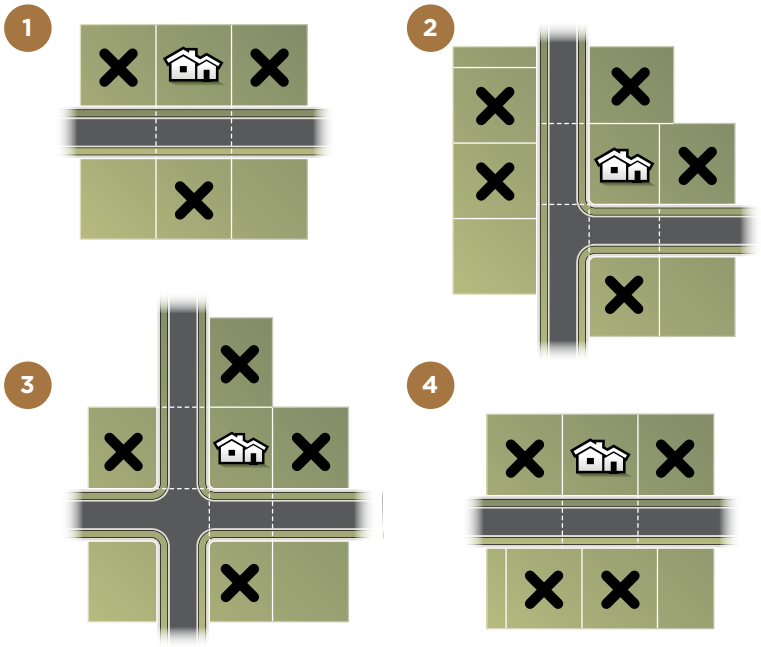

D. GENERAL DESIGN CRITERIA

APPLICABILITY

The *General Design Criteria* in this section addresses a range of architectural design topics and requirements applicable to all residential product types and styles within Panorama. Builders are required to understand and apply these design principles to their individual homes and neighborhoods.

PRINCIPLES TO ACHIEVE A SCALED AND ARTICULATED BUILDING

- Avoid large, unbroken wall planes and windowless elevations.
- Mitigate the impact of garages by integrating them into the building mass and design (see EXHIBIT 4 on page 19).
- Vary the building massing footprint.
- Utilize a variety of architectural elements consistent with the approved style.
- Design building elements that are visually more massive or *heavier* on the bottom half of the home, and those that are less massive and visually *lighter* on the top half of the home. A second story should not appear heavier, or have a disproportionately greater bulk, than the portion of the structure that supports it. Accordingly, all exterior building elements should be appropriately scaled in size in relationship to each other.

EXHIBIT 3



Examples of well-articulated buildings

BUILDING MASSING & ARCHITECTURAL RELIEF

Street Facing portions of all buildings shall be designed to avoid flat planes or visual lines that give the appearance of a single continuous wall face for the length of the building facade fronting the street. The same standard shall be required for homes adjacent to open space or on the corner side of corner lots. Street facing facades greater than 40 feet in length must exhibit a change in the wall plane. Change of wall plane can be done by adding porches, balconies, windows, bay windows or a change in materials.

Consideration should be given to the design of upper levels and how the massing will appear from streets, adjacent parcels, and common areas. Variety can be achieved by differentiating locations of building footprints on lots and avoiding repetitive forms over garages.

Utilize a variety of architectural elements consistent with the proposed style, including architectural projections such as roof overhangs, bay and box windows, decks, and covered porches, to create depth and shadows. For more information, refer to *Architectural Elements* on page 22.

In reviewing a proposed home design, careful scrutiny will be given to the home proportions, massing, and overall scale.

The allocation of exterior materials and features such as masonry bases, bay and box window elements, cantilevers, wall plane offsets, upper floor setbacks, and covered decks and porches are encouraged in order to break up elevations and provide visual interest.

Front elevations of all homes shall incorporate a one-story building element (as a minimum) or a building offset relative in scale to the elevation or wall plane, either horizontally between floors or vertically within the overall elevation. For example, a bay window, box window, covered porch element, accent roof, or cantilevered building element, with a *24-inch minimum* pop-out, may be incorporated into the design. The following guidelines must be adhered to while designing front elevations:


- Large, plain, exposed areas between the bottom of the gable/roofline trim and the top of the garage door trim shall not exceed 36".
    - The vertical distance between the added architectural element(s) and the gable/roofline trim shall not exceed 36".
    - The vertical distance between the added architectural element(s) and the garage door trim shall not exceed 36".

See EXHIBIT 4 on page 19 for examples of a non-conforming elevation and potential solutions. All added architectural elements must be approved by the PARC. In the case of non-compliance, the builder will be required to correct the issue, and a fee may be assessed. (See page 50 for details).



EXHIBIT 4

NON-CONFORMING ELEVATION

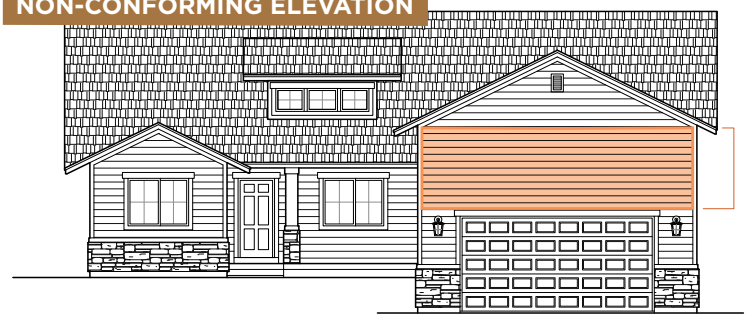


This large, plain, exposed area between the bottom of the gable/roofline trim and the top of the garage door trim exceeds the vertical distance of 36".


POTENTIAL SOLUTIONS



Windows, intermediate roofing, or other approved decorative elements may be added to break up large, plain, exposed areas between the gable/roofline trim and garage door trim.

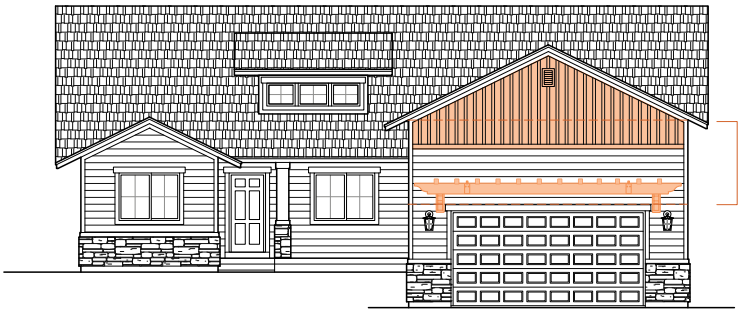

A pergola or other architectural element may be used to break up a large, plain, exposed area between the gable/roofline trim and garage door trim. If, after adding a pergola or other architectural element, more than 36" of vertical distance remains between the architectural element and the gable/roofline and/or between the architectural element and garage door trim, the area may be further broken up by changing the cladding style.

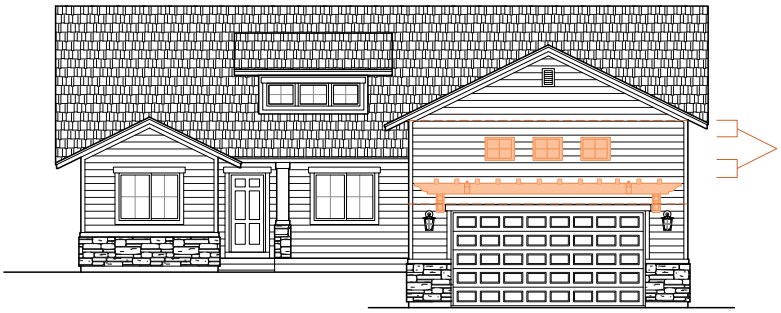

Each of these areas shall not exceed the vertical distance of 36".

The vertical distance between the architectural element and the gable/roofline trim, as well as the vertical distance between the architectural element and the garage door trim, shall not exceed 36".

ALL ELEVATIONS (FRONT/SIDE/BACK) MUST BE APPROVED BY THE PARC.

Garages

Minimize the impact of garages by integrating them into the floor plan, building massing, and design of each home. In no case shall a garage simply be *tacked on* the front of a home. As such, front-load garages shall be set back or project a minimum of 24 inches and shall not exceed more than 13 feet from the main building face or front porch (see EXHIBIT 5 below).

EXHIBIT 5



A minimum of 24 inches and maximum of 13 feet is required.

Recommended techniques to mitigate the impact of garages include the following:

- Extend the front porch or living space forward so the garage doesn't exceed 13 feet from the main building face or front porch.
- Integrate the roof above the garage with the home's main body roof, including similar form, slope and massing.
- Create a second-story building element above the garage incorporating windows and appropriate detailing, located within 6 feet of the front face of the garage.
- Use recessed garage doors with heavier and deeper header trim, columns, and other such architectural features to provide shadow lines and depth around garage doors.
- Incorporate side-load garage orientations, which present an opportunity for a window feature facing the street.
- Explore incorporating tandem garage layouts, as well as combining front- and side-load garage orientations to reduce the impact of 3-car garage elevations.

For more information, refer to *Garage Elevations and Doors* on pages 22-23.

ROOF FORMS AND ELEMENTS

Roof Form

Roof form is an important contributor to a home's visual massing and scale. All roof designs shall be consistent with the architectural style of the home.

Gables, dormers, and other smaller roof elements should be proportionate to the spaces they cover and to the overall roof sizes and forms. For acceptable roof materials and colors, refer to *Roof Materials and Colors* on page 29.

EXHIBIT 6





Examples of single, dominant roof forms with complementary secondary roofs.

ARCHITECTURAL ELEMENTS

Building Elevations and Articulation

All building elevations facing a street or common area, shall be well articulated and shall meet the requirements in the *General Design Criteria* on pages 17-34. This will reduce a *boxlike* form and create interesting streetscapes.

Covered Entryways and Porches

A covered entryway, compatible with the architectural style of the home, is required over the front door on all residences. This may be accomplished with a porch, second floor overhang, shed roof, etc. The minimum covered area for each porch is 36 square feet with a minimum width of 6 feet and a minimum depth of 4 feet. However, a minimum 8-foot depth is recommended to create a usable porch area. Porch railings, when utilized, must be compatible with the architectural style. The PARC may require larger porches in some Villages. The specific requirements may be established with each builder during the *Initial Base Plan Submittal* process.

Garage Elevations and Doors

Garage elevations and doors shall be an integral part of the design of the home and should not dominate the front elevation. As such, all home designs shall incorporate the following methods to diminish the impact of garages:


- Architectural forms, materials, and design details present in the building's elevation, including masonry and windows, shall be incorporated into garage elevations.
- Side-load garage configurations are encouraged.
- Front-load garages shall not project more than 13 feet from the main building face or front porch.
- The exposed facade above the garage doors shall not exceed 36 inches (as measured from the top of garage trim to the bottom of the roof fascia). This may require a separation of the main home roof from the garage roof (see EXHIBIT 4 on page 19).
- Large gables and walls above garage doors should receive additional detailing and articulation including windows, corbels, wall vents and louvers, decorative brackets, or enhanced siding such as board and batten, shake, etc. (see EXHIBIT 4 on page 19).
- Oversized garage doors for RVs, boats, etc., shall be designed as a 12-foot height maximum. Garage doors shall be a single-car door with a separate roof form, and offset from the main garage elevation. All garage doors exceeding 12 feet in height are subject to PARC review and approval.
- Any elements added to a garage door, such as accents, whether permanent or not, must match the style/design of house and be pre-approved by the PARC prior to installation.
- All garage doors shall be sectional roll-up types only. Acceptable materials include wood-grained, manufactured and composite wood, paneled particle board, and metal doors that are factory finished to match the home. Wood garage doors and painted metal garage doors are not allowed.



The following design criteria shall apply to all 3-car, front-load garage elevations:

- Garage offset depths are required between the front face of the double-car and single-car garages by a minimum of 12 inches (see EXHIBIT 7 below).

EXHIBIT 7

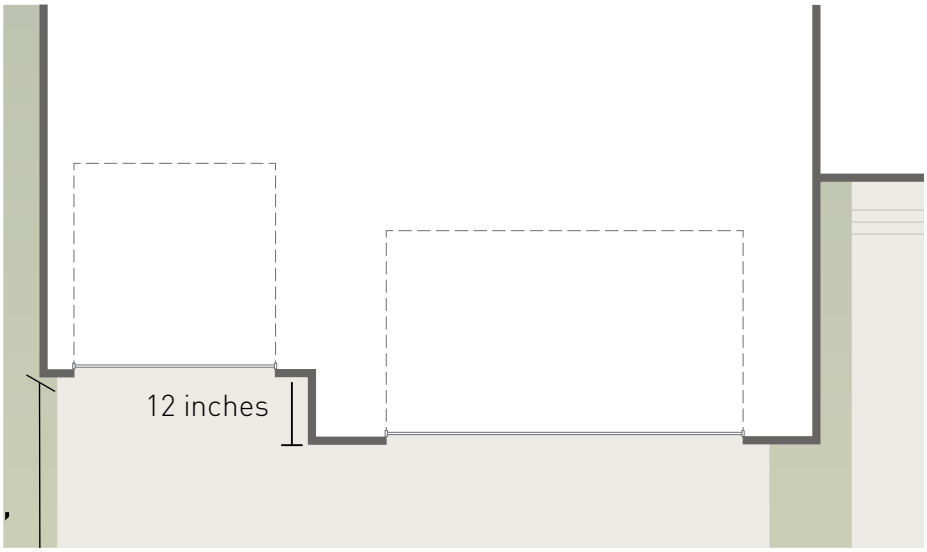

Future Projects


With the exception of homes in Village 8, there are no extensions to allow for future projects, such as installation of an RV pad. Buyer may not request the builder to leave any area of front or side yards, or park strips unfinished in order to install concrete or landscaping at a later date.

If the homeowner chooses to install a concrete RV pad or extension of the parking pad after Certificate of Occupancy, a detailed plan must be submitted and approved by the HOA. All plans submitted to the HOA must adhere to the *Home Design Guidelines*.

RV Pad & Extended Driveway Guidelines for Medium & Large Lots

» When the length of the driveway exceeds 30 feet from the sidewalk (measured from the garage to the sidewalk), the driveway width must be narrowed down to 28 feet wide or less at the sidewalk (see exhibit below). Driveway width at the sidewalk may not be less than 13 feet wide. When homes are set back less than 30 feet from the sidewalk, the driveway width must be narrowed down to 32' or less. The angle where the concrete narrows down to the minimum driveway width may not exceed 45˚ (see EXHIBIT 8A below). Any configurations that vary from these guidelines must be submitted to the PARC and will be approved on a case-by-case basis. Furthermore, all plan submissions and approvals must be in writing.

EXHIBIT 8

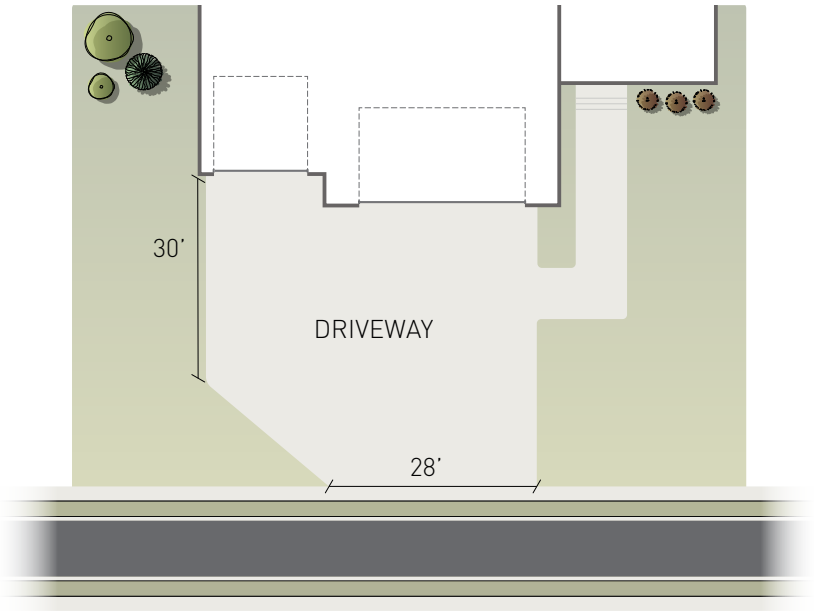

» Concrete may not butt up against neighbor's concrete when widening a driveway or adding an RV pad (see EXHIBIT 8D on the following page). If a neighbor has installed concrete to the property line (see EXHIBIT 8A), the adjacent neighbor must leave a minimum 3' strip of landscaped space, which must contain living plant material, as well as sprinklers and/or drip lines (see EXHIBIT 8C on the following page). The required size of that space will vary depending on the type of plant material proposed. The purpose of adding landscaping is to break up large, concrete pads, reducing the overall mass of the concrete driveway.

» If a utility box is located within the widening zone, at least 5' must be kept clear on each side to allow plant material to be added in order to screen and/or soften the appearance of the utility box. However, landscaping is not allowed within 3' of the box. Shrubs and grasses are acceptable plants to be installed between the 3' to 5' area.

EXHIBIT 8A

Example of Existing Driveway

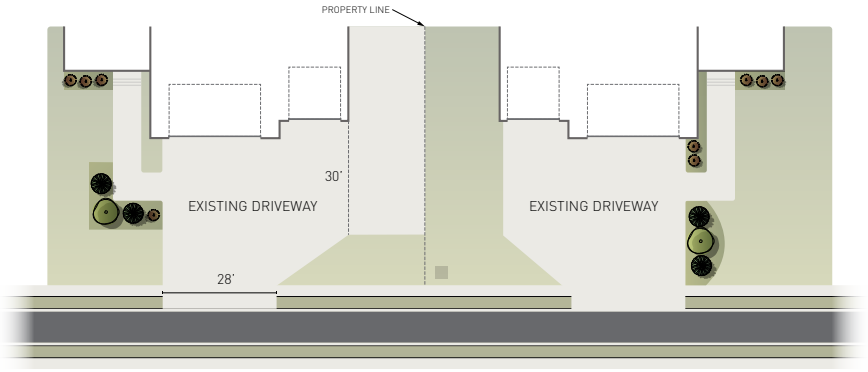


EXHIBIT 8B

Driveway Extension Allowed


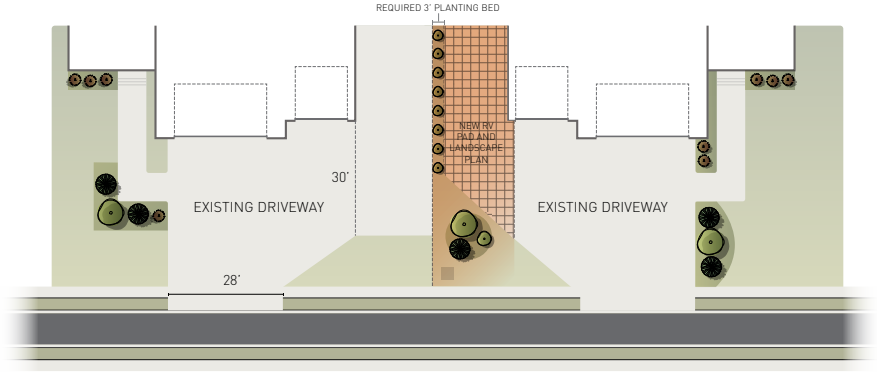


EXHIBIT 8C

Driveway Extension Not Allowed

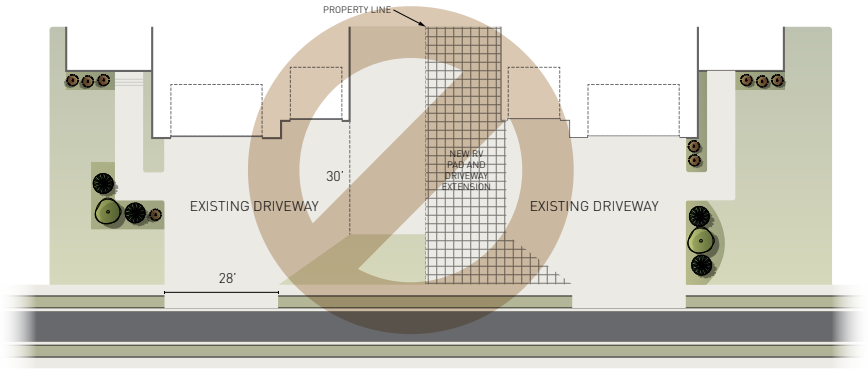

- Any change to the approach must match the existing concrete color and stamping.
- Front yard landscaping, including areas adjacent to the driveway and side yards on a corner lot, must be completely landscaped and fully irrigated when the additional concrete or RV pad is installed.

Windows

Windows shall be placed to complement the character and scale of each home. Groupings of windows should generally be centered in the building form on which they are placed. Windows with distinctive shape, size, or detail such as divided glass, arches, or bays shall complement the architectural style of the building and are encouraged.


The placement, size, and detailing of windows on basement-level walkout homes should be consistent with the home's architectural style and compatible with other windows on the home.

Decorative window grids, appropriate to the architectural style, are encouraged for windows on elevations which face front, side, or rear streets.

Elevated or Walkout Decks

- **Size:** Decks should be appropriately sized for the scale of the home/residence. Decks should be designed to provide usable and functional space. Decks shall be a minimum of 50 sq. ft. in size. The minimum horizontal projection of the deck from the exterior wall shall be 5 feet.
- **Roof Coverings:** Any roof covering over a deck shall have a finished soffit. No exposed roof trusses or wood rafters. Soffit materials should be low maintenance materials that are appropriate to the design of the home.
- **Deck Material:** Deck boards shall be long lasting, weather resistant and low maintenance. Examples are composite decking, redwood, teak, and Ipe. Other materials may be allowed if it can be shown that they will be long lasting with little maintenance required. Waterproof deck membranes are allowed such as TPO deck membranes, Vinyl Deck Membranes or similar. Multi-layer or built-up waterproof deck systems are also allowed.
- **Exposed Deck Framing:** In instances where the underside of deck framing will be visible from common areas or a public street, effort should be made to hide exposed deck framing joists. This can be in the form of soffits, screens, trellis members or other decorative type features as appropriate to the deck design and aesthetics of the home design.
- **Deck Structure:** All decks shall be built out of long lasting durable structural materials. TJIs or other manufactured lumber products shall not be used unless they are fully enclosed in a waterproof enclosure.
- **Deck Columns:** For decks that are 4 feet and greater above grade, the minimum finished column size shall be 8 inches by 8 inches. If the column is heavy timber (see below), the minimum nominal column size shall be 8 inches by 8 inches. All columns that are not heavy timber products shall be wrapped with appropriate water proofing products and encased in finished materials such as stone, fiber cement, PVC, or other durable low maintenance materials.
- **Timber Structures:** Timber structures for deck framing and support or trellis features covering decks are allowed. All framing material shall be classified as heavy timber product with horizontal framing members having a minimum nominal dimension of 6 inches in any direction. Minimum vertical framing members such as columns shall have a minimum nominal dimension of 8 inches in any direction. Haunches, brackets, or other decorative support framing shall have a minimum nominal dimension of 6 inches in any direction.
- **Deck Fascia:** All decks shall have a finished fascia covering the perimeter rim boards if rim board are not constructed of heavy timber. This finish material shall be durable and low maintenance such as composite boards, paintable fiber cement, paintable PVC, or other similar products. No metal fascia products are allowed unless it can be shown that they will be of a thick enough gauge to not "oil can." All decks shall have a fascia/skirting of the same material that is a minimum of 2 inches larger than the joist in order to shield the underside of the deck from view (see EXHIBIT 10 on the following page).

EXHIBIT 10

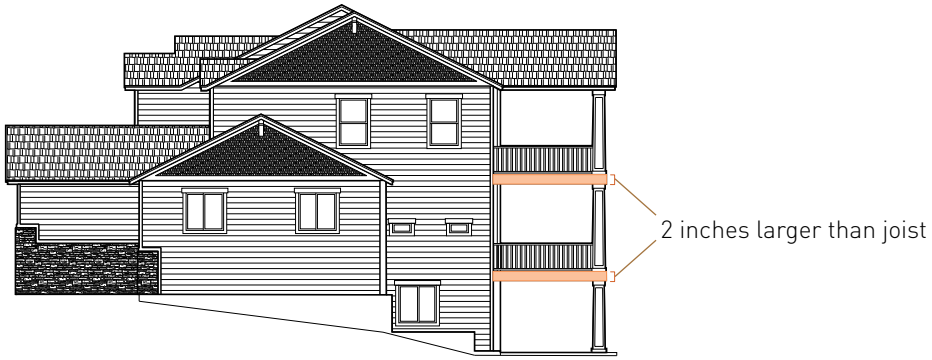


» **Deck Stairs:** Special attention shall be given to stairway construction as it connects from the deck to the finished grade. Running the stairs along the side or rear of the home or adjacent to the deck, are encouraged. Stairs shall be constructed of similar materials to the deck.

Decks should be designed so that stairs and railings do not block or overlap windows and the design shall complement the exterior elevation. Decks shall be built consistent with and complementary to the main structure and not appear to be tacked onto the home.

Columns and Supports

All columns and supports on front elevations should appear substantial and in proportion to the overall building massing. Each column or support shall be a minimum of 8 inches wide. Grouped columns of 2 or more may be reduced to 6 inches each. Such grouped columns must be a minimum of 14 inches total (see EXHIBIT 11 below). The character and detailing of columns should be consistent with the architectural style of the building or as approved by the PARC.

EXHIBIT 11

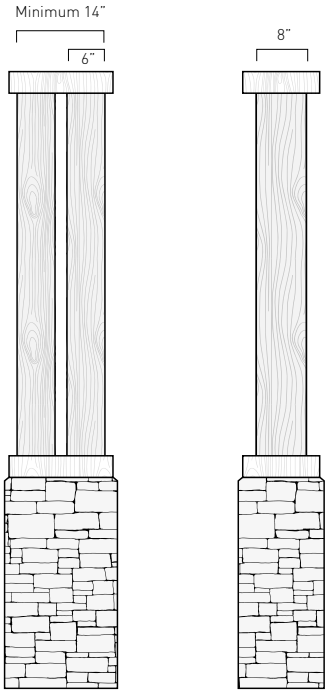

Chimneys and Gas Fireplaces

- Masonry or decorative materials are preferred for chimneys visible on exterior walls.
- Fireplace box-outs for direct vent gas units shall be consistent with the architectural style and materials of the home, and shall complement the wall on which they are located.
- Exhaust ducts are not allowed on the front elevation.

Skylights

Skylights, when included, shall be integrated with the roof design and parallel to roof pitches. Skylight glazing should be flat and clear, solar bronze, or gray in color. Reflective glazing on skylights is not permitted. The finish trim material color shall be copper, bronze, or colored to match the surrounding roofing material.

Solar Panels

Details regarding solar panels are located in the *Exterior Equipment and Features* section on page 32.

EXTERIOR MATERIALS AND COLORS

Building Materials Overview

Exterior building materials have been recommended for use at Panorama to enhance the theme and quality of the Community. Appropriate use of materials will add value and reinforce the architectural style of each home design. Materials may not be limited to those listed in this section, however, additional materials must be approved by the PARC.

Roof Materials and Colors (Type and Application)

Proper selection of roof materials and colors is an important element in distinguishing each recommended elevation style. The roofing material shall complement the color scheme of the home. Acceptable roof materials include dimensional and standard composition shingles, as well as concrete tile. Slate and metal (standing seam) are also acceptable.

- **Dimensional Composition Shingles**
  All asphalt shingle roofs shall be a 30-year minimum grade. Blended shingle colors, rather than a single-color look, is encouraged.
- **Concrete Tile**
  The color and profile of concrete tile should be appropriate to the architectural style. Concrete tile colors shall have an integral flashed finish or consist of a blend of homogeneous colors.
- **Metal** (Standing Seam)
  The minimum requirement is 24-gauge metal with an 18-inch maximum seam spacing. Other styles of metal roof must be approved by the PARC.

Sharply contrasting roof colors shall not be permitted. Shades of gray, green, and brown will generally be permitted, yet shall be approved by the PARC.

Wall Materials (Type and Application)

No minimum percentage of a particular material is required, however, the essential requirement is that the material selection and its detailing successfully contribute to the creation of the desired architectural style. As such, multiple wall materials shall blend harmoniously with one another and frequent material changes shall be avoided. In general, no more than 2 dominant materials should be used per home.

Brick and stone, together on the same home, shall not be permitted except as approved by the PARC. All materials shall wrap architectural elements in their entirety, as well as wrap the sides of the home a minimum of 24 inches. See Number 8 of Universal Required Features on page 14 (EXHIBIT 1b and 1c).

- **Manufactured Siding**
  Vinyl and aluminum siding, as well as grooved plywood are not acceptable.
- **Shakes or Shingles**
  Manufactured shingles and natural wood shake siding are allowed.
- **Masonry** elements should appear substantial and be integral to the architecture and not merely an applied feature. Masonry shall wrap columns and other elements on all sides. Modeled brick face textures and colors are encouraged.



MATERIAL CHANGES AND TRANSITIONS

Material application shall be considered early in the design process so logical termination points are identified. In general, material transitions shall occur at changes in plane or on inside corners. Masonry used to express a building's *base* or to create a wainscot shall wrap corners and terminate at a prominent building element on side elevations. All front facade materials shall wrap around sides of home a minimum of 24 inches. See Number 8 of *Universal Required Features* on page 13 (EXHIBIT 1b and 1c on page 14).

Foundation wall finish materials facing streets must not exceed a height of 48 inches from the finished grade (see EXHIBIT 12 below).

EXHIBIT 12



BUILDING COLORS


When homeowners repaint their homes, they must submit the colors for approval, in accordance to the HOA requirements.

EXTERIOR BUILDING LIGHTING

Exterior building lighting shall be designed to avoid spilling onto adjacent residences and into the sky. Specifically, lighting shall illuminate downward with a concealed light source. This will minimize glare, as well as lateral and upward light leakage. Exterior lighting may include wall sconces, recessed lighting, soffit lighting, and directional lighting (see EXHIBIT 13 below).

- Each home is required to have exterior recessed lighting centered directly above each pillar or column (see EXHIBIT 13 below). If there are no columns, there must be at least two recessed lights installed in the roofline soffit(s).
- Each home shall have coach lights on both sides of each garage door or recessed can lights installed above the garage door.
- All exterior coach lights and lights centered above columns are required to be installed with either a photo cell or programmed digitally to automatically turn on 1/2 hour after sundown and turn off 1/2 hour before sunrise.

EXHIBIT 13

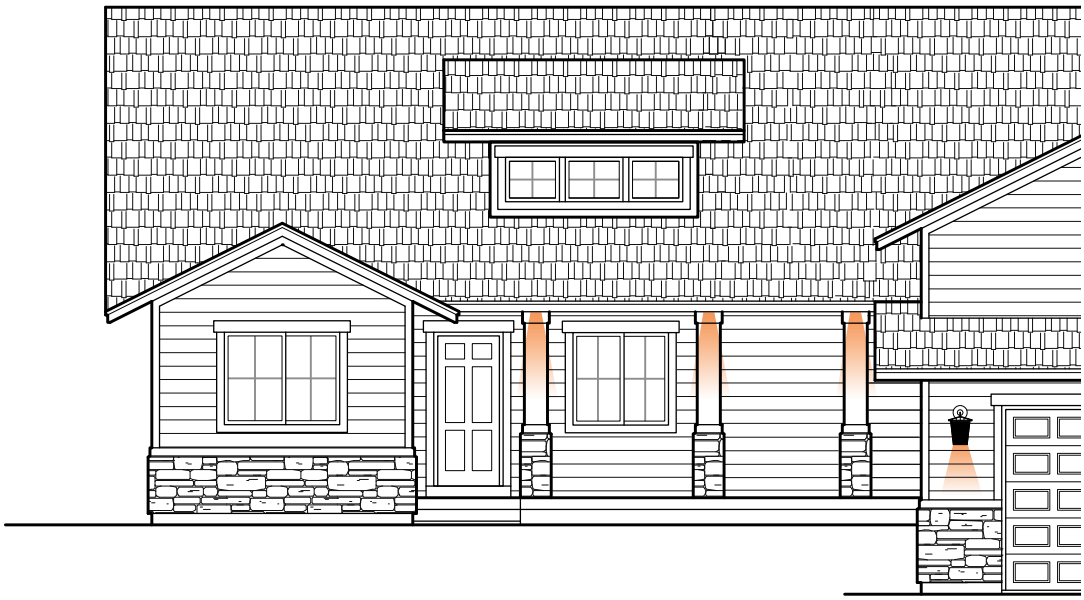

ACCESSORY STRUCTURES

All accessory structures, such as garden/utility storage sheds, green homes, and detached garages (as permitted by zoning), which are visible from a street or common area, shall match the architectural details, color, and materials of the home. Carports are not allowed. For additional details, refer to the Panorama CC&Rs.

EXTERIOR EQUIPMENT AND FEATURES

Mechanical, Electrical, and Communications Equipment

All mechanical and electrical equipment, including, but not limited to, water softener tanks, cable television boxes, security apparatus, transformers, telephone boxes, and electric and gas meters, are encouraged to be integrated into the home's design, screened with a four-foot privacy fence from public view, or when appropriate, enclosed in a suitable accessory structure. Air-conditioning and evaporative cooling units may not be located on roofs, in windows, or mounted on sides of buildings. All air-conditioning units shall be located at ground level, adjacent to the home(s) they serve, and screened from public view.

Antennas and Satellite Systems

Television antennae and satellite dishes, 2 feet in diameter or smaller, shall be installed at the lowest possible level, no closer than 15 feet from the front of any street-facing elevation. Satellite dishes and antennae are not to be located above the roof line, shall not be located in front or visible side yards, and must be screened if the system cannot be installed out of sight. Screening solutions are subject to PARC review and approval. All wiring shall either be out of sight or painted to match the adjacent surface. All radio antennae and satellite dishes greater than 2 feet in diameter are not permitted, unless approved by the PARC. For additional information, refer to the Panorama CC&Rs.

Solar Panels and Equipment

Maintaining a beautiful community at Panorama is very important. Therefore, when solar panels are used, they shall be integrated into roof designs, and related plumbing and mechanical equipment shall be enclosed and/or screened from view. All solar energy systems must be approved by the PARC **prior to installation** and shall meet the following criteria:

- Panels shall lie flat against the roof.
- Panels shall not differ in pitch from the roof surface on which they are installed.
- Panels shall not differ in color from the roof surface on which they are installed.
- Panels are not permitted on the front roof pitch of the home or on any roof area facing any street or open space, including garage roofs that are set forward from the main home.
- Metal brackets and/or conduits shall not be visible anywhere on the home after installation. All wiring must be run through the attic and walls.

For additional information, refer to the Panorama CC&Rs.

Gutters and Downspouts

Gutters and downspouts shall be integrated into the design of buildings and appear as a continuous architectural element. Drainage solutions shall be unobtrusive to the overall home design. Downspouts shall be located on vertical members in inconspicuous locations.



FENCING

All fencing shall be constructed of maintenance-free materials. Natural wood and chain link fencing are not permitted. Six-foot vinyl and SimTek fencing in white or gray tones are approved for individual yards. See Exhibit 14 for examples of approved styles and colors. All other materials and colors must be submitted to the PARC for approval. The specific location of fencing shall be approved by the PARC prior to installation.

See fencing plan in the following section outlining builder and developer responsibility, as well as specific materials and colors to be used. Builder-installed fencing shall be installed prior to receiving a Certificate of Occupancy. If the Certificate of Occupancy is issued between November and March, fencing shall be installed by the end of May.

Fencing plans must incorporate City sight triangle code requirements. To add articulation to the front of the home, do not install fences flush with the front elevation (the porch is not considered the front elevation). If possible, set fences back at least 24 inches. The short section of fencing that connects a main fence line to a structure must be at a 90˚ angle. Fences for lots on cul-de-sacs and other non-traditional lots shall be approved by the PARC on a case-by-case basis.

EXHIBIT 14




SimTek — Gray



Vinyl Privacy — White

Fencing Responsibility Exhibit

EXHIBIT 15

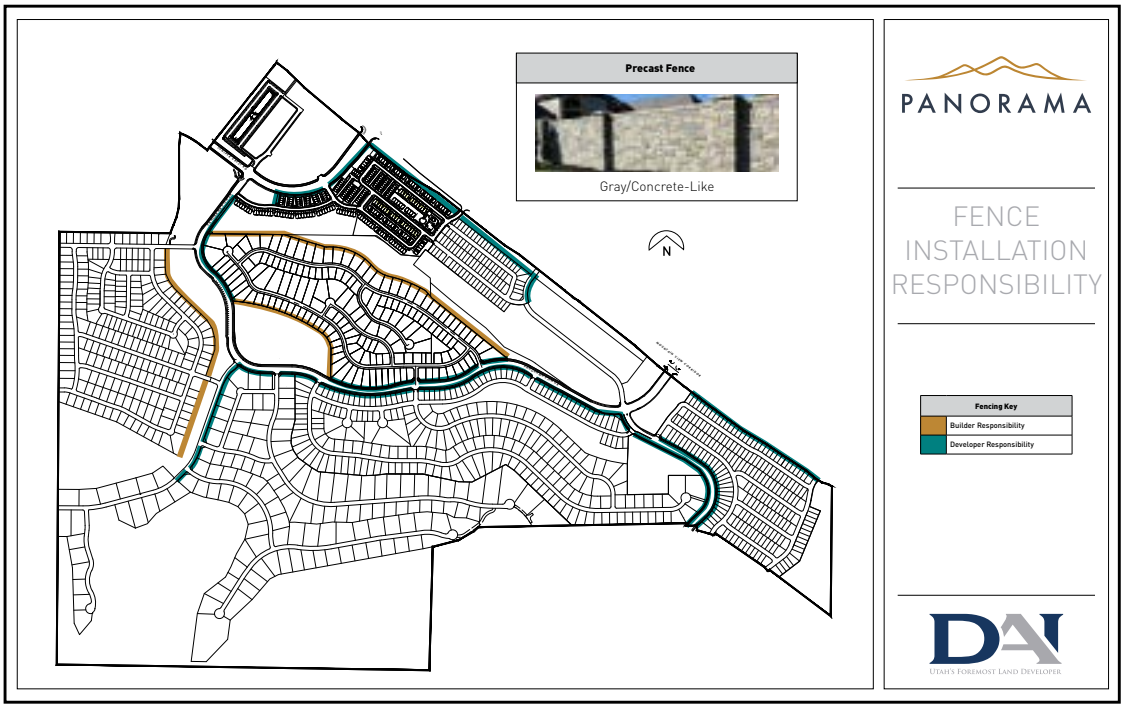

Fencing Restrictions

No structures or walls may be installed under fences to increase the height of a fence. In addition, double fences are not allowed. If developer has installed a fence, or if a future fence is included on the master developer fencing plan, the homeowner may not install a fence adjacent to or parallel to developer's fence. View lots may be graded when the foundation of a home is higher than the fence. In such case, homeowner may choose to bring property grade down to street level and install a retaining wall close to the home with steps leading down into the yard. If extreme circumstances exist, a proposed fence plan may be submitted to the PARC for approval.


Front yard fencing is prohibited in Panorama. No fencing, including property line fencing, may continue beyond the allowed back yard fencing area, which is 24" behind the front corner of the house.

Fence Stepping and Racking


On sloped lots, fences should be stepped to maintain a consistent appearance and comply with height requirements. Each panel will remain level, with posts adjusted to accommodate changes in grade. For gradual slopes, fences should be racked to follow the natural contour of the land. This ensures a seamless look while maintaining proper spacing between pickets.

EXHIBIT 16

Racking Method

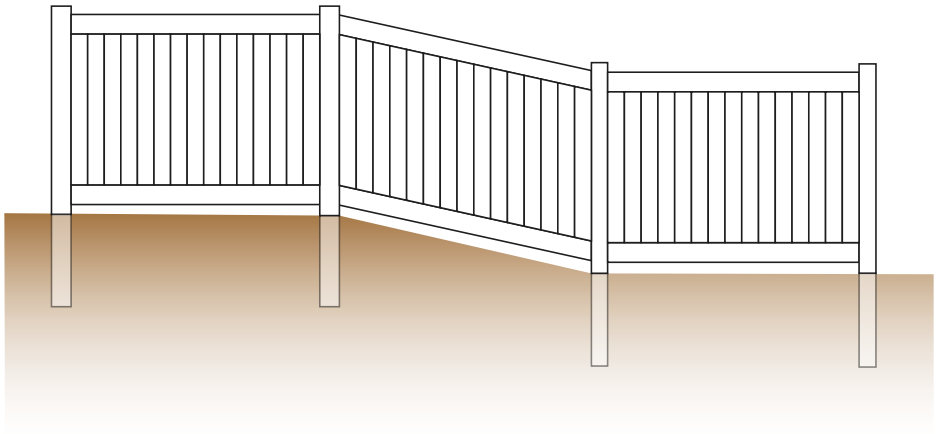

Stepping Method

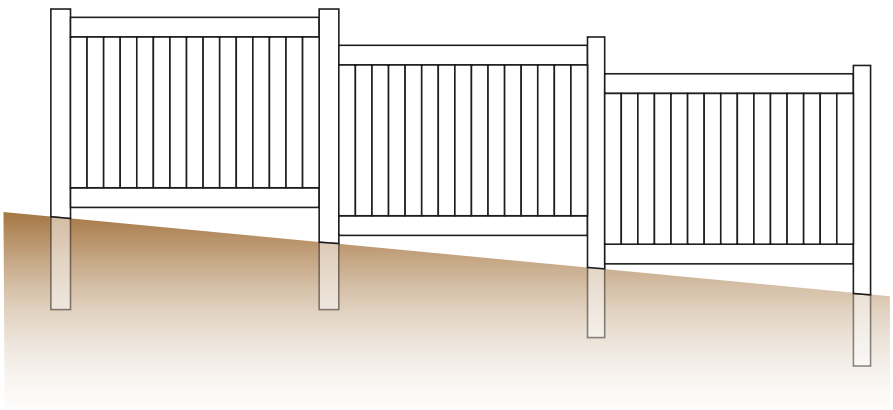

E. LANDSCAPING

GENERAL GUIDELINES

Landscaping for is an important feature of the overall community design. However, individual landscape plans must meet the *Landscaping Guidelines*, including the more specific guidelines, exhibits, and requirements in this document. All landscape plans required per Herriman City landscape Code 10-23-5 must be submitted and approved by Herriman City in addition to PARC/HOA. Click the button below or go to https://www.herriman.gov/landscaping-requirements for more details.

LANDSCAPING CODE

A list of suggested trees, shrubs, ornamental grasses, perennials, and groundcovers are included in the following pages. Other plant materials may be allowed. The goal is to add interest and diversity by using a variety of plant materials and designs throughout the community that are appropriate to the regional climate. Prior to installation, landscaping plans must be approved by the Panorama Architectural Review Committee (PARC).

Landscaping refers to the installation of any combination of the following items to enhance and preserve natural features of the site:

- Plant materials, such as turf, annual and perennial flowering plants, native vegetation, vines, shrubs, and trees (excluding weeds or noxious plants)
- Groundcovers, such as mulch, bark, and decorative rock
- Ponds, fountains, falls, and streams
- Statues, outdoor artwork, benches and tables, earth berms, pots, and planters

Turf

- The definition of *turf* is living grass/sod, not artificial materials.
- No front yard landscaping may be comprised of more than 35% turf. In addition no more than 50% of the total lot irrigated area may be comprised of turf.
- Turf/grass areas must be at least 8' wide and incorporated into the landscaping designs for front and side yards visible from the street. An owner may propose a reduced turf/grass area, but not complete removal of turf. A landscape plan must address how the remaining yard would be landscaped to provide an acceptable aesthetic.
- Artificial turf is not allowed in front or side yards visible from the street.
- Turf is not allowed on slopes greater than 30%.

Mulch

Panorama encourages Water Wise landscaping by requiring the use of mulch in planting beds.

- Natural materials such as bark, wood, plant fiber, or stone are allowed for mulch.
- Landscape rock and stone mulch must be natural in color and may range from gray to warmer earth tones.
- Decorative rock must be at least 1" in diameter.
- Rubber mulch is not allowed.

Retaining Walls

All retaining walls over 4' must be designed by a licensed Engineer and be permitted through Herriman City.

Storm Water & Storm Water System

Builders & Homeowners shall be responsible for all landscape grading, pipes storm water drains, and related facilities located on their lots. Builders & Homeowners are required to accept and discharge storm water based on the overall Panorama storm water plan. Builders & Homeowners are responsible to keep all gutters, pipes and drains grates of the storm water system that are located on their lot clear of debris, dirt and vegetation. Builders & Homeowners shall be responsible for any costs incurred by the Master Association for any necessary clearing of debris from the storm water system. Builders & Homeowners are responsible for any alterations made to the grading and / or swale located on their lot that diverts or directs storm water. Builders and Homeowners shall be responsible to keep swales, ditches, and gutters clear of debris to ensure proper drainage. Builders & Homeowners shall be liable for all damages and claims that may arise from alterations in the grading, drainage pattern, or storm water facilities located on their lot.

Lot Grading

Grading shall be maintained at all times so as to conduct irrigation and surface waters away form buildings and so as to protect foundations and footings from excess moisture. Any drainage flows directed to adjacent lots should not exceed historic flows. Builders & Homeowners shall not impede or retain water flow in any of the natural drainage gulches nor retain additional water flow in excess of the man made storm drain system

Plant Materials

Panorama encourages the use of Water Wise, drought-tolerant plants that are native or regionally adapted. Native plants are adapted to the local climate and thrive in hot, dry summers, and cold winters.

- 75% of all trees, shrubs, ornamental grasses, perennials, and groundcover are required to be water-wise/drought-tolerant with *low-to-moderate* water-use needs.
- Plants with similar water needs must be grouped together as much as possible in order to facilitate irrigation zoning.

Planting Beds

Panorama encourages landscaping practices that improve water efficiency and increase sustainability. The goal is to minimize the impact on the environment, reduce maintenance, and provide an attractive landscape.

- Slopes greater than 30% should be landscaped with deep-rooting, water-wise plants for erosion control and slope stabilization.
- Planting beds must include 3-4 inches of high-quality, natural mulch.
- Professionally installed concrete curbing or steel edging may be used to separate turf from planting beds.

Irrigation

Panorama utilizes landscape irrigation best management practices recommended by Herriman City. To maintain a healthy and functional landscape with optimal irrigation performance, these recommendations include designing the irrigation system for water-use efficiency, installing the irrigation system to meet the design criteria, and managing landscape water resources to optimize the efficient use of water in order. Click the button below or go to www.herriman.gov/water-efficiency.standards for details.

WATER STANDARDS

Total Irrigated Area of Lot

In using irrigation best management practices Panorama has placed a restriction on the maximum irrigated area of lot. Irrigated area is defined as the remainder of area of lot after subtracting the following:

- 30% slopes
- Home / Accessory Building Footprints
- Hardscaped Areas
- Any additional area that will not require irrigation.


Total irrigated area of lot may not exceed the below:

- 50% of lot for lots over .40 acre
- 45% of lot for lots between .25 and .40 acre
- 40% of lot for lots less than .25 acreIn addition, total amount of turf within a single lot may not exceed 50% of the irrigated area (including slopes above 30%).

Specific guidelines may be required for future neighborhoods, Designs that deviate from these requirements must be approved by PARC / HOA. Landscaping by the builder or Homeowner must include all front yards and side yards visible from street(s).

Calculating the Square Footage for Front Yard Landscaping

Front yard landscaping requirements are based on the total square footage of the front yard area. To determine the total square footage, add the turf areas and planting beds. Do not include hardscapes in your calculations. The green area on the exhibit below represents typical front yard landscaping. Be sure to extend your landscaping beyond the front corners of the house. On the garage side of house, front yard landscaping must extend at least two feet past the front corner of the house. On the living side of the house, front yard landscaping must extend past the utility meters and boxes.

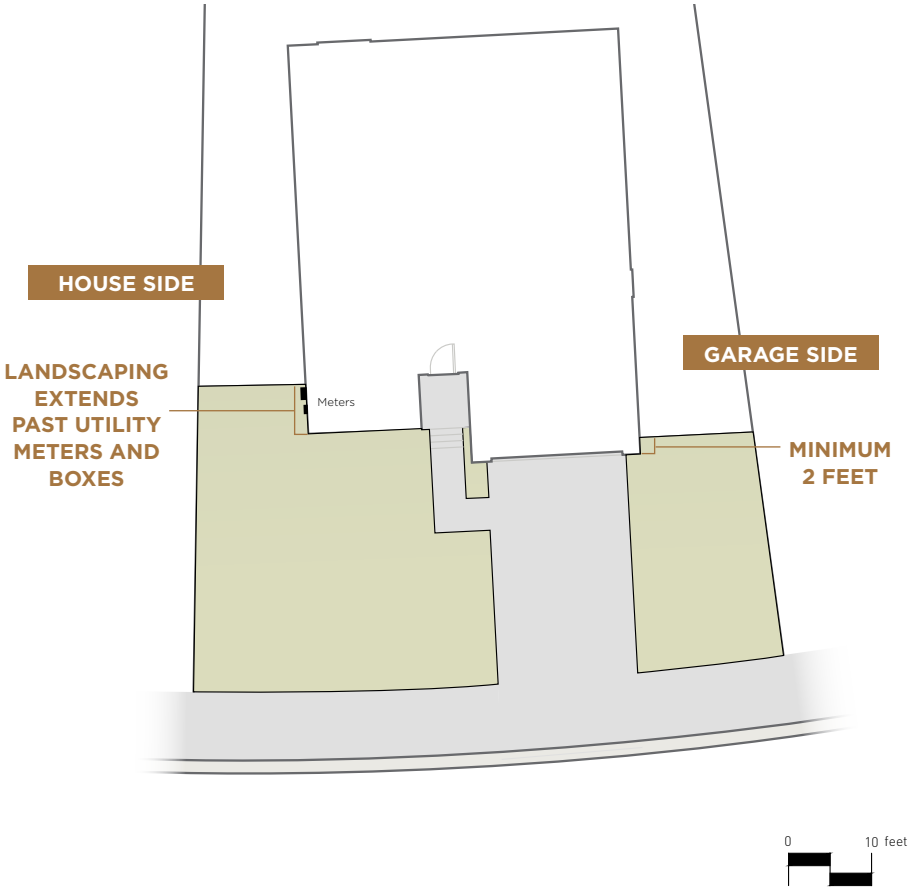

Front Yard Landscaping Completion Requirements

Prior to occupancy of a residence, fully irrigated landscaping is required for all front yards. If occupancy of a residence occurs during winter months, then the completion of the landscaping required may be delayed until the following June 1st.

Side and Back Yard Landscaping Completion Requirements

The landscaping of side and back yard areas (the entire area of the lot located behind the front fence of the Residence) must be completed no later than one year following the date of the first transfer of title of a lot to the initial homeowner. Homeowner will be granted a deadline extension to two years to install landscaping from the transfer of title if homeowner installs an approved privacy fence fully enclosing the side and rear yard areas that are not fully landscaped.

Landscaping Maintenance Requirements

Each homeowner is required to maintain their landscaping, including automated sprinkler systems. All yards must be kept clean, well manicured, and weed free. Homeowner is required to remove or replace dead trees, shrubs, plants, and grass promptly. Landscaping, grading, and drainage must be designed to control water runoff so neighboring lots within the project will not be adversely affected.

Submitting a Landscaping Plan

There are two options for submitting a landscape design.

1. A professional landscaping plan for front, back, and side yards must be submitted to the PARC or HOA for approval.
2. To expedite the approval process, builders may submit a minimum of three front yard landscaping plans for lots owned in each category of the following front-yard sizes: small, medium, large, and estate lots. Landscape plans must follow the Landscaping Monotony Requirements (see below). Professionally designed landscape drawings must be provided for estate lots.
3. Items that need to be identified in each landscape submittal.
    - » Total square footage and percentage of irrigated area of lot.
    - » Total square footage and percentage of planting beds / turf / Xeriscape.
    - » Quantity of each type of plant material
    - » Specific name of each plant (add note if plant species is not included on suggested plant list).

Landscaping Monotony Requirements

To ensure each front yard is uniquely beautiful, a diverse mix of plant materials and landscaping designs are required. The following parameters have been established to ensure such diversity.

- » All landscaping plans must list the specific plant species used in the design.
- » The exact landscaping plan cannot be used next to or directly across the street.
- » Plant species must be selected from the Suggested Plant List starting on page 43.
- » Each lot must use a landscaping plan that is different from adjacent homes or home(s) located directly across the street. The PARC will track which landscaping plans are used for which lots and will not approve plans that do not follow the monotony requirements.

Planting Requirements for Corner Lot Landscaping

If corner lot landscaping is installed by a builder or homeowner in a side yard facing a street prior to, or instead of, fence installation, the same requirements for plants per landscaping area for the front yard landscaping apply to the side yard. The side yard landscape size is calculated separately from front yard. There are no minimum planting requirements for side yards between homes or back yards. The PARC must approve all landscaping plans prior to installation.



Minimum Landscaping

LOT CLASSIFICATION				
	SMALL	MEDIUM	LARGE	ESTATE LOTS
Min Frontage	40’	50’	75’	110’
Front Yard Trees	2	4	6	8
Shrubs	8	12	16	20
Ornamental Grasses/ Perennials	12	16	20	24

Minimum Plant Sizes

PLANTS	MINIMUM SIZE
Front Yard and Decorative Trees (Deciduous)	2” caliper
Front Yard and Decorative Trees (Evergreen)	6’ height
Shrubs (Includes Small, Medium, and Large)	5 gallon
Ornamental Grasses	1 gallon
Perennials	1 gallon

SUGGESTED PLANT LIST

The following is a suggested list of plant materials. This does not mean that all the listed plants and trees are guaranteed to thrive. It is the responsibility of each builder and/or homeowner to consult with appropriate professionals for installation and maintenance advice. Each homeowner should consult with their builder or landscaper regarding any issues or concerns they have with the types of plants on their landscaping plan. The HOA is not responsible to verify that drought-tolerant plants were used.

For local information about drought-tolerant or water-wise plants, visit the Center for Water Efficient Landscaping website at https://cwel.usu.edu/water-wise-plants.

LARGE TREES			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Abies concolor	White Fir	20’ x 50’	Evergreen
Cedrus atlantica argentea ‘Fastigiata’	Columnar Blue Atlas Cedar	40’ x 10’	Evergreen
Celtis occidentalis 'Chicagoland'	Chicagoland Hackberry	40’ x 35’	Deciduous
Ginkgo biloba ‘Magyar’ (males only)	Magyar Ginkgo	50’ X 30’	Deciduous
Ginkgo biloba ‘Shangra La’ (males only)	Shangra La Ginkgo	55’ x 40’	Deciduous

LARGE TREES			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Gleditsia tricanthos inermis 'Skyline'	Skyline Honeylocust	40' x 35'	Deciduous
Gymnocladus dioicus	Kentucky Coffee Tree 'Espresso'	50' x 70'	Deciduous
Pinus nigra	Austrian Black Pine	50' x 30'	Evergreen
Pinus sylvestris	Scotch Pine	40' x 30'	Evergreen
Quercus bicolor 'Bonnie and Mike' Beacon	Columnar Oak	40' x 15'	Deciduous
Quercus robur 'Fastigiata'	Columnar English Oak	60' x 15'	Deciduous
Quercus robur 'Skinny Genes'	Skinny Genes Columnar Oak	45' x 10'	Deciduous
Quercus robur fastigiata 'Skyrocket'	Columnar English Oak	40' x 15'	Deciduous
Quercus robur x alba 'Crimschmidt' Crimson Spire	Columnar English Oak	45' x 20'	Deciduous
Quercus robur x bicolor 'Long' Regal Prince'	Columnar English Oak	40' x 15'	Deciduous
Quercus robur x bicolor 'Nadler' Kindred Spirit	Columnar English Oak	30' x 6'	Deciduous
Quercus x 'Adeline' Castle Green'	Columnar Oak	40' x 12'	Deciduous
Quercus x 'Scarlet Letter'	Columnar Oak	40' x 15'	Deciduous
Tilia americana 'Redmond'	Redmond American Linden	60' x 35'	Deciduous
Tilia cordata 'Greenspire'	Greenspire Littleleaf Linden	50' x 35'	Deciduous
Tilia tomentosa 'Sterling'	Sterling Silver Linden	60' x 30'	Deciduous
Ulmus x 'Accolade'	Accolade Elm	50' x 25'	Deciduous
Zelkova serrata 'Green Vase'	Green Vase Zelkova	50' x 35'	Deciduous

MEDIUM TREES			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Acer truncatum x acer platanoides 'Crimson Sunset'	Crimson Sunset	35' x 25'	Deciduous
Acer truncatum x acer platanoides 'Norwegian Sunset'	Norwegian Sunset	35' x 25'	Deciduous
Acer truncatum x acer platanoides 'Ruby Sunset'	Ruby Sunset	25' x 20'	Deciduous
Acer truncatum x acer platanoides 'Urban Sunset'	Urban Sunset	35' x 20'	Deciduous
Acer truncatum x acer platanoides Pacific Sunset'	Pacific Sunset	30' x 25'	Deciduous
Amelanchier x grandiflora 'Autumn Brilliance'	Autumn Brilliance Serviceberry	25' x 20'	Deciduous
Cedrus atlantics glauca	Blue Atlas Cedar	30' x 20'	Evergreen
Celtis occidentalis	Common Hackberry	40' x 30'	Deciduous
Chamaecyparis nootkatensis 'Pendula Green Arrow'	Weeping Alaskan Cedar	25' x 3'	Evergreen
Fagus sylvatica 'Red Obelisk'	Columnar Purple Beech	3' x 40'	Deciduous
Gleditsia triacanthos inermis 'Shademaster'	Shademaster Locust	30' x 25'	Deciduous

MEDIUM TREES			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Juniperus scopulorum	Rocky Mountain Juniper	30' x 30'	Evergreen
Malus x 'Marilee'	Marilee Flowering Crabapple	24' x 10'	Deciduous
Quercus ilicifolia	Scrub Oak	15' x 20'	Deciduous
Prunus maackii	Amur Chokecherry	30' x 30'	Deciduous
Prunus Virginiana	Canada Red Chokecherry	20' x 30'	Deciduous
Syringa reticulata 'Ivory Silk'	Ivory Silk Japanese Tree Lilac	20' x 25'	Deciduous
Zelkova serrata 'City Sprite'	Zelkova	24' x 18'	Deciduous

SMALL TREES			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Acer tataricum 'Pattern Perfect'	Pattern Perfect Tatarian Maple	25' X 20'	Deciduous
Cedrus atlantica glauca 'Pendula'	Weeping Blue Atlas Cedar	15' x 15'	Evergreen
Cedrus libani 'Beacon Hill'	Weeping Cedar of Lebanon	10' x 6'	Evergreen
Chamaecyparis lawsoniana 'Pinpoint'	Pinpoint Blue False Cypress	20' x 7'	Evergreen
Juniperus chinensis	Trautman Juniper	4' x 15'	Evergreen
Malus x 'Prarie Fire'	Prarie Fire Crabapple	20' x 20'	Deciduous
Malus x 'Purple Prince'	Perfect Purple Prince Crabapple	20' x 20'	Deciduous
Malus x 'Spring Snow'	Spring Snow Crabapple	20' x 20'	Deciduous
Malas x 'Radiant'	Radiant Crabapple	20' x 20'	Deciduous
Malus 'Amberina'	Amberina Flowering Crabapple	12' x 10'	Deciduous
Malus x 'April Showers'	Weeping Flowering Crabapple	10' x 6'	Deciduous
Malus x 'Cardinal's Robe'	Cardinal's Robe Flowering Crabapple	15' x 20'	Deciduous
Malus x 'Harvest Gold'	Harvest Gold Flowering Crabapple	22' x 18'	Deciduous
Malus x 'Indian Magic'	Indian Magic Crabapple	20' x 15'	Deciduous
Malus x 'Leprechaun'	Leprechaun Flowering Crabapple	8' x 8'	Deciduous
Malus x 'Little Troll'	Little Troll Weeping Flowering Crabapple	16' x 16'	Deciduous
Malus x 'Orange Crush'	Orange Crush Flowering Crabapple	15' x 15'	Deciduous
Malus x 'Prairie Fire'	Prairie Fire Crabapple	20' x 20'	Deciduous
Malus x 'Raspberry Spear'	Raspberry Spear Crabapple	20' x 8'	Deciduous
Malus x 'Red Barron'	Red Barron Crabapple	20' x 12'	Deciduous
Malus x 'Red Jade'	Red Jade Weeping Crabapple	15' x 15'	Deciduous
Malus x 'Red Jewel'	Red Jewel Crabapple	15' x 12'	Deciduous
Malus x 'Snowdrift'	Snowdrift Crabapple	20' x 20'	Deciduous
Malus x 'Sparkling Sprite'	Sparkling Sprite Crabapple	12' x 12'	Deciduous



SMALL TREES			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Pinus densiflora umbraculifera 'Compacta'	Tanyosho Pine	6' x 6'	Evergreen
Quercus gambelii	Gamble Oak	25' x 20'	Deciduous

SHRUBS			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Amelanchier alnifolia 'Obelisk'	Standing Ovation Serviceberry	15' x 4'	Deciduous
Aronia melanocarpa 'Low Scape Hedger'	Dwarf Chokeberry	2' x 2'	Deciduous
Berberis thunbergii `Concorde`	Concorde Japanese Barberry	2' x 2'	Deciduous
Berberis thunbergii 'Golden Jackpot' Joyce	Golden Jackpot Joyce Barberry	2' x 2'	Deciduous
Buxus microphylla japonica 'Winter Gem'	Winter Gem Japanese Boxwood	4' x 6'	Evergreen
Buddleja davidii 'Buzz Hot Raspberry'	Hot Raspberry Butterfly Bush	3' x 5'	Deciduous
Buxus x 'Green mountain'	Green mountain Boxwood	3' x 5'	Evergreen
Caryopteris x clandonensis 'First Choice'	First Choice Bluebeard	3' x 3'	Deciduous
Caryopteris x clandonensis 'Blue Mist'	Blue Mist Shrub - Beyond Midnight	3' x 3'	Deciduous
Cornus alba 'Bailhalo'	Ivory Halo Dogwood	6' x 6'	Deciduous
Corylus avellana 'Red Dragon'	Red Leafed Filbert	8' x 5'	Deciduous
Daphne x burkwoodii 'Carol Mackie'	Carol Mackie Daphne	4' x 4'	Semi-Evergreen
Ephedra viridis	Mormon Tea	2' x 4'	Evergreen
Euonymus japonicus 'Grandifolius'	Globe Japanese Eunonymus	6' x 8'	Evergreen
Forsythia x intermedia 'Arnold's Dwarf'	Dwarf Forsythia	3' x 6'	Deciduous
Forsythia x 'Show Off Sugar Baby'	Sugar Baby Dwarf Forsythia	3' x 3'	Deciduous
Hesperaloe parviflora 'Red Yucca'	Red Yucca	3' x 4'	Evergreen
Juniperus chinensis 'Sea Green'	Sea Green Juniper	6' x 8'	Evergreen
Juniperus horizontalis 'Blue Chip'	Blue Chip Creeping Juniper	1' x 6'	Evergreen
Juniperus horizontalis 'Hughes"	Hughes Creeping Juniper	12" x 6'	Evergreen
Juniperus horizontalis 'Wiltonii'	Wilton's Creeping Juniper	1' x 8'	Evergreen
Juniperus procumbens 'Green Mound'	Japanese Garden Juniper	6" x 6'	Evergreen
Juniperus scopulorum 'Blue Arrow'	Blue Arrow Upright Juniper	15' x 3'	Evergreen
Juniperus scopulorum 'Moonglow'	Moonglow Upright Juniper	20' x 10'	Evergreen
Juniperus scopulorum 'Wichita Blue'	Wichita Blue Upright Juniper	15' x 6'	Evergreen
Lonicera x xylosteoides 'Clavy's Dwarf'	Honeysuckle Shrub	5' x 5'	Deciduous
Mahonia aquifolium 'Compacta'	Compact Oregon Grape	3' x 4'	Evergreen
Perovskia atriplicifolia 'Blue Steel'	Russian Sage	3' x 2'	Deciduous
Perovskia atriplicifolia 'Little Lace'	Russian Sage	2' x 1	Deciduous

SHRUBS			
Botanical Name	**Common Name**	**Mature Size**	**Deciduous or Evergreen**
Philadelphus x virginalis 'Miniature Snowflake'	Mock Orange	4' x 4'	Deciduous
Physocarpus opulifolius `Donna May`	Little Devil Ninebark	4' x 4'	Deciduous
Physocarpus opulifolius 'Nugget'	Nugget Ninebark	6' x 6'	Deciduous
Pinus mugo var. pumilio	Dwarf Mugo Pine	5' x 6'	Evergreen
Pinus sylvestris 'Hillside Creeper'	Creeping Scotch Pine	2' x 8'	Evergreen
Prunus besseyi 'Pawnee Buttes'	Sand Cherry	1' x 6'	Deciduous
Rhamnus frangula 'Fine Line'	Fern Leaf Buckthorn	7' x 3'	Deciduous
Rhamnus frangula columnaris	Tallhedge Buckthorn	15' x 4'	Deciduous
Rhus aromatica 'Gro-Low'	Gro-Low Fragrant Sumac	3' x 8'	Deciduous
Rhus trilobata 'Autumn Amber'	Three Leaf Sumac	2' x 8'	Deciduous
Ribes alpinum 'Green Mound'	Green Mound Alpine Currant	3' x 3'	Deciduous
Rosa x 'Iceburg'	Iceburg White Rose	4' x 3'	Deciduous
Rosa x `Red Knock Out`	Red Knock Out	4' x 4'	Deciduous
Rosa x 'SRPylwko'	Rosa x 'Yellow Easy Peasy'	4' x 4'	Deciduous
Rosa x 'White Knockout'	White Knockout	4' x 4'	Deciduous
Rosa Meidiland series 'Red'	Red Meidiland Rose	4' x 6'	Deciduous
Rosa Meidiland series 'White'	White Meidiland Rose	2' x 6'	Deciduous
Sambucus nigra 'Laced Up'	Laced Up Elderberry	10' x 3'	Deciduous
Sorbaria sorbifolia 'Sem'	Sem Ash False Spirea	6' x 6'	Decidious
Symphoricarpos oreophilus	Mountain Snowberry	4' x 4'	Deciduous
Symphoricarpos orbiculatus	Coralberry	5' x 8'	Deciduous
Symphoricarpos x chenaultii 'Hancock'	Hancock Coralberry	2' x 8'	Deciduous
Symphoricarpos x doorensbosii 'Kolmcan'	Kolmcan Coralberry	3' x 3'	Deciduous
Symphoricarpos x doorensbosii 'Magic Berry'	Magic Berry Coralberry	5' x 5'	Deciduous
Syringa meyeri 'Palibin'	Dwarf Korean Lilac	5' x 7'	Deciduous
Syringa x 'Bloomerang'	Dwarf Reblooming Lilac	3' x 3'	Deciduous
Taxus x media 'Everlow'	Everlow Yew	5' x 2'	Evergreen
Yucca filamentosa 'Bright Edge'	Bright Edge Yucca	3' x 2'	Evergreen

ORNAMENTAL GRASSES		
Botanical Name	**Common Name**	**Mature Size**
Bouteloua gracilis	Blue Grama Grass	2' x 2'
Bouteloua gracilis 'Blonde Ambition'	Blonde Ambition Blue Grama Grass	2.5' x 1.5'
Calamagrostis acutiflora 'Eldorado'	Feather Reed Grass	4' x 2'

ORNAMENTAL GRASSES		
Botanical Name	**Common Name**	**Mature Size**
Calamagrostis x acutiflora ‘Karl Foerster’	Feather Reed Grass	5’ x 3’
Calamagrostis x acutiflora ‘Lightning Strike’	Lightning Strike Feather Reed Grass	4’ x 2’
Calamagrostis x acutiflora ‘Overdam’	Overdam Feather Reed Grass	3’ x 2’
Deschampsia cespitosa	Tufted Hairgrass	2’ x 2’
Deschampsia cespitosa ‘Schottland’	Tufted Hairgrass	3’ x 2’
Festuca mairei	Atlas Fescue	3’ x 3’
Festuca ovina glauca ‘Boulder Blue’	Boulder Blue Fescue	1’ x 1’
Helictotrichon sempervirens 'Sappire'	Sapphire Blue Oat Grass	2’ x 3’
Helictotrichon sempervirens ‘Blue Oats’	Blue Oat Grass	3’ x 2’
Miscanthus sinensis ‘Adagio’	Dwarf Maiden Grass	4’ x 4’
Miscanthus sinensis ‘Dixieland’	Maiden Grass	3’ x 4’
Miscanthus sinensis ‘Gracillimus Nana’	Gracillimus Nana Maiden Grass	4’ x 4’
Mischanthus sinensis ‘Yaku Jima’	Dwarf Maiden Grass	5’ x 2’
Muhlenbergia rigens	Deer Grass	4’ x 5’
Panicum virgatum 'Rotstrahlbusch'	Rotstrahlbusch Red Switch Grass	3’ x 5’
Pennisetum alopecuroides	Dwarf Fountain Grass	4’ x 2’
Pennisetum alopecuroides ‘Burgundy Bunny’	Burgundy Bunny Dwarf Fountain Grass	1 x 1.5’
Pennisetum alopecuroides ‘Hameln’	Hameln Dwarf Fountain Grass	3’ x 2’
Pennisetum alopecuroides ‘Little Bunny’	Little Bunny Dwarf Fountain Grass	1’ x 1’
Pennisetum alopecuroides ‘Red Head’	Red Head Dwarf Fountain Grass	4’ x 2.5’
Pennisetum setaceum	Crimson Fountaingrass	2’ 4’
Schizachyrium scoparium	Little Bluestem Grass	3’ x 2’
Schizachyrium scoparium ‘Blaze’	Blaze Little Bluestem	3’ x 2’
Schizachyrium scoparium ‘Blue Heaven’	Blue Heaven Little Bluestem	4’ x 4’
Schizachyrium scoparium ‘Smoke Signal’	Smoke Signal Little Bluestem	3’ x 2’

PERENNIALS		
Botanical Name	**Common Name**	**Mature Size**
Acer tataricum ‘Pattern Perfect’	Pattern Perfect Tatarian Maple	25’ X 20’
Cedrus atlantica glauca ‘Pendula’	Weeping Blue Atlas Cedar	15’ x 15’
Cedrus libani ‘Beacon Hill’	Weeping Cedar of Lebanon	10’ x 6’
Chamaecyparis lawsoniana ‘Pinpoint’	Pinpoint Blue False Cypress	20’ x 7’
Juniperus chinensis	Trautman Juniper	4’ x 15’
Malus x 'Prarie Fire'	Prarie Fire Crabapple	20’ x 20’

PERENNIALS		
Botanical Name	**Common Name**	**Mature Size**
Malus x 'Purple Prince'	Perfect Purple Prince Crabapple	20' x 20'
Malus x 'Spring Snow'	Spring Snow Crabapple	20' x 20'
Malas x 'Radiant'	Radiant Crabapple	20' x 20'
Malus 'Amberina'	Amberina Flowering Crabapple	12' x 10'
Malus x 'April Showers'	Weeping Flowering Crabapple	10' x 6'
Malus x 'Cardinal's Robe'	Cardinal's Robe Flowering Crabapple	15' x 20'
Malus x 'Harvest Gold'	Harvest Gold Flowering Crabapple	22' x 18'
Malus x 'Indian Magic'	Indian Magic Crabapple	20' x 15'
Malus x 'Leprechaun'	Leprechaun Flowering Crabapple	8' x 8'
Malus x 'Little Troll'	Little Troll Weeping Flowering Crabapple	16' x 16'
Malus x 'Orange Crush'	Orange Crush Flowering Crabapple	15' x 15'
Malus x 'Prairie Fire'	Prairie Fire Crabapple	20' x 20'
Malus x 'Raspberry Spear'	Raspberry Spear Crabapple	20' x 8'
Malus x 'Red Barron'	Red Barron Crabapple	20' x 12'
Malus x 'Red Jade'	Red Jade Weeping Crabapple	15' x 15'
Malus x 'Red Jewel'	Red Jewel Crabapple	15' x 12'
Malus x 'Snowdrift'	Snowdrift Crabapple	20' x 20'
Malus x 'Sparkling Sprite'	Sparkling Sprite Crabapple	12' x 12'
Pinus densiflora umbraculifera 'Compacta'	Tanyosho Pine	6' x 6'
Quercus gambelii	Gamble Oak	25' x 20'

GROUNDCOVERS		
Botanical Name	**Common Name**	**Mature Spread**
Lysimachia nummularia	Creeping Jenny	12–18"
Mahonia repens	Creeping Oregon Grape	24–36"
Sedum acre	Goldmoss Stonecrop	12–24"
Sedum ochroleucum 'Red Wiggle'	Stonecrop (general)	12–24"
Thymus lanuginosus	Woolly Thyme	12–18"
Thymus serpyllum sp.	Thyme (culinary)	12–18"
Veronica sp.	Speedwell (Creeping)	12–18"



XERISCAPING GUIDELINES

Xeriscaping is a water-smart landscaping approach tailored for Utah's dry climate. It focuses on creating beautiful, low-maintenance outdoor spaces that use minimal supplemental water.

Key Principles

Panorama encourages Water Wise landscaping by requiring the use of mulch in planting beds.

- **Drought-Tolerant Plants:** Choose plants that naturally thrive in Utah's climate with little water, including many native species.
- **Efficient Watering:** Use drip systems, soaker hoses, or smart irrigation controllers to minimize
- water loss.
- **Healthy Soil:** Add compost or organic matter to improve water retention and root growth.
- **Watering Frequency:** Set systems to water deeply but infrequently.
- **Mulching:** Cover soil with bark, gravel, or other mulch materials to reduce evaporation and suppress weeds.
- **Zoning:** Group plants with similar water needs together for targeted watering.
- **Minimal Lawn Areas:** Landscaping must maintain a balanced 50/50 split between:
  - **Irrigated plant areas** (such as turf, shrubs, or flowers), and
  - **Non-irrigated features** (such as gravel, mulch, hardscape, or drought-tolerant plantings that do not require permanent irrigation).
- **Sloped Areas:** Xeriscaping or native revegitation is required on any slope that has been disturbed and is near or above 30%. These areas are more prone to erosion and water runoff, making turf difficult to maintain and inefficient to irrigate.
- **Maintain Thoughtfully:** Weed as needed and refresh mulch annually. Water according to seasonal needs.

F. ASSOCIATIONS

MASTER OWNERS ASSOCIATION

In accordance with section 19.26.03,2,d of the Planned Community Zone ordinance, a Master Home Owners Association (HOA) will be established to review, approve, and enforce architectural requirements and restrictions, and to address common area maintenance obligations for the entire Panorama Community. Where required, typically in multi-family areas in later phases, sub-HOAs will be established to address area-specific costs.

PANORAMA ARCHITECTURAL REVIEW COMMITTEE (PARC)

In order to create, maintain, and improve Panorama as a pleasant, desirable and sustainable community, and to establish and implement a consistent and harmonious design concept, and to protect and promote the present and future values of Panorama, all exterior, architectural building elevations and building materials, colors and usage design, site plan and landscape treatments, wall and fencing, and signage within Panorama, shall be subject to a Design Review Process and approval by the established Panorama Architectural Review Committee (PARC).

The PARC shall review and approve all residential site plans and building permits prior to beginning the City of Herriman submittal and review processes. The PARC shall consist of representatives from the following: the Master Developer and a selected team of design professionals, planners, engineers, architects, contractors, etc. The Master Developer shall retain the right to retain or replace members of the PARC at its discretion.

All submittals reviewed by PARC must comply with the Declaration of Covenants, Conditions, and Restrictions (CC&Rs). In the event of any conflict between this document and the CC&Rs, the CC&Rs shall prevail.

Submittal Process

- **STEP 1** Sign *Acknowledgment of Receipt* and email to PARC@LiveAtPanorama.com.
- **STEP 2** Complete *Initial Base Plan Submittal Checklist* and email, along with all required documents, to PARC@LiveAtPanorama.com. Be sure that all home designs comply with the rules established in this document, the Design Guidelines Handbook.
- **STEP 3** Fill out the *Home Design Guidelines Checklist* and email, along with floor plans and elevations, to PARC@LiveAtPanorama.com.

Submittal Fees and Timeline

A submittal fee of $250 per home design will be assessed for Initial Plan Submittals and Home Design Submittals. All submissions that are not complete will be returned to the builder unreviewed. All plans submitted by Friday at 3:00 p.m. will be reviewed and returned by Friday at 3:00 pm of the following week. In addition, a submittal fee of $150 will be assessed per specific home plan at the time of submission.

Non-compliance

If any improvements are completed outside the parameters set forth in the Design Guidelines Handbook, a $1,000 fee will be assessed to the builder for each violation related to new home construction, and to the homeowner for each violation unrelated to new home construction. If there is a violation the homeowner will not allow their builder to resolve, the fine will be assessed to the homeowner. In addition to such fine(s), all violations must be corrected in accordance with the plans approved in writing by the PARC.