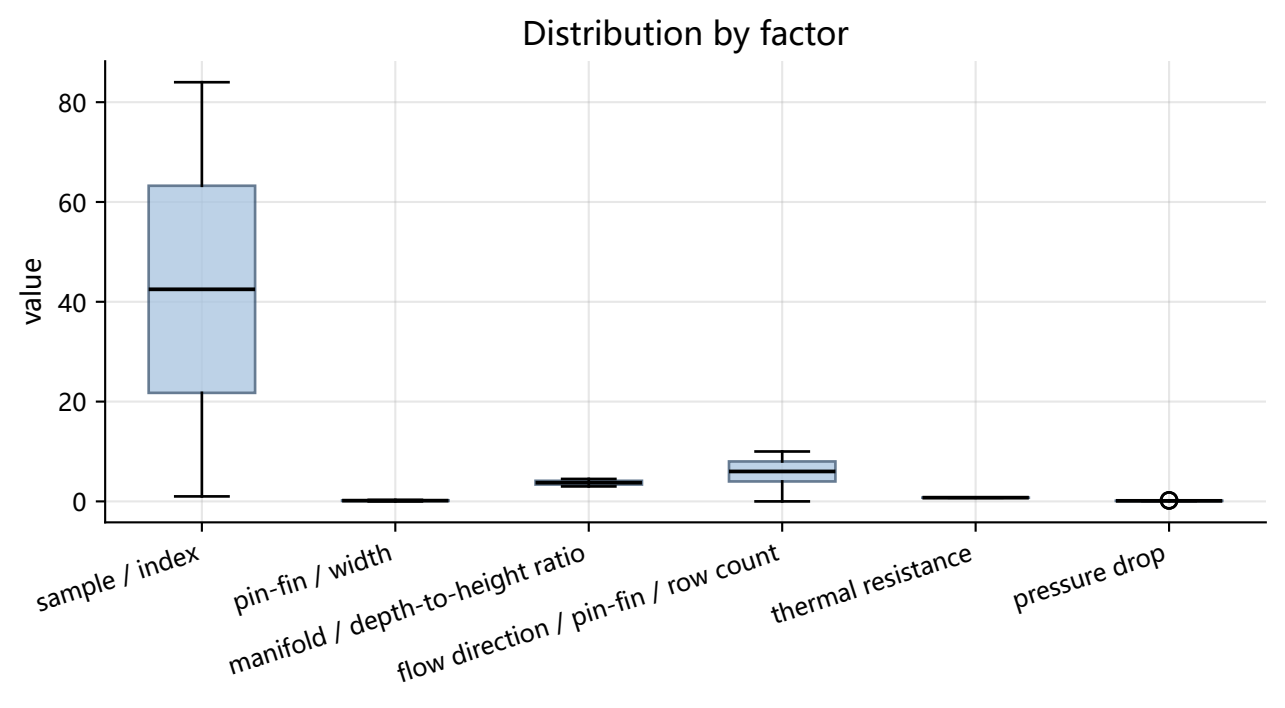
Distribution by factor
value
80
60
40
20
0
sample / index
pin-fin / width
manifold / depth-to-height ratio
flow direction / pin-fin / row count
thermal resistance
pressure drop