



HY-8101(ANSI: FR-4)

环氧玻璃布覆铜板-普通


Copper Clad Glass Fabric Epoxy Laminate-Normal

特点

- 优良的PCB加工性
- 优良的尺寸稳定性
- UV Blocking and AOI 兼容性
- 符合ROHS法则要求
- 符合IPC-4101规范要求

Features

- Excellent PCB process ability
- Excellent dimensional stability
- UV blocking and AOI compatible
- Meet ROHS' s requirement.
- IPC-4101C specification id applicable

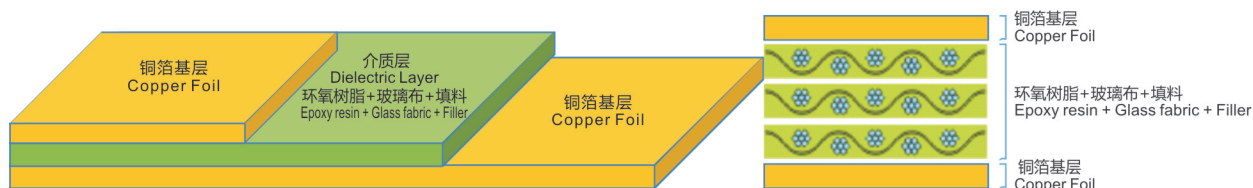

一般特性 General Properties

测试项目 Item	单位 Unit	测试方法 Test Method (IPC-TM-650)	处理条件 Test Condition	规格值 Specification(IPC-4101C)		典型值 Typical Value
铜箔剥离厚度 Peel strength	N/mm	2.4.8	Float 260°C/10 sec	Hoz	≥ 1.07	1.45
				1oz	≥ 1.43	1.92
热应力 Thermal Stress	Sec	2.4.13.1	Float 260°C/unetched	≥ 30		60
弯弓度/翘曲度 Bow/Twist	%	2.4.22.1	A	≤ 1.0		0.21/0.39
抗弯强度 Flexural Strength	N/mm ²	2.4.4	Warp	≥ 415		550
			Fill	≥ 345		450
燃烧性 Flam Ability	Rating	UL 94	UL-94	V-0		V-0
玻璃化转变 温度 Glass Transition	°C	2.4.25	E-2/105(DSC)	≥ 130		135
表面电阻 Surface Resistivity	M Ω	2.5.17.1	C-96/35/90	$\geq 1.0 \times 10^4$		1.0×10^{11}
体积电阻 Volume Resistivity	M Ω .cm	2.5.17.1	C-96/35/90	$\geq 1.0 \times 10^6$		1.0×10^{12}
介电常数 Dielectric Constant	—	2.5.5.2	C-40/23/50	≤ 5.4		4.3
介质损耗 Loss Tangent	—	2.5.5.2	C-40/23/50	≤ 0.035		0.022
耐电弧性 Arc Resistance	sec	2.5.1	D-48/50+D-0.5/23	≥ 60		125
吸水率 Moisture Absorption	%	2.6.2.1	D-24/23	≤ 0.35 (min0.51mm)		0.22
				≤ 0.80 (max0.51mm)		0.19
Z轴热膨胀系数 Z-Axis Expansion	ppm/°C	2.4.24	E-2/105 TMA	—		58/286
相比漏电起痕指数 Comparative Tracking Index	V	IEC 60112	Etched/0.1% NH ₄ CL	—		$\geq 175V$

样品厚度: 1.0mm

Remarks: Specimen Thickness :1.0mm

A 保持原样, 不作处理 Keep the specimen originally without any process

D 浸在恒温的水中处理 Immersing in distilled water with temperature control

C 在恒温恒湿的空气中处理 Temperature and humidity conditioning

E 在恒温的空气中处理 Temperature conditioning


HY-8101(ANSI:FR-4)

环氧玻璃布覆铜板-普通


Copper Clad Glass Fabric Epoxy Laminate-Normal

板材特性图 Speciality Chart


尺寸稳定性 Dimensional stability

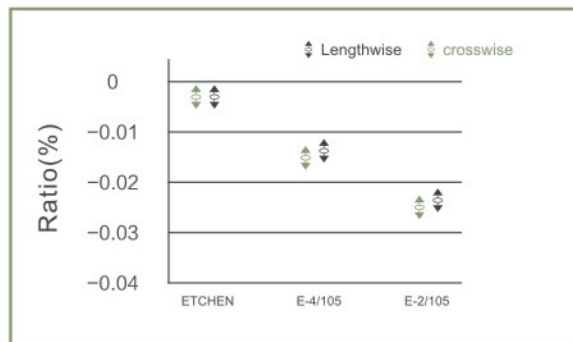


Dimensional stability-PCB process(size:360*310mm)

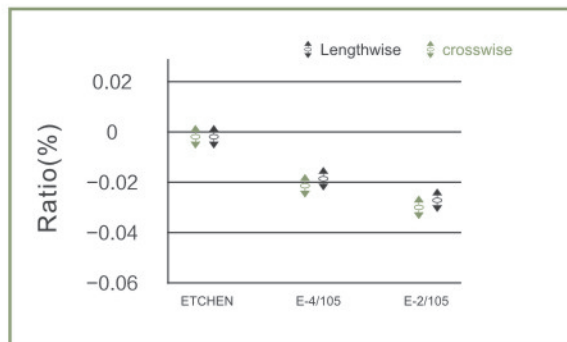

Thermal expansion of Z-direction(tes by TMA)

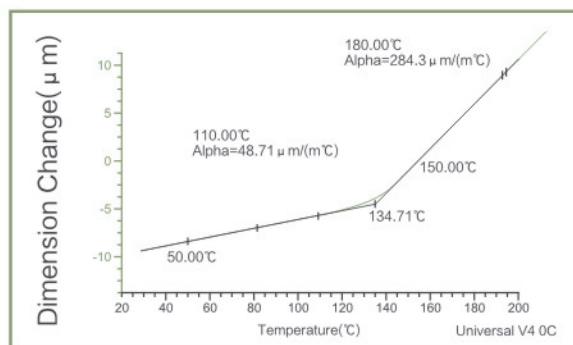

介电常数 Dielectric constant

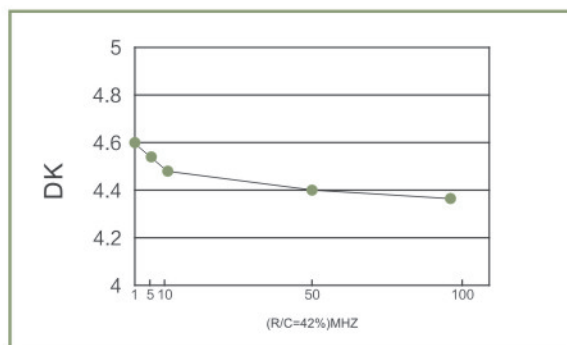

应用领域

电脑、摄像机, 通讯设备, 汽车电子, 仪器仪表, 自动控制器等

Application

Computer, Camera, Communication Equipment, Automotive Electronics Instrument, Automatic Controller, Etc.

采购信息 Purchasing Information

类型 Type	厚度 Thickness	铜箔厚度 Copper Cladding	常规尺寸 Regular Size(mm)	CTI值 CTI Value
HY-8101	0.4mm~1.6mm	15 μm 18 μm 30 μm 35 μm 70 μm 105 μm	940 × 1245mm(+3/-0mm) 1042 × 1245mm(+3/-0mm) 1093 × 1245mm(+3/-0mm)	≥ 175V

可根据客户要求提供其他尺寸和宽度

Remarks: Other sheet size and thickness could be available upon request